



1914304STO-001 (J1936 Stråla)




1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)

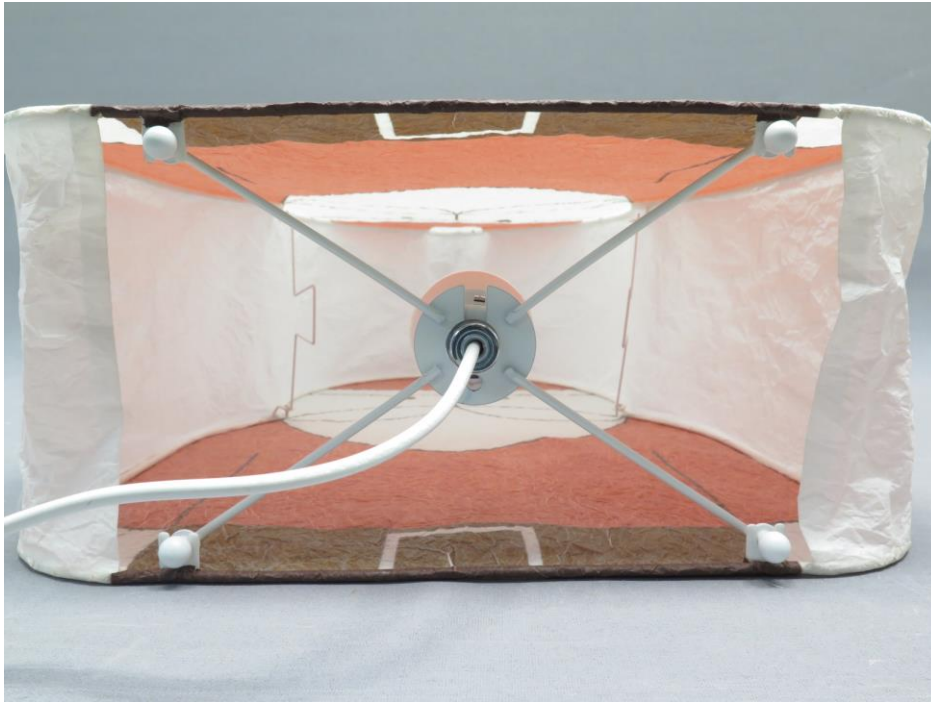

1914304STO-001 (J1936 Stråla)




1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)




1914304STO-001 (J1936 Stråla)

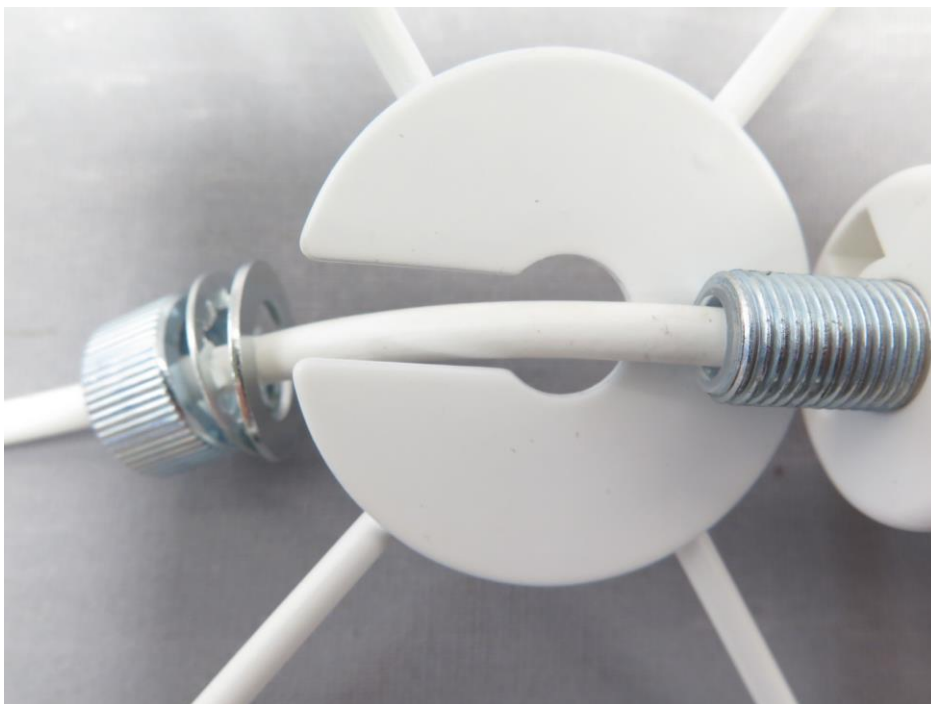

1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)

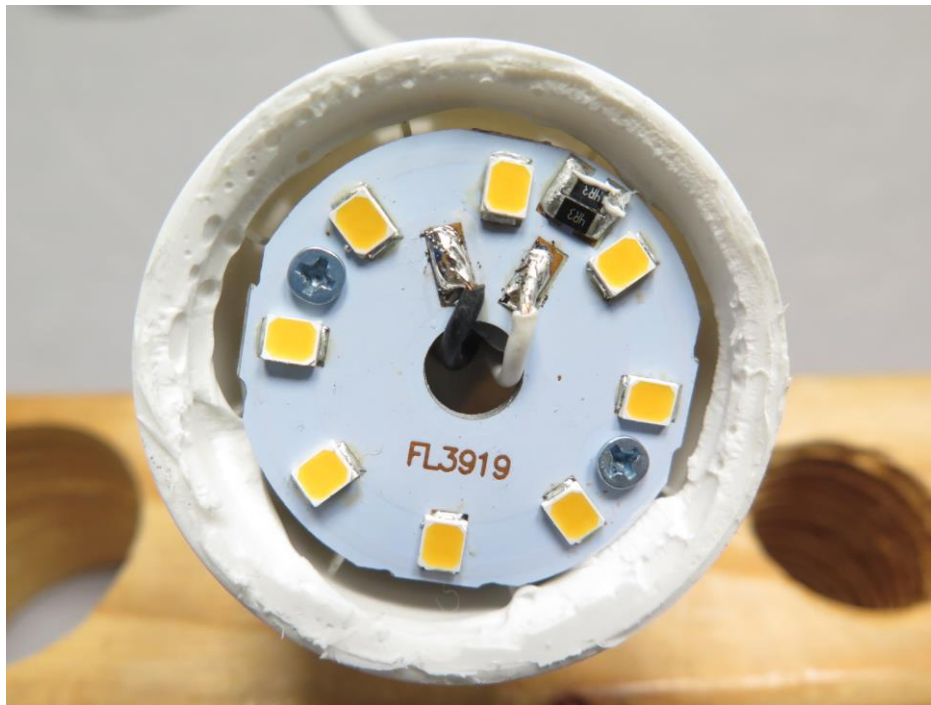


1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)

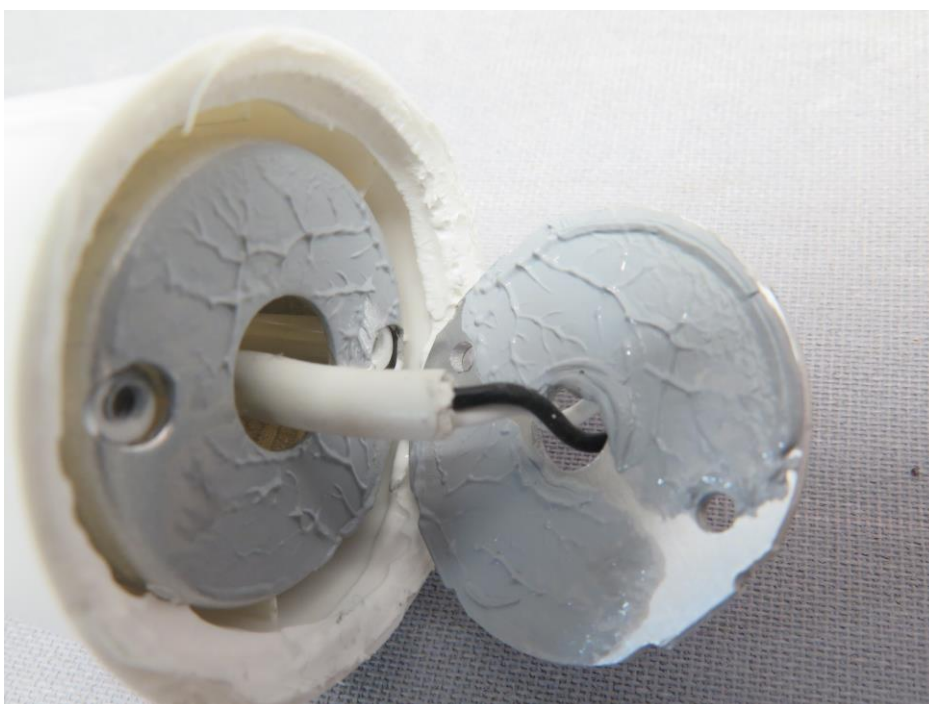

1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)



1914304STO-001 (J1936 Stråla)

Label location


C LISTED US
Intertek
3060998
Type No. J1936

Conforms to:
UL Std 588
Certified to:
CSA Std C22.2 No. 37
CAN ICES-005 (B) / NMB-005 (B)
This device complies with Part 15 of the FCC
Rules. Operation is subject to the following
two conditions: (1) this device may not
cause harmful interference, and (2) this
device must accept any interference
received, including interference that may
cause undesired operation.

FCC ID: FHO-J1936
4V DC, 2.2W

Sup. No.15621


Stråla
Made in China

TYP J1936 NA Version 1

