

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

FCC / ISED

RF Exposure Evaluation Report

Model: SmartPass Signal Beacon

FCC ID: FIHSPSBPT15V1

IC: 1584A-SPSBRSS247

2402-2480 MHz

Transcore

Amtech Technology Center
8600 Jefferson Street, NE
Albuquerque, NM 87113

Test Report Number: 260415A

Test Date: April 15, 2026 – May 27, 2026

Authorized Signatory: 

Patrick Powell

Rogers Labs, a division of The Compatibility Center LLC

FCC Designation Number: US5305

FCC Registration Number: 315994

ISED Company Number: 32275

ISED CAB Identifier: US0096

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS.....	2
REVISIONS.....	3
EXECUTIVE SUMMARY	4
Regulatory Requirements:	4
FCC:	4
Industry Canada:.....	4
Applicant:	5
EUT details:	5
Names and IDs:	5
Equipment Operational Modes:	5
Equipment & Accessory List.....	6
Equipment Configuration.....	7
Equipment Function	8
TEST SITE LOCATIONS	9
ENVIRONMENTAL CONDITIONS.....	9
TEST RESULTS	10
Test Data: Chip 1, BLE	10
Test Data: Chip 2, BLE	11
Summary and Simultaneous Chip 1 and 2 Calculations.....	12
Conclusion.....	13
ANNEX.....	14
Annex A Measurement Uncertainty Calculations.....	15
Annex B Test Equipment.....	16
Annex C Laboratory Certificate of Accreditation.....	18

Revisions

Revision 1 Issued July 22, 2026 – Initial Release

Revision 2 Issued August 14, 2026 – Corrected IC ID# and showed exemption from routine evaluation.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: FIHSPSBPT15V1 HVIN: SPSBV1

Lenexa, KS 66214 Test: 260415A IC: 1584A-SPSBRSS247

Phone/Fax: (913) 660-0666 Test to: 47CFR 1.1307, RSS-102 Issue 6

Revision 2 File: Transcore SmartPass Signal Beacon RFExp FCC-IC 260415A r2

Transcore

PMN: SmartPass Signal Beacon

SN's: 051205-01

Date: August 14, 2026

Page 3 of 18

Executive Summary

The purpose of this report is to evaluate the EUT's transmitters for exemption from routine SAR testing. This product is a fixed location device and is thereby treated as a mobile device with and is used in Public / Uncontrolled environments.

Regulatory Requirements:

FCC:

47CFR 1.1307

Per 47CFR §1.1310 and §2.091 RF Exposure is calculated.

This fixed location device is treated as a mobile device so MPE is required to evaluate it for exemption from routine SAR testing.

Industry Canada:

RSS-102 Issue 6

This is a mobile device so MPE is required to evaluate it for exemption from routine SAR testing.

Applicant:

Name of Applicant: Transcore
 Amtech Technology Center
 8600 Jefferson Street, NE
 Albuquerque, NM 87113

EUT details:

Names and IDs:

HVIN: SPSBV1
 PMN/Model: SmartPass Signal Beacon
 FCC ID: FIHSPSBPT15V1
 Industry Canada: 1584A-SPSBRSS247
 Operating Frequency Range: 2402-2480 MHz

Equipment Operational Modes:

Mode #	Standard
1A	BT BLE (GMSK)
2A	BT BLE (GMSK)

Equipment & Accessory List

HVIN: SPSBV1
 PMN/Model: SmartPass Signal Beacon

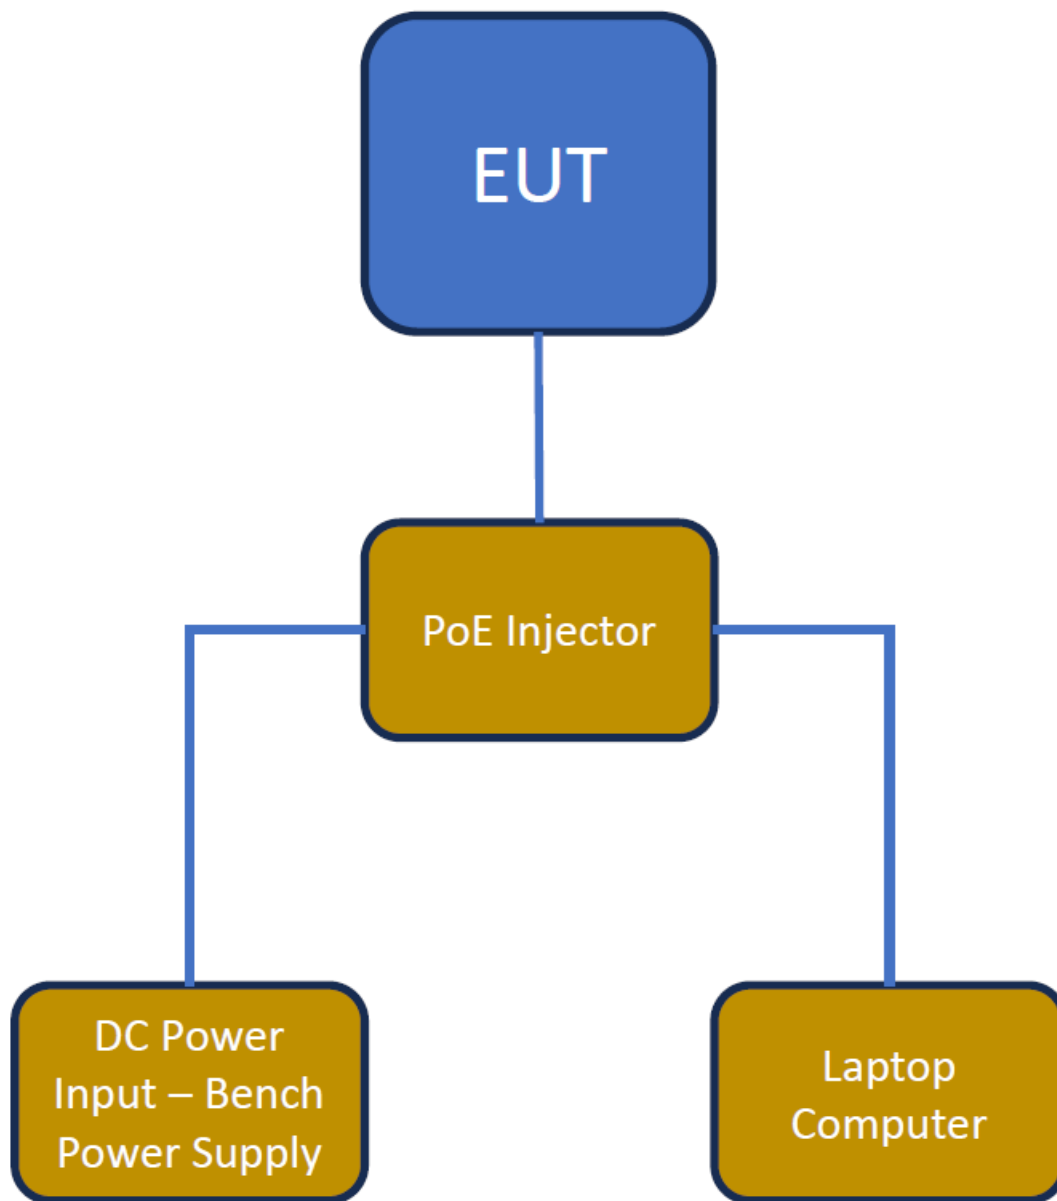
Transcore
 Amtech Technology Center
 8600 Jefferson Street, NE
 Albuquerque, NM 87113

Equipment Under Test	Model ~ P/N	S/N
Radiated & Antenna Port EUT	SmartPass Signal Beacon	051205-01
Support Equipment		
Power Over Ethernet Injector	HMS07021	224002673D
Ethernet cable 1	N/A	N/A
Ethernet cable 2	N/A	N/A
Ethernet cable 3	N/A	N/A

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

Software (FVIN): FccCwModTest_1.04b;
 Antenna: 2.4GHz 4x4 Circularly Polarized Patch Array (max 6.08 dBi gain)

Equipment Configuration



Equipment Function

The EUT is engineered to operate as part of an integrated tolling ecosystem, working in coordination with both the SmartPass Lane Beacon and the SmartPass mobile application. Its primary function is to wake up and keep awake the mobile app as vehicles enter and pass through the toll zone, enabling reliable user and vehicle identification.

The transmitter documented in this report provides operation in the 2400-2483.5 MHz band. The transmitter is a Bluetooth Low Energy beacon advertising over three Bluetooth channels, 37 (2402 MHz), 38 (2426 MHz) and 39 (2480 MHz).

The unit operates from externally supplied power over ethernet (POE). There are no provision for alternative power source. The design utilizes internal fixed antenna and offers no provision for antenna replacement or modification. Operation of the design utilizes standardized Bluetooth Low Energy advertising protocol, modulation and packet structure. The test sample was modified from production equipment for testing purposes. The modification involved a special firmware load to allow full control of the EUT's radio behavior. Two different test samples **Radiated** and **Antenna Port EUT** were provided for testing radiated and antenna port conducted emissions, respectively. The **Antenna Port EUT** sample was modified by replacing the internal antenna with a 50-ohm antenna port connector and attenuator for testing purposes. Test results in this report relate only to the products described in this report.

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS.

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS.

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS.

Registered Site information: FCC Site: US5305, ISED: 32275, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Environmental Conditions

Ambient Temperature 24.0° C

Relative Humidity 40%

Atmospheric Pressure 1017.9 mb

Test Results

Test Data: Chip 1, BLE

				dBd + 2.17 = dBi	Antenna Gain (dBi)	6.1		
Tx Frequency (MHz)	2426	Peak Power (Watts)	0.0148		dBi to dBd	2.2		
		Peak Power (mW)	14.8		Antenna Gain (dBd)	3.91		
Cable Loss (dB)	0.0	(dBm)	11.7		Antenna Gain (numeric)	4.1		
		Duty Cycle (%)	100.0%		Antenna minus cable (dBi)	6.08		
		Adjusted Power (mW)	14.8					
		Adjusted Power (dBm)	11.7					
		Calculated ERP (mw)	36.392	EIRP = Po(dBm) + Gain (dB)				
		Calculated EIRP (mw)	59.979		Radiated (EIRP) dBm	17.780		
				ERP = EIRP - 2.17 dB				
					Radiated (ERP) dBm	15.610		
Power density (S) EIRP ----- = mW/cm² 4 π r² r (cm) EIRP (mW)		FCC radio frequency radiation exposure limits per 1.1310						
		Frequency (MHz)		Occupational Limit W/m ²		Public Limit W/m ²		
		300-1500		#30		#150		
		1500-100,000		50		10		
		2426.0		50		10		
IC radio frequency radiation exposure limits per RSS-102, Issue 6 Field Reference Level FRL Limit (W/m ²)								
Frequency (MHz)		Uncontrolled		Frequency (MHz)		Controlled		
10-20		2.0		10-20		10.0		
20-48		8.944*f ^{0.5}		20-48		44.72*f ^{0.5}		
48-300		1.291		48-100		6.455		
300-6,000		0.02619*f ^{0.424}		100-6,000		0.6455*f ^{0.5}		
6,000-15,000		5.0		6,000-15,000		50.0		
15,000-150,000		10		15,000-150,000		50.0		
150,000-300,000		6.67*(10 ⁻⁵)*f		150,000-300,000		3.33*(10 ⁻⁴)*f		
f = Transmit Frequency (MHz)				f (MHz) =		FCC	ISSED	
P _T = Power Input to Antenna (mW)				P _T (mW) =		2426.0	2426.0	MHz
Duty cycle (percentage of operation)				% =		100.0%	100.0%	%
P _A = Adjusted Power due to Duty cycle or Cable Loss (mW)				P _A (mW) =		14.79	14.79	mW
G _N = Numeric Gain of the Antenna				GN (numeric) =		4.06	4.06	numeric
S ₂₀ = Power Density of device at 20cm (mW/m ²)				S ₂₀ (mW/m ²) =		0.01	0.01	mW/m ²
S ₂₀ = Power Density of device at 20cm (W/m ²)				S ₂₀ (W/m ²) =		0.12	0.12	W/m ²
S _L = Power Density Limit (W/m ²)				S _L (W/m ²) =		10.00	5.39	W/m ²
R _C = Minimum distance to the Radiating Element for Comp				R _C (cm) =		2.2	3.0	cm
S _C = Power Density of the device at the Compliance Distanc				S _C (W/m ²) =		10.00	5.39	W/m ²
R ₂₀ = 20cm				R20 =		20	20	cm
Summary: Standalone MPE Calculations and Summary								
Radio	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S _L (W/m ²)	S ₂₀ (W/m ²)	R _C (cm)	S _C (W/m ²)
Chip 1 BT (FCC)	100.0%	2426.0	14.8	4.06	10.0	0.12	2.2	10.0
Chip 1 BT (ISSED)	100.0%	2426.0	14.8	4.06	5.4	0.12	3.0	5.4

Test Data: Chip 2, BLE

					Antenna Gain (dBi)	6.1		
					dBi to dBd	2.2		
Tx Frequency (MHz)	2426	Peak Power (Watts)	0.0161		Antenna Gain (dBd)	3.91		
		Peak Power (mW)	16.1		Antenna Gain (numeric)	4.1		
Cable Loss (dB)	0.0	(dBm)	12.1		Antenna minus cable (dBi)	6.08		
		Duty Cycle (%)	100.0%					
		Adjusted Power (mW)	16.1					
		Adjusted Power (dBm)	12.1					
		Calculated ERP (mw)	39.719		EIRP = Po(dBm) + Gain (dB)			
		Calculated EIRP (mw)	65.464		Radiated (EIRP) dBm	18.160		
					ERP = EIRP - 2.17 dB			
					Radiated (ERP) dBm	15.990		
Power density (S) EIRP = mW/cm^2 4 π r^2 r (cm) EIRP (mW)								
FCC radio frequency radiation exposure limits per 1.1310								
Frequency (MHz) Occupational Limit W/m^2 Public Limit W/m^2								
300-1500 0.030 0.030								
1500-100,000 0.030 0.030								
2426.0 0.030 0.030								
IC radio frequency radiation exposure limits per RSS-102, Issue 6 Field Reference Level FRL Limit (W/m^2)								
Frequency (MHz)	Uncontrolled		Frequency (MHz)	Controlled				
10-20	2.0	0.2	10-20	10.0	10.0			
20-48	8.944*f^0.5	0.2	20-48	44.72*f^0.5	0.9			
48-300	1.291	0.2	48-100	6.455	6.455			
300-6,000	0.02619*f^0.4434	5.4	100-6,000	0.6455*f^0.5	31.8			
6,000-15,000	5.0	10.0	6,000-15,000	50.0	50.0			
15,000-150,000	10	10.0	15,000-150,000	50.0	50.0			
150,000-300,000	6.67*(10^-4)*f	0.2	150,000-300,000	3.33*(10^-4)*f	0.8			
f = Transmit Frequency (MHz) P_T = Power Input to Antenna (mW) Duty cycle (percentage of operation) P_A = Adjusted Power due to Duty cycle or Cable Loss (mW) G_N = Numeric Gain of the Antenna S₂₀ = Power Density of device at 20cm (mW/m^2) S₂₀ = Power Density of device at 20cm (W/m^2) S_L = Power Density Limit (W/m^2) R_C = Minimum distance to the Radiating Element for Compliance S_C = Power Density of the device at the Compliance Distance R₂₀ = 20cm								
f (MHz) = P_T (mW) = % = P_A (mW) = G_N (numeric) = S₂₀ (mW/m^2) = S₂₀ (W/m^2) = S_L (W/m^2) = R_C (cm) = S_C (W/m^2) = R₂₀ =								
FCC ISED								
2426.0 2426.0 MHz 16.1 16.1 mW 100.0% 100.0% 16.14 16.14 mW 4.06 4.06 numeric 0.01 0.01 mW/m^2 0.13 0.13 W/m^2 10.00 5.39 W/m^2 2.3 3.1 cm 10.00 5.39 W/m^2 20 20 cm								
Summary: Standalone MPE Calculations and Summary								
Radio	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	S _L (W/m^2)	S ₂₀ (W/m^2)	R _C (cm)	S _C (W/m^2)
Chip 2 BT (FCC)	100.0%	2426.0	16.1	4.06	10.0	0.13	2.3	10.0
Chip 2 BT (ISED)	100.0%	2426.0	16.1	4.06	5.4	0.13	3.1	5.4

Summary and Simultaneous Chip 1 and 2 Calculations

Simultaneous Transmitter Data									
Radio	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)	Source-based, Time-avg. EIRP (W)	S_L (W/m ²)	S_{20} (W/m ²)	R_C (cm)	S_C (W/m ²)
Chip 1 BT (FCC)	100.0%	2426.0	14.79	4.06	0.0600	10.0	0.119	2.2	10.0
Chip 2 BT (FCC)	100.0%	2426.0	16.14	4.06	0.0655	10.0	0.130	2.3	10.0
	Tx Duty Cycle (%)	Tx Frequency (MHz)	Power Total (mW)	Gain (numeric)		S_L (W/m ²)	S_{20} (W/m ²)	R_C (cm)	S_C (W/m ²)
Chip 1 BT (ISED)	100.0%	2426.0	14.79	4.06	0.0600	5.4	0.119	3.0	5.4
Chip 2 BT (ISED)	100.0%	2426.0	16.14	4.06	0.0655	5.4	0.130	3.1	5.4

FCC Simultaneous MPE Calculation (Worst Case)		
	Chip 1 BT (FCC)	Chip 2 BT (FCC)
Tx Frequency (MHz)	2426.0	2426.000
S_{20} (W/m ²)	0.119	0.130
S_L (W/m ²)	10.000	10.000
Power Ratio (S_{20} / S_L)	0.0119	0.0130
Sum of Power Ratios at compliance distance	0.0250	
Requirement = Σ of MPE Ratio ≤ 1	COMPLIANT	

ISED Simultaneous MPE Calculation (Worst Case)		
	Chip 1 BT (ISED)	Chip 2 BT (ISED)
Tx Frequency (MHz)	2426.0	2426.0
Source-based, Time-avg. EIRP	0.0600	0.0655
RSS-102 6.6 exemption threshold	2.69	2.69
Exemption Ratio (EIRP/Pexempt)	0.0223	0.0243
Sum of Simultaneous Exemption Ratios	0.0466	
Requirement = Σ of Exemption Ratios ≤ 1	EXEMPT	

Conclusion

The EUT incorporates multiple Bluetooth transmitters capable of simultaneous operation. RF exposure compliance was evaluated using the maximum source-based, time-averaged transmitter power, maximum antenna gain, and a minimum separation distance of 20 cm from the user and/or bystander. A 100% transmit duty cycle was applied to both transmitters, representing a conservative simultaneous-transmission condition.

For **FCC**, the RF exposure contribution of each transmitter was evaluated in accordance with 47 CFR §§1.1307(b), 1.1310, and 2.1091. The individual normalized exposure ratios for the simultaneously operating Bluetooth transmitters were summed and found to be less than the applicable criterion of 1.0. Therefore, simultaneous operation of the Bluetooth transmitters satisfies the applicable FCC RF exposure requirements at the specified minimum separation distance of 20 cm.

For **ISED**, the EUT incorporates two Bluetooth transmitters capable of simultaneous operation. RF exposure exemption was evaluated in accordance with ISED RSS-102 Issue 6, Section 6.6, using the maximum source-based, time-averaged EIRP of each transmitter, including maximum tune-up tolerance and maximum antenna gain. A 100% transmit duty cycle was applied to both transmitters, representing a conservative simultaneous-transmission condition. Calculations were done using worst-case transmitter frequencies and output power. Individual exemption ratios were summed for the worst-case simultaneous-transmission conditions. The resulting simultaneous-transmission exemption ratio is less than the applicable criterion of 1.0. Therefore, the EUT satisfies the RSS-102 Issue 6, Section 6.6 FRL exemption requirements and is exempt from routine FRL exposure evaluation. Compliance with the applicable ISED RF exposure requirements is documented using the RSS-102 Annex B, Declaration of RF Exposure Compliance for Exemption from Routine Evaluation Limits.

The SmartPass Signal Beacon, a device that is deployed in public, uncontrolled environments, meets RF exposure requirements for both FCC and Industry Canada. For RF exposure safety, personnel should maintain a safe distance of 20 cm from the product.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: FIHSPSBPT15V1 HVIN: SPSBV1

Lenexa, KS 66214 Test: 260415A IC: 1584A-SPSBRSS247

Phone/Fax: (913) 660-0666 Test to: 47CFR 1.1307, RSS-102 Issue 6

Revision 2 File: Transcore SmartPass Signal Beacon RFExp FCC-IC 260415A r2

Transcore

PMN: SmartPass Signal Beacon

SN's: 051205-01

Date: August 14, 2026

Page 14 of 18

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2026	3/20/2027
☐ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/9/2025	9/9/2026
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/2/2025	9/2/2026
☐ Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
☒ Antenna	ARA	BCD-235-B (169)	20-350MHz	9/2/2025	9/2/2026
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/2/2025	9/2/2026
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
☒ Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
☒ Antenna	Com Power	AH-1840 (101046)	18-40 GHz	3/17/2025	3/17/2027
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/9/2025	7/9/2026
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/20/2026	1/20/2027
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☐ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/9/2025	9/9/2026
☐ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/9/2025	9/9/2026
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/9/2025	9/9/2026
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/9/2025	9/9/2026
☒ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/9/2025	9/9/2026
☒ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/20/2026	3/20/2027
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/20/2026	3/20/2027
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/20/2026	3/20/2027
☒ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/20/2026	3/20/2027
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/20/2026	3/20/2027
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/20/2026	3/20/2027
☐ Attenuator	Fairview	SA6NFFNF100W-40 (1625)	30-18000 MHz	3/20/2026	3/20/2027
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/20/2026	3/20/2027
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/20/2026	3/20/2027
☒ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/20/2026	3/20/2027
☒ Weather station	Davis	6152 (A70927D44N)		1/23/2026	1/23/2027

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☒ Frequency Counter: Leader		LDC-825 (8060153)		3/20/2026	3/20/2027
☐ ISN	Com-Power	Model ISN T-8 (600111)		3/20/2026	3/20/2027
☒ LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
☐ LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/9/2025	9/9/2026
☒ Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/20/2026	3/20/2027
☒ Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2026	3/20/2027
☐ Antenna:	Solar	9229-1 & 9230-1		2/5/2026	2/5/2028
☐ CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2026
☐ EMC Transient Generator HVT	TR 3000			2/5/2026	2/5/2027
☐ AC Power Source (Ametech, California Instruments)				2/5/2026	2/5/2027
☒ Field Intensity Meter: EFM-018				2/5/2026	2/5/2027
☒ ESD Simulator: MZ-15				3/20/2026	3/20/2027
☐ Injection Clamp Luthi Model EM101				not required	
☐ R.F. Power Amp ACS 230-50W				not required	
☐ R.F. Power Amp EIN Model: A301				not required	
☐ R.F. Power Amp A.R. Model: 10W 1010M7				not required	
☐ R.F. Power Amp A.R. Model: 50U1000				not required	
☒ Temperature Chamber				not required	
☒ Shielded Room				not required	

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ILAC-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-03-11 through 2026-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ILAC-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2026-03-17 through 2027-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program