

**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: April 16, 2001

Submitted: April 23, 2001

Federal Communications Commission

Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Modular Mining Systems Inc
Equipment: 301805 (Repeater) and 301582 (Mobile)
FCC ID: FJ6-301582
FCC Rules: Radiofrequency Radiation Exposure Limits
47 CFR 1.1310
MPE - Mobiles x Fixed Based Station x

Gentlemen:

On behalf of the Applicant, enclosed please find the Calculated Supplemental Test Data Report, the whole for Environmental Assessment (MPE) of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

CALCULATED ENVIRONMENTAL ASSESSMENT

for

MOBILES/FIXED BASE STATION

for

FCC ID: FCC ID: FJ6-301582
Models: 301805 (Repeater) and 301582 (Mobile)

to

FEDERAL COMMUNICATIONS COMMISSION

47 CFR 1.1310 (MPE)
Radiofrequency Radiation Exposure Limits

DATE OF REPORT: April 16, 2001

ON THE BEHALF OF THE APPLICANT:

Modular Mining Systems Inc

AT THE REQUEST OF:

P.O. 4500012536

Modular Mining Systems Inc
3289 East Hemisphere Loop
Tucson, AZ 85706-5028

Attention of:

(520) 746-9127; FAX: 889-5790 (Headquarters)
Lyle V Johnson, Vice President, Product Eng'g
Romer Johnson, Supervisor, Product Design
(520) 806-3603; FAX: 3344
Email: johnsonr@mmsi.com
and/or Eric Gustafson, Senior RF Systems
Engineer
Email: eric@mmsi.com
(520) 806-3235; FAX: -3344

SUPERVISED BY:

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath.

Morton Flom, P. Eng.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
	Identification of the Equipment Under Test	2
	Standard Test Conditions and Engineering Practices	4
1.1310	Environmental Assessment	5

PAGE NO. 1 of 6.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT (SUPPLEMENTAL)
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0140011
- d) Client: Modular Mining Systems Inc
3289 East Hemisphere Loop
Tucson, AZ 85706-5028
- e) Identification: Models 301805 (Repeater) and 301582 (Mobile)
FCC ID: FJ6-301582
Description: 2.4Ghz Radio
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: April 16, 2001
EUT Received: March 12, 2001
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by: 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 6.

IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)

NAME AND ADDRESS OF APPLICANT:

Modular Mining Systems Inc
3289 East Hemisphere Loop
Tucson, AZ 85706-5028

MANUFACTURER:

Applicant

FCC ID: FJ6-301582

MODEL NOS: 301805 (Repeater)
301582 (Mobile)

DESCRIPTION: 2.4Ghz Radio

FREQUENCY RANGE, MHz: 2412 to 2457

POWER RATING, Watts: 0.0361 EIRP (Repeater)
0.038 EIRP (Mobile)
___ Switchable ___ Variable x N/A

MODULATION: ___ AMPS
___ TDMA
___ CDMA
x OTHER


ANTENNA: ___ HELICAL
___ MONOPOLE
___ WHIP
x OTHER

NOTE: For RF Safety test antenna gain taken at the upper range of expected gain (i.e. 0 dBd) and RF Power set to highest nominal power across all channels.

PAGE NO.

3 of 6.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

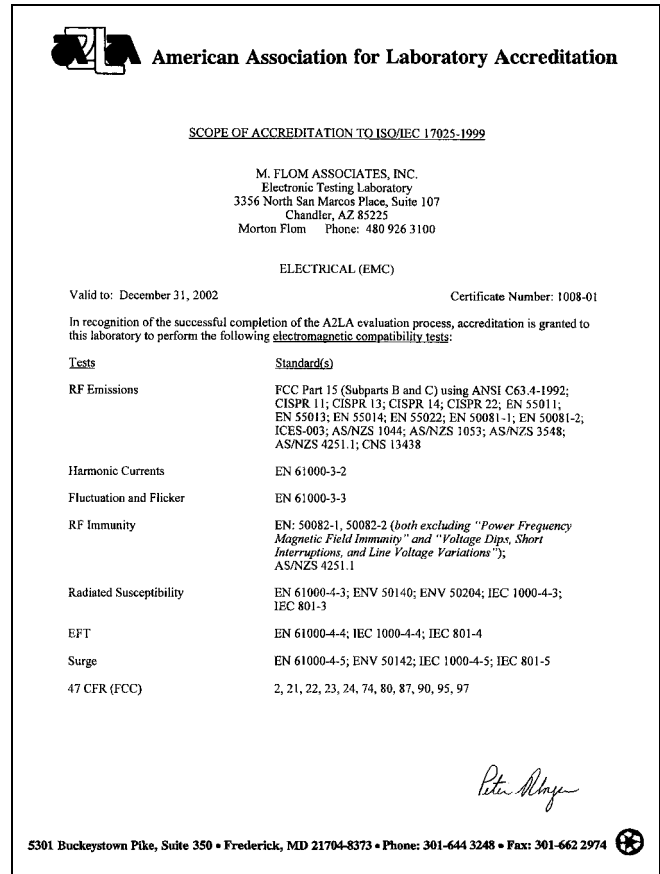

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

4 of 6.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 5 of 6.

Name of test: Environmental Assessment

Specification: FCC: 47 CFR 1.1310

Measurement Guide: ANSI/IEEE C95.1 1992

Test Equipment: Maximum Permissible Exposure (MPE)
measurement system, consisting of:
Narda 8717-1174R, Radiation meter
Narda 8761D, E-field probe (300 kHz - 3 GHz)
(Calibrated Nov-98)

Measurement Procedure:

1. The following measurements were performed with a Narda probe using ANSI/IEEE C95.1 as a guide.
2. Prior to making any measurements, the measurements system was calibrated in accordance with the manufacturer's procedures.
3. The EUT's radiating element (antenna) was placed on a 1 m tall table for ease of testing. For equipment normally operated on a metal surface, a ground plane was used.
4. The remaining equipment necessary to operate the EUT was maintained at a distance from the measurement arrangement suitable to minimize interference with the measurements.
5. The minimum safe distance was calculated from the formula $\text{Power Density} = \text{EIRP} / 4\pi R^2$ (Peak Watts/m²). The calculation is shown with the measurement data.
6. With the EUT operating at maximum power, a search was initiated for worst case emissions with the probe raised and lowered over a range of 0.2 to 2 meters in height and over a horizontal plane of 0° to 360°.
7. Average values were calculated for the whole body (0.2-2.0m), lower body (0.2-0.8m) and upper body (1.0-2.0m).

Results: Attached.

PAGE NO. 6 of 6.

Name of test: R.F. Radiation Exposure

FCC Rules: 1.1307, 1.1310, 1.1311, 2.1091
Description, EUT: See page 2 of Test Report

LIMITS: Uncontrolled	0.3-1.234 MHz:	Limit [mw/cm ²]	= 100
Exposure	1.34-30 MHz:	Limit [mw/cm ²]	= (180/f ²)
47 CFR 1.1310	30-300 MHz:	Limit [mw/cm ²]	= 0.2
Table 1, (B)	300-1500 MHz:	Limit [mw/cm ²]	= f/1500
	1500-100,000 MHz:	Limit [mw/cm ²]	= 1.0

Theoretical Safe Distance, R meters

$$R_m = (\text{Peak Watts}/4\pi \times \text{Limit})^{1/2}$$

$$F_c = 2432 \text{ MHz}$$

$$\text{Limit} = 1.0 \text{ mw/cm}^2$$

Peak Power =

$$R_m = [0.038/(4\pi \times 10 \times 1.0)]^{1/2}$$

$$= 0.0174 \text{ meter}$$

$$= 1.7 \text{ cm}$$

Minimum safe distance = 20 cm for the Repeater and the Mobile Radio.

SUPERVISED BY:


Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:


Morton Flom, P. Eng.