

WCDMA Band 2

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 20.5°C
Medium parameters used: $f = 1908$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 40.429$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.72, 7.88, 7.39) @ 1907.6 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 2_ch9538/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.38 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 2_ch9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.846 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.479 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.61 W/kg

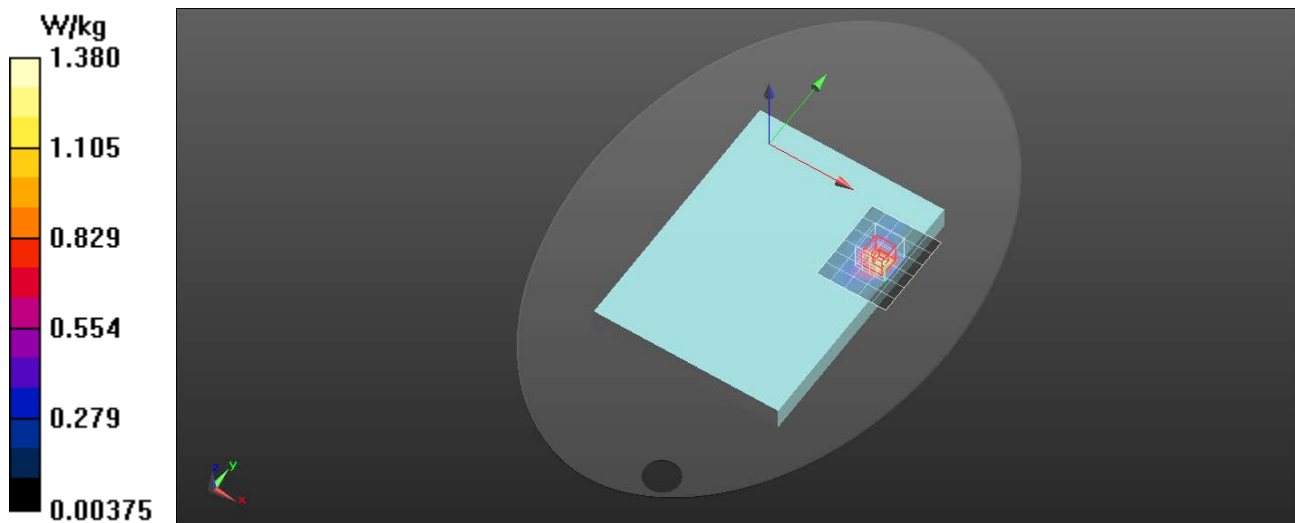

WCDMA Band 4

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 20.8°C
Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 41.241$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.96, 8.13, 7.62) @ 1712.4 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 4_ch1312/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 4_ch1312/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.472 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.53 W/kg

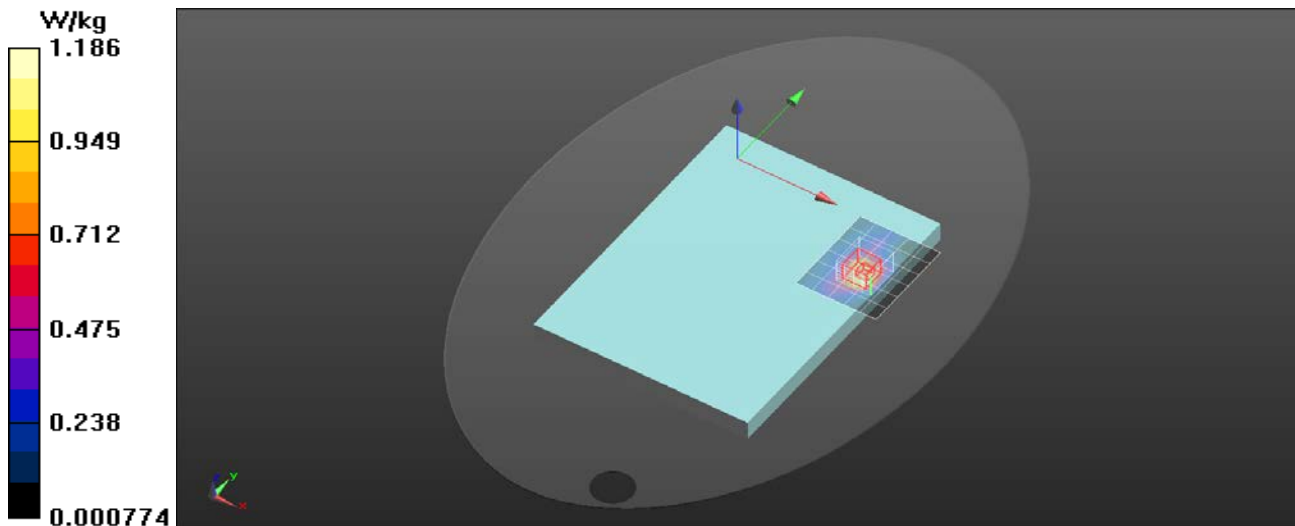

WCDMA Band 5

Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 20.6°C
Medium parameters used: $f = 847$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 43.107$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.37, 9.57, 8.97) @ 846.6 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 5_ch4233/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.57 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/WCDMA Band 5_ch4233/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.989 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.673 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.60 W/kg

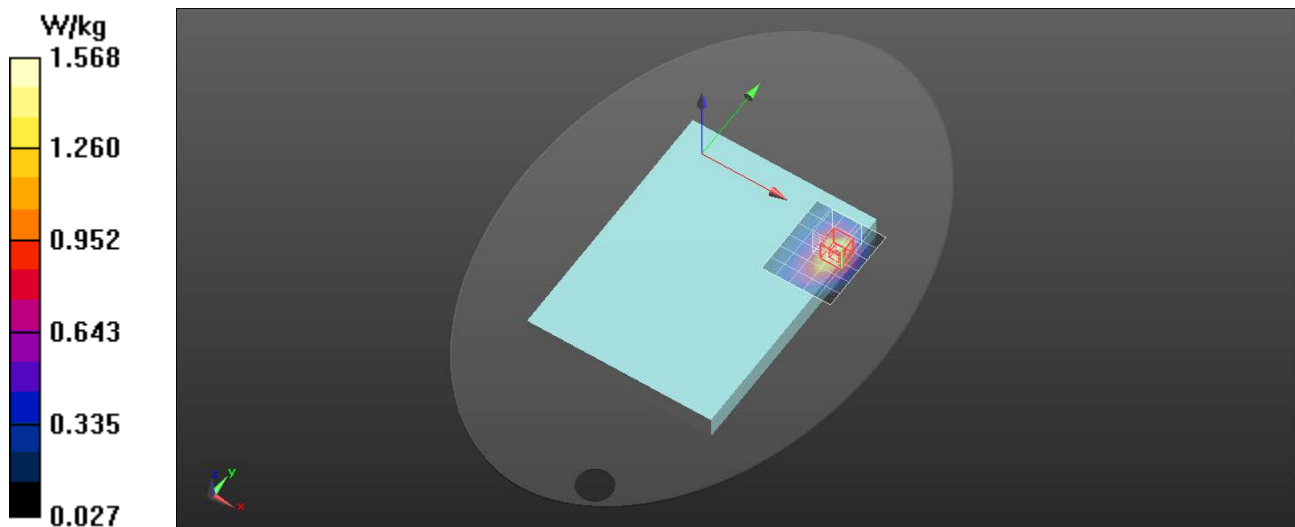

LTE Band 2/25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.1°C; Liquid Temperature: 20.3°C
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.72, 7.88, 7.39) @ 1905 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 25_20M_ch26590/RB 50,0/Area Scan (7x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.78 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 25_20M_ch26590/RB 50,0/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.138 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.558 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 1.83 W/kg

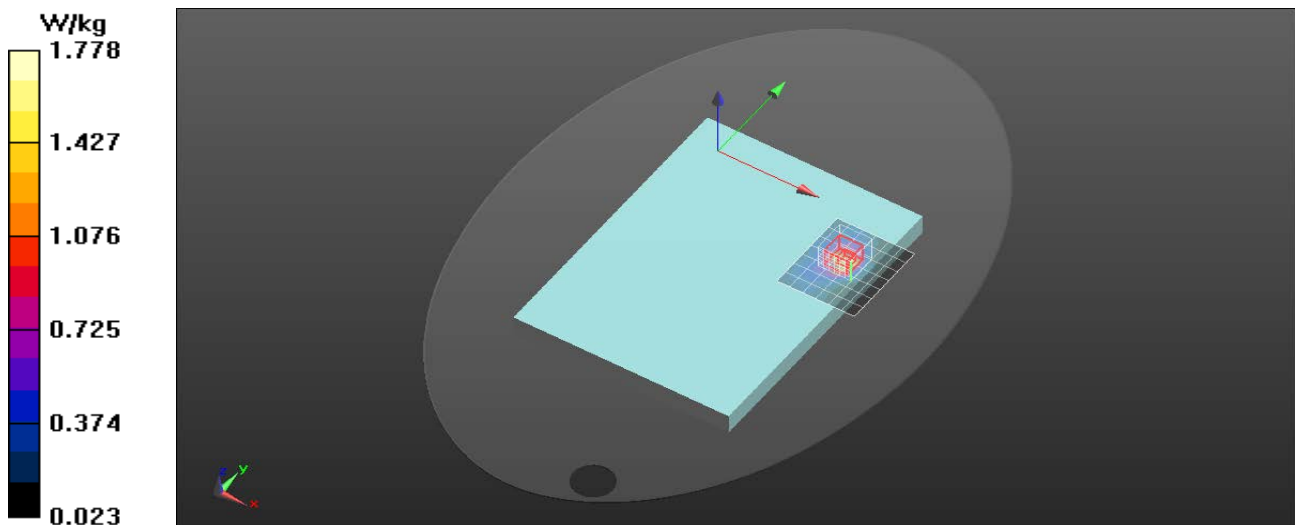

LTE Band 4/66

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.7°C; Liquid Temperature: 20.4°C
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 41.672$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.96, 8.13, 7.62) @ 1720 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_10mm/LTE Band 66_20M_ch132072/RB 1,0/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.899 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_10mm/LTE Band 66_20M_ch132072/RB 1,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.644 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 1.55 W/kg

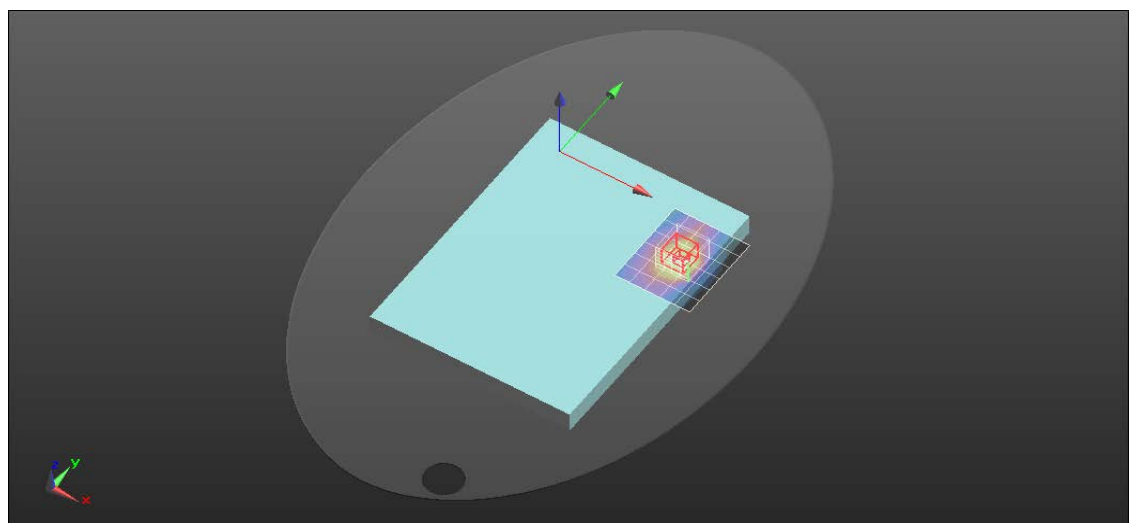

LTE Band 5/26

Frequency: 831 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.7°C; Liquid Temperature: 20.5°C
Medium parameters used: $f = 831$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.084$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.37, 9.57, 8.97) @ 831 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 26_15M_ch26865/RB 36,0/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.47 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 26_15M_ch26865/RB 36,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.808 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.589 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

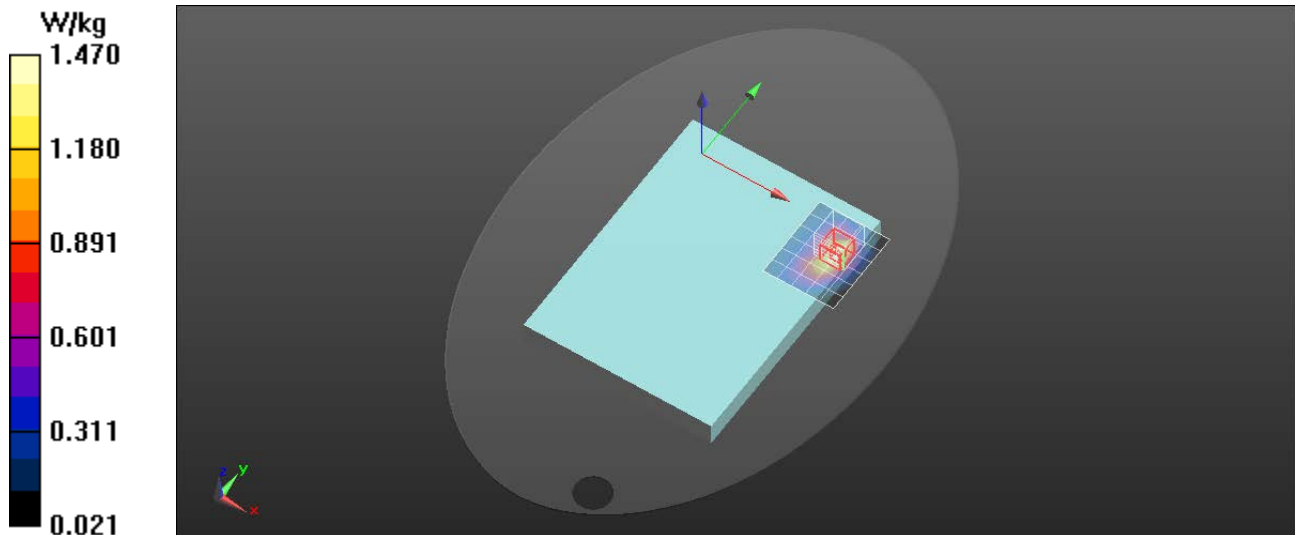

LTE Band 7

Frequency: 2560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.2°C; Liquid Temperature: 21.0°C
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 39.593$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.12, 7.26, 6.81) @ 2560 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 7_20M_ch21350/RB 50,0/Area Scan (7x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.81 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 7_20M_ch21350/RB 50,0/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.999 V/m; Power Drift = 0.11 dB



Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 2.03 W/kg

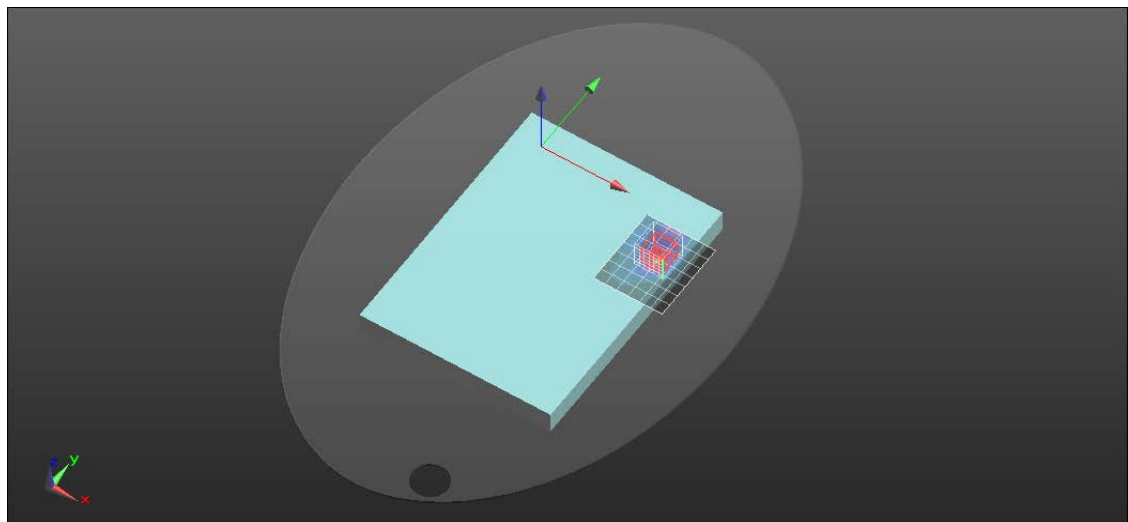

LTE Band 12

Frequency: 711 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.5°C; Liquid Temperature: 20.3°C
Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 43.712$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.9, 10.1, 9.47) @ 711 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 12_10M_ch23130/RB 25,0/Area Scan (6x7x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.36 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 12_10M_ch23130/RB 25,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$



Reference Value = 5.895 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.994 W/kg; SAR(10 g) = 0.602 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

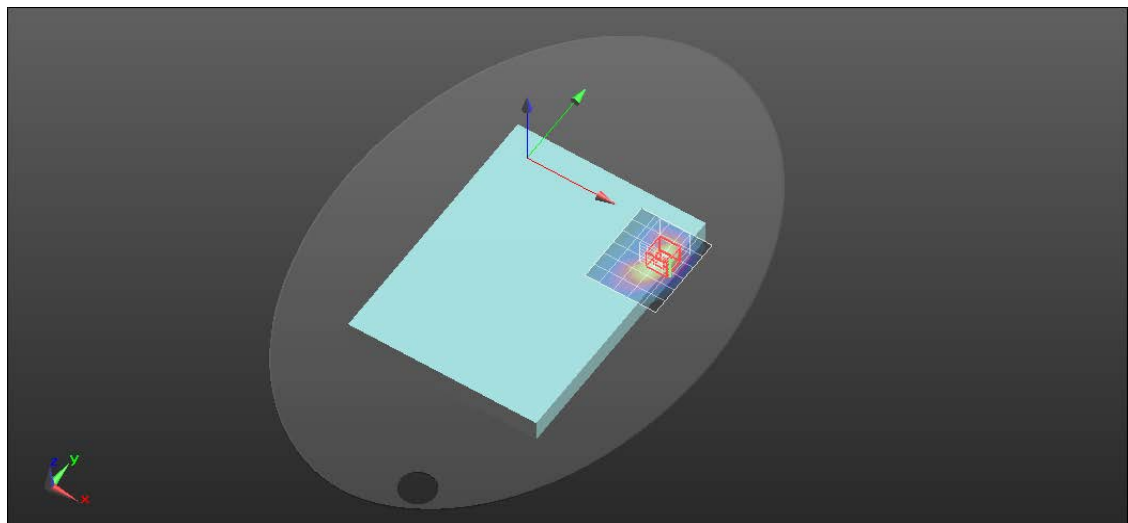

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.2°C; Liquid Temperature: 20.5°C
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.872 \text{ S/m}$; $\epsilon_r = 40.666$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.9, 10.1, 9.47) @ 782 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 13_10M_ch23230/RB 50,0/Area Scan (6x7x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.45 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 13_10M_ch23230/RB 50,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.552 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.637 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.56 W/kg

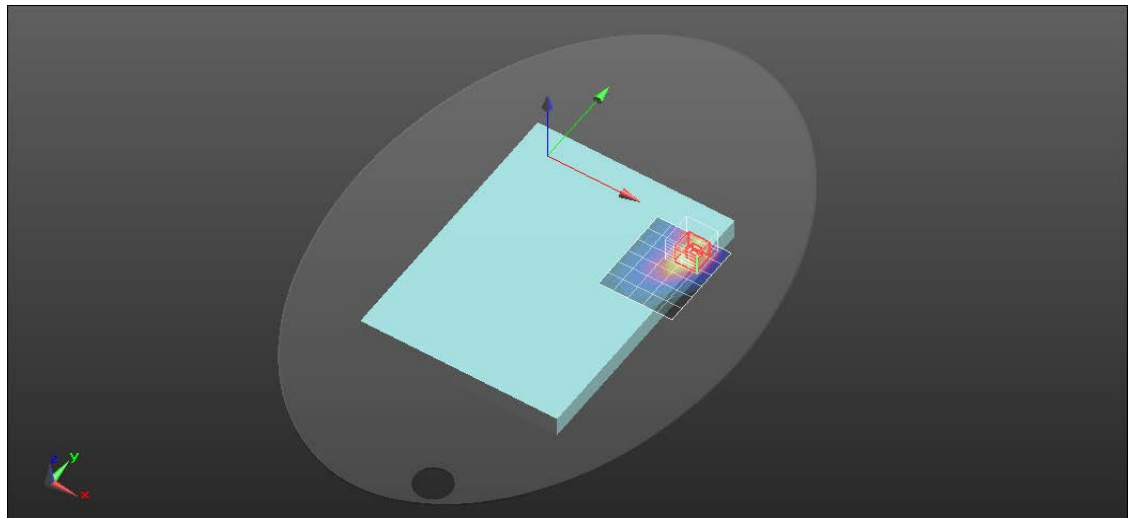

LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.2°C; Liquid Temperature: 20.5°C
Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 40.555$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.9, 10.1, 9.47) @ 793 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 14_10M_ch23330/RB 50,0/Area Scan (6x7x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.32 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 14_10M_ch23330/RB 50,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.219 V/m; Power Drift = 0.16 dB



Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.577 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 1.42 W/kg

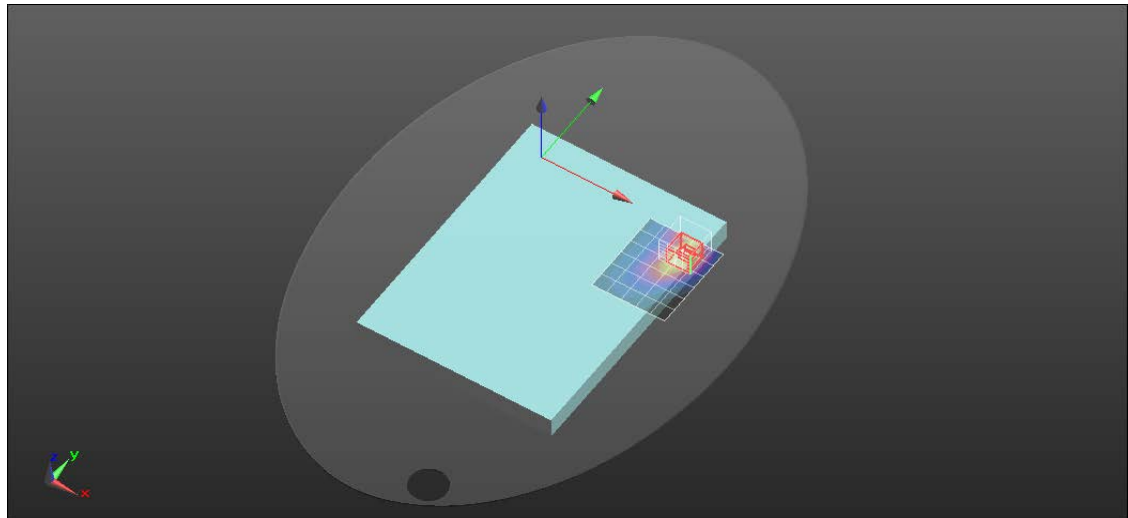

LTE Band 41

Frequency: 2680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.2°C; Liquid Temperature: 20.3°C
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.012$ S/m; $\epsilon_r = 39.779$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.12, 7.26, 6.81) @ 2680 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 41_20M_ch41490/RB 1,0/Area Scan (7x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.08 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 41_20M_ch41490/RB 1,0/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.557 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.2%

Maximum value of SAR (measured) = 1.41 W/kg

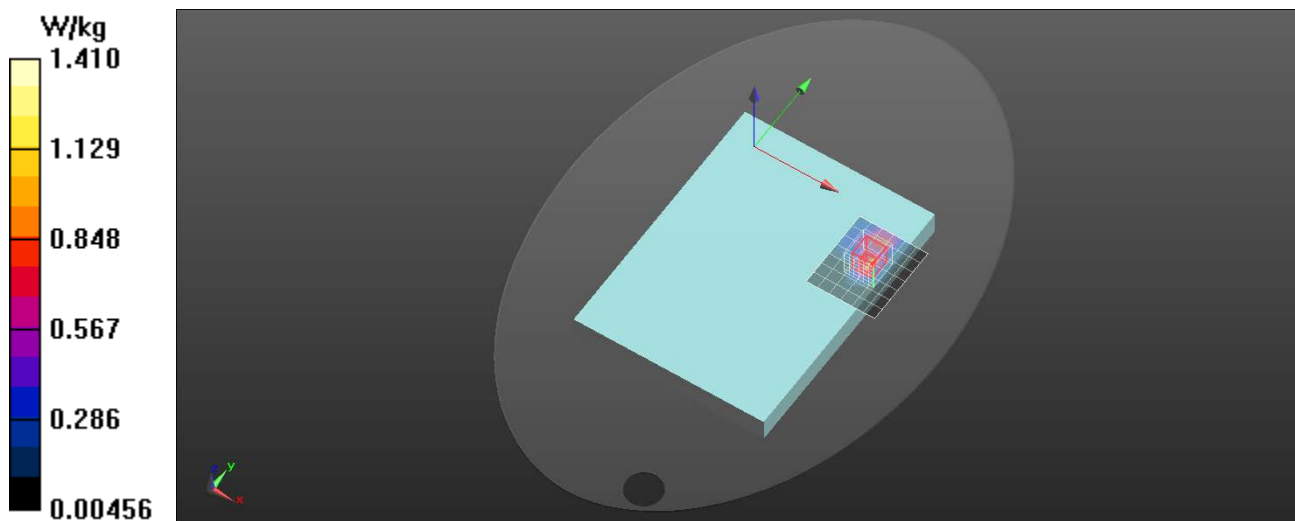

LTE Band 48

Frequency: 3625 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.6°C; Liquid Temperature: 20.7°C
Medium parameters used: $f = 3625$ MHz; $\sigma = 3.007$ S/m; $\epsilon_r = 36.152$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(6.63, 6.77, 6.34) @ 3625 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 48_20M_ch55990/RB 50,0/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.850 W/kg

P-sensor on/Fully Rugged Tablet PC/Rear_0mm/LTE Band 48_20M_ch55990/RB 50,0/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.6%

Maximum value of SAR (measured) = 1.21 W/kg

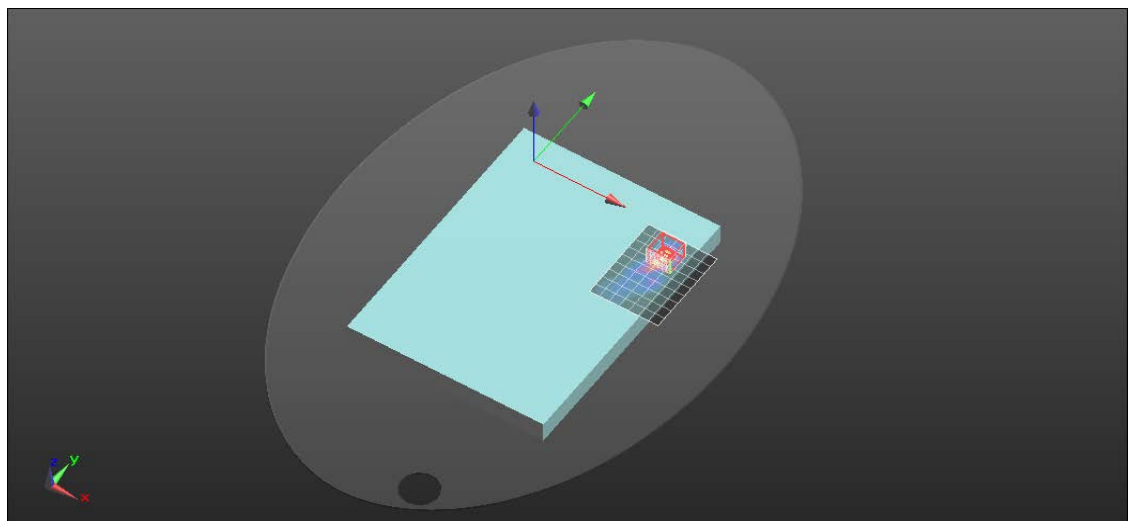

LTE Band 71

Frequency: 680.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.8°C; Liquid Temperature: 20.9°C
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 42.748$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(9.9, 10.1, 9.47) @ 680.5 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Fully Rugged Tablet PC/Edge 1_0mm/LTE Band 71_20M_ch133297/RB 50,0/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.48 W/kg

P-sensor on/Fully Rugged Tablet PC/Edge 1_0mm/LTE Band 71_20M_ch133297/RB 50,0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.98 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.445 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.53 W/kg

