

EXHIBIT 4

Test Report

Test Report

ACS-F98040

APPLICATION FOR CERTIFICATION
On Behalf of
JING MOLD ENTERPRISE CO., LTD.
Keyboard

Model : JME-7551A

Prepared for : JING MOLD ENTERPRISE CO., LTD.
No. 6-7, I-Huo Rd., Ta-Ya Chiang,
Taichung Hsien, Taiwan, R.O.C.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6 Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755)663-9496

Report Number : ACS-F98040
Date of Test : Nov. 16/19, 1998
Date of Report : Nov. 20, 1998

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION.....	1.-1
1.1. Description of Device (EUT).....	1.-1
1.2. Tested System Details.....	1.-1
1.3. Measurement Uncertainty.....	1.-2
1.4. Description of Test Facility	1.-3
2. POWER LINE CONDUCTED MEASUREMENT	2.-1
2.1. Test Equipment	2.-1
2.2. Block Diagram of Test Setup.....	2.-1
2.3. Conducted Power Line Emission Limit.....	2.-1
2.4. EUT Configuration on Measurement.....	2.-1
2.5. Operating Condition of EUT.....	2.-2
2.6. Test Procedure.....	2.-2
2.7. Line Conducted RF Voltage Measurement Results.....	2.-3
3. RADIATED EMISSION MEASUREMENT	3.-1
3.1. Test Equipment	3.-1
3.2. Block Diagram of Test Setup.....	3.-1
3.3. Radiation Limit	3.-2
3.4. EUT Configuration on Measurement.....	3.-2
3.5. Operating Condition of EUT.....	3.-2
3.6. Test Procedure.....	3.-3
3.7. Radiated Emission Noise Measurement Results.....	3.-3
4. PHOTOGRAPH	4.-1
4.1. Photos of Power Line Conducted Measurement.....	4.-1
4.2. Photos of Radiated Measurement	4.-2
APPENDIX I	(1 Page)
APPENDIX II	(1 Page)

TEST REPORT CERTIFICATION

Applicant : JING MOLD ENTERPRISE CO., LTD.
 Manufacturer : JING MOLD PLASTIC ELECTRONICS (SHENZHEN) CO., LTD.
 EUT Description : Keyboard
 (A) MODEL NO. : JME-7551A
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : +5V DC

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Class B October 1997 & FCC / ANSI C63.4-1992

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Nov. 16/19, 1998

Prepared by : Mabel Liu 20/11
 (ASSISTANT: MABEL LIU)

Reviewer : Martin Lu 21/11
 (SUPERVISOR: MARTIN LU)

For and on behalf of
 AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Approve & Authorized Signer : Leon Liu Nov. 24, 1998
 Authorized Signature(s)
 (MANAGER: LEON LIU)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Keyboard
Model Number	:	JME-7551A
Applicant	:	JING MOLD ENTERPRISE CO., LTD. No. 6-7, I-Huo Rd., Ta-Ya Chiang, Taichung Hsien, Taiwan, R.O.C.
Manufacturer	:	JING MOLD PLASTIC ELECTRONICS (SHENZHEN) CO., LTD. Xin Qiao 3rd Industrial Estate, Sha Jing, Pao An, Shen Zhen, China.
Data Cable	:	Shielded, Undetachable, 1.2m
Date of Test	:	Nov. 16/19, 1998

1.2. Tested System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	PC763
Serial Number	:	TA341U1417
FCC ID	:	AO9-PC76X
Manufacturer	:	Digital
Switching Power	:	Astec
Supply	:	Model SA20I-3438
Floppy Driver	:	Teac Corp. Model FD-235HF
Hard Disk Driver	:	Quantum, Model 540AT
Disk Ctrl Card	:	Within Mother Board
Serial/Parallel Card	:	Within Mother Board
Power Cord	:	Nonshielded, Detachable, 1.8m

1.2.2. MONITOR

Model Number	:	KS-M1421
Serial Number	:	120954
FCC ID	:	KVCKS-M1421
Manufacturer	:	KSAI Electronics Co., Ltd.
Data Cable	:	Shielded, Undetachable, 1.2m
Power Cord	:	Nonshielded, Undetachable, 1.2m

1.2.3. PRINTER

Model Number	:	2225C+
Serial Number	:	2937S56660
FCC ID	:	DS16XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, Model 82241A
Power Cord	:	Nonshielded, Undetachable, 1.8m
Data Cable	:	Shielded, Detachable, 1.5m

1.2.4. MODEM # 1

Model Number	:	AT-1200CK
Serial Number	:	07-317798
FCC ID	:	E2O5OV1200CK
Manufacturer	:	Datatronics Technology, Inc.
Data Cable	:	Shielded, Detachable, 1.5m
Power Adapter	:	Datatronics, Model 48C
		Nonshielded, Undetachable, 1.5m

1.2.5. MODEM # 2

Model Number	:	1200AT
Serial Number	:	AT 122257
FCC ID	:	EF56A5 1200AT
Manufacturer	:	Team Technology, Inc.
Data Cable	:	Shielded, Detachable, 1.5m
Power Adapter	:	Kaming, Model AD-09
Power Cord	:	Unshielded, Nondetachable, 1.8m

1.2.6. MOUSE

Model Number	:	M-S34
Serial Number	:	LZA81403347
FCC ID	:	DZL211029
Manufacturer	:	LOGITECH
Data Cable	:	Nonshielded, Undetachable, 2.5m

1.3. Measurement Uncertainty

Conduction Uncertainty	:	$U_c = \pm 2.66 \text{ dB}$
Radiation Uncertainty	:	$U_r = \pm 4.26 \text{ dB}$

2. POWER LINE CONDUCTED MEASUREMENT


2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	Jun. 07, 98	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-541-4	Jun. 07, 98	1 Year
3.	L.I.S.N. # 2	EMCO	3825/2	9006-1660	Jun. 07, 98	1 Year
4.	Coaxial Switch	Anritsu	MP59B	M29242	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

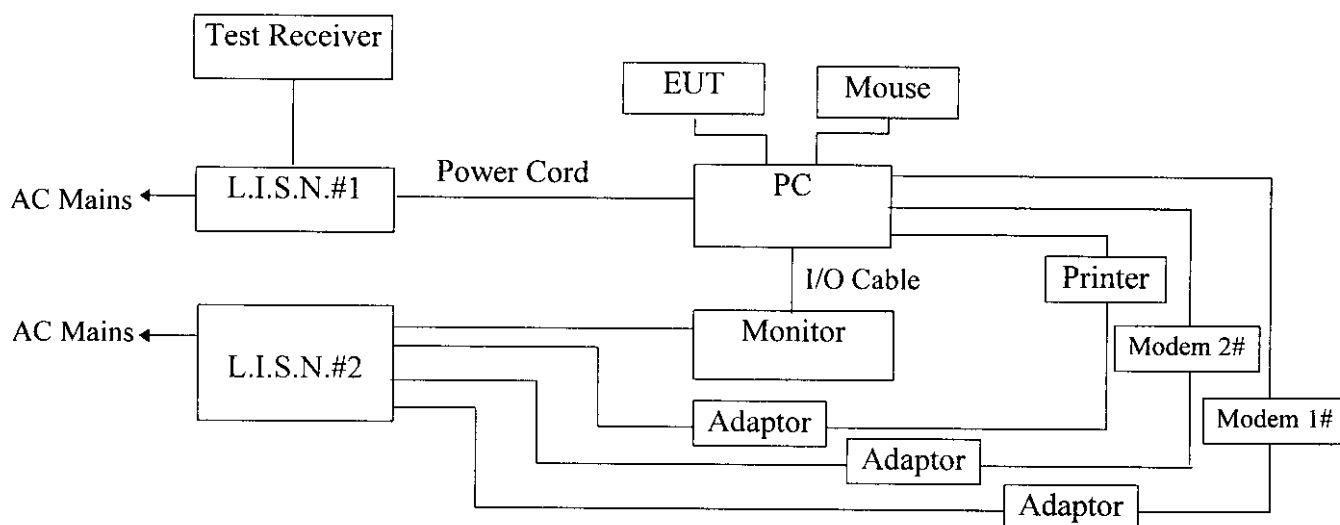

(EUT: Keyboard)

2.3. Conducted Power Line Emission Limit

Frequency MHz	Maximum RF Line Voltage	
	μV	$dB(\mu V)$
0.45 ~ 30.00	250	48

Remarks: RF LINE VOLTAGE ($dB(\mu V)$) = $20 \log$ RF LINE VOLTAGE (μV)

2.4. EUT Configuration on Measurement

The following equipments are installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

1.4. Description of Test Facility

Site Description	:	
3m Anechoic Chamber	:	Certificated by FCC, U.S.A, Aug. 18, 1997
3m & 10m Open Site	:	Certificated by FCC, U.S.A, Feb. 13, 1998
EMC Lab.	:	Certificated by TUV Rheinland Taiwan Dec. 05, 1995
		Certificated by COMMERCE, New Zealand May 19, 1997
		Certificated by NEMKO, Norway Feb. 28, 1998
Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd.
Site Location	:	No. 6 Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

2.4.1. Keyboard (EUT)

Model Number	:	JME-7551A
Serial Number	:	N/A
Manufacturer	:	JING MOLD PLASTIC ELECTRONICS (SHENZHEN) CO., LTD.
Data Cable	:	Shielded, Undetachable, 1.2m

2.4.2. Support Equipments

As in Section 1.2. Test System Details

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2.

2.5.2. Turn on the power of all equipments.

2.5.3. Personal Computer reads data from hard disk.

2.5.4. Personal Computer sends “H” character to Keyboard (EUT) and the screen will display and full with “H” pattern.

2.5.5. Personal Computer reads “H” character to printer, the printer will print “H” pattern on paper.

2.5.6. Personal Computer reads data from floppy disk and then writes data into floppy disk.

2.5.7. Personal Computer reads data from modem.

2.6. Test Procedure

The EUT is put on table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the testing equipments. Please reference the block diagram of the test setup and photographs. Both sides of AC line(VA & VB) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipments and all of the interface cables must be changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the test receiver (R&S ESHS20) is set at 10KHz.

The frequency range from 450KHz to 30MHz is checked.

The disturbance voltage from the EUT are investigated and the data is reported in Section 2.7.. Please reference to Appendix I.

2.7. Line Conducted RF Voltage Measurement Results

PASS.

The frequency range from 450KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test : Nov. 18, 1998 Temperature : 25 °C

EUT : Keyboard Humidity : 63 %

Model No. : JME-7551A Working Condition : **Running**

Test Engineer : Bright Xie

Frequency MHz	Reading		Limit dB(μV)
	Phase VA dB(μV)	Phase VB dB(μV)	
0.515	36.3	36.3	48
0.594	*	38.5	48
0.595	38.4	*	48
0.670	38.3	38.4	48
0.831	39.9	40.1	48
0.990	39.2	39.4	48
3.858	34.4	34.3	48

- Remark :
1. "*" means the emission level is undetectable.
 2. The worst emission is detected at 0.831MHz with corrected signal level of 40.1 dB(μV) (limit is 48 dB(μV)) when the VB side of the EUT is connected to L.I.S.N.

Reviewer : Martin Lu 2/1/11

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

3.1.1. In Chamber # 3

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	HP	85422E	3625A00181	Jun. 07, 98	1 Year
2.	Amplifier	HP	8447D	2944A07794	Aug. 23, 98	1/2 Year
3.	Bilog Antenna	Chase	CBL6112A	2176	Sep. 27, 98	1 Year
4.	Computer	N/A	N/A	N/A	N/A	N/A
5.	Printer	NEC	P3800	568101448	N/A	N/A

3.2. Block Diagram of Test Setup


3.2.1. Block diagram of connection between the EUT and simulators

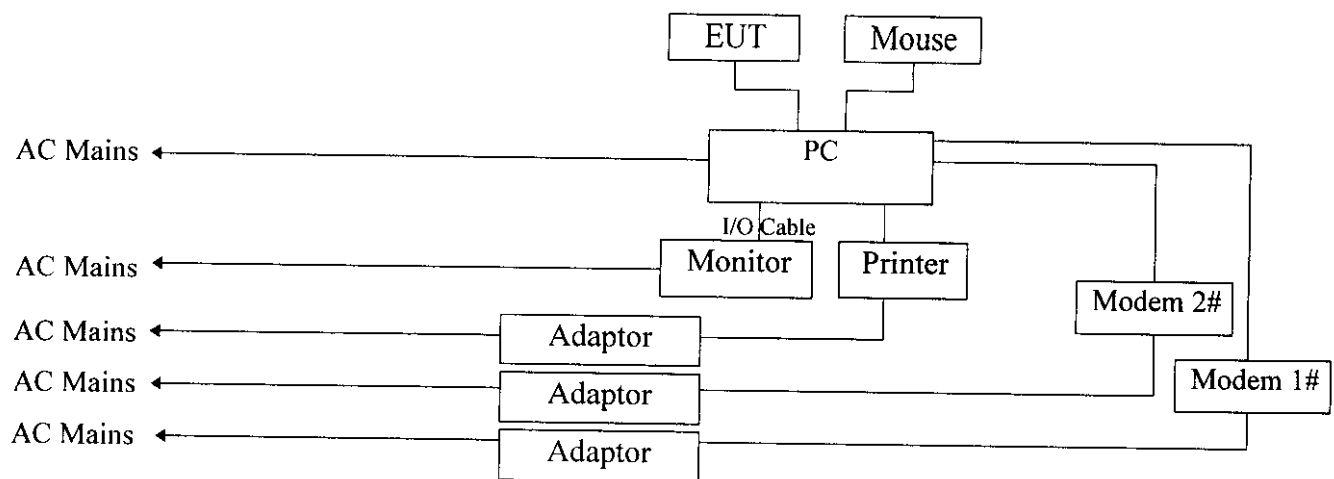

(EUT: Keyboard)

3.2.2. Chamber # 3 Test Setup Diagram

ANTENNA TOWER

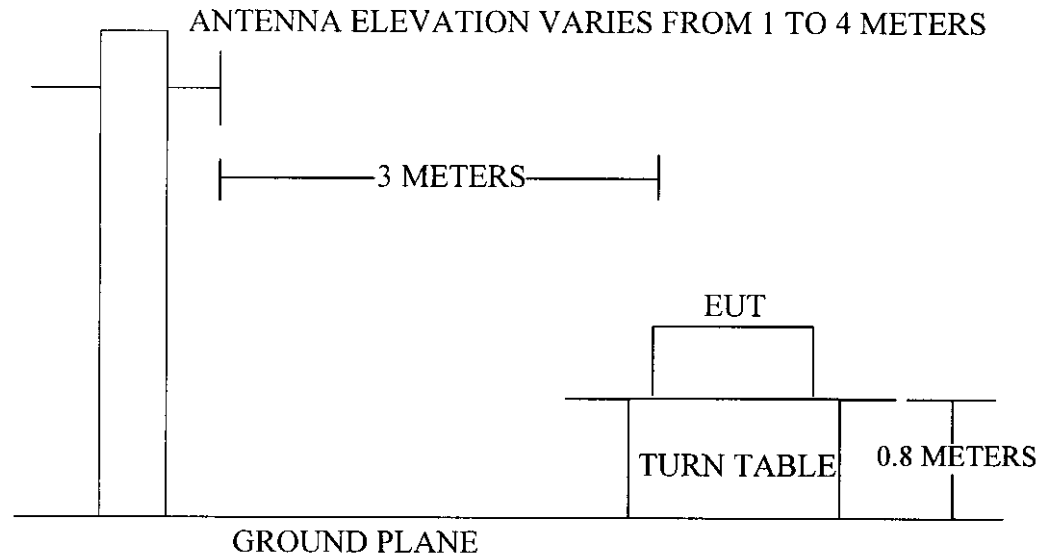

3.3. Radiation Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS dB(μ V)/m
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0

- Remark :
- (1) Emission level (dB(μ V)/m) = 20 log Emission level (μ V/m)
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

3.4. EUT Configuration on Measurement

The configuration of EUT and its simulators are same as those used in conducted measurement. Please refer to Section 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in Section 2.5.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna are used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-1992 on radiated emission measurement.

The bandwidth of the test receiver (R&S ESVS 20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

The one test mode (Running) are measured in the Chamber #3. All the test results are listed in Section 4.7. and all the scanning waveform are attached in Appendix II.

3.7. Radiated Emission Noise Measurement Results.

PASS.

The frequency range from 30MHz to 1000MHz is investigated. All the emission levels not reported below are too low against the Limit.

Please see the attached pages.

Date of Test : Nov. 16, 1998 Temperature : 25 °C

EUT : Keyboard Humidity : 55%

Model No. : JME-7551A Test Site : #3 Chamber

Display Pattern : **Running** Test Engineer : Bright Xie

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Horizontal dB	Emission Level Horizontal dBμV/m	Limits dBμV/m	Limits Over dBμV/m
71.200	6.30	1.68	20.80	28.77	40.00	-11.23
160.600	10.90	2.59	11.90	25.39	43.50	-18.11
216.050	9.67	3.05	12.80	25.52	46.00	-20.48
233.320	10.99	3.14	17.60	31.73	46.00	-14.27
249.980	12.38	3.28	20.90	36.56	46.00	-9.44
266.630	13.24	3.47	14.40	31.11	46.00	-14.89
312.130	13.84	3.72	14.50	32.07	46.00	-13.93
424.990	16.99	4.47	14.30	35.76	46.00	-10.24
433.450	16.84	4.50	12.70	34.04	46.00	-11.96

Calculation: Emission Level = Antenna Factor + Cable Loss + Meter Reading

Date of Test : Nov. 16, 1998 Temperature : 25 °C

EUT : Keyboard Humidity : 55%

Model No. : JME-7551A Test Site : #3 Chamber

Display Pattern : **Running** Test Engineer : Bright Xie

Frequency MHz	Antenna Factor dB	Cable Loss dB	Meter Reading Vertical dB	Emission Level Vertical dBμV/m	Limits dBμV/m	Limits Over dBμV/m
57.100	5.21	1.49	16.60	23.31	40.00	-16.69
92.100	10.61	1.92	13.20	25.72	43.50	-17.78
199.260	7.29	2.92	15.10	25.31	43.50	-18.19
209.697	8.14	2.99	14.60	25.73	43.50	-17.77
216.040	8.81	3.05	15.30	27.16	46.00	-18.84
249.600	11.86	3.28	12.70	27.84	46.00	-18.16
266.630	12.58	3.47	12.70	28.75	46.00	-17.25
313.020	14.08	3.73	10.40	28.21	46.00	-17.79
433.360	16.89	4.50	10.70	32.09	46.00	-13.91
541.340	16.95	5.11	8.60	30.67	46.00	-15.33
626.010	18.12	5.52	10.80	34.44	46.00	-11.56

Calculation: Emission Level = Antenna Factor + Cable Loss + Meter Reading

Reviewer : Martin Lu 2/11


Data#: 45

Title: JINGMOLD EMI

Date: 11-16-1998 Time: 09:04:02

Lab: ACS Standard Chamber

AUDIX Technology (Shenzhen) Co., Ltd.

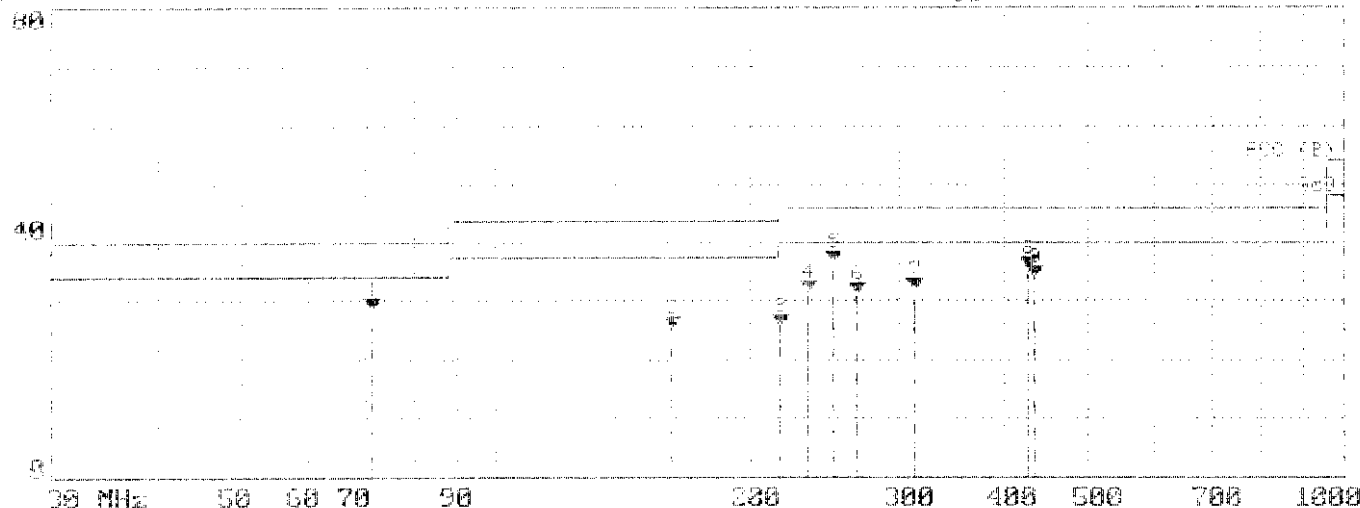

Trace :

Ref :

Limit : 700 (dB)

Scale : 100% HORIZONTAL

Margin : -6dB

TUT : 1000.00 MHz (30.00 MHz)

Power : 100.00 dBm

Mode : Running


Page: 1

	Freq	Level	Over	Ident	Lead	Probe	Cable	Preamp	
	MHz	dB	dB	Line	Level	Factor	Loss	Factor	Remark
				dB	dB	dB	dB	dB	
1	71.200	20.77	-11.23	40.00	20.00	0.00	1.66	0.00	OP
2	160.700	25.30	-14.70	40.00	11.30	10.00	1.59	0.00	OP
3	216.050	25.62	-14.38	46.00	12.60	9.67	3.05	0.00	OP
4	233.300	21.7	-18.30	46.00	17.60	10.99	3.14	0.00	OP
5	249.980	31.56	-8.44	46.00	20.90	12.30	3.28	0.00	OP
6	266.600	11.11	-28.89	46.00	14.40	13.24	2.47	0.00	OP
7	312.100	32.07	-7.93	46.00	14.50	13.64	1.72	0.00	OP
8	421.900	25.76	-14.24	46.00	14.30	16.99	4.67	0.00	OP
9	477.450	34.04	-11.96	46.00	12.70	16.24	4.50	0.00	OP

^a The number of subjects who were included in each group was determined by the number of subjects who completed the study. The number of subjects who were excluded from each group was determined by the number of subjects who did not complete the study.

[illegible]


71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 10

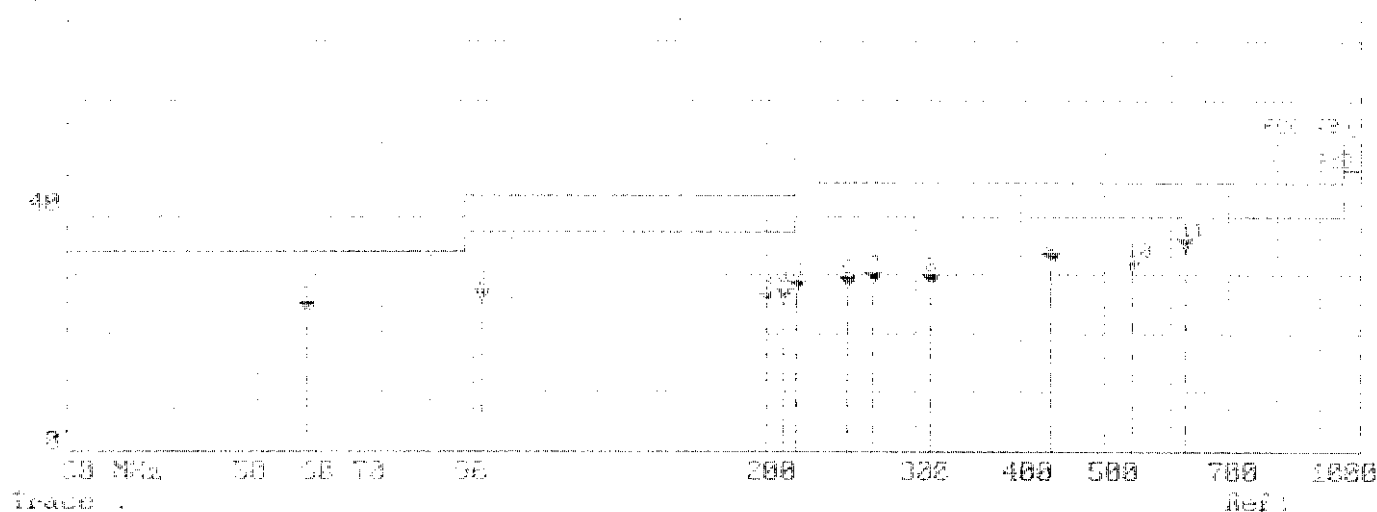

Conduction Test FCC Part15 B

18. Nov 98 09:34


EUT: Keyboard M/N:JME-7551A
Manuf: JingMold
Op Cond: Running
Operator: PHILO
Test Spec: Va 120V/60Hz
Comment: Temp:25°C
Humi:63%

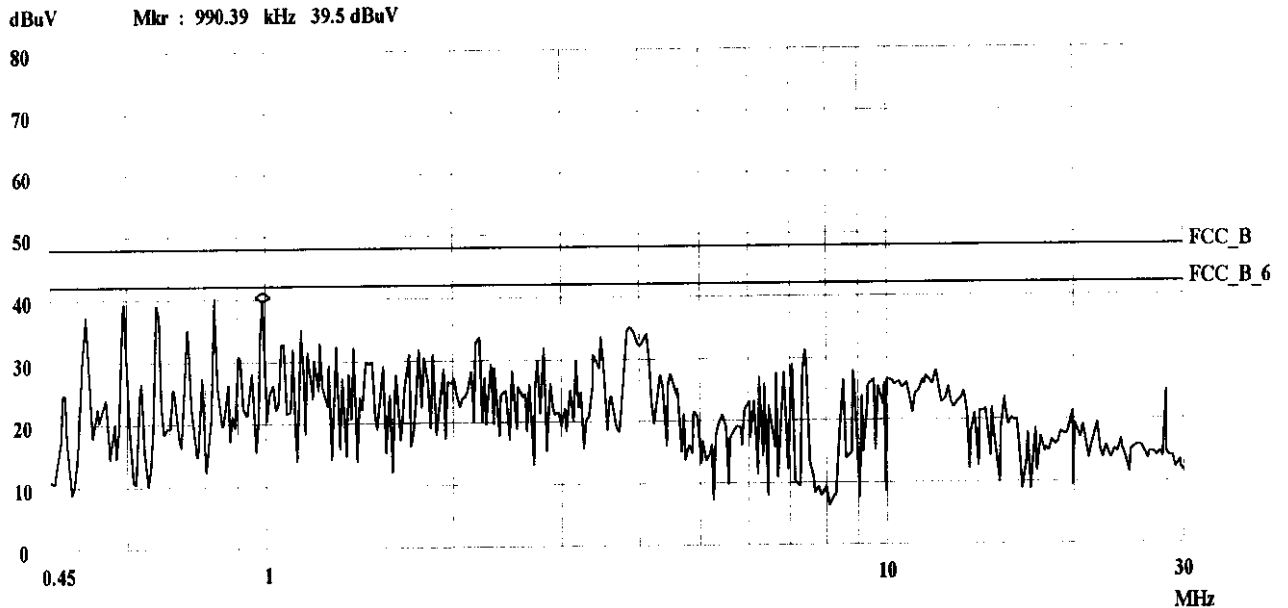

Conduction Test FCC Part15 B

18. Nov 98 09:31

EUT: Keyboard M/N:JME-7551A
Manuf: JingMold
Op Cond: Running
Operator: PHILO
Test Spec: Vb 120V/60Hz
Comment: Temp:25°C
Humi:63%

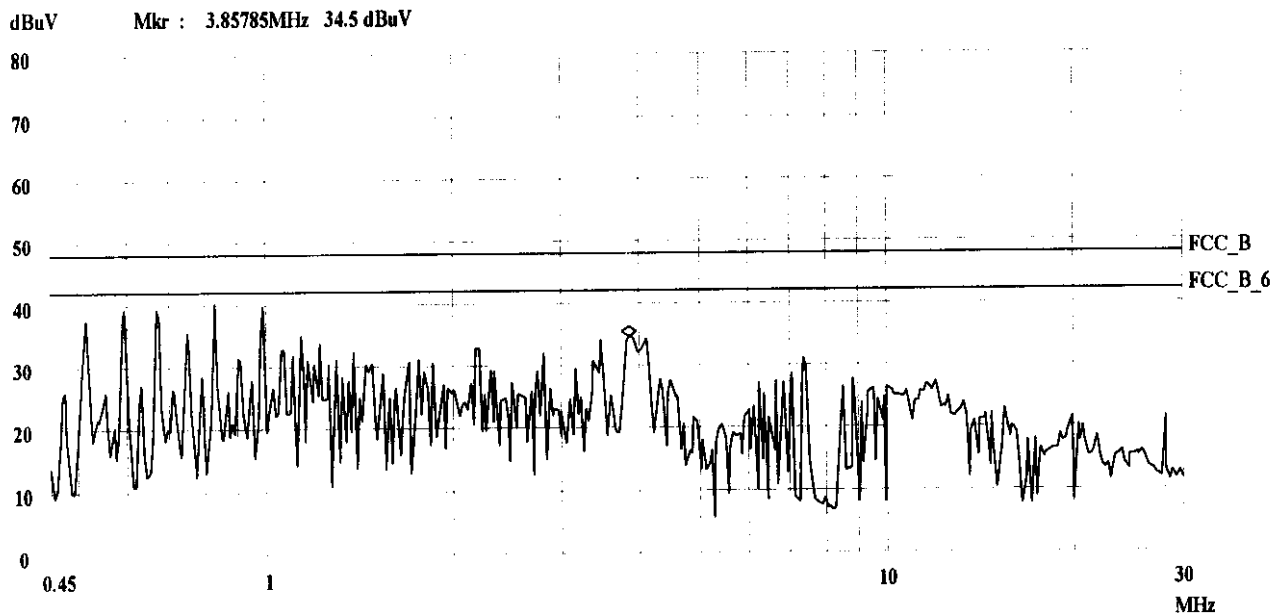


APPENDIX II

Data#: 47 File#: JINGMOLD.EMI

Date: 11-16-1998 Time: 09:02:08
AUDIX Technology (Shenzhen) Co., Ltd.

dBuV/m ACS Standard Chamber

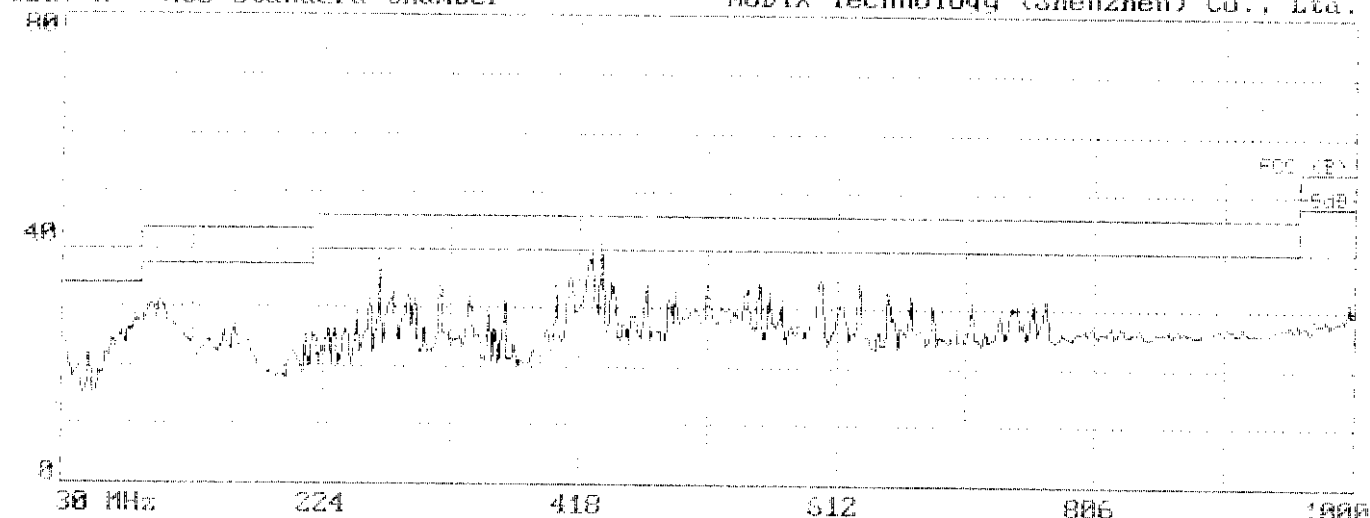


Trace :

Limit : F00 (B) 30
Filter : 0170 HORIZONTAL
Margin : -0.00
FUT : KeyBoard 1 M/NORME 7711A
Power : 120V/60Hz
Memo : Reading
:
:

Data#: 46 File#: JINGMOLD.EMI

Date: 11-16-1998 Time: 08:58:41
AUDIX Technology (Shenzhen) Co., Ltd.

dBuV/m ACS Standard Chamber

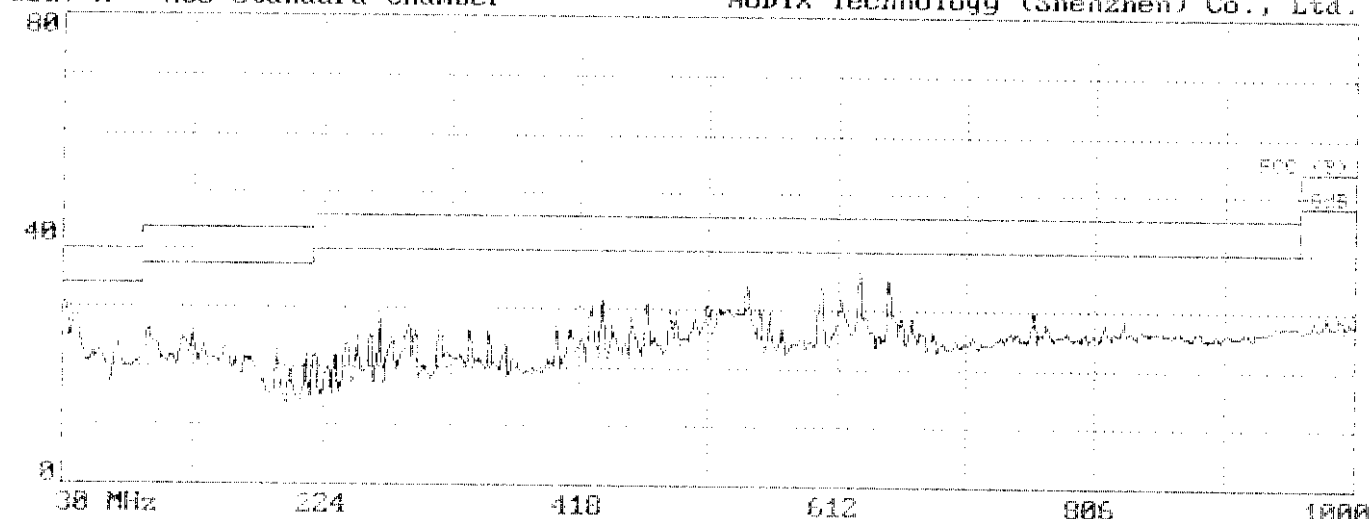

Trace :

Limit : F00 (B) 30
Filter : 0170 VERTICAL
Margin : -0.00
FUT : KeyBoard 1 M/NORME 7711A
Power : 120V/60Hz
Memo : Reading
:
: