


1.0 ID Label

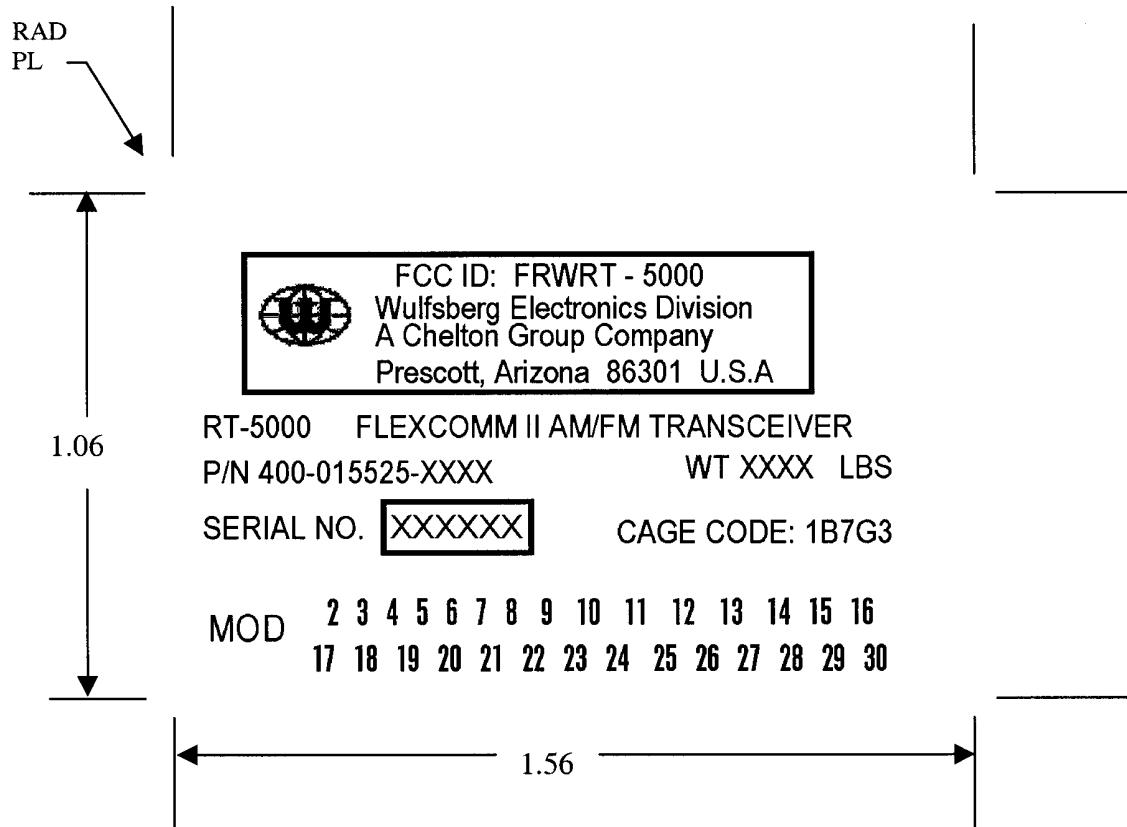

Dimensions: Inches  
Tolerance: .XX +/- .03

Location: Front of RT-5000, near RF connectors

NOTES:

1. MATERIAL: 156-040975 DIE CUT SPECIFICATION FOR CLUSTER 1 TAMPER  
PROOF PERMANENT LABEL  
OR  
156-040963 STANDARD CUT TAMPER PROOF PERMANENT LABEL
2. LETTERS: BLACK THERMAL TRANSFER
3. BACKGROUND: SILVER (MATTE FINISH)
4. BORDER: BLACK NONE CUT-LINE
5. CORNER: ROUNDED SQUARE
6. ARTWORK: USE DATAFILE LABEL IMAGE 156-016466.X.LBL  
(X = CURRENT REV OF THIS DOCUMENT)
7. THERMAL RIBBON: RHD TT BLK 80MM X 300M REVERSE
8. FILL IN FIELDS (eg. UNIT DASH NUMBERS, SERIAL NUMBERS) TO BE MARKED  
PER 150-341005 "WORK INSTRUCTIONS FOR THERMAL LABELS"