

# Test report

**250123-1TRFEMC**

Date of issue: July 17, 2014

Applicant:

**Lotek Wireless Inc.**

Product:

**SRX800**

Model

**SRX800**

Specifications:

- ◆ FCC 47 CFR Part 15, Subpart B – Certification
- ◆ ICES-003 Issue 5 August 2012



Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

*FCC-ICES.docx; Date: July 2013*

#### Lab and test locations

|                    |                   |                  |                         |
|--------------------|-------------------|------------------|-------------------------|
| Company name       | Nemko Canada Inc. |                  |                         |
| Designation number | CA2040            |                  |                         |
| Facility Name      | Ottawa            | Montreal         | Almonte                 |
| Address            | 303 River Road    | 292 Labrosse Ave | 1500 Peter Robinson Rd. |
| City               | Ottawa            | Pointe-Claire    | West Carleton           |
| Province           | ON                | QC               | ON                      |
| Postal code        | K1V 1H2           | H9R 5M3          | K0A 1L0                 |
| Country            | Canada            | Canada           | Canada                  |
| Telephone          | +1 613 737 9680   | +1 514 694 2684  | +1 613 256-9117         |
| Facsimile          | +1 613 737 9691   | +1 514 694 3528  | +1 613 256-8848         |
| Toll free          | +1 800 563 6336   |                  |                         |
| Website            | www.nemko.com     |                  |                         |

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Tested by          | Kevin Rose, Wireless/EMC Specialist                                                 |
| Reviewed by        | Andrey Adelberg, Senior Wireless/EMC Specialist                                     |
| Review date        | July 17, 2014                                                                       |
| Reviewer signature |  |

#### Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.  
© Nemko Canada Inc.

# Table of Contents

|                                                                                      |           |
|--------------------------------------------------------------------------------------|-----------|
| <b>Table of Contents .....</b>                                                       | <b>3</b>  |
| <b>Section 1      Report summary .....</b>                                           | <b>4</b>  |
| 1.1    Test specifications .....                                                     | 4         |
| 1.2    Exclusions .....                                                              | 4         |
| 1.3    Statement of compliance.....                                                  | 4         |
| 1.4    Test report revision history.....                                             | 4         |
| <b>Section 2      Summary of test results .....</b>                                  | <b>5</b>  |
| 2.1    North America test results.....                                               | 5         |
| <b>Section 3      Equipment under test (EUT) details .....</b>                       | <b>6</b>  |
| 3.1    Applicant/ Manufacturer .....                                                 | 6         |
| 3.2    Sample information .....                                                      | 6         |
| 3.3    EUT information .....                                                         | 6         |
| 3.4    EUT exercise and monitoring details .....                                     | 6         |
| 3.5    EUT setup details .....                                                       | 7         |
| <b>Section 4      Engineering considerations .....</b>                               | <b>8</b>  |
| 4.1    Modifications incorporated in the EUT.....                                    | 8         |
| 4.2    Technical judgment .....                                                      | 8         |
| 4.3    Deviations from laboratory tests procedures .....                             | 8         |
| <b>Section 5      Test conditions .....</b>                                          | <b>9</b>  |
| 5.1    Atmospheric conditions.....                                                   | 9         |
| 5.2    Power supply range .....                                                      | 9         |
| <b>Section 6      Measurement uncertainty .....</b>                                  | <b>10</b> |
| 6.1    Uncertainty of measurement .....                                              | 10        |
| <b>Section 7      Terms and definitions .....</b>                                    | <b>11</b> |
| 7.1    Product classifications definitions .....                                     | 11        |
| 7.2    General definitions .....                                                     | 12        |
| <b>Section 8      Testing data .....</b>                                             | <b>13</b> |
| 8.1    Radiated disturbance.....                                                     | 13        |
| 8.2    Conducted disturbance at mains port .....                                     | 18        |
| 8.3    Scanning receivers and frequency converters used with scanning receivers..... | 24        |
| <b>Section 9      EUT photos .....</b>                                               | <b>25</b> |
| 9.1    External photos.....                                                          | 25        |

## Section 1 Report summary

---

### 1.1 Test specifications

---

|                                               |                                                                            |
|-----------------------------------------------|----------------------------------------------------------------------------|
| FCC 47 CFR Part 15, Subpart B – Certification | Title 47: Telecommunication; Part 15—Radio frequency devices               |
| ICES-003 Issue 5 August 2012                  | Information Technology Equipment (ITE) – Limits and methods of measurement |

### 1.2 Exclusions

---

None

### 1.3 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.4 Test report revision history

---

**Table 1.4-1:** Test report revision history

| Revision # | Details of changes made to test report |
|------------|----------------------------------------|
| TRF        | Original report issued                 |

## Section 2 Summary of test results

---

### 2.1 North America test results

---

**Table 2.1-1:** FCC 47 CFR Part 15, Subpart B and ICES-003 Issue 5 results

| Test description                                                                       | Verdict |
|----------------------------------------------------------------------------------------|---------|
| Radiated disturbance                                                                   | Pass    |
| Conducted disturbance at mains port                                                    | Pass    |
| FCC 15.241(b) Scanning receivers and frequency converters used with scanning receivers | Pass    |

Notes: <sup>1</sup>Product classification B

## Section 3 Equipment under test (EUT) details

### 3.1 Applicant/ Manufacturer

|                 |                     |
|-----------------|---------------------|
| Company name    | Lotek Wireless Inc. |
| Address         | 115 Pony Drive      |
| City            | Newmarket           |
| Province/State  | Ontario             |
| Postal/Zip code | L3Y 7B5             |
| Country         | Canada              |

### 3.2 Sample information

|                        |                   |
|------------------------|-------------------|
| Receipt date           | February 10, 2014 |
| Nemko sample ID number | 1                 |

### 3.3 EUT information

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name                    | SRX800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Model                           | SRX800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Serial number                   | 0010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Frequency Band                  | 138–174 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Frequencies tested              | 138.3, 149.8, and 173.845 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Part number                     | SRX800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Power requirements              | 9 V <sub>DC</sub> , 1 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description/theory of operation | Telemetry Receiver. The telemetry receiver is a VHF receiver receiving OOK (ON-Off keyed) VHF signals, with a burst interval in the range of seconds. The system consists of: CPU board, RF receiver board (including audio amplifier and speaker), power management and interconnect board, keypad, LCD display, and GPS receiver).<br>The CPU controls the system and is collecting information from the RF board, which is then displayed on the LCD. The receiving of the signal is also signaled via the incorporated speaker. The user can operate the receiver via a keypad. |
| Operational frequencies         | 138–176 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Software details                | Master firmware: V 4.0/ Slave firmware V 9.4/ Windows software V2.0.3648.16.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

### 3.4 EUT exercise and monitoring details

The EUT was receiving RF ID tags.

All testing was performed with the EUT scanning at each frequency of operation.

### 3.5 EUT setup details

**Table 3.5-1: EUT sub assemblies**

| Description                             | Brand name | Model/Part number | Serial number | Rev. |
|-----------------------------------------|------------|-------------------|---------------|------|
| CPU Board                               | Lotek      | 200-2495          | -             | 2.4  |
| RF board                                | Lotek      | 200-2490          | -             | 2.0  |
| Power management and interconnect board | Lotek      | 200-2508          | -             | 3    |
| Keypad Assembly                         | Lotek      | 011-1351          | -             | N/A  |
| LCD Display                             | Lotek      | 011-1245          | -             | N/A  |
| GPS antenna assembly                    | Lotek      | 200-1249          | -             | N/A  |

**Table 3.5-2: EUT interface ports**


| Description                        | Qty. |
|------------------------------------|------|
| USB                                | 1    |
| RS-232 (9 pin DB, male)            | 1    |
| VHF input (BNC)                    | 1    |
| GPS antenna connector (SMA female) | 1    |

**Table 3.5-3: Support equipment**

| Description                          | Brand name | Model/Part number | Serial number | Rev. |
|--------------------------------------|------------|-------------------|---------------|------|
| VHF antenna                          | Larsen     | KD4-150-HQ        | -             | N/A  |
| Wall Mount Power Supply 9 V/1.3 A DC | Microchip  | PS1000            | -             | N/A  |

**Table 3.5-4: Inter-connection cables**

| Cable description      | From     | To          | Length (m) |
|------------------------|----------|-------------|------------|
| USB cable              | Receiver | PC          | 1.8 m      |
| RS-232 cable           | Receiver | PC          | 1.8 m      |
| GPS antenna with cable | Receiver | GPS antenna | 2.5 m      |

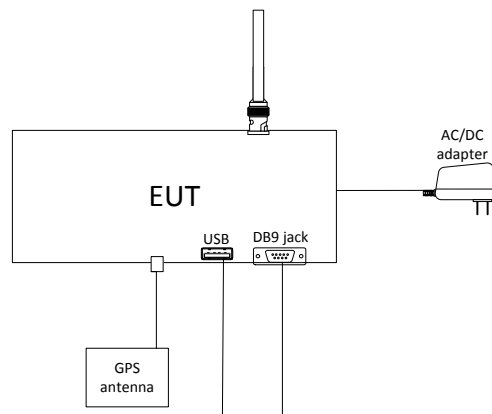

**Figure 3.5-1: Setup diagram**

## Section 4 Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 5 Test conditions

---

### 5.1 Atmospheric conditions

---

|                   |            |
|-------------------|------------|
| Temperature       | 15–30 °C   |
| Relative humidity | 20–75 %    |
| Air pressure      | 86–106 kPa |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6 Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of  $K=2$  with 95% certainty.

## Section 7 Terms and definitions

### 7.1 Product classifications definitions

#### 7.1.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Class A digital device | A digital device that is marketed for use in a commercial, industrial or business environment, exclusive of a device which is marketed for use by the general public or is intended to be used in the home.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Class B digital device | <p>A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.</p> <p>Note: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.</p> |

#### 7.1.2 EN 55022, AS/NZS CISPR 22, and CISPR 22

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Class B ITE | <p>ITE (Information technology equipment) is intended primarily for use in the domestic environment and may include:</p> <ul style="list-style-type: none"> <li>– Equipment with no fixed place of use; for example, portable equipment powered by built-in batteries;</li> <li>– Telecommunication terminal equipment powered by a telecommunication network;</li> <li>– Personal computers and auxiliary connected equipment.</li> </ul> |
| Class A ITE | <p>is a category of all other ITE, which satisfies the class A ITE limits but not the class B ITE limits. Such equipment should not be restricted in its sale but the following warning shall be included in the instructions for use:</p> <p><b>WARNING</b></p> <p>This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.</p>   |

#### 7.1.3 ICES-003

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Class B ITE | limits of radio noise for ITE for residential operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Class A ITE | limits of radio noise for ITE for non-residential operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Conditions  | <p>Only ITE intended strictly for non-residential use in commercial, industrial or business environments, and whose design or other characteristics strongly preclude the possibility of its use in a residential environment, shall be permitted to comply with the less stringent Class A limits.</p> <p>All ITE that cannot meet the conditions for Class A operation shall comply with the Class B limits.</p> <p>The ITE shall comply with both the power line – conducted and the radiated emissions limits within the same Class, with no intermixing.</p> |

## 7.2 General definitions

### 7.2.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Digital device (Previously defined as a computing device) | <p>An unintentional radiator (device or system) that generates and uses timing signals or pulses at a rate in excess of 9,000 pulses (cycles) per second and uses digital techniques; inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio frequency energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer. A radio frequency device that is specifically subject to an emanation requirement in any other FCC Rule part or an intentional radiator subject to subpart C of this part that contains a digital device is not subject to the standards for digital devices, provided the digital device is used only to enable operation of the radio frequency device and the digital device does not control additional functions or capabilities.</p> <p>Note: Computer terminals and peripherals that are intended to be connected to a computer are digital devices.</p> |
|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 7.2.2 EN 55022, AS/NZS CISPR 22, and CISPR 22

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information technology equipment (ITE) | <p>Any equipment:</p> <ul style="list-style-type: none"> <li>a) Which has a primary function of either (or a combination of) entry, storage, display, retrieval, transmission, processing, switching, or control, of data and of telecommunication messages and which may be equipped with one or more terminal ports typically operated for information transfer;</li> <li>b) With a rated supply voltage not exceeding 600 V.</li> </ul> <p>It includes, for example, data processing equipment, office machines, electronic business equipment and telecommunication equipment.</p>                                                                                                                                                                                                                                                                             |
| Telecommunications/network port        | <p>Point of connection for voice, data and signaling transfers intended to interconnect widely dispersed systems via such means as direct connection to multi-user telecommunications networks (e.g. public switched telecommunications networks (PSTN) integrated services digital networks (ISDN), x-type digital subscriber lines (xDSL), etc.), local area networks (e.g. Ethernet, Token Ring, etc.) and similar networks</p> <p>NOTE A port generally intended for interconnection of components of an ITE system under test (e.g. RS-232, IEEE Standard 1284 (parallel printer), Universal Serial Bus (USB), IEEE Standard 1394 ("Fire Wire"), etc.) and used in accordance with its functional specifications (e.g. for the maximum length of cable connected to it), is not considered to be a telecommunications/network port under this definition.</p> |

### 7.2.1 ICES-003

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information technology equipment (ITE) | <p>Information Technology Equipment (ITE) is defined as devices or systems that use digital techniques for purposes such as data processing and computation. ITE is any unintentional radiator (device or system) that generates and/or uses timing signals or pulses having a rate of at least 9 kHz and employs digital techniques for purposes such as computation, display, data processing and storage, and control.</p> |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Section 8 Testing data

### 8.1 Radiated disturbance

#### 8.1.1 References

CISPR 22 and ANSI C63.4-2003

#### 8.1.2 Test summary

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Verdict       | Pass              |                   |           |
| Test date     | February 12, 2014 | Temperature       | 22 °C     |
| Test engineer | Kevin Rose        | Air pressure      | 1004 mbar |
| Test location | Ottawa            | Relative humidity | 36 %      |

#### 8.1.3 Notes

The test was performed on each frequency of operation and then in scan mode. Worst case data is presented

#### 8.1.4 Setup details

|                          |                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT setup configuration  | Table top                                                                                                                                                                                                                                                                                                                          |
| Test facility            | 3 m Semi anechoic chamber                                                                                                                                                                                                                                                                                                          |
| Measuring distance       | 3 m                                                                                                                                                                                                                                                                                                                                |
| Antenna height variation | 1–4 m                                                                                                                                                                                                                                                                                                                              |
| Turn table position      | 0–360°                                                                                                                                                                                                                                                                                                                             |
| Measurement details      | A preview measurement was generated with receiver in continuous scan or sweep mode while the EUT was rotated and antenna adjusted to maximize radiated emission. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement. |

Receiver/spectrum analyzer settings for frequencies below 1 GHz:

|                      |                                                            |
|----------------------|------------------------------------------------------------|
| Resolution bandwidth | 120 kHz                                                    |
| Video bandwidth      | 300 kHz                                                    |
| Detector mode        | Peak (preview measurement); Quasi-peak (final measurement) |
| Trace mode           | Max Hold                                                   |
| Measurement time     | 100 ms (preview measurement); 1000 ms (final measurement)  |

Receiver/spectrum analyzer settings for frequencies above 1 GHz:

|                      |                                          |
|----------------------|------------------------------------------|
| Resolution bandwidth | 1 MHz                                    |
| Video bandwidth      | 3 MHz                                    |
| Detector mode        | Peak (preview); Peak and Average (final) |
| Trace mode           | Max Hold                                 |
| Measurement time     | 100 ms (preview); 1000 ms (final)        |

#### 8.1.4 Setup details, continued

**Table 8.1-1: Radiated disturbance equipment list**

| Equipment                   | Manufacturer           | Model no.  | Asset no. | Cal cycle | Next cal.   |
|-----------------------------|------------------------|------------|-----------|-----------|-------------|
| 3 m EMI test chamber        | TDK                    | SAC-3      | FA002047  | 1 year    | Mar. 09/14  |
| Flush mount turntable       | Sunol                  | FM2022     | FA002082  | —         | NCR         |
| Controller                  | Sunol                  | SC104V     | FA002060  | —         | NCR         |
| Antenna mast                | Sunol                  | TLT2       | FA002061  | —         | NCR         |
| Power source                | California Instruments | 3001i      | FA001021  | 1 year    | June 04/14  |
| Receiver/spectrum analyzer  | Rohde & Schwarz        | ESU 26     | FA002043  | 1 year    | Oct. 24/14  |
| Bilog antenna (20–3000 MHz) | Sunol                  | JB3        | FA002108  | 1 year    | Feb. 21/14  |
| Horn antenna (1–18 GHz)     | EMCO                   | 3115       | FA000825  | 1 year    | Feb. 21/14  |
| Pre-amplifier (1–18 GHz)    | JCA                    | JCA118-503 | FA002091  | 1 year    | June 21/14  |
| 50 Ω coax cable             | Huber + Suhner         | NONE       | FA002392  | 1 year    | July. 17/14 |
| 50 Ω coax cable             | C.C.A.                 | None       | FA002555  | 1 year    | Oct. 07/14  |


Notes: NCR - no calibration required

**Table 8.1-2: Radiated disturbance test software details**

| Manufacturer of Software | Details                                              |
|--------------------------|------------------------------------------------------|
| Rhode & Schwarz          | EMC32, Software for EMC Measurements, Version 8.53.0 |

Notes: None

## 8.1.5 Test data

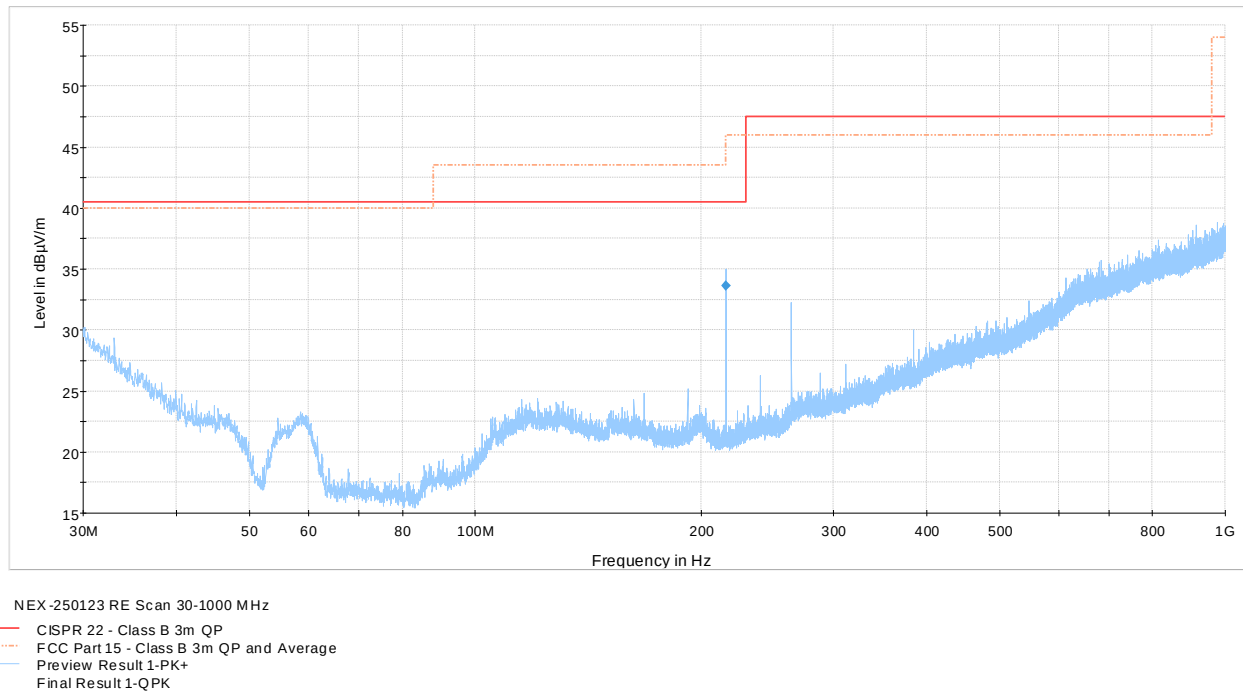

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

**Figure 8.1-1: Radiated disturbance spectral plot (30 to 1000 MHz)**

**Table 8.1-3: Radiated disturbance (Quasi-Peak) results**


| Frequency (MHz)                               | Quasi-Peak field strength <sup>1</sup> (dBμV/m) | Measurement time (ms) | Bandwidth (kHz) | Antenna height (cm) | Pol. (V/H) | Turn table position (°) | Correction factor <sup>2</sup> (dB) | Margin (dB) | 3 m Quasi-Peak limit <sup>3</sup> (dBμV/m) |
|-----------------------------------------------|-------------------------------------------------|-----------------------|-----------------|---------------------|------------|-------------------------|-------------------------------------|-------------|--------------------------------------------|
| <b>CISPR 22, EN 55022 and AS/NZS CISPR 22</b> |                                                 |                       |                 |                     |            |                         |                                     |             |                                            |
| 216.0                                         | 33.6                                            | 1000.0                | 120             | 100.0               | V          | 22.0                    | 13.0                                | 6.9         | 40.5                                       |
| <b>FCC and ICES-003</b>                       |                                                 |                       |                 |                     |            |                         |                                     |             |                                            |
| 216.0                                         | 33.6                                            | 1000.0                | 120             | 100.0               | V          | 22.0                    | 13.0                                | 12.4        | 43.5                                       |

Notes: <sup>1</sup> Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factor = antenna factor ACF (dB) + cable loss (dB)

Sample calculation: 33.6 dBμV/m (field strength) = 20.6 dBμV (receiver reading) + 13.0 dB (Correction factor)

### 8.1.5 Test data, continued

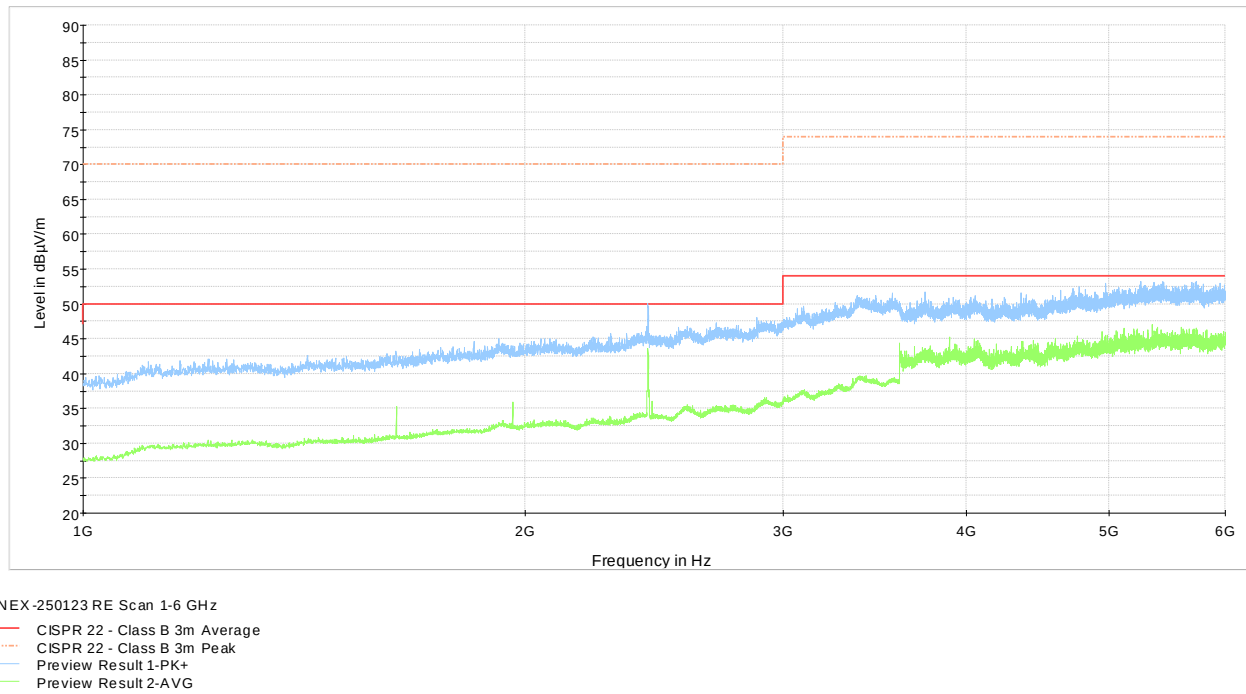


The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

**Figure 8.1-2: Radiated disturbance spectral plot (1 to 6 GHz)**

8.1.6 Setup photos



**Figure 8.1-3:** Radiated disturbance setup photo

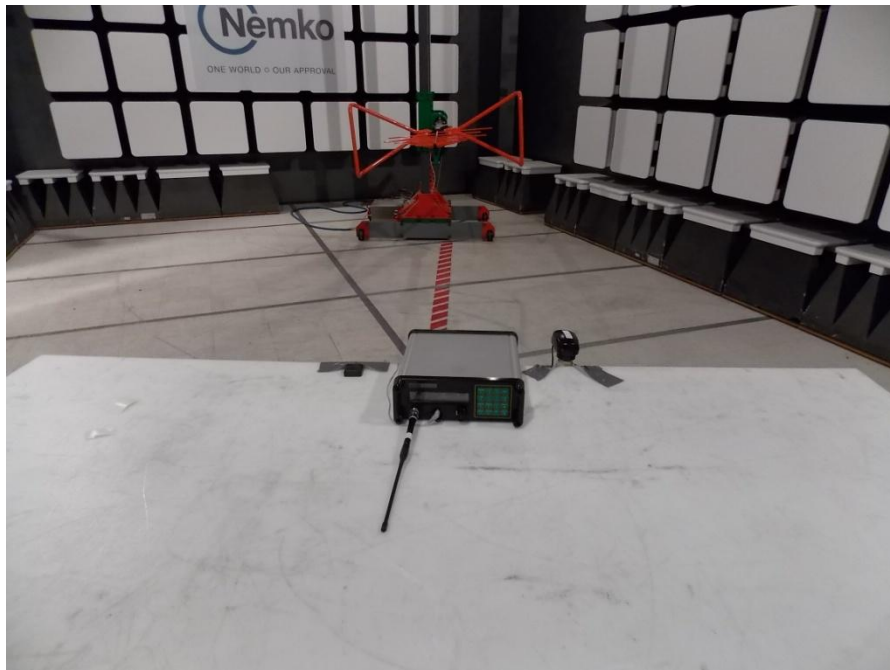

**Figure 8.1-4:** Radiated disturbance setup photo

## 8.2 Conducted disturbance at mains port

### 8.2.1 References

ANSI C63.4-2003

### 8.2.2 Test summary

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Verdict       | Pass              |                   |           |
| Test date     | February 12, 2014 | Temperature       | 22 °C     |
| Test engineer | Kevin Rose        | Air pressure      | 1004 mbar |
| Test location | Ottawa            | Relative humidity | 36 %      |

### 8.2.3 Notes

None

### 8.2.4 Setup details

|                         |                                                                                                                                                                                                                                                  |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port under test         | AC Mains                                                                                                                                                                                                                                         |
| EUT setup configuration | Table top                                                                                                                                                                                                                                        |
| Measurement details     | A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement. |

Receiver settings:

|                      |                                                                                    |
|----------------------|------------------------------------------------------------------------------------|
| Resolution bandwidth | 9 kHz                                                                              |
| Video bandwidth      | 30 kHz                                                                             |
| Detector mode        | Peak and Average (preview measurement); Quasi-peak and Average (final measurement) |
| Trace mode           | Max Hold                                                                           |
| Measurement time     | 100 ms (preview measurement); 1000 ms (final measurement)                          |


**Table 8.2-1: Conducted disturbance at mains port equipment list**

| Equipment                  | Manufacturer           | Model no. | Asset no. | Cal cycle | Next cal.  |
|----------------------------|------------------------|-----------|-----------|-----------|------------|
| Receiver/spectrum analyzer | Rohde & Schwarz        | ESU 26    | FA002043  | 1 year    | Oct. 24/14 |
| Power source               | California Instruments | 3001i     | FA001021  | 1 year    | June 04/14 |
| LISN                       | Rohde & Schwarz        | ENV216    | FA002023  | 1 year    | Oct. 28/14 |
| 50 Ω coax cable            | Huber + Suhner         | None      | FA002394  | 1 year    | June 27/14 |
| 50 Ω coax cable            | C.C.A.                 | None      | FA002556  | 1 year    | Oct. 07/14 |

**Table 8.2-2: Conducted disturbance at mains port test software details**

| Manufacturer of Software | Details                                              |
|--------------------------|------------------------------------------------------|
| Rhode & Schwarz          | EMC32, Software for EMC Measurements, Version 8.53.0 |
| Notes:                   | None                                                 |

## 8.2.5 Test data

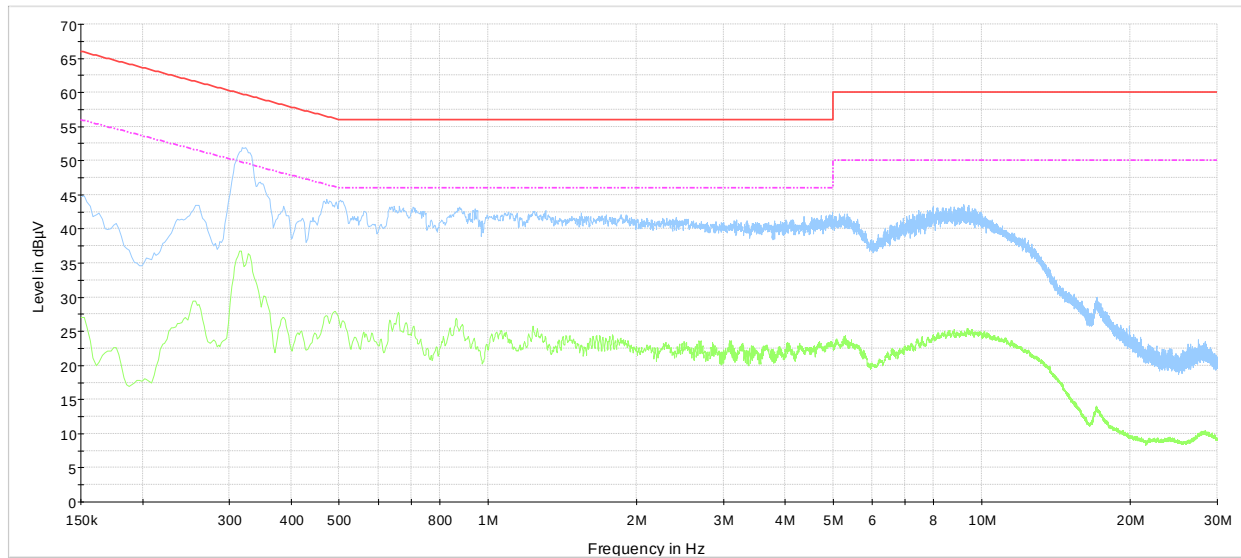


NEX-250123 CE Scan 120 Vac 60 Hz Phase

— CISPR 22 Mains QP Class B  
— CISPR 22 Mains AV Class B  
— Preview Result 1-PK+  
— Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

**Figure 8.2-1:** Conducted disturbance at mains port spectral plot on phase line

## 8.2.5 Test data, continued

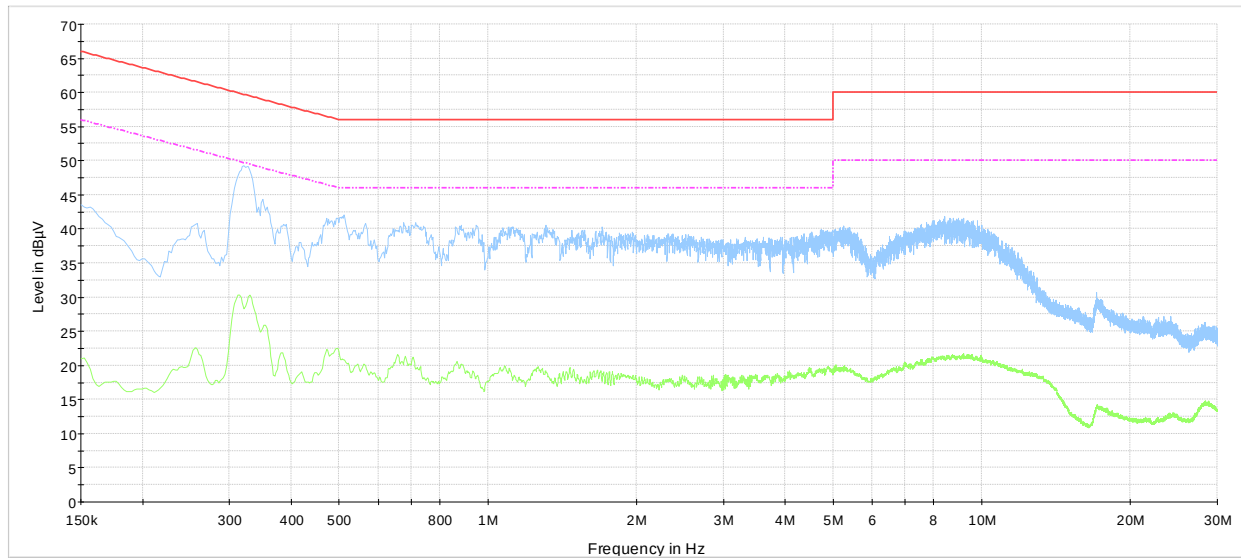


NEX-250123 CE Scan 120 Vac 60 Hz Neutral

— CISPR 22 Mains QP Class B  
— CISPR 22 Mains AV Class B  
— Preview Result 1-PK+  
— Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

**Figure 8.2-2:** Conducted disturbance at mains port spectral plot on neutral line

## 8.2.5 Test data, continued

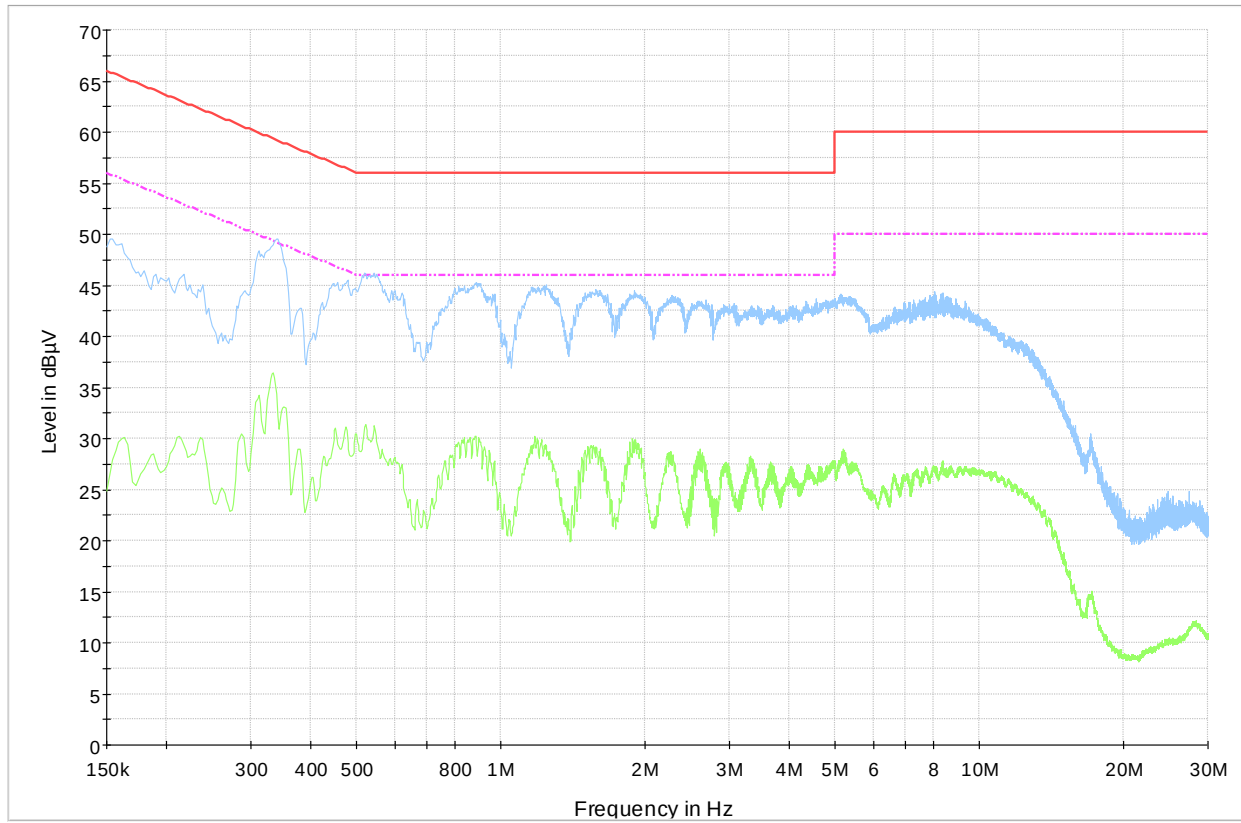


NEX-250123 CE Scan 230 Vac 50 Hz Phase

- CISPR 22 Mains QP Class B
- - - CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

**Figure 8.2-3:** Conducted disturbance at mains port spectral plot on phase line

## 8.2.5 Test data, continued

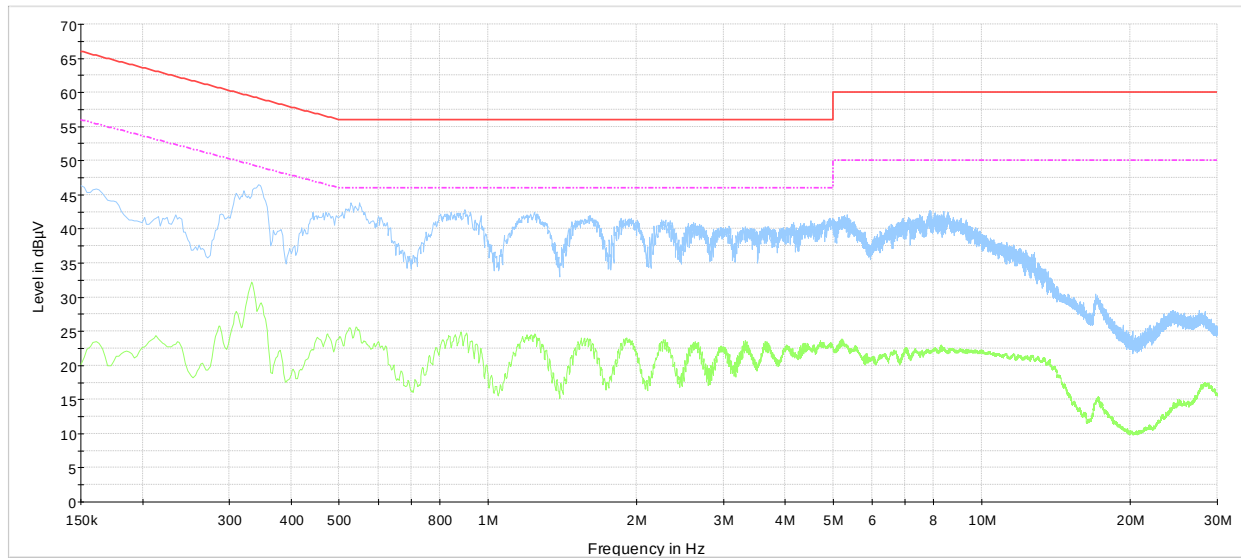

NEX-250123 CE Scan 230 Vac 50 Hz Neutral


— CISPR 22 Mains QP Class B  
- - - CISPR 22 Mains AV Class B  
— Preview Result 1-PK+  
— Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

**Figure 8.2-4:** Conducted disturbance at mains port spectral plot on neutral line

8.2.6 Setup photos

---

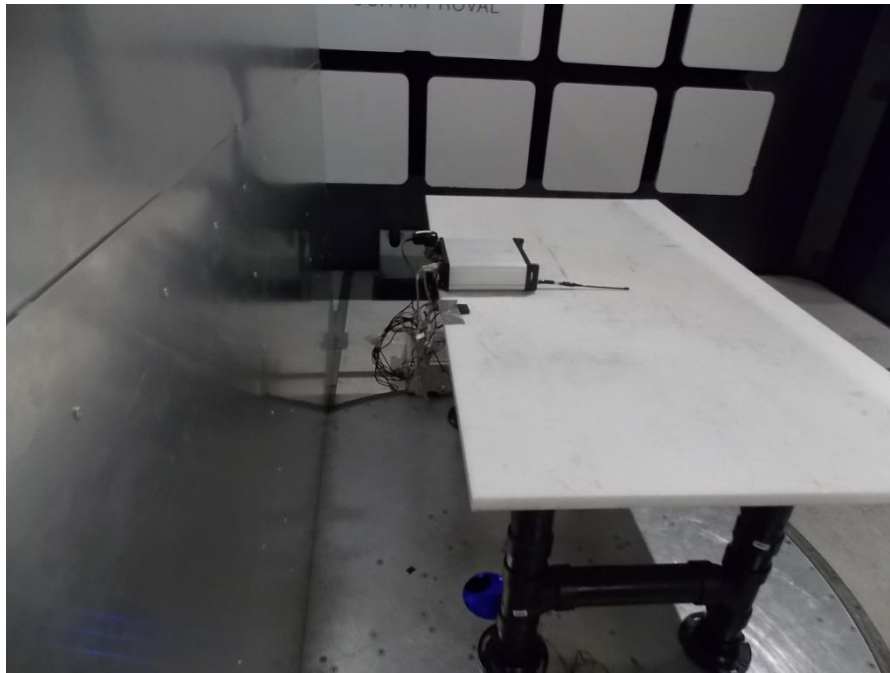

**Figure 8.2-5:** Conducted disturbance at mains port setup photo



**Figure 8.2-6:** Conducted disturbance at mains port setup photo

## 8.3 Scanning receivers and frequency converters used with scanning receivers

### 8.3.1 Clause 15.121(b) Scanning receivers and frequency converters used with scanning receivers

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

### 8.3.2 Test summary

|               |               |                   |           |
|---------------|---------------|-------------------|-----------|
| Verdict       | Pass          |                   |           |
| Test date     | July 10, 2014 | Temperature       | 23 °C     |
| Test engineer | Kevin Rose    | Air pressure      | 1001 mbar |
| Test location | Ottawa        | Relative humidity | 38 %      |

**Table 8.3-1:** Conducted disturbance at mains port equipment list

| Equipment        | Manufacturer    | Model no. | Asset no. | Cal cycle | Next cal.  |
|------------------|-----------------|-----------|-----------|-----------|------------|
| Signal generator | Rohde & Schwarz | SMIQ03E   | FA001269  | 1 year    | Jan 27/15  |
| Signal generator | Rohde & Schwarz | SMIQ06B   | FA001878  | 1 year    | Jan. 24/15 |
| ARB              | HP              | 33120A    | FA001082  | -         | VOU        |
| Vector analyzer  | HP              | 89410A    | -         | 1 year    | Oct. 18/14 |

Notes: VOU - verify on use

### 8.3.3 Notes

No change in SINAD value was measured at the output of the receiver.

### 8.3.4 Setup details

- 1) The EUT was connected as illustrated in appendix C.
- 2) Reference sensitivity of the EUT was measured according to the following procedure. In the absence of any other signals an input signal of pulse modulated CW carrier at 1 kHz was applied to the RF Antenna port through a calibrated combining network. The level of the signal was reduced until the gain combination gave a 12 dB SINAD value at the AF output of the receiver. The highest sensitivity value obtained in this way in all frequency bands was recorded as reference sensitivity (−98 dBm).
- 3) The reference input signal was then increased by 3 dB.
- 4) An unwanted input signal added through the second input terminal of the combining network. The level of the unwanted signal was adjusted according to the following:  

$$P_{\text{Unwanted}} = \text{Preference} + \text{Required Rejection} + 6 \text{ dB}$$

$$P_{\text{Unwanted}} = (-98 \text{ dBm} + 3 \text{ dB}) + 38 \text{ dB} + 6 \text{ dB} = -51 \text{ dBm}$$
- 5) The frequency of the unwanted signal was swept through the frequency bands allocated to the Cellular Radiotelephone Service (824–849 MHz and 880–894 MHz).

## Section 9 EUT photos

### 9.1 External photos



**Figure 9.1-1:** Front view photo



**Figure 9.1-2:** Rear view photo



**Figure 9.1-3:** Right Side view photo



**Figure 9.1-4:** Left Side view photo