



Prüfbericht-Nr.: Test report no.:	CN21F0JY(P15C-BLE) 001	Auftrags-Nr.: Order no.:	238494141	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-12-11	
Auftraggeber: Client:	TAIWAN CAROL ELECTRONICS CO., LTD. No.202, TUNG KUANG ROAD. TAICHUNG, TAIWAN			
Prüfgegenstand: Test item:	BLE True Sound low Latency Chargeable Audio Transmission Adapter			
Bezeichnung / Typ-Nr.: Identification / Type no.:	BTM-510CC, BTM-510CD, BTM-510CR			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BLE)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2021-06-07			
Prüfmuster-Nr.: Test sample no:	A003067848-002, 007, 011 A003067848-023			
Prüfzeitraum: Testing period:	2021-06-16 - 2021-06-28			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: compiled by:			genehmigt von: authorized by:	
Datum: Date:	2021-07-12		Ausstellungsdatum: Issue date:	2021-07-12
Stellung / Position:	David Huang Project Manager		Stellung / Position:	Brenda Chen Senior Project Manager
Sonstiges / Other:	The model number BTM-510CD, BTM-510CC, BTM-510CR are electrically identical, but the audio connector types are different. Therefore, we evaluated the complete tests for BTM-510CD and verified the worst mode of BTM-510CC and BTM-510CR for radiated spurious emission.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	14
4.5 TEST SETUP DIAGRAM	15
5. TEST RESULTS	16
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	16
5.1.1 Antenna Requirement	16
5.1.2 Peak Output Power	17
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	19
5.1.4 Power Spectral Density.....	20
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....	21
5.1.6 Radiated Spurious Emissions and Band Edges	22
5.2 MAINS EMISSION	27
5.2.1 Mains Conducted Emission.....	27

Prüfbericht - Nr.: CN21F0JY(P15C-BLE) 001
Test Report No.

Seite 4 von 28
Page 4 of 28

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION_BTM-510CC

APPENDIX C - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION_ BTM-510CD

APPENDIX D - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION_ BTM-510CR

APPENDIX SP - Photographs of Test Setup

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN21F0JY(P15C-BLE) 001
Test Report No.

Seite 5 von 28
Page 5 of 28

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN21F0JY(P15C-BLE) 001	Original Release	2021-07-12

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission_ BTM-510CC

Appendix C - Test Result of Radiated Emissions & Mains Conducted Emission_ BTM-510CD

Appendix D - Test Result of Radiated Emissions & Mains Conducted Emission_ BTM-510CR

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a BLE True Sound low Latency Chargeable Audio Transmission Adapter. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface. For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	BLE True Sound low Latency Chargeable Audio Transmission Adapter
Type Identification	BTM-510CC, BTM-510CD, BTM-510CR
FCC ID	G4RBTM-510C

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel Number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	USB 5 Vdc ; Battery 3.7 Vdc
Modulation	GFSK
Maximum Output Power (mW)	8.77
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

- All models are listed as below.

Model Type	Type Identification	Difference
Main	BTM-510CD	They are electrically identical, but the audio connector types are different. BTM-510CR used with 6.3Ø Phone Jack. BTM-510CC used with 3.5Ø Phone Jack. BTM-510CD used with Cannon XLR connector.
Series	BTM-510CC	
	BTM-510CR	

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	CMW500
---------------	--------

The samples were used as follows:

A003067848-002(BTM-510CC), 007(BTM-510CD), 011(BTM-510CR)

A003067848-023 for conducted

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
BTM-510CD	√	√	√	√	-
BTM-510CC	-	√	√	√	-
BTM-510CR	-	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
BTM-510CD	2402 to 2480	2402, 2440, 2480	1
BTM-510CD	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
Tx			
BTM-510CD	2402 to 2480	2402, 2440, 2480	1 & 2
BTM-510CC	2402 to 2480	2480	2
BTM-510CR	2402 to 2480	2480	2

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
Tx			
BTM-510CD	2402 to 2480	2480	2
BTM-510CC	2402 to 2480	2480	2
BTM-510CR	2402 to 2480	2480	2

Prüfbericht - Nr.: CN21F0JY(P15C-BLE) 001
Test Report No.**Seite 13 von 28**
Page 13 of 28**Mains Conducted Emission**

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
BTM-510CD	2402 to 2480	2480	2
BTM-510CC	2402 to 2480	2480	2
BTM-510CR	2402 to 2480	2480	2

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	24.8 °C	53 %	Nick Hsu
Radiated Spurious Emissions above 1 GHz	24.5-26.5 °C	57-62 %	Eagle Tsai
Radiated Spurious Emissions below 1 GHz	24.5-26.5 °C	57-62 %	Eagle Tsai
Mains Conducted Emission	19.5 °C	61 %	Temo Chen

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None.

Support Unit


No.	Description	Brand	Model	S/N	Remark
Raidated Test					
1	UART	TUV	CP2102	-	-
2	USB Cable	Pro-Best	MK-USBMF-3M	-	300 cm shielded cable w/o core
3	Wireless Tester	R&S	CMW270	-	-
Mains Conducted Test					
1	UART	TUV	CP2102	-	-
2	USB Cable	Pro-Best	MK-USBMF-3M	-	300 cm shielded cable w/o core
3	Wireless Tester	R&S	CMW270	101929	-
4	USB Type_C Cable	TUV	TUV01	-	-
5	Notebook	HP	TPN-C135	CND9111RJ2	non-shielded cable w/o core
6	Adaptor	HP	TPN-DA17	-	160 cm shielded cable w/o core
Conducted Test					
-	Wireless Tester	R & S	CMW500	166924	-

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

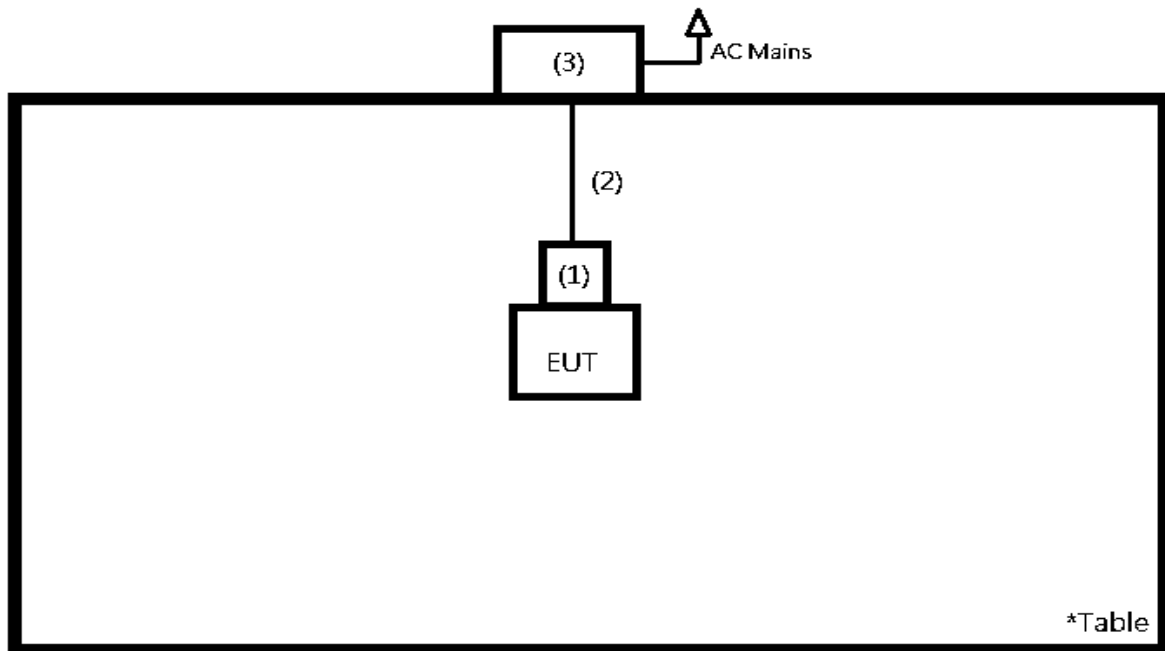

<Mains Conducted Emission mode>

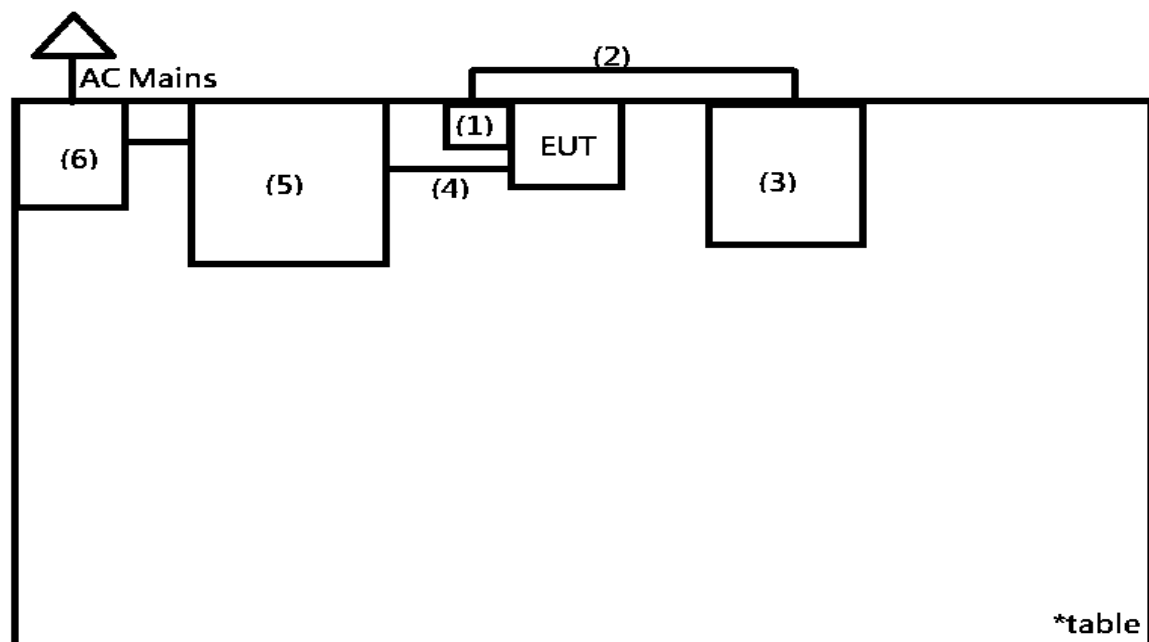

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 0 dBi. The antenna is a Chip Antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.


Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2021/6/16	2021/6/16
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2021/6/16	2021/6/16

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	9.43	8.77	30
Middle Channel	2440	9.18	8.28	30
High Channel	2480	9.13	8.18	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	9.43	8.77	30
Middle Channel	2440	9.15	8.22	30
High Channel	2480	9.13	8.18	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	9.41	8.73
Middle Channel	2440	9.16	8.24
High Channel	2480	9.11	8.15

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	9.41	8.73
Middle Channel	2440	9.13	8.18
High Channel	2480	9.10	8.13

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/6/28	2021/6/28

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/6/28	2021/6/28

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20 dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/6/28	2021/6/28

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

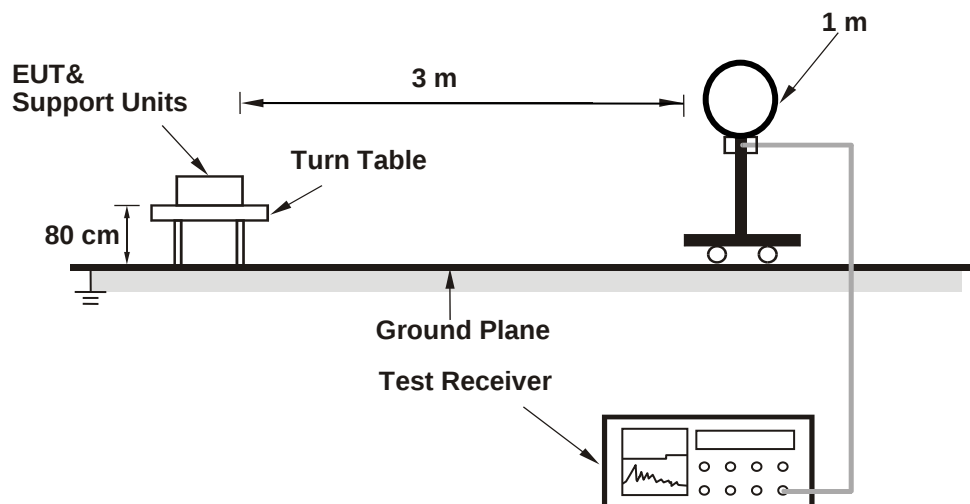

<Radiated Emissions 30 MHz to 1 GHz>

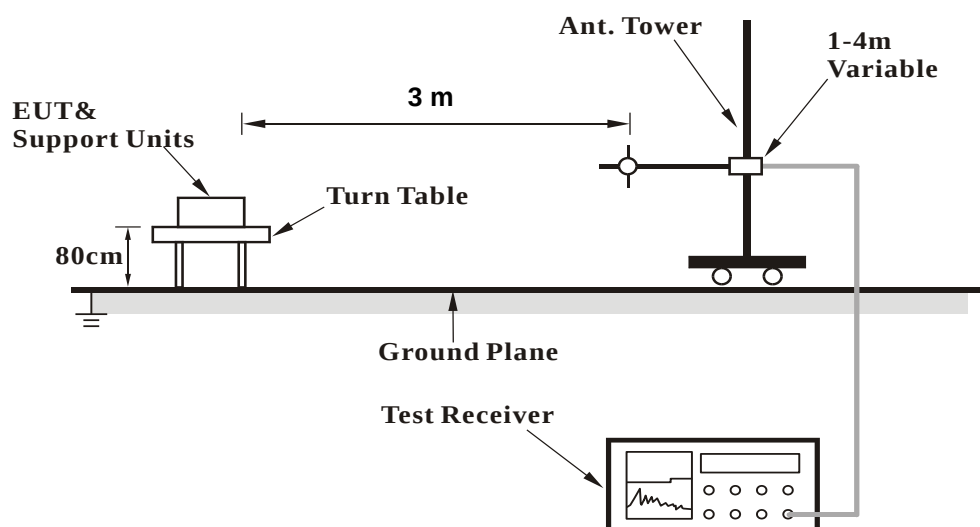

<Radiated Emissions above 1 GHz>

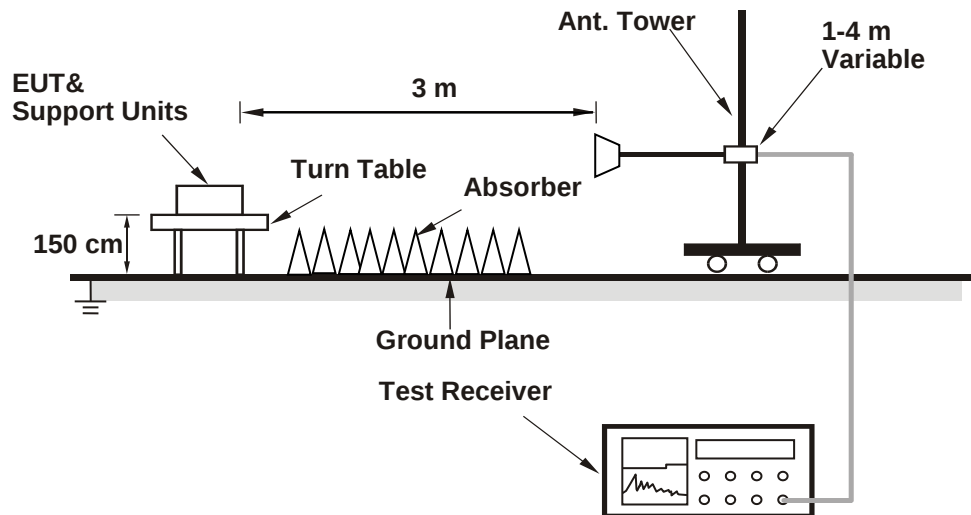

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2021/3/16	2022/3/15
Receiver	R&S	ESR7	102109	2021/3/16	2022/3/15
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2021/2/18	2022/2/17
Horn Antenna	ETS-Lindgren	3117	00218930	2020/12/1	2021/11/30
LF-AMP	Agilent	8447D	2944A10772	2021/2/18	2022/2/17
HF-AMP + AC source	EMCI	EMC051845SE	980633	2021/2/9	2022/2/8
HF-AMP + AC source	EMCI	EMC184045SE	980657	2021/2/1	2022/1/31
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2021/4/8	2022/4/7
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2021/3/17	2022/3/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2021/4/16	2022/4/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2021/4/16	2022/4/15
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2021/1/15	2022/1/14

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: CN21F0JY(P15C-BLE) 001
Test Report No.

Seite 26 von 28
Page 26 of 28

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B for BTM-510CC, Appendix C for BTM-510CD, Appendix D for BTM-510CR .

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

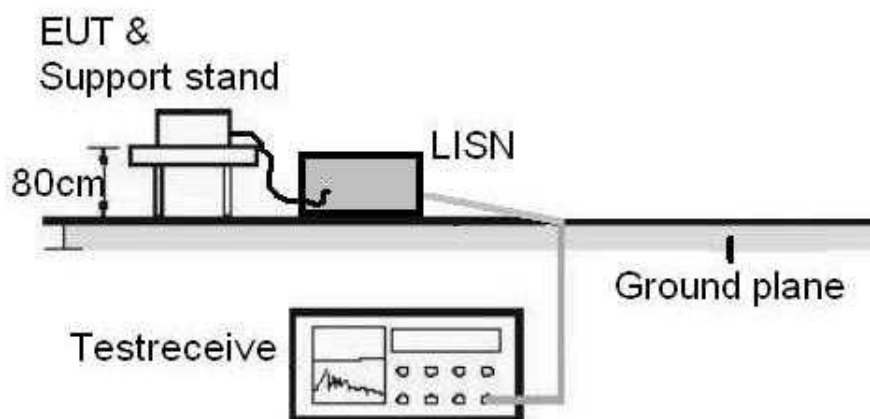

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	R&S	ENV216	1816064	2020/9/10	2021/9/9
EMI Test Receiver	R&S	ESCI	1816063	2020/11/17	2021/11/16
RF Cable	N/A	N/A	EMC-003	2020/11/15	2021/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B for BTM-510CC, Appendix C for BTM-510CD, Appendix D for BTM-510CR.


Appendix A: Test Results of Conducted Test_BT M-510CD

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	632.40	> 500	Pass
Middle Channel	2440	623.40	> 500	Pass
High Channel	2480	629.40	> 500	Pass


Low Channel

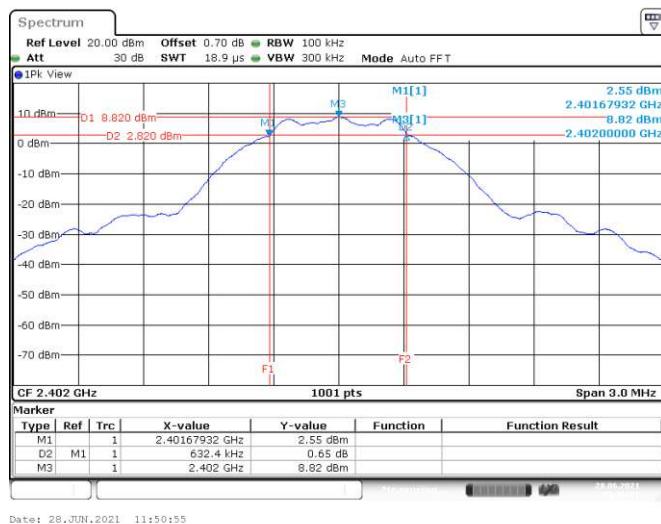

Middle Channel

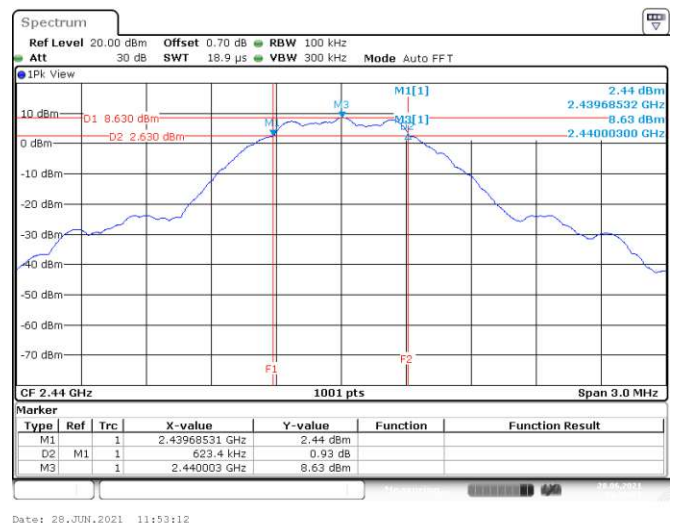


High Channel

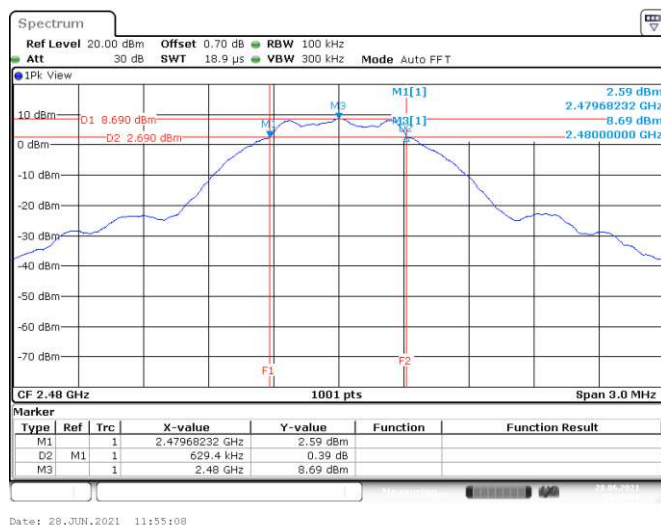


BLE_2M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (kHz)	Result
Low Channel	2402	1.09	> 500	Pass
Middle Channel	2440	1.09	> 500	Pass
High Channel	2480	1.08	> 500	Pass


Low Channel

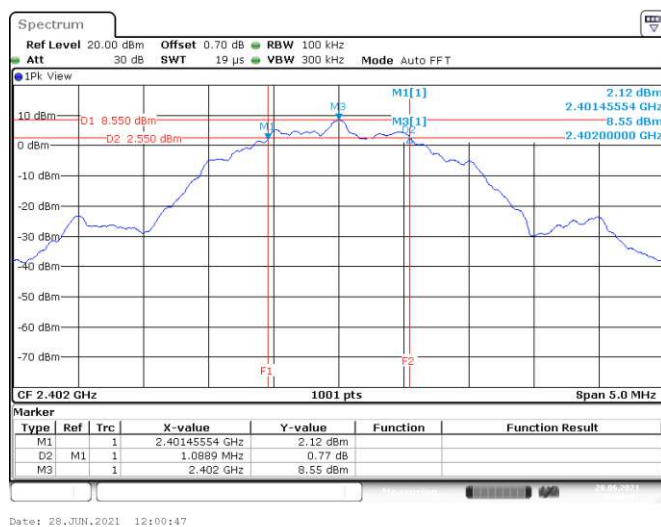

Middle Channel

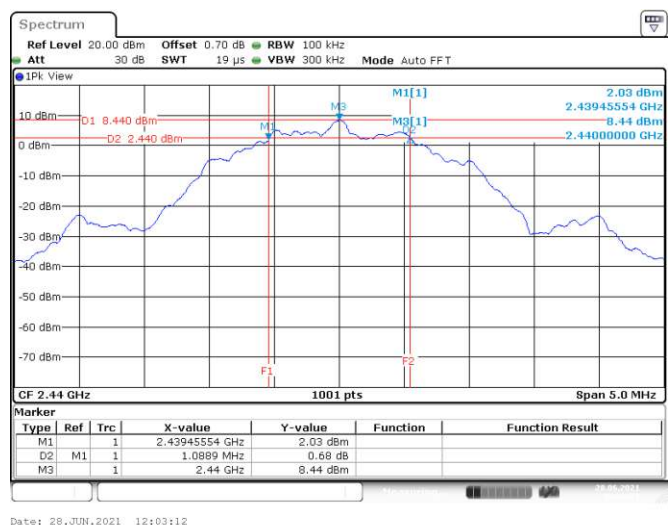

High Channel

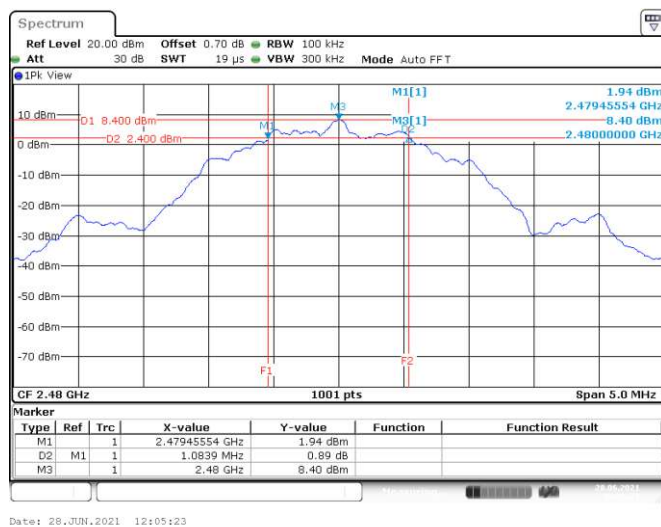


Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.02
Middle Channel	2440	1.02
High Channel	2480	1.02


Low Channel

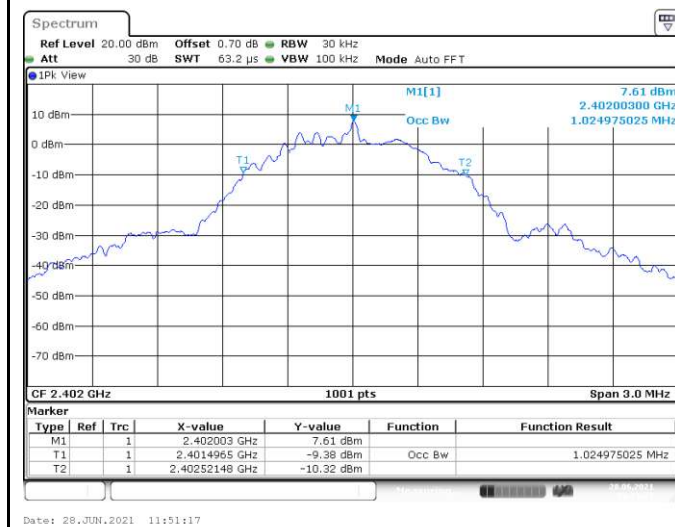

Middle Channel

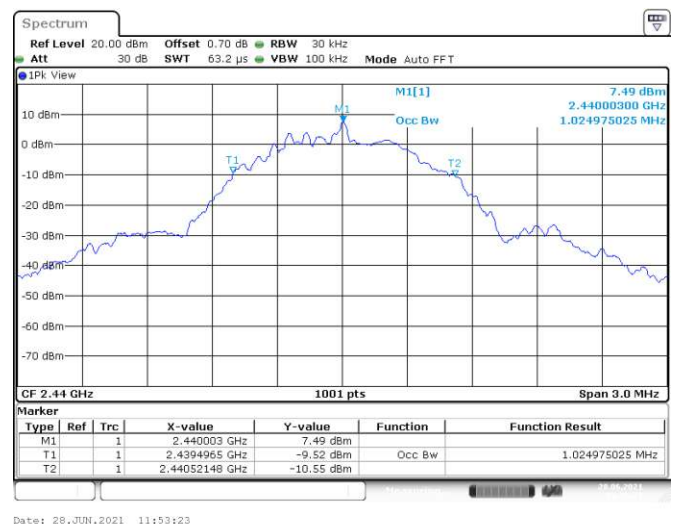


High Channel

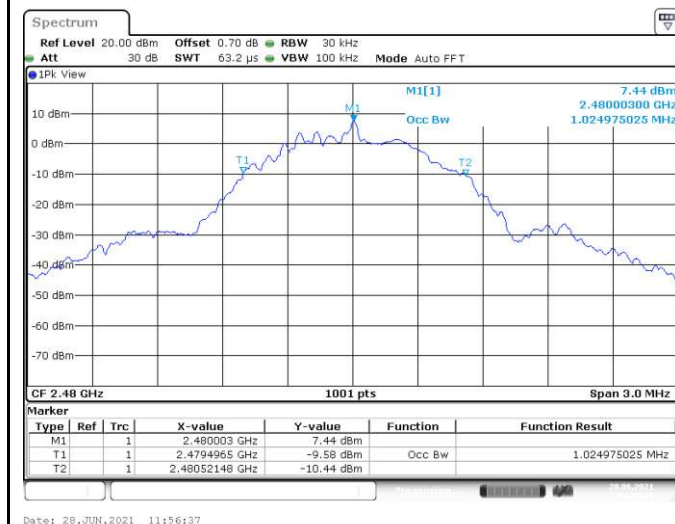


BLE_2M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	2.04
Middle Channel	2440	2.05
High Channel	2480	2.06


Low Channel

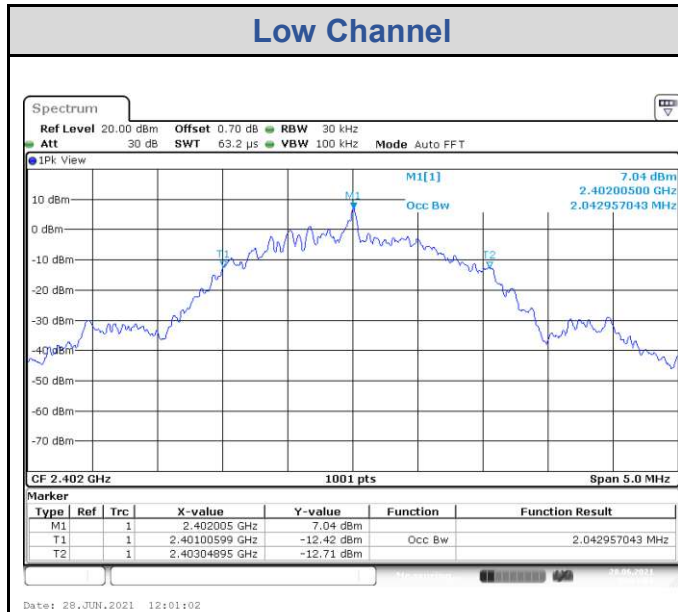

Middle Channel

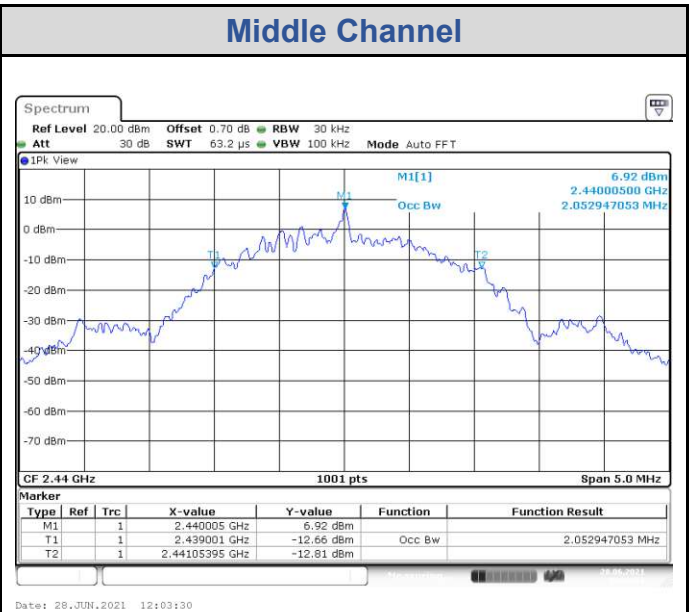

High Channel

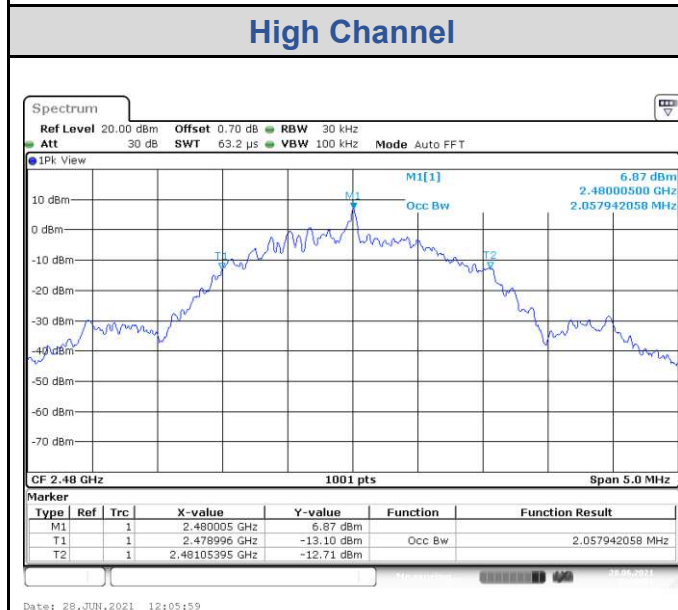


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-6.37	8	Pass
Middle Channel	2440	-6.41	8	Pass
High Channel	2480	-6.44	8	Pass


Low Channel

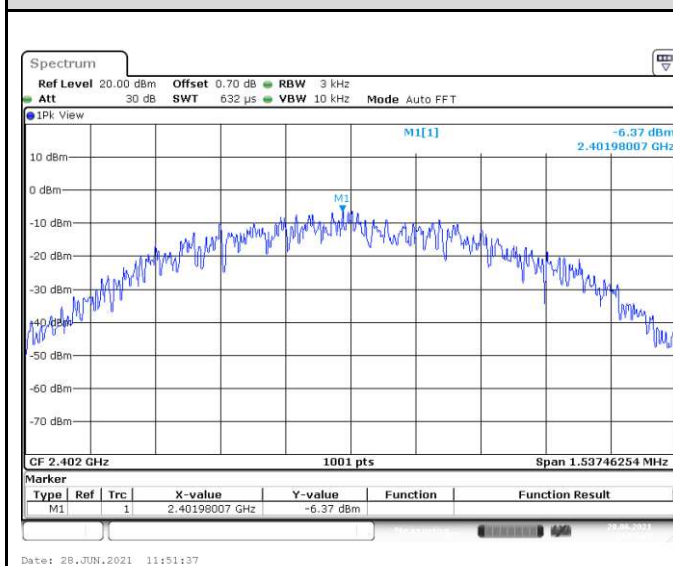

Middle Channel

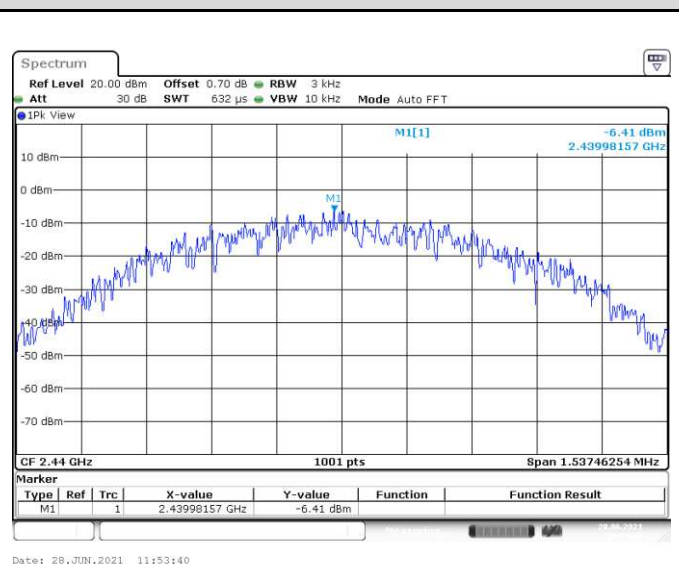


High Channel

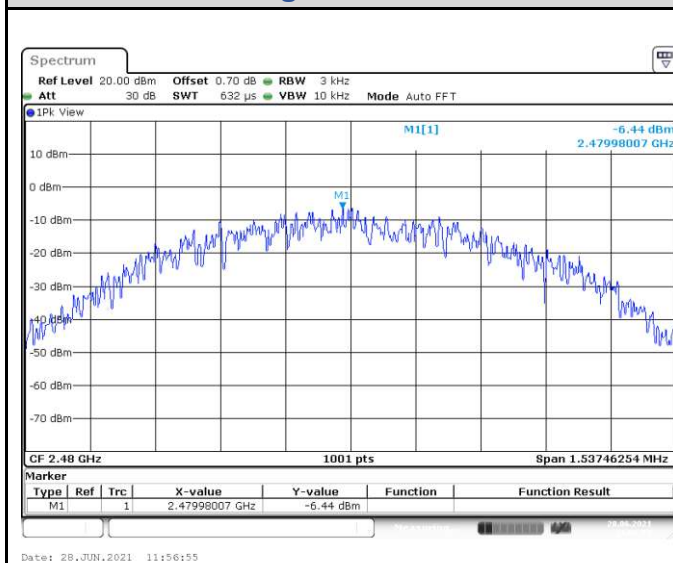


BLE_2M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-7.01	8	Pass
Middle Channel	2440	-7.09	8	Pass
High Channel	2480	-7.17	8	Pass

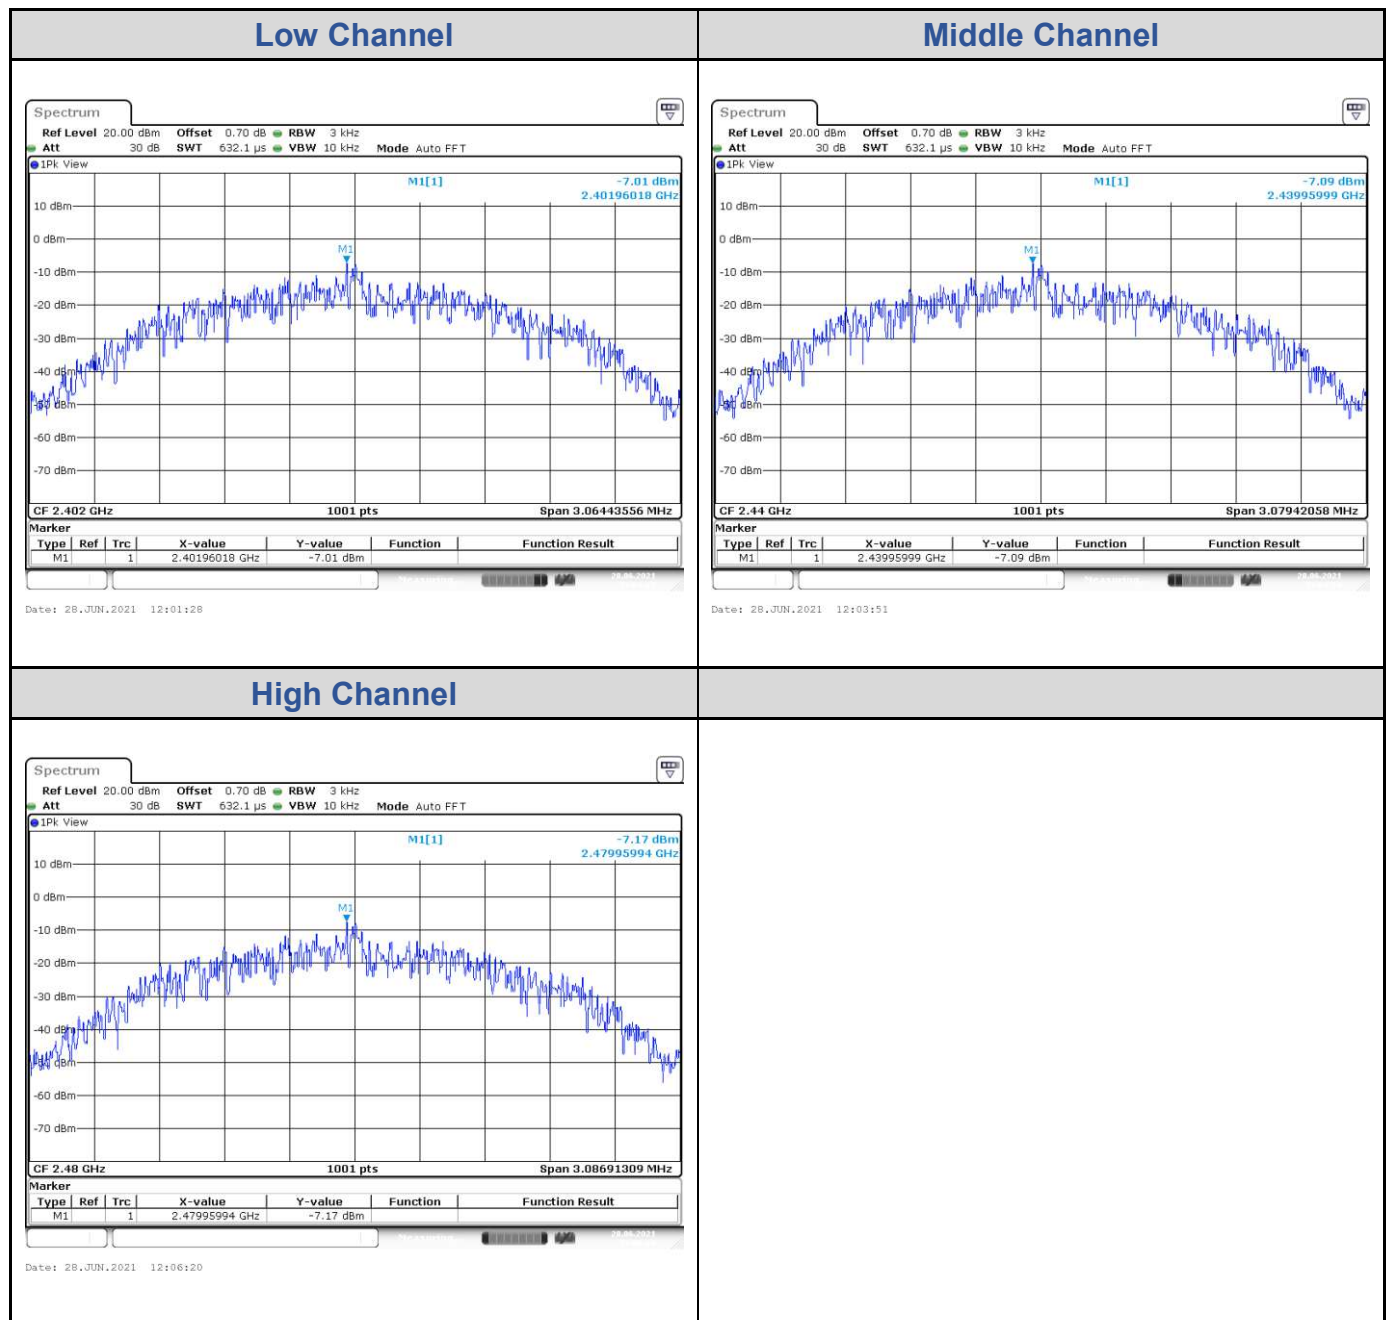


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

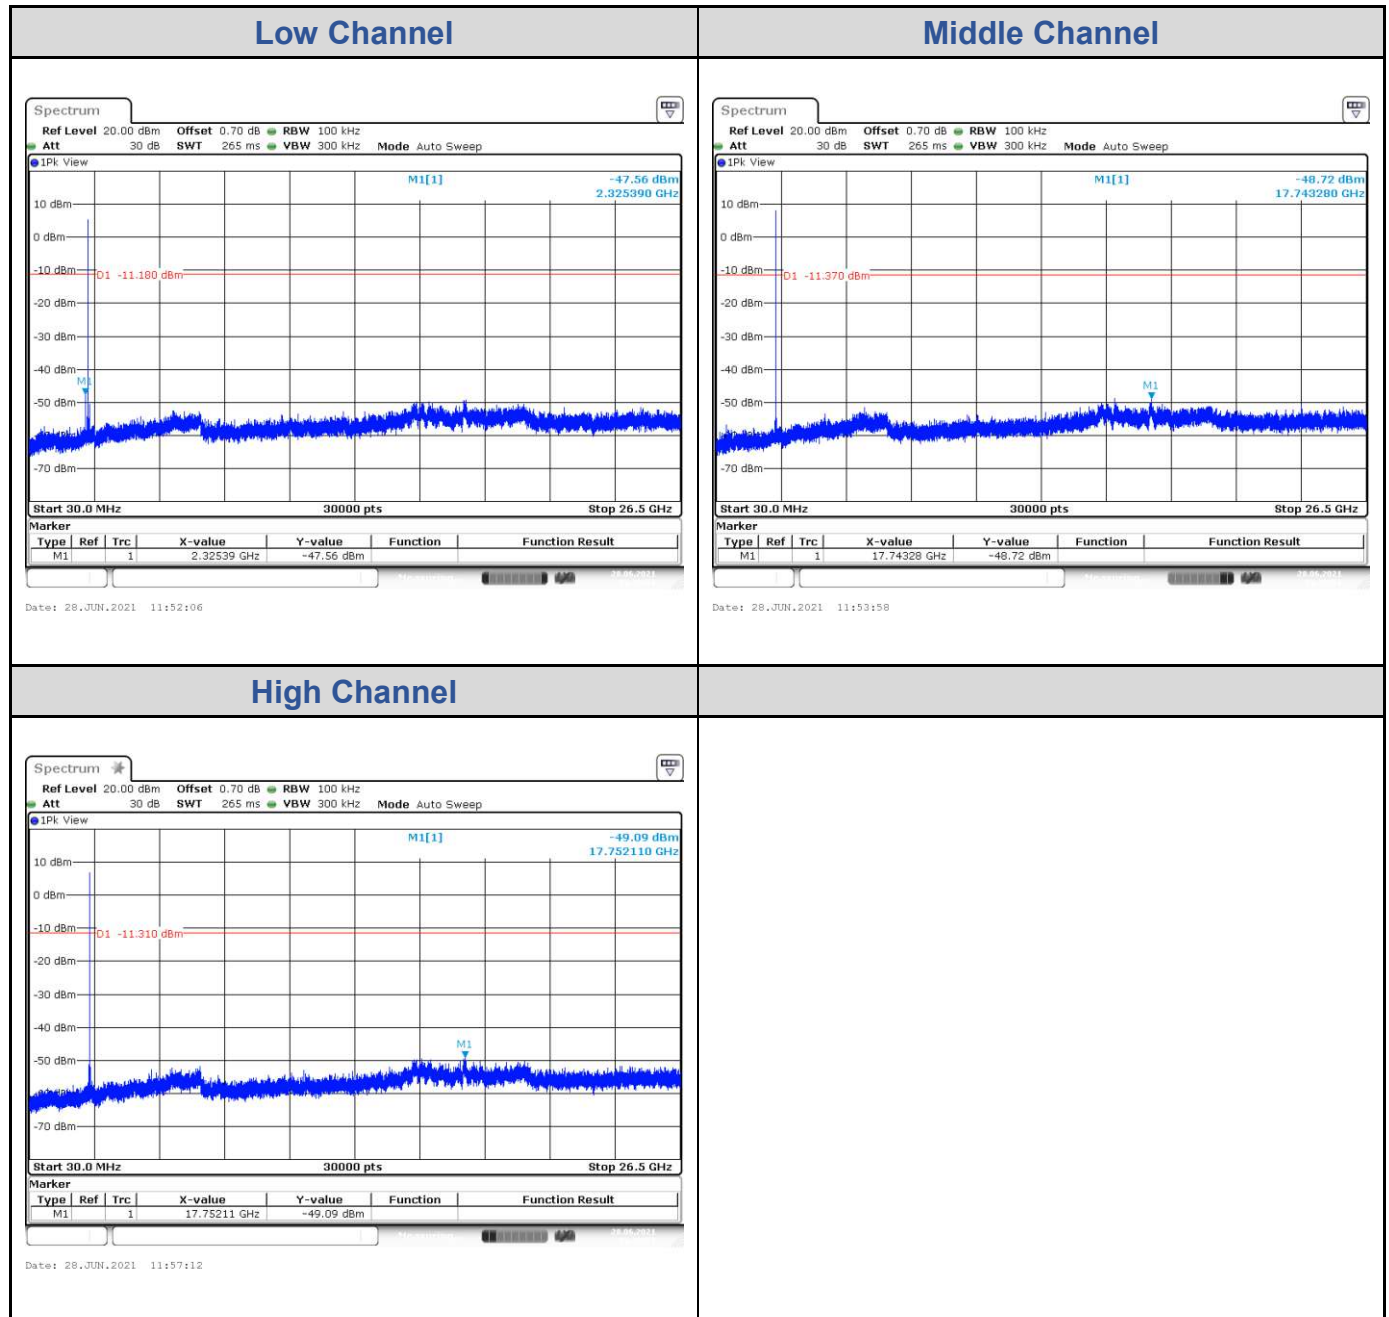


BLE_2M


Low Channel

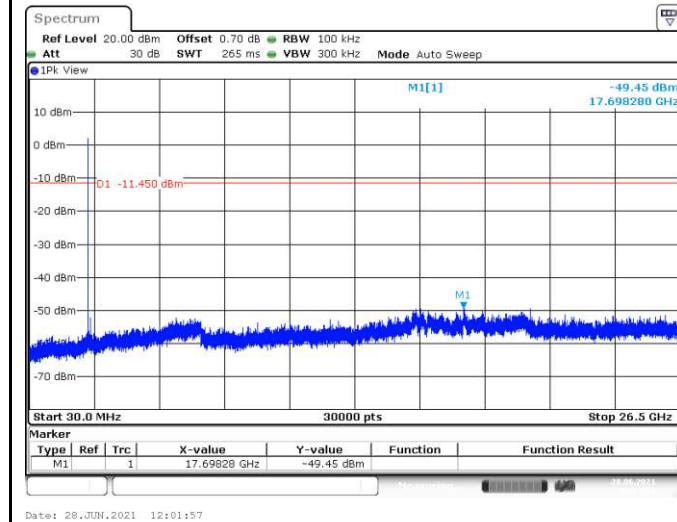

Middle Channel

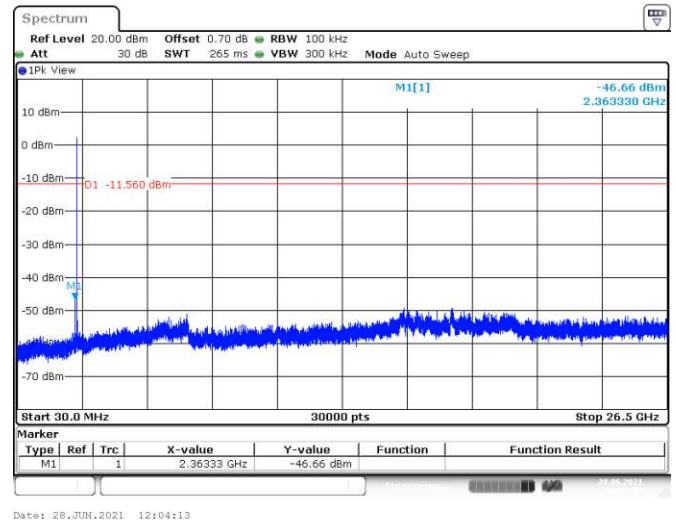


High Channel

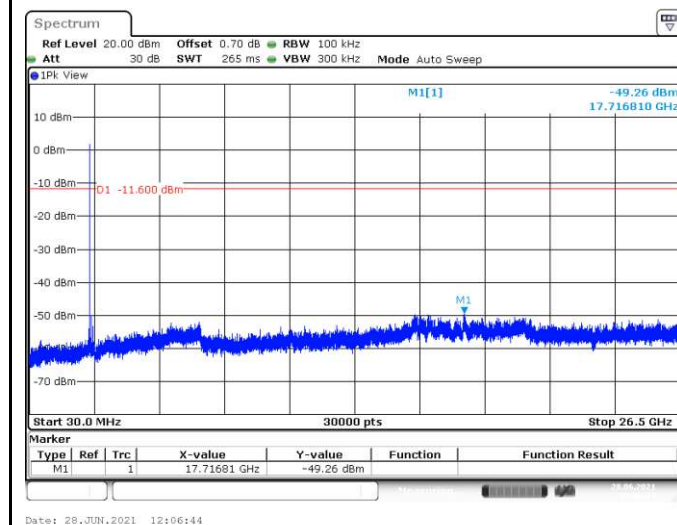


Test Result of Conducted Band Edge, Tx Mode

BLE_1M

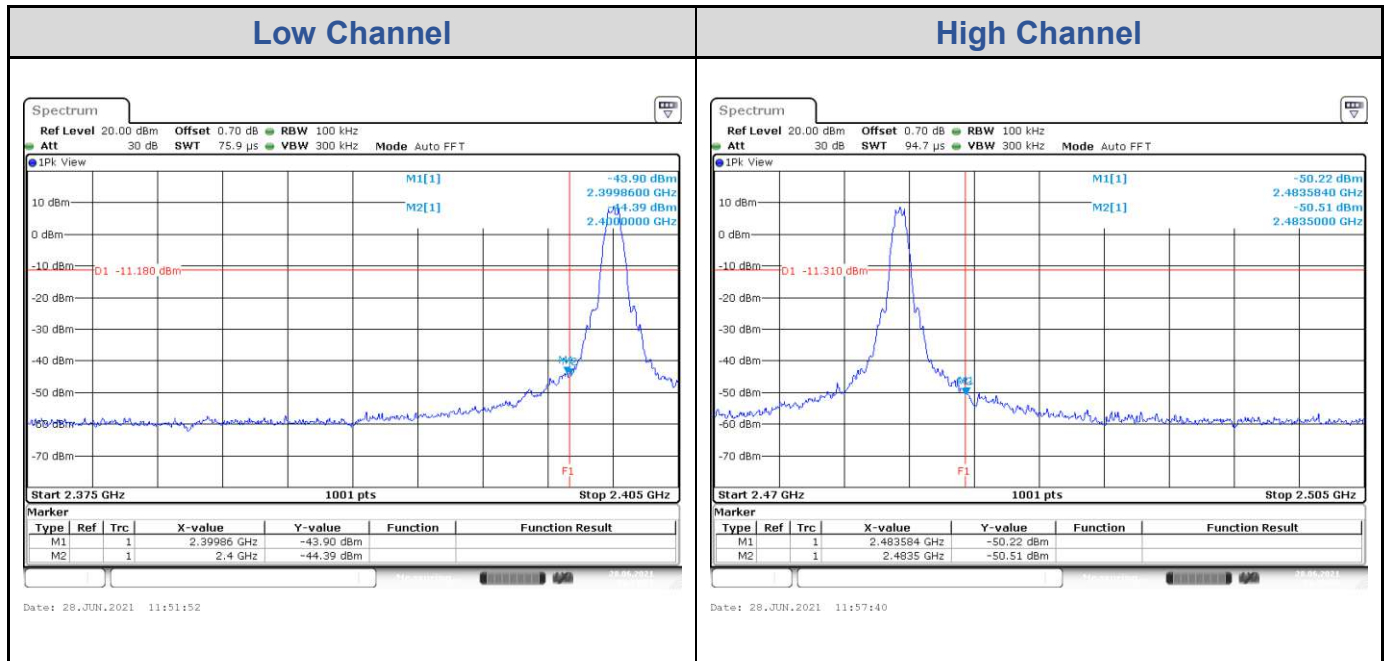

BLE_2M

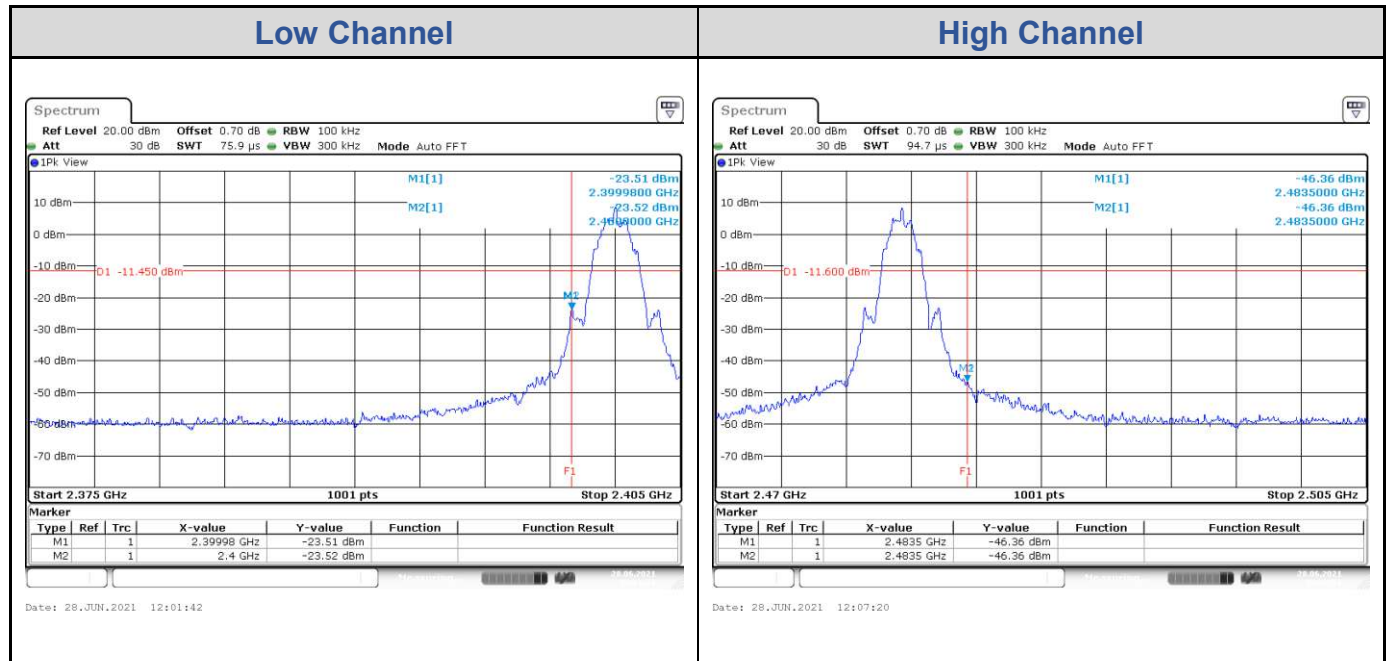

Appendix B: Test Results of Radiated Emissions & Mains Conducted

Emission Test_ BTM-510CC

Band Edges, 2.31GHz ~ 2.9GHz


BLE_2M

High Channel (Horizontal) Peak

High Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

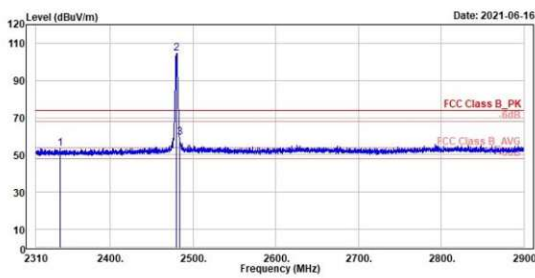

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2339.50	53.22	15.98	37.24	74.00	-20.78	327	54	Peak	Horizontal	
2 *	2480.00	104.65	66.50	38.15	74.00	30.65	327	54	Peak	Horizontal	
3	2483.50	59.40	21.24	38.16	74.00	-14.60	327	54	Peak	Horizontal	




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

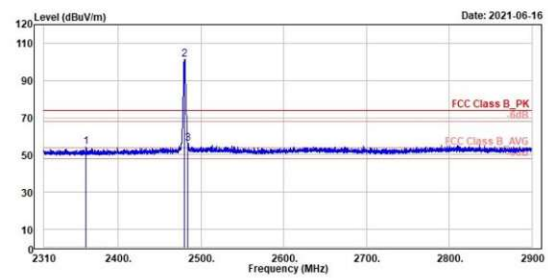

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2360.00	54.13	16.77	37.36	74.00	-19.87	331	328	Peak	Vertical	
2 *	2480.00	101.43	63.28	38.15	74.00	27.43	331	328	Peak	Vertical	
3	2483.50	56.27	18.11	38.16	74.00	-17.73	331	328	Peak	Vertical	


BLE_2M

High Channel (Horizontal) Average

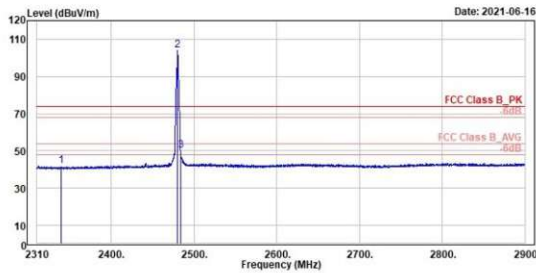

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2339.50	41.96	4.72	37.24	54.00	-12.04	327	54	Average	Horizontal	
2 *	2480.00	103.98	65.83	38.15	54.00	49.98	327	54	Average	Horizontal	
3 †	2483.50	50.00	11.84	38.16	54.00	-4.00	327	54	Average	Horizontal	

High Channel (Vertical) Average

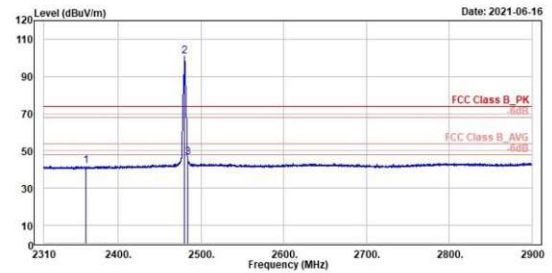

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2360.90	41.78	4.42	37.36	54.00	-12.22	331	328	Average	Vertical	
2 *	2480.00	100.73	62.56	38.15	54.00	46.73	331	328	Average	Vertical	
3 †	2483.50	46.63	8.47	38.16	54.00	-7.37	331	328	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_2M

High Channel (Open) 9kHz~150kHz

High Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

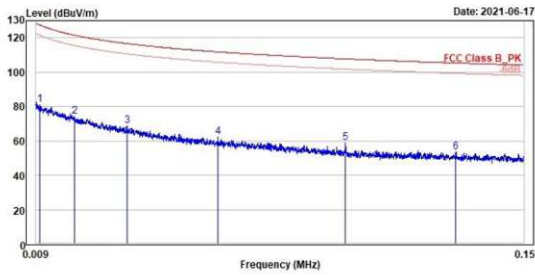

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	81.13	4.46	76.67	127.44	-46.31	100	223	QP	Open	
2	0.02	74.20	1.51	72.69	121.51	-47.31	100	7	QP	Open	
3	0.04	68.48	1.02	67.46	116.64	-48.16	100	214	QP	Open	
4	0.06	62.43	0.11	62.32	111.80	-49.37	100	172	QP	Open	
5	0.10	58.59	1.12	57.47	107.73	-49.14	100	225	QP	Open	
6	0.13	53.42	-2.53	55.95	105.29	-51.07	100	176	QP	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

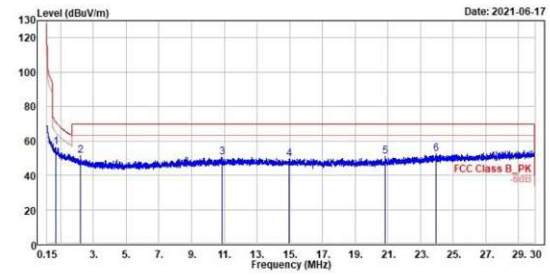


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.71	56.37	12.97	43.40	70.64	-14.27	100	225	QP	Open	
2	2.18	51.39	12.75	38.64	69.50	-18.11	100	92	QP	Open	
3	10.87	50.35	12.23	38.12	69.50	-19.15	100	306	QP	Open	
4	14.95	49.40	11.58	37.82	69.50	-20.10	100	107	QP	Open	
5	20.82	50.81	12.97	37.84	69.50	-18.69	100	89	QP	Open	
6	23.97	52.47	13.16	39.31	69.50	-17.03	100	347	QP	Open	

BLE_2M

High Channel (Close) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

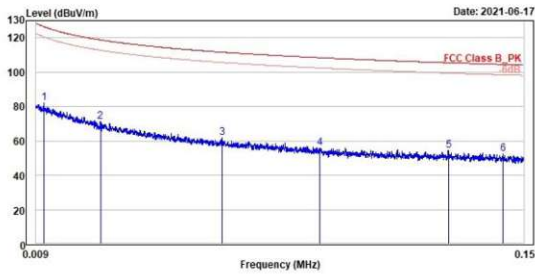

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	81.81	5.58	76.23	126.54	-44.73	100	357 QP	Close		
2	0.03	71.07	1.39	69.68	118.76	-47.69	100	152 QP	Close		
3	0.06	61.62	-0.55	62.17	111.64	-50.02	100	334 QP	Close		
4	0.09	55.97	-2.46	58.43	108.41	-52.44	100	91 QP	Close		
5	0.13	54.52	-1.53	56.05	105.44	-50.92	100	93 QP	Close		
6	0.14	52.41	-2.96	55.37	104.43	-52.02	100	246 QP	Close		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

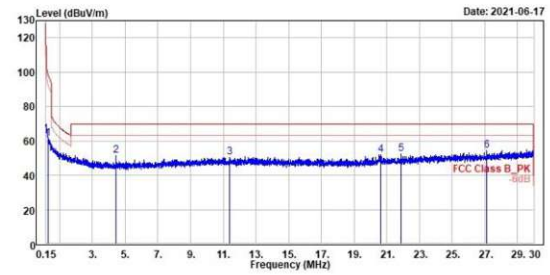

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.30	61.28	12.64	48.64	97.99	-36.71	100	226 QP	Close		
2	4.43	51.22	14.71	36.51	69.50	-18.28	100	134 QP	Close		
3	11.38	50.51	12.43	38.08	69.50	-18.99	100	189 QP	Close		
4	20.62	51.91	14.17	37.74	69.50	-17.59	100	29 QP	Close		
5	21.87	52.33	14.00	38.33	69.50	-17.17	100	297 QP	Close		
6	27.10	54.14	13.37	40.77	69.50	-15.36	100	265 QP	Close		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_2M

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

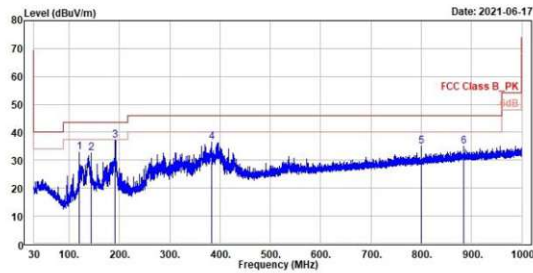

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	119.92	32.87	42.69	-9.82	43.50	-10.63	300	102 QP	Horizontal		
2	143.98	32.68	40.30	-7.62	43.50	-10.82	200	120 QP	Horizontal		
3	191.89	37.12	47.24	-10.12	43.50	-6.38	100	110 QP	Horizontal		
4	383.66	36.58	41.10	-4.52	46.00	-9.42	228	0 QP	Horizontal		
5	800.08	34.98	33.19	1.79	46.00	-11.02	100	59 QP	Horizontal		
6	884.86	34.94	31.77	3.17	46.00	-11.06	100	155 QP	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

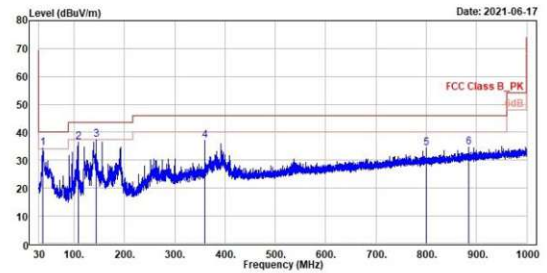

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	37.57	34.45	42.86	-8.41	40.00	-5.55	100	242 QP	Vertical		
2	107.99	36.46	47.77	-11.31	43.50	-7.04	100	160 QP	Vertical		
3	143.98	37.41	45.03	-7.62	43.50	-6.09	100	30 QP	Vertical		
4	360.48	37.20	42.62	-5.42	46.00	-8.80	100	170 QP	Vertical		
5	800.08	34.37	32.58	1.79	46.00	-11.63	120	360 QP	Vertical		
6	884.86	34.71	31.54	3.17	46.00	-11.29	100	135 QP	Vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_2M

High Channel (Horizontal)


High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

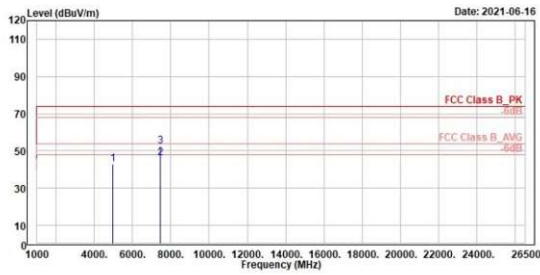

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

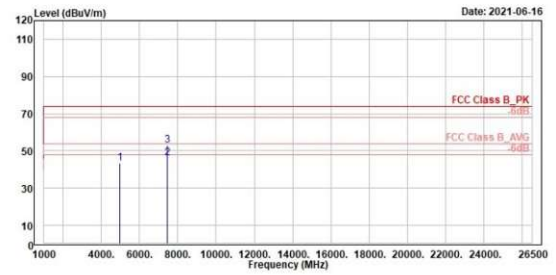

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

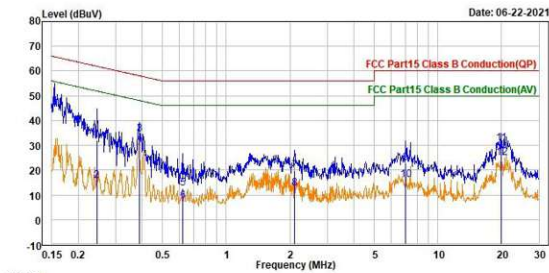


Trace: 1

	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.244	21.83	10.11	31.94	61.94	-30.00	QP	line1	
2	0.244	5.46	10.11	15.57	51.94	-36.37	Average	line1	
3	0.389	24.53	10.12	34.65	58.09	-23.44	QP	line1	
4	0.389	20.14	10.12	30.26	48.09	-17.83	Average	line1	
5	0.621	2.56	10.12	12.68	56.00	-43.32	QP	line1	
6	0.621	-2.71	10.12	7.41	46.00	-38.59	Average	line1	
7	2.106	9.76	10.17	19.93	56.00	-36.07	QP	line1	
8	2.106	2.35	10.17	12.52	46.00	-33.48	Average	line1	
9	7.034	12.44	10.30	22.74	60.00	-37.26	QP	line1	
10	7.034	5.54	10.30	15.84	50.00	-34.16	Average	line1	
11	19.935	20.05	10.55	30.60	60.00	-29.40	QP	line1	
12	19.935	14.33	10.55	24.88	50.00	-25.12	Average	line1	



TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

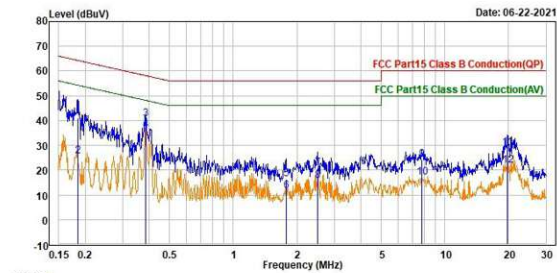

Trace: 1

	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.184	30.82	10.11	40.93	64.30	-23.37	QP	neutral	
2	0.184	15.47	10.11	25.58	54.30	-28.72	Average	neutral	
3	0.385	30.48	10.11	40.59	58.18	-17.59	QP	neutral	
4	0.385	26.20	10.11	36.31	48.18	-11.87	Average	neutral	
5	1.777	6.25	10.16	16.41	56.00	-39.59	QP	neutral	
6	1.777	1.25	10.16	11.41	46.00	-34.59	Average	neutral	
7	2.494	10.52	10.17	20.69	56.00	-35.31	QP	neutral	
8	2.494	5.49	10.17	15.66	46.00	-30.34	Average	neutral	
9	7.771	13.77	10.31	24.08	60.00	-35.92	QP	neutral	
10	7.771	6.78	10.31	17.09	50.00	-32.91	Average	neutral	
11	19.737	18.41	10.57	28.98	60.00	-31.02	QP	neutral	
12	19.737	11.15	10.57	21.72	50.00	-28.28	Average	neutral	

Appendix C: Test Results of Radiated Emissions & Mains Conducted

Emission Test_ BTM-510CD

Band Edges, 2.31GHz ~ 2.9GHz


BLE_1M

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

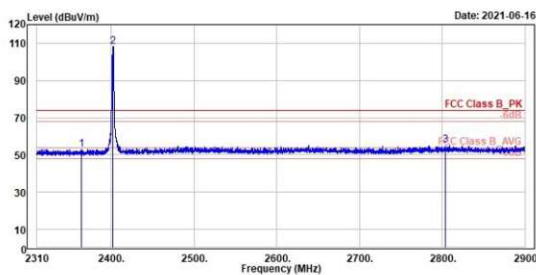

Peak	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.57	53.08	15.71	37.37	74.00	-20.92	269	259	Peak	Horizontal		
2 *	2482.00	100.06	70.42	37.64	74.00	34.06	269	259	Peak	Horizontal		
3	2883.71	55.41	17.10	38.31	74.00	-18.59	269	259	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

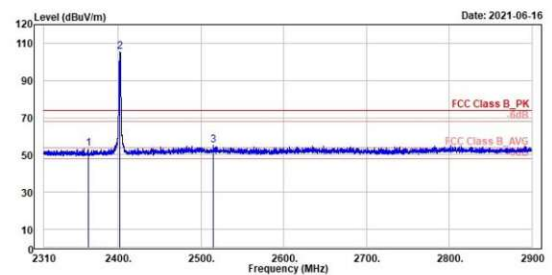


Peak	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.45	53.28	15.91	37.37	74.00	-20.72	395	325	Peak	Vertical		
2 *	2482.00	105.19	67.55	37.64	74.00	31.19	395	325	Peak	Vertical		
3	2514.97	55.15	16.94	38.21	74.00	-18.85	395	325	Peak	Vertical		

BLE_1M

Low Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

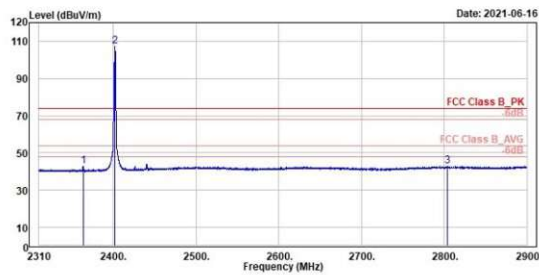

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.57	42.88	5.43	37.37	54.00	-11.20	269	259	Average	Horizontal	
2 *	2402.00	107.15	69.51	37.64	54.00	53.15	269	259	Average	Horizontal	
3	2803.71	42.84	4.53	38.31	54.00	-11.16	269	259	Average	Horizontal	




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

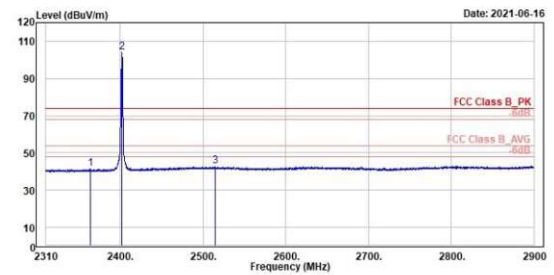

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.45	41.62	4.25	37.37	54.00	-12.38	395	325	Average	Vertical	
2 *	2402.00	104.26	66.62	37.64	54.00	50.26	395	325	Average	Vertical	
3	2514.97	42.98	4.77	38.21	54.00	-11.02	395	325	Average	Vertical	

BLE_1M

High Channel (Horizontal) Peak

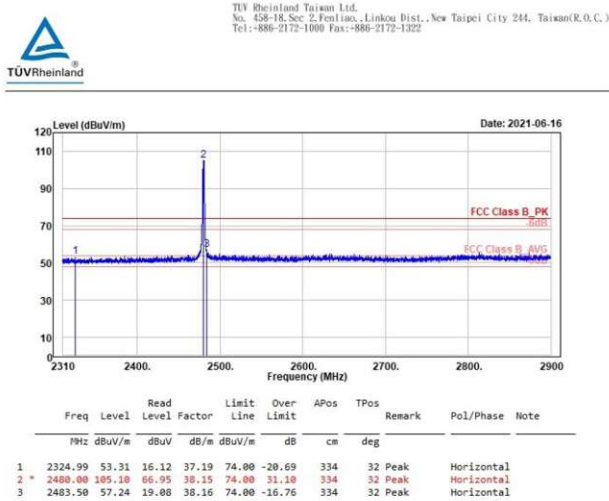

High Channel (Vertical) Peak




BLE_1M

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

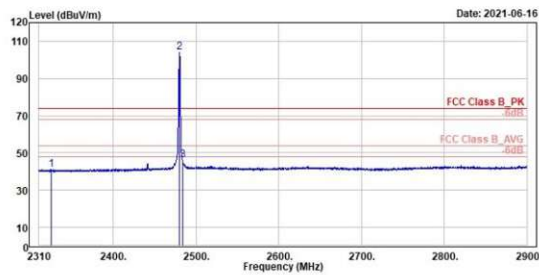

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2324.99	41.29	4.10	37.19	54.00	-12.71	334	32	Average	Horizontal	
2 *	2480.00	104.18	66.03	38.15	54.00	50.18	334	32	Average	Horizontal	
3	2483.50	45.89	7.73	38.16	54.00	-8.11	334	32	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

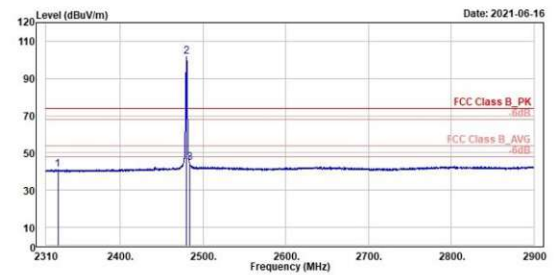


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2324.40	41.15	3.96	37.19	54.00	-12.85	332	327	Average	Vertical	
2 *	2480.00	101.95	63.80	38.15	54.00	47.95	332	327	Average	Vertical	
3	2483.50	44.78	6.62	38.16	54.00	-9.22	332	327	Average	Vertical	

BLE_2M

Low Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

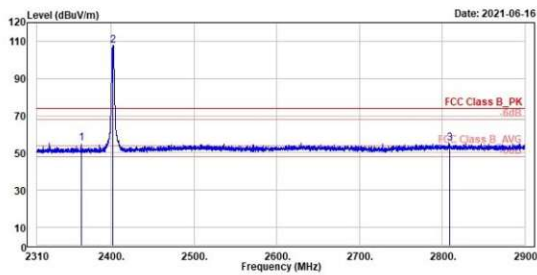

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.57	55.42	18.05	37.37	74.00	-18.58	180	48	Peak	Horizontal	
2 *	2402.00	107.91	70.27	37.64	74.00	33.91	180	48	Peak	Horizontal	
3	2809.26	55.34	17.03	38.31	74.00	-18.66	180	48	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

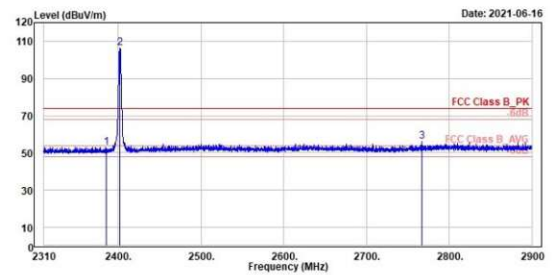


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2365.20	53.13	15.61	37.52	74.00	-20.87	395	324	Peak	Vertical	
2 *	2402.00	106.18	68.54	37.64	74.00	32.18	395	324	Peak	Vertical	
3	2766.66	55.91	17.72	38.19	74.00	-18.09	395	324	Peak	Vertical	

BLE_2M

Low Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

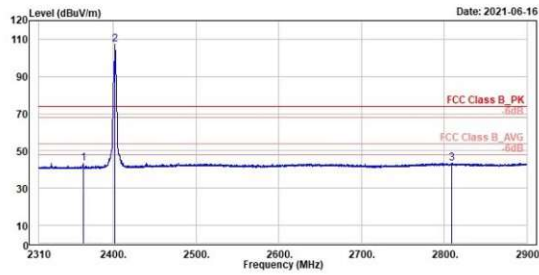

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2363.57	43.28	5.83	37.37	54.00	-10.00	180	48	Average	Horizontal	
2 *	2402.00	107.28	69.64	37.64	54.00	53.28	180	48	Average	Horizontal	
3	2809.26	43.44	5.13	38.31	54.00	-10.56	180	48	Average	Horizontal	




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

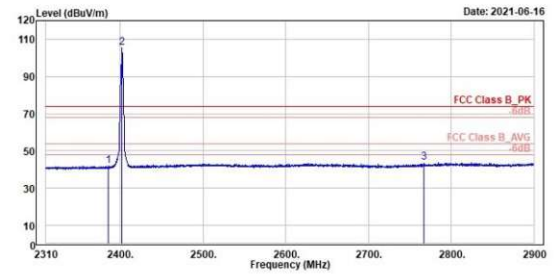

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2365.28	42.00	4.48	37.52	54.00	-12.00	395	324	Average	Vertical	
2 *	2402.00	105.55	67.91	37.64	54.00	51.55	395	324	Average	Vertical	
3	2766.66	43.78	5.59	38.19	54.00	-10.22	395	324	Average	Vertical	


BLE_2M

High Channel (Horizontal) Peak

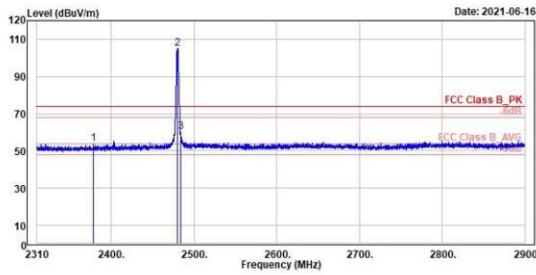

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2377.97	53.63	16.15	37.48	74.00	-20.37	333	30	Peak	Horizontal	
2 *	2480.00	105.01	66.86	38.15	74.00	31.01	333	30	Peak	Horizontal	
3	2483.50	60.04	21.88	38.16	74.00	-13.96	333	30	Peak	Horizontal	


High Channel (Vertical) Peak

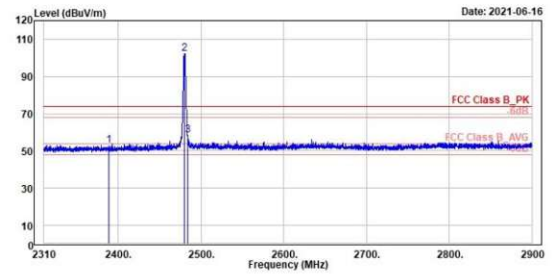

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2388.71	52.88	15.33	37.55	74.00	-21.12	332	327	Peak	Vertical	
2 *	2480.00	102.41	64.26	38.15	74.00	28.41	332	327	Peak	Vertical	
3	2483.50	58.20	20.04	38.16	74.00	-15.80	332	327	Peak	Vertical	


BLE_2M

High Channel (Horizontal) Average

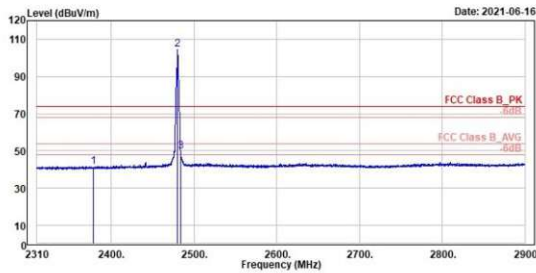

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2377.97	41.74	4.26	37.48	54.00	-12.26	333	30	Average	Horizontal	
2 *	2480.00	104.30	66.15	38.15	54.00	50.30	333	30	Average	Horizontal	
3 †	2483.50	49.82	11.66	38.16	54.00	-4.18	333	30	Average	Horizontal	

High Channel (Vertical) Average

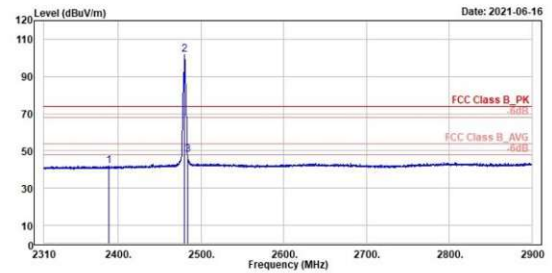

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2388.71	41.80	4.25	37.55	54.00	-12.20	332	327	Average	Vertical	
2 *	2480.00	101.76	63.61	38.15	54.00	47.76	332	327	Average	Vertical	
3	2483.50	47.70	9.54	38.16	54.00	-6.30	332	327	Average	Vertical	


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

BLE_2M

High Channel (Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

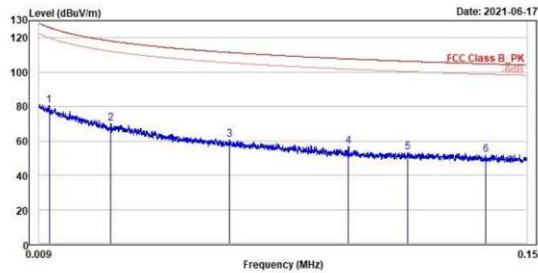

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	80.69	4.73	75.96	126.04	-45.35	100	13	QP	Open		
2	0.03	70.31	1.48	68.83	118.11	-47.80	100	105	QP	Open		
3	0.06	60.67	-1.33	62.00	111.46	-50.79	100	267	QP	Open		
4	0.10	57.07	-0.40	57.47	107.74	-50.67	100	149	QP	Open		
5	0.12	53.29	-3.30	56.59	106.34	-53.05	100	348	QP	Open		
6	0.14	51.88	-3.74	55.62	104.79	-52.91	100	34	QP	Open		



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

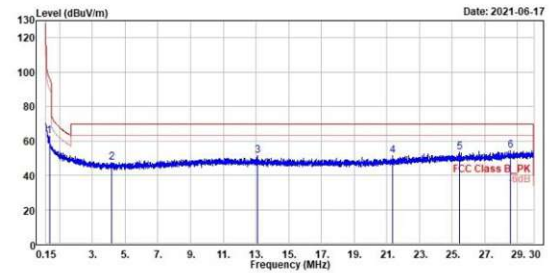


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.36	62.61	15.02	47.59	96.50	-33.89	100	84	QP	Open		
2	4.19	47.68	11.10	36.58	69.50	-21.82	100	88	QP	Open		
3	13.09	51.38	13.43	37.95	69.50	-18.12	100	30	QP	Open		
4	21.36	51.36	13.27	38.09	69.50	-18.14	100	256	QP	Open		
5	25.47	53.14	13.13	40.01	69.50	-16.36	100	24	QP	Open		
6	28.58	54.47	13.01	41.46	69.50	-15.03	100	232	QP	Open		

BLE_2M

High Channel (Close) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

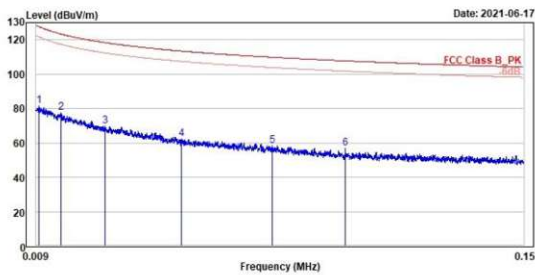

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	81.33	4.37	76.96	127.76	-46.43	100	315 QP	Close		
2	0.02	77.53	3.31	74.22	123.34	-49.11	100	305 QP	Close		
3	0.03	69.91	0.77	69.14	118.34	-48.43	100	268 QP	Close		
4	0.05	62.14	-1.56	63.70	113.41	-51.27	100	345 QP	Close		
5	0.08	58.44	-1.83	60.27	109.84	-51.40	100	168 QP	Close		
6	0.10	56.73	-0.74	57.47	107.73	-51.00	100	176 QP	Close		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

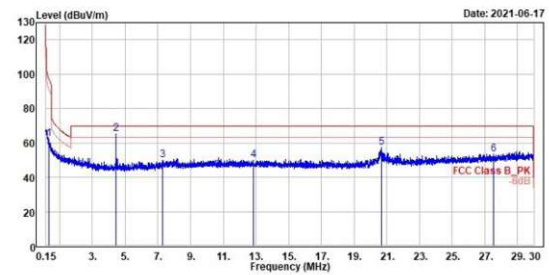

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.31	62.44	14.02	48.42	97.66	-35.22	100	166 QP	Close		
2	4.43	65.08	28.57	36.51	69.50	-4.42	100	119 QP	Close		
3	7.30	50.16	12.97	37.19	69.50	-19.34	100	220 QP	Close		
4	12.86	50.13	12.16	37.97	69.50	-19.37	100	203 QP	Close		
5	20.67	57.31	19.54	37.77	69.50	-12.19	100	162 QP	Close		
6	27.56	53.57	12.58	40.99	69.50	-15.93	100	156 QP	Close		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_2M

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

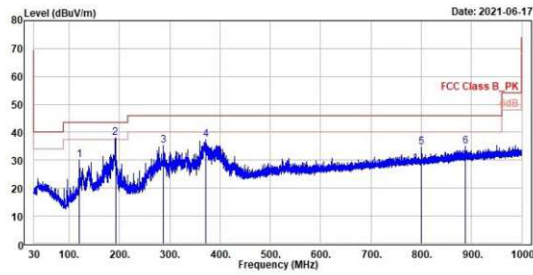

	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	120.02	30.09	39.90	-9.81	43.50	-13.41	300	264	QP		Horizontal	
2	191.99	38.11	48.25	-10.14	43.50	-5.39	200	98	QP		Horizontal	
3	287.92	35.23	41.98	-6.75	46.00	-10.77	100	101	QP		Horizontal	
4	372.12	37.55	42.56	-5.01	46.00	-8.45	200	152	QP		Horizontal	
5	800.08	34.81	33.02	1.79	46.00	-11.19	100	295	QP		Horizontal	
6	888.35	35.06	31.00	3.26	46.00	-10.94	100	167	QP		Horizontal	



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhua Rd., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

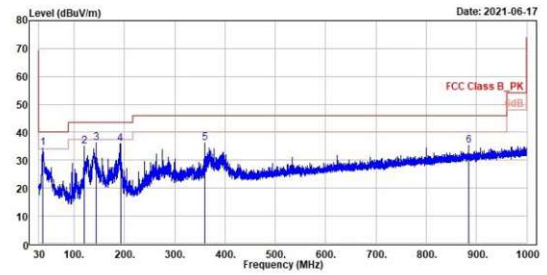

	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	37.28	34.22	42.75	-8.53	40.00	-5.78	100	227	QP		Vertical	
2	119.92	34.83	44.65	-9.82	43.50	-8.67	100	176	QP		Vertical	
3	144.07	36.26	43.87	-7.61	43.50	-7.24	100	41	QP		Vertical	
4	191.99	35.94	46.08	-10.14	43.50	-7.56	100	360	QP		Vertical	
5	360.48	36.30	41.72	-5.42	46.00	-9.70	100	184	QP		Vertical	
6	884.86	35.22	32.05	3.17	46.00	-10.78	100	157	QP		Vertical	


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_1M


Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

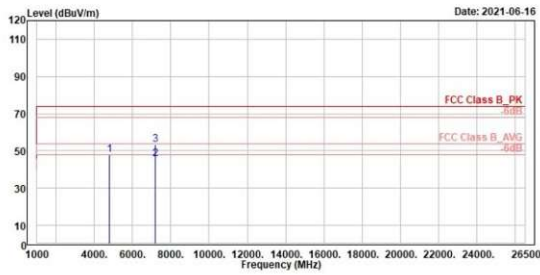

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

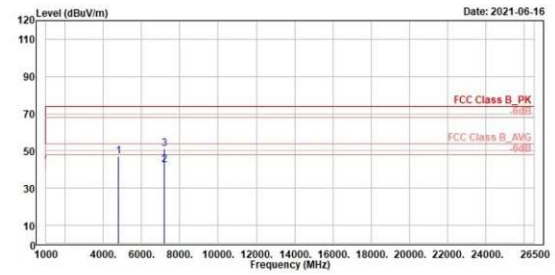


BLE_1M

Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

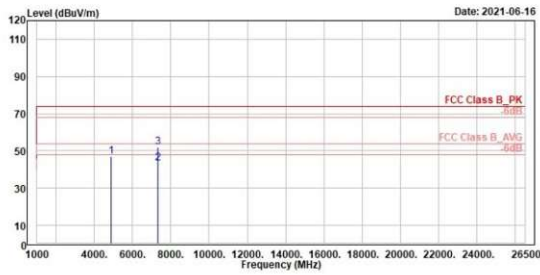


Line	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.00	46.90	56.57	-9.67	74.00	-27.10	490	111	Peak	Horizontal	
2	7320.00	43.32	50.59	-7.27	54.00	-10.68	190	191	Average	Horizontal	
3	7320.00	52.15	59.42	-7.27	74.00	-21.85	190	191	Peak	Horizontal	

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

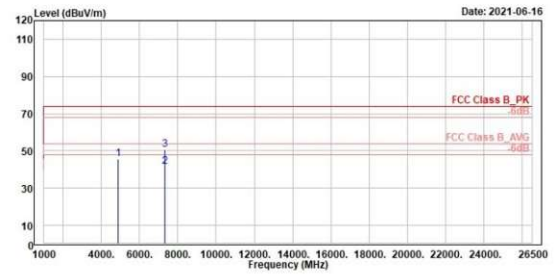

Line	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.00	45.54	55.21	-9.67	74.00	-28.46	190	262	Peak	Vertical	
2	7320.00	41.58	48.85	-7.27	54.00	-12.42	190	360	Average	Vertical	
3	7320.00	50.56	57.83	-7.27	74.00	-23.44	190	360	Peak	Vertical	


BLE_1M

High Channel (Horizontal)


High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

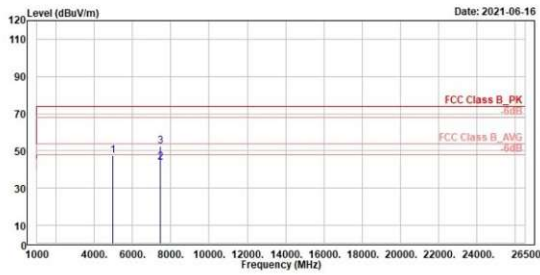

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

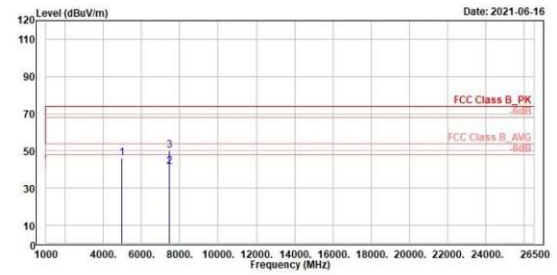


BLE_2M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

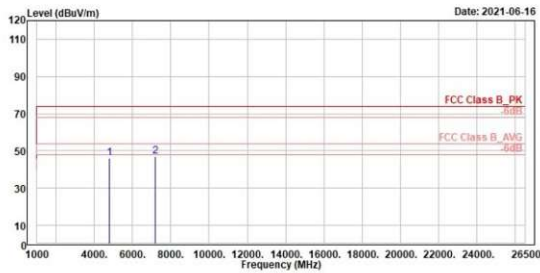

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4894.00	45.93	55.71	-9.78	74.00	-28.07	375	368	Peak	Horizontal	
2	7286.00	46.95	54.19	-7.24	87.91	-40.96	380	58	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

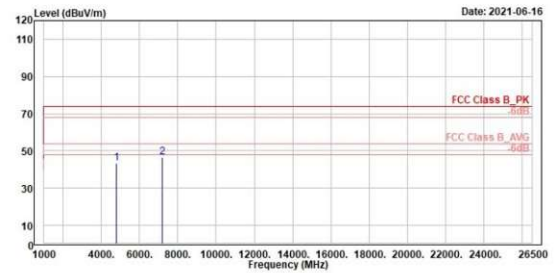


Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4894.00	43.30	53.08	-9.78	74.00	-30.70	180	278	Peak	Vertical	
2	7286.00	46.52	53.76	-7.24	86.18	-39.66	180	351	Peak	Vertical	

BLE_2M


Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

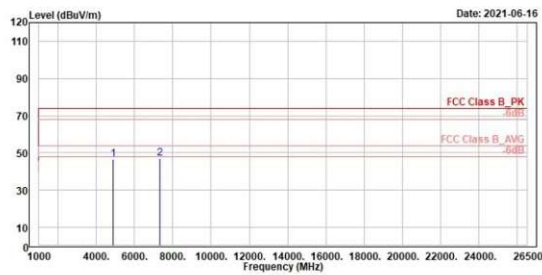

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

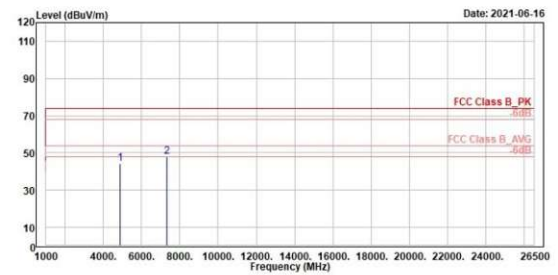


BLE_2M

High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

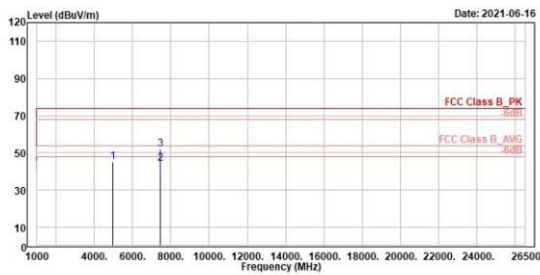


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	45.05	54.51	-9.46	74.00	-28.95	100		114 Peak	Horizontal	
2	7440.00	44.17	51.42	-7.25	54.00	-9.83	100		204 Average	Horizontal	
3	7440.00	51.81	59.06	-7.25	74.00	-22.19	100		204 Peak	Horizontal	

High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

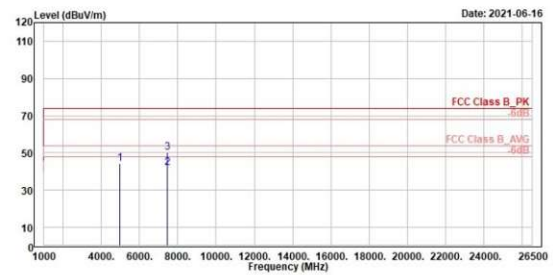

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	44.16	53.62	-9.46	74.00	-29.84	100		138 Peak	Vertical	
2	7440.00	41.96	49.21	-7.25	54.00	-12.04	102		343 Average	Vertical	
3	7440.00	50.13	57.38	-7.25	74.00	-23.87	102		343 Peak	Vertical	

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

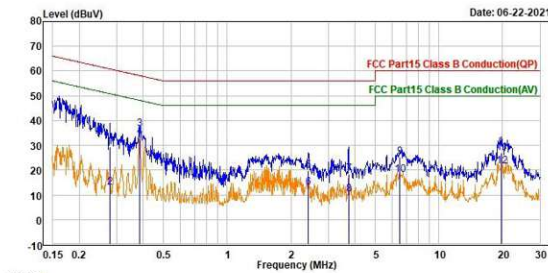


Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Po1/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.280	19.10	10.11	29.21	60.83	-31.62	QP	line1	
2	0.280	2.98	10.11	13.09	50.83	-37.74	Average	line1	
3	0.387	26.39	10.12	36.51	58.13	-21.62	QP	line1	
4	0.387	23.23	10.12	33.35	48.13	-14.78	Average	line1	
5	2.421	9.62	10.18	19.80	56.00	-36.20	QP	line1	
6	2.421	2.58	10.18	12.76	46.00	-33.24	Average	line1	
7	3.754	8.19	10.21	18.40	56.00	-37.60	QP	line1	
8	3.754	0.11	10.21	10.32	46.00	-35.68	Average	line1	
9	6.527	14.91	10.29	25.20	60.00	-34.80	QP	line1	
10	6.527	7.92	10.29	18.21	50.00	-31.79	Average	line1	
11	19.737	16.36	10.55	26.91	60.00	-33.09	QP	line1	
12	19.737	10.89	10.55	21.44	50.00	-28.56	Average	line1	



TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

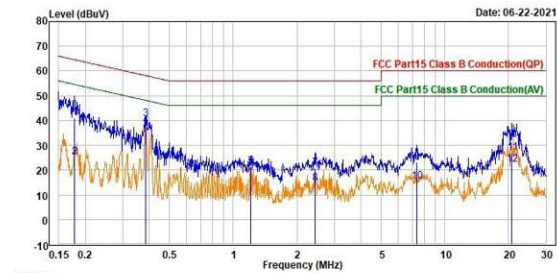

Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Po1/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.178	30.80	10.11	40.91	64.59	-23.68	QP	neutral	
2	0.178	15.25	10.11	25.36	54.59	-29.23	Average	neutral	
3	0.387	30.56	10.11	40.67	58.13	-17.46	QP	neutral	
4	0.387	27.92	10.11	38.03	48.13	-10.10	Average	neutral	
5	1.205	11.49	10.14	21.63	56.00	-34.37	QP	neutral	
6	1.205	8.82	10.14	18.96	46.00	-27.04	Average	neutral	
7	2.445	10.55	10.17	20.72	56.00	-35.28	QP	neutral	
8	2.445	4.59	10.17	14.76	46.00	-31.24	Average	neutral	
9	7.357	12.74	10.30	23.04	60.00	-36.96	QP	neutral	
10	7.357	5.16	10.30	15.46	50.00	-34.54	Average	neutral	
11	20.746	16.52	10.58	27.10	60.00	-32.90	QP	neutral	
12	20.746	11.52	10.58	22.10	50.00	-27.90	Average	neutral	

Appendix D: Test Results of Radiated Emissions & Mains Conducted

Emission Test_ BTM-510CR


Band Edges, 2.31GHz ~ 2.9GHz

BLE_2M

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

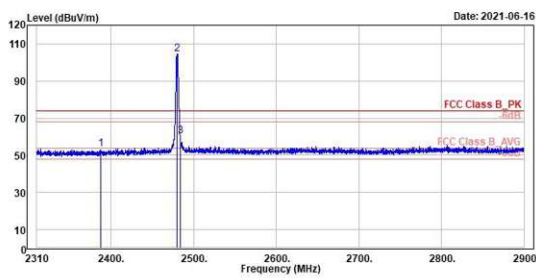

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2387.64	53.23	15.68	37.55	74.00	-20.77	368	46	Peak	Horizontal		
2 *	2480.00	104.59	66.44	38.15	74.00	30.59	368	46	Peak	Horizontal		
3	2483.50	60.22	22.06	38.16	74.00	-13.78	368	46	Peak	Horizontal		




TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

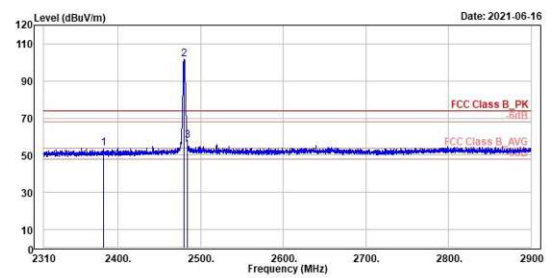

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2382.10	53.73	16.23	37.50	74.00	-20.27	331	327	Peak	Vertical		
2 *	2480.00	101.71	63.56	38.15	74.00	27.71	331	327	Peak	Vertical		
3	2483.50	57.93	19.77	38.16	74.00	-16.07	331	327	Peak	Vertical		


BLE_2M

High Channel (Horizontal) Average

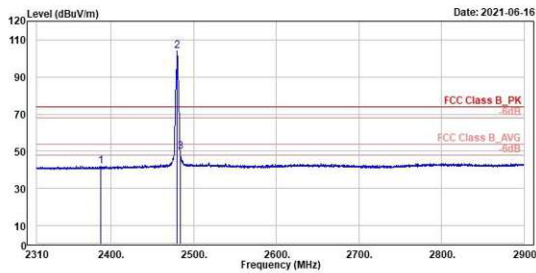

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	2387.64	41.97	4.42	37.55	54.00	-12.03	368	46	Average	Horizontal	
2 *	2480.00	103.93	65.78	38.15	54.00	49.93	368	46	Average	Horizontal	
3 !	2483.50	49.87	11.71	38.16	54.00	-4.13	368	46	Average	Horizontal	

High Channel (Vertical) Average

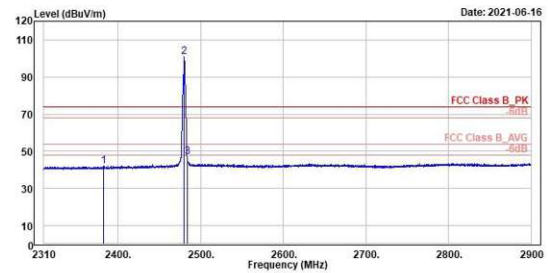

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	2382.10	41.83	4.33	37.50	54.00	-12.17	331	327	Average	Vertical	
2 *	2480.00	101.04	62.89	38.15	54.00	47.04	331	327	Average	Vertical	
3	2483.50	46.88	8.72	38.16	54.00	-7.12	331	327	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_2M

High Channel (Open) 9kHz~150kHz

High Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

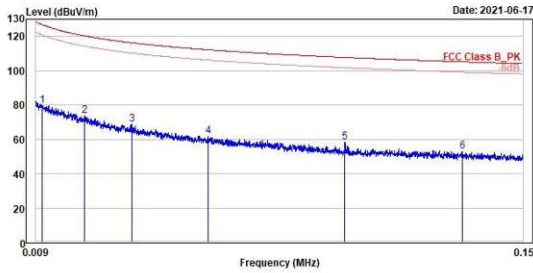

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	79.82	3.46	76.36	126.79	-46.97	100	360	QP	Open		
2	0.02	73.89	2.42	71.47	120.29	-46.40	100	148	QP	Open		
3	0.04	68.84	1.74	67.10	116.29	-47.45	100	360	QP	Open		
4	0.06	61.69	-0.99	62.68	112.19	-50.50	100	279	QP	Open		
5	0.10	58.44	0.98	57.46	107.73	-49.29	100	139	QP	Open		
6	0.13	52.73	-3.14	55.87	105.16	-52.43	100	327	QP	Open		




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

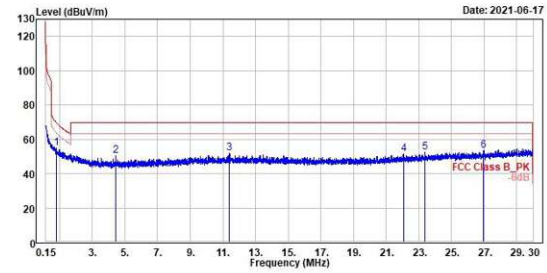


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.79	54.88	12.11	42.77	69.70	-14.82	100	301	QP	Open		
2	4.43	50.40	13.89	36.51	69.50	-19.10	100	297	QP	Open		
3	11.41	51.81	13.73	38.08	69.50	-17.69	100	19	QP	Open		
4	22.06	51.57	13.15	38.42	69.50	-17.93	100	50	QP	Open		
5	23.38	52.39	13.35	39.04	69.50	-17.11	100	137	QP	Open		
6	26.98	53.32	12.61	40.71	69.50	-16.18	100	194	QP	Open		

BLE_2M
High Channel (Close) 9kHz~150kHz

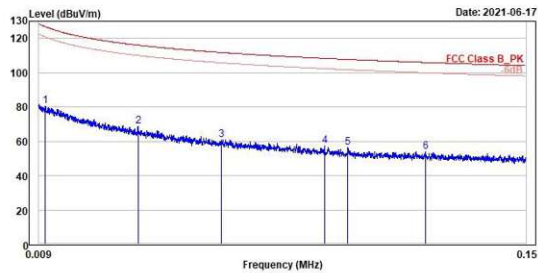 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	80.57	4.20	76.37	126.81	-46.24	100	351 QP	Close	
2	0.04	68.63	1.77	66.86	116.06	-47.43	100	357 QP	Close	
3	0.06	60.95	-1.34	62.29	111.77	-50.82	100	272 QP	Close	
4	0.09	57.11	-1.25	58.36	108.35	-51.24	100	349 QP	Close	
5	0.10	56.42	-1.04	57.46	107.73	-51.31	100	187 QP	Close	
6	0.12	54.01	-2.35	56.36	105.95	-51.94	100	162 QP	Close	

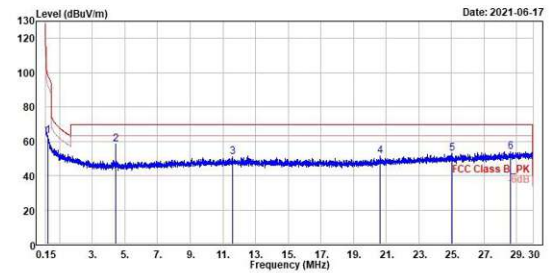
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.26	63.50	13.00	50.50	99.39	-35.89	100	160 QP	Close	
2	4.43	58.21	21.70	36.51	69.50	-11.29	100	99 QP	Close	
3	11.59	50.91	12.85	38.06	69.50	-18.59	100	328 QP	Close	
4	20.62	51.16	13.42	37.74	69.50	-18.34	100	324 QP	Close	
5	25.05	52.86	13.05	39.81	69.50	-16.64	100	88 QP	Close	
6	28.63	53.99	12.50	41.49	69.50	-15.51	100	29 QP	Close	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_2M

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

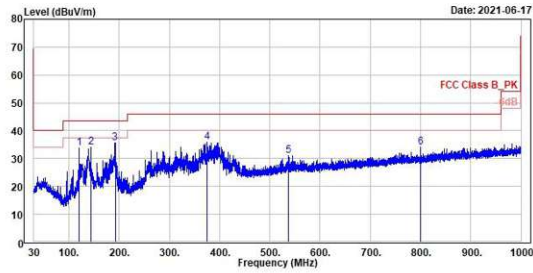

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	120.02	33.04	43.65	-9.61	43.50	-9.66	300	98	QP	Horizontal		
2	143.98	34.16	41.78	-7.62	43.50	-9.34	200	121	QP	Horizontal		
3	191.99	35.73	45.87	-10.14	43.50	-7.77	100	263	QP	Horizontal		
4	375.81	35.95	40.82	-4.87	46.00	-10.05	200	140	QP	Horizontal		
5	536.83	30.90	33.37	-2.47	46.00	-15.10	200	131	QP	Horizontal		
6	800.00	34.18	32.39	1.79	46.00	-11.82	100	84	QP	Horizontal		



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

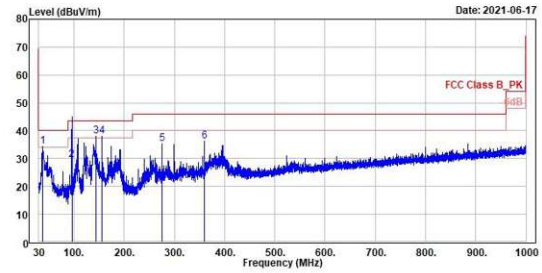

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	37.37	34.32	42.01	-8.49	40.00	-5.68	100	199	QP	Vertical		
2	95.86	29.49	42.00	-13.31	43.50	-14.01	100	193	QP	Vertical		
3	143.98	38.16	45.78	-7.62	43.50	-5.34	100	39	QP	Vertical		
4	155.91	38.03	45.27	-7.24	43.50	-5.47	300	360	QP	Vertical		
5	275.90	35.33	42.44	-7.11	46.00	-10.67	200	7	QP	Vertical		
6	360.48	36.13	41.55	-5.42	46.00	-9.87	100	160	QP	Vertical		


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_2M


High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

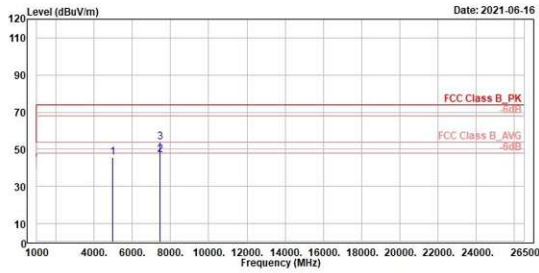

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

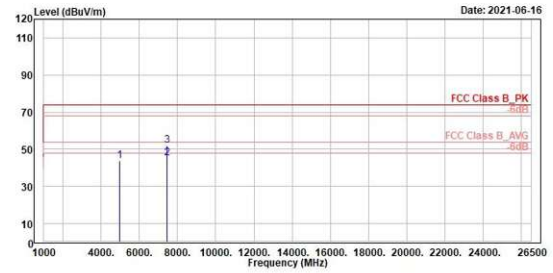

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TUV Rheinland Taiwan Ltd(New Taipei City Branch)
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

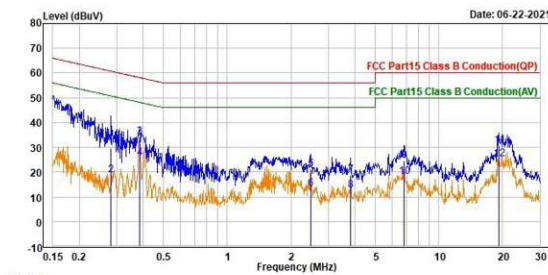


Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.282	19.54	10.11	29.65	60.74	-31.09	QP	line1	
2	0.282	8.52	10.11	18.63	50.74	-32.11	Average	line1	
3	0.387	23.98	10.12	34.10	58.13	-24.03	QP	line1	
4	0.387	15.54	10.12	25.66	48.13	-22.47	Average	line1	
5	2.482	10.96	10.18	21.14	56.00	-34.86	QP	line1	
6	2.482	2.96	10.18	13.14	46.00	-32.86	Average	line1	
7	3.829	8.46	10.21	18.67	56.00	-37.33	QP	line1	
8	3.829	2.36	10.21	12.57	46.00	-33.43	Average	line1	
9	6.827	14.14	10.29	24.43	60.00	-35.57	QP	line1	
10	6.827	7.72	10.29	18.01	50.00	-31.99	Average	line1	
11	19.252	20.09	10.54	30.63	60.00	-29.37	QP	line1	
12	19.252	14.73	10.54	25.27	50.00	-24.73	Average	line1	



TUV Rheinland Taiwan Ltd(New Taipei City Branch)
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

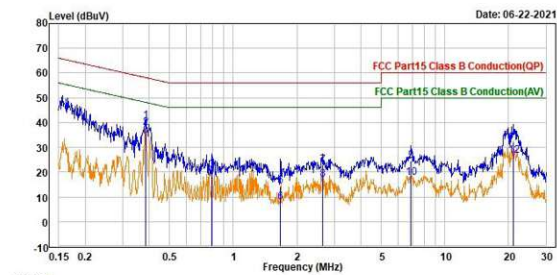

Trace: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.387	30.49	10.11	40.60	58.13	-17.53	QP	neutral	
2	0.387	27.77	10.11	37.88	48.13	-10.25	Average	neutral	
3	0.793	10.62	10.13	20.75	56.00	-35.25	QP	neutral	
4	0.793	8.56	10.13	18.69	46.00	-27.31	Average	neutral	
5	1.674	4.06	10.16	14.22	56.00	-41.78	QP	neutral	
6	1.674	-2.21	10.16	7.95	46.00	-38.05	Average	neutral	
7	2.648	12.67	10.17	22.84	56.00	-33.16	QP	neutral	
8	2.648	6.82	10.17	16.99	46.00	-29.01	Average	neutral	
9	6.930	14.14	10.29	24.43	60.00	-35.57	QP	neutral	
10	6.930	7.56	10.29	17.85	50.00	-32.15	Average	neutral	
11	21.059	21.35	10.58	31.93	60.00	-28.07	QP	neutral	
12	21.059	16.01	10.58	26.59	50.00	-23.41	Average	neutral	