


WHAT'S INCLUDED

Component Checklist



(1) R/C TumbleBee

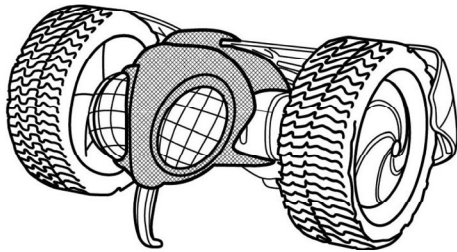

(1) Transmitter




(2) "AA" Batteries

TRANSMITTER

Battery Installation

1. To open battery compartment cover on transmitter, slide in the direction indicated by the arrow.
2. Insert 2 "AA" size batteries.
Make sure the positive (+) and negative (-) markings on the batteries match up to the ones inside the Battery Compartment.
3. Replace the Battery Compartment Cover making certain that the Compartment tab has "snapped" into the locked position.

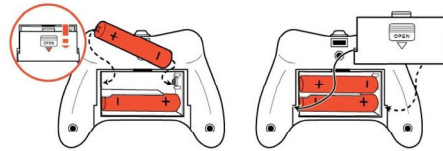

Note: When replacing Transmitter batteries:
Do not mix old and new batteries.
Do not mix alkaline, standard or rechargeable batteries.
Use alkaline batteries only.

Syncing

This transmitter is equipped with 2.4GHz technology which allows up to 6 vehicles to be used at the same time.

To sync transmitter and vehicle, follow these steps:

1. Install batteries in Transmitter.
2. Turn on Vehicle.

Once the batteries are installed and the vehicle is turned on, the Transmitter will sync automatically with the vehicle.

Sound

Touch the head to hear Laughing sound.

TRANSMITTER

Functions

Left Tread Control

Right Tread Control



Note:
Vehicle has working lights. When vehicle is powered ON, eyes will glow. When vehicle is in motion, eye color will change.

How to Drive

FORWARD AND REVERSE DRIVING



FORWARD DRIVING
Push BOTH joysticks forward for Forward Driving.



REVERSE DRIVING
Pull BOTH joysticks backward for Reverse Driving.

TURNING



RIGHT TURNING
Push LEFT joystick forward to turn right while driving forward. Pull LEFT joystick back to turn right in reverse.



LEFT TURNING
Push RIGHT joystick forward to turn left while driving forward. Pull RIGHT joystick back to turn left in reverse.

SPINS




360° SPINS - Clockwise
Push joysticks as shown for Clockwise Spinning.



360° SPINS - Counter-Clockwise
Push joysticks as shown for Counter-Clockwise Spinning.

VEHICLE

Functions

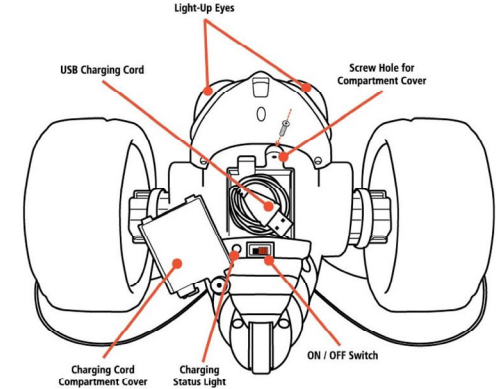

Charging

This vehicle is equipped with an internal Lithium-Ion battery that is recharged via USB. **ON/OFF Switch must be in the OFF position prior to charging.**

1. Locate the Charging Cord Compartment Cover on the underside of vehicle.
2. Use a screwdriver to remove the small screw keeping the cover in place.
3. Remove USB cable from the Storage Compartment. (Use care when extending cord as it is attached to inside internal battery). Cord can be plugged into any computer or USB outlet brick (not included).
4. Insert the USB connector into a computer or other USB power source.
5. While charging, the Charging Status Light under the vehicle will be on. Once fully charged the light will turn off. Charging is completed in approximately 2 hours (when charging from a computer).
6. After charging is complete, store the USB cord in the Charging Cord Compartment. Replace the Compartment cover and screw securely back into place.