



**FCC Part15, Subpart B
ICES-003**

TEST REPORT

For

TOY Receiver

MODEL NUMBER: 64UB

FCC ID: G6D64UB

REPORT NUMBER: 4788960613-2

ISSUE DATE: April 30, 2019

Prepared for

**NEW BRIGHT INDUSTRIAL CO., LTD
9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY,
KOWLOON, HONG KONG.**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	04/30/2019	Initial Issue	



Summary of Test Results				
Standard	Test Item	Limit	Result	Remark
FCC Part15, Subpart B ICES-003 Issue 6 ANSI C63.4-2014	Conducted Disturbance	Class B	PASS	
	Radiated Disturbance below 1 GHz	Class B	PASS	
	Radiated Disturbance above 1 GHz	Class B	PASS	NOTE (1)
Note: (1) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.				



CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>Measuring Instrument Calibration</i>	<i>7</i>
4.2. <i>Measurement Uncertainty</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>Description of EUT.....</i>	<i>8</i>
5.2. <i>Test Mode.....</i>	<i>8</i>
5.3. <i>EUT Accessory</i>	<i>8</i>
5.4. <i>Support Units or Accessories for System Test</i>	<i>9</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	10
7. EMISSION TEST	11
7.1. <i>Conducted Disturbance Measurement</i>	<i>11</i>
7.1.1. <i>Limits of conducted disturbance voltage</i>	<i>11</i>
7.1.2. <i>Test Procedure</i>	<i>11</i>
7.1.3. <i>Test Setup</i>	<i>12</i>
7.1.4. <i>Test Environment.....</i>	<i>12</i>
7.1.5. <i>Test Mode.....</i>	<i>12</i>
7.1.6. <i>Test Results.....</i>	<i>13</i>
7.2. <i>Radiated Disturbance Measurement</i>	<i>15</i>
7.2.1. <i>Limits of radiated disturbance measurement.....</i>	<i>15</i>
7.2.2. <i>Test Procedure</i>	<i>16</i>
7.2.3. <i>Test Setup</i>	<i>16</i>
7.2.4. <i>Test Environment.....</i>	<i>17</i>
7.2.5. <i>Test Mode.....</i>	<i>17</i>
7.2.6. <i>Test Results – below 1GHz.....</i>	<i>18</i>
7.2.7. <i>Test Results – above 1GHz</i>	<i>22</i>



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: NEW BRIGHT INDUSTRIAL CO., LTD
Address: 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD,
KOWLOON BAY, KOWLOON, HONG KONG.

Manufacturer Information

Company Name: NEW BRIGHT INDUSTRIAL CO., LTD
Address: 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD,
KOWLOON BAY, KOWLOON, HONG KONG.

EUT Information

EUT Name: TOY Receiver
Model: 64UB
Brand: /
Sample ID: 2235955
Sample Received Date: April 8, 2019
Date of Tested: April 8, 2019 ~ April 30, 2019

APPLICABLE STANDARDS	
STANDARDS	TEST RESULTS
FCC Part15, Subpart B ICES-003 Issue 6 ANSI C63.4-2014	PASS

Prepared By:

Gary Zhang
Engineer Project Associate

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC Part15 Subpart B, ANSI C63.4-2014, and ICES-003 Issue 6

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China



4. CALIBRATION AND UNCERTAINTY

4.1. Measuring Instrument Calibration

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports	0.009MHz ~ 0.15MHz	2	4.00
Conducted emissions from the AC mains power ports	0.15MHz ~ 30MHz	2	3.62
Radiated emissions	30MHz ~ 1GHz	2	4.00
Radiated emissions	1GHz ~ 18GHz	2	5.78

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. EQUIPMENT UNDER TEST

5.1. Description of EUT

EUT Name	TOY Receiver
Model	64UB
Rated voltage	DC 6.4V
The highest working frequency	2473MHz

5.2. Test Mode

Test Mode	Description
Mode 1	Charging
Mode 2	Running

5.3. EUT Accessory

Item	Accessory	Brand Name	Model Name	Description
1	Remote control	NEW BRIGHT	31HB	/



5.4. Support Units or Accessories for System Test

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Specification	Series No.
1	AC/DC adaptor	MEIZU	UP0520	5Vdc,2A	1539001489E1

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Specification
1	DC	NO	NO	0.5m



6. MEASURING EQUIPMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Dec. 10, 2018	Dec. 10, 2019
Two-Line V-Network	R&S	ENV216	101983	Dec. 10, 2018	Dec. 10, 2019
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1
Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec. 10, 2018	Dec. 10, 2019
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	HP	8447D	2944A09099	Dec. 10, 2018	Dec. 10, 2019
EMI Measurement Receiver	R&S	ESR26	101377	Dec. 10, 2018	Dec. 10, 2019
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Dec. 10, 2018	Dec. 10, 2019
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

7. EMISSION TEST

7.1. Conducted Disturbance Measurement

7.1.1. Limits of conducted disturbance voltage

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46*
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

7.1.2. Test Procedure

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item: Photographs of Test Configuration.

7.1.3. Test Setup

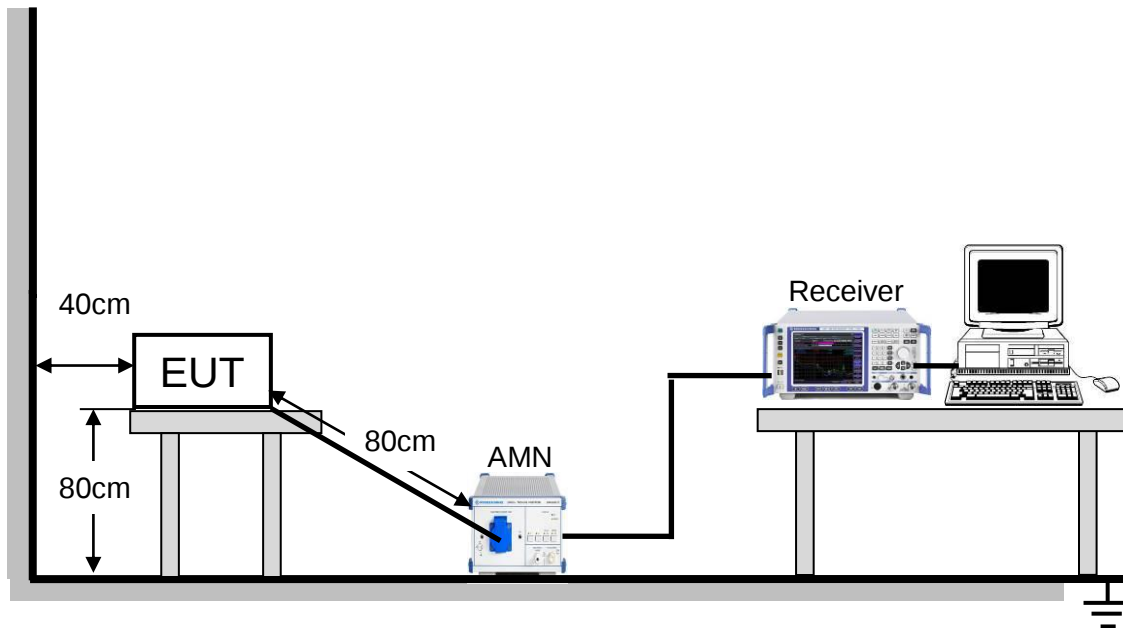

For the actual test configuration, please refer to the setup photo.

7.1.4. Test Environment

Temperature:	24°C
Humidity:	53%
ATM pressure:	101kPa


7.1.5. Test Mode

Pre-test Mode:	Mode 1
Final Test Mode:	Mode 1



7.1.6. Test Results


Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz

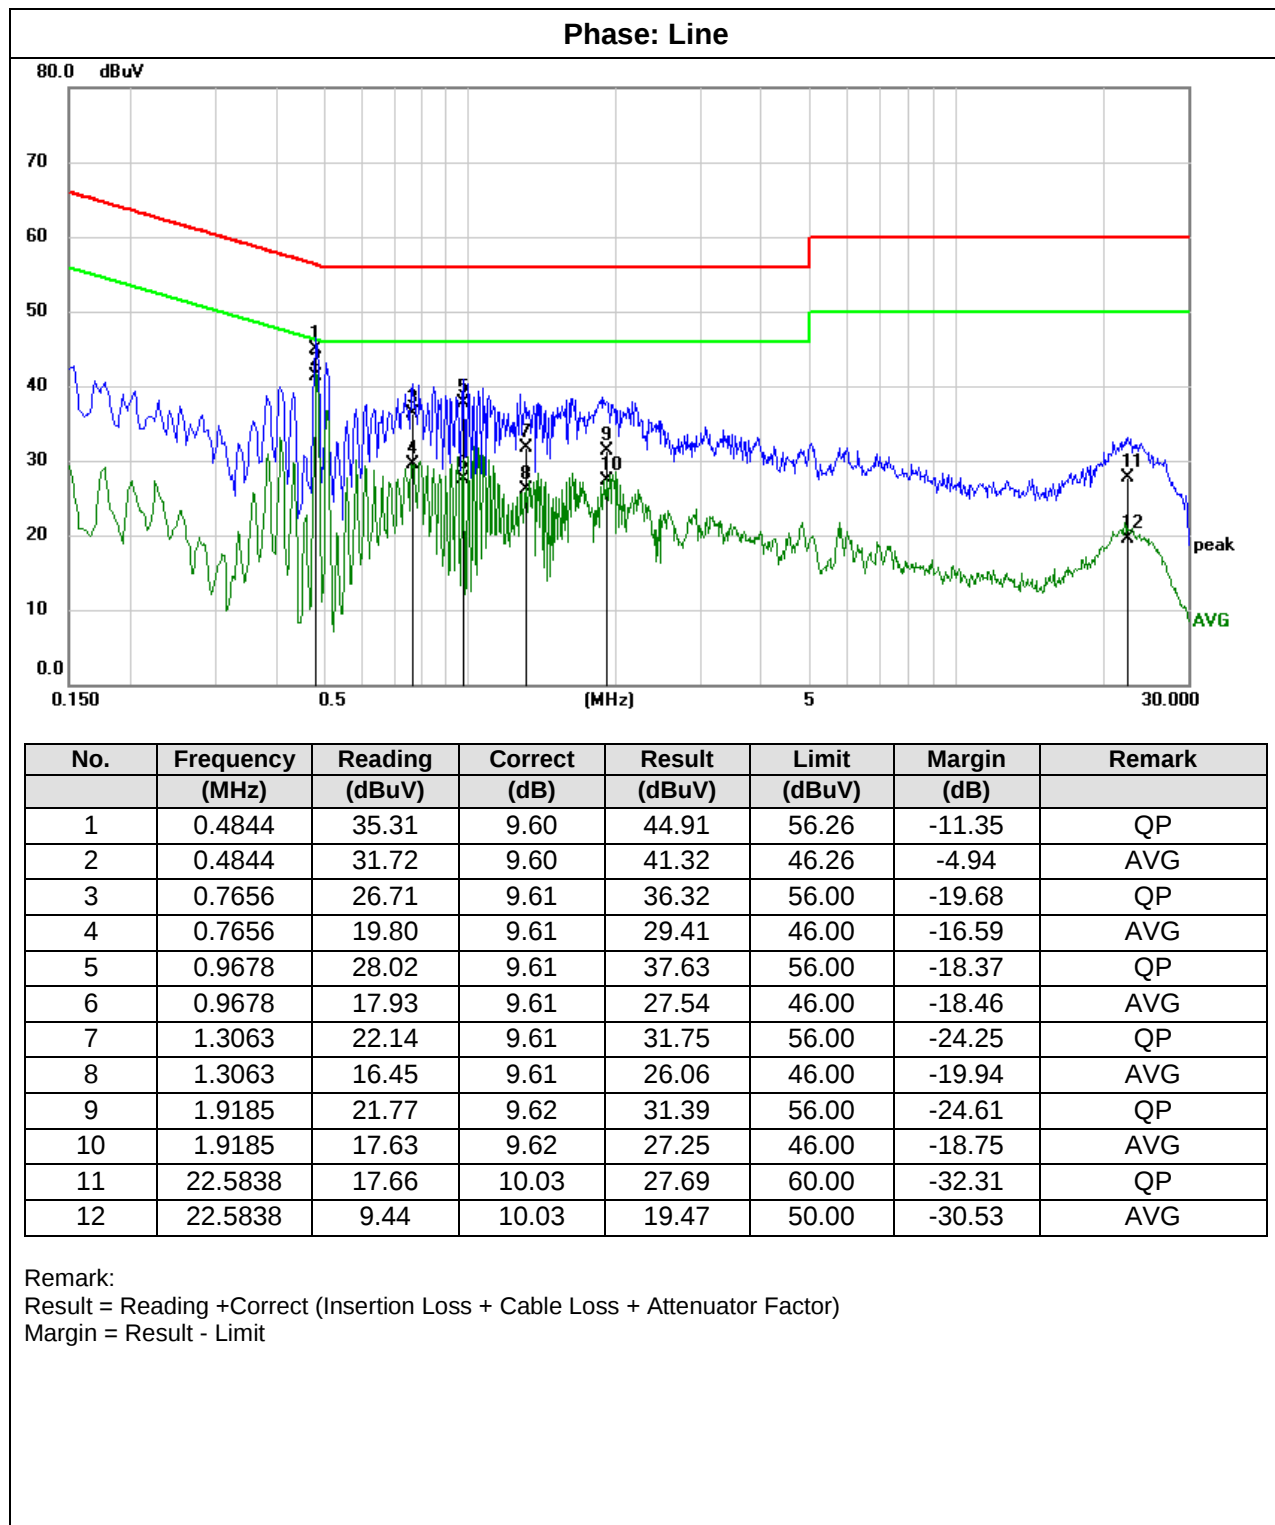



Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz

Phase: Neutral

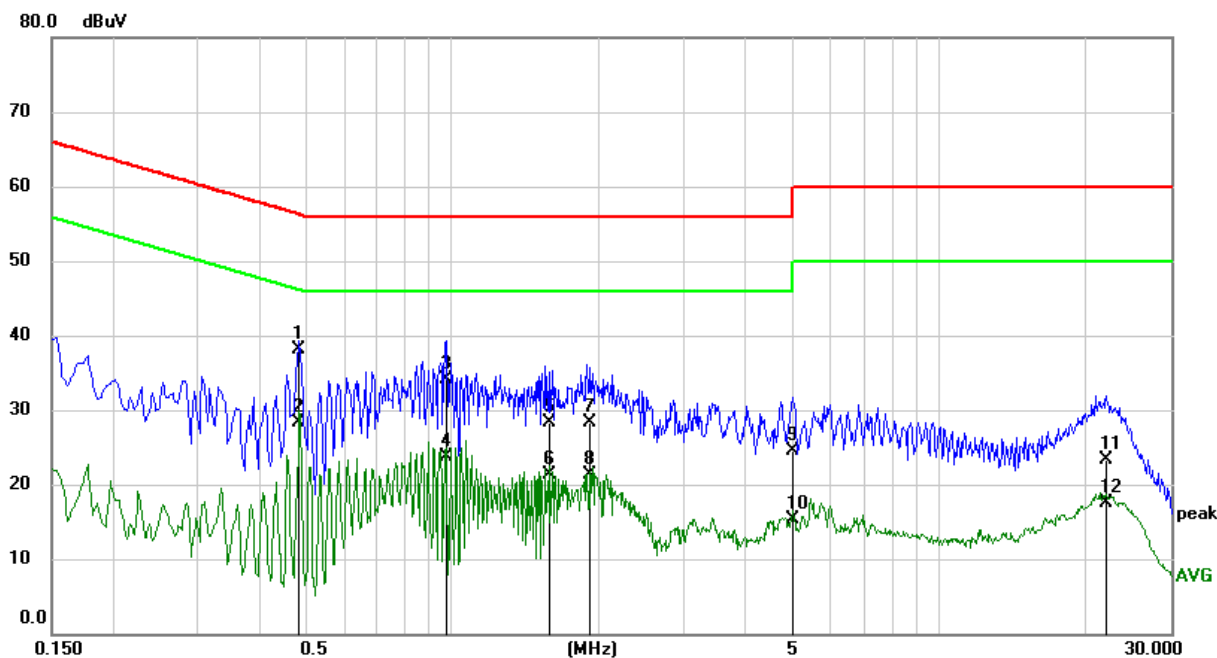

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4845	28.59	9.60	38.19	56.26	-18.07	QP
2	0.4845	18.75	9.60	28.35	46.26	-17.91	AVG
3	0.9732	24.45	9.61	34.06	56.00	-21.94	QP
4	0.9732	14.03	9.61	23.64	46.00	-22.36	AVG
5	1.5817	18.60	9.62	28.22	56.00	-27.78	QP
6	1.5817	11.73	9.62	21.35	46.00	-24.65	AVG
7	1.9173	18.73	9.63	28.36	56.00	-27.64	QP
8	1.9173	11.58	9.63	21.21	46.00	-24.79	AVG
9	5.0150	14.84	9.67	24.51	60.00	-35.49	QP
10	5.0150	5.58	9.67	15.25	50.00	-34.75	AVG
11	22.1347	13.09	10.17	23.26	60.00	-36.74	QP
12	22.1347	7.34	10.17	17.51	50.00	-32.49	AVG

Remark:

Result = Reading + Correct (Insertion Loss + Cable Loss + Attenuator Factor)

Margin = Result - Limit

7.2. Radiated Disturbance Measurement

7.2.1. Limits of radiated disturbance measurement

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A		Class B
	Field strength (uV/m) (at 10m)	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	90	49.5	40
88 - 216	150	53.9	43.5
216 - 960	210	56.9	46
Above 960	300	60	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:


- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),
3m Emission level = 10m Emission level + 20log(10m/3m);

7.2.2. Test Procedure


- The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the actual test configuration, please refer to the related Item:EUT Photographs of Test Configuration.

7.2.3. Test Setup

(a) Radiated Disturbance Test Set-Up Frequency 30MHz - 1GHz

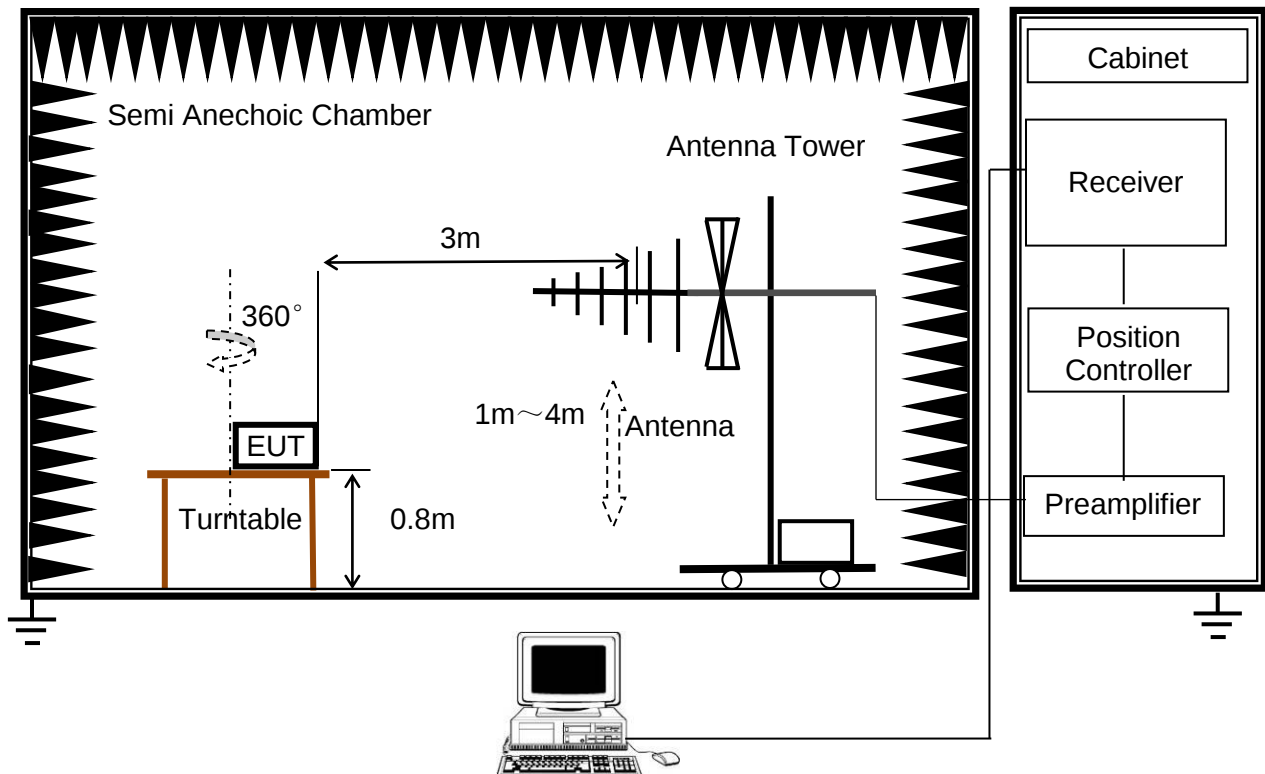

(b) Radiated Disturbance Test Set-Up Frequency above 1GHz

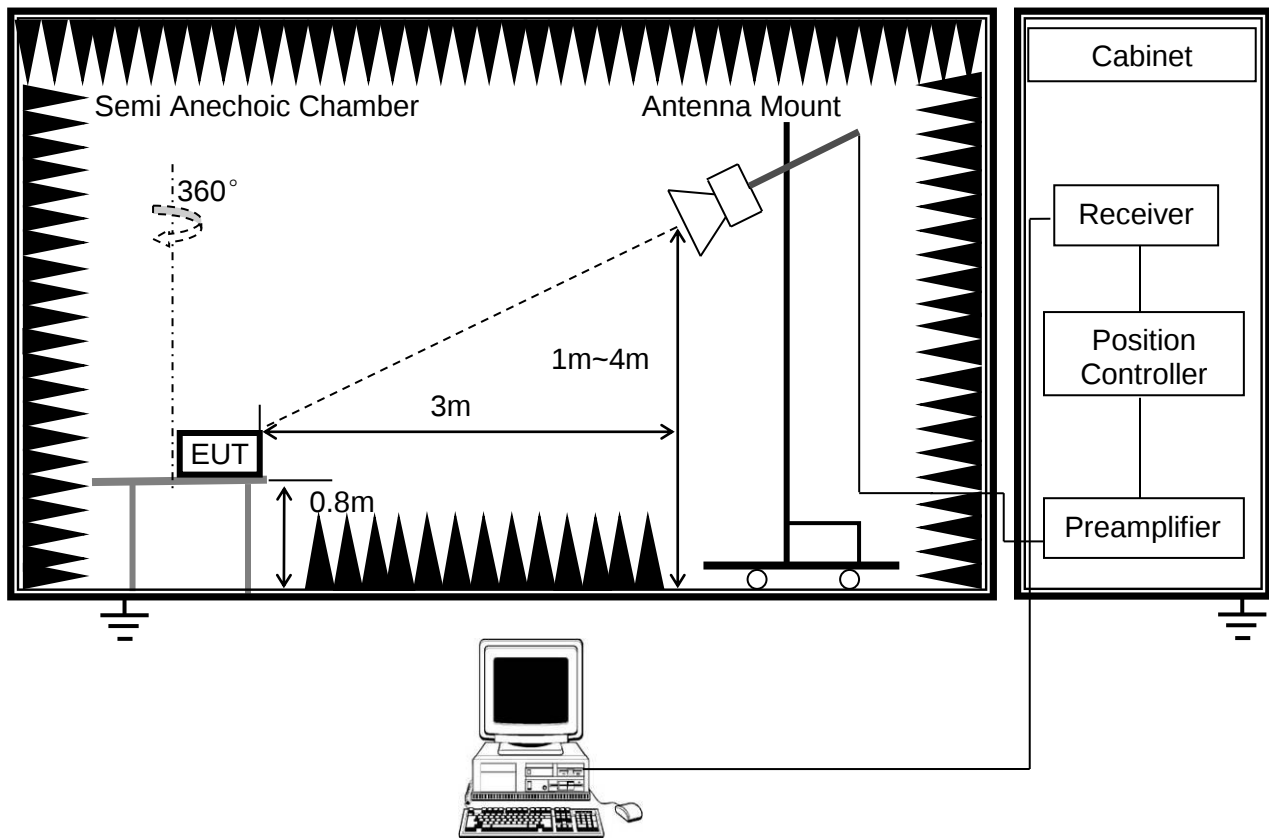

For the actual test configuration, please refer to the setup photo.

7.2.4. Test Environment

Radiated Disturbance - below 1 GHz		Radiated Disturbance - above 1 GHz	
Temperature:	24°C	Temperature:	22.7°C
Humidity:	60%	Humidity:	59%
ATM pressure:	101kPa	ATM pressure:	101kPa

7.2.5. Test Mode


Radiated Disturbance - below 1 GHz		Radiated Disturbance - above 1 GHz	
Pre-test Mode:	Mode 1 & Mode 2	Pre-test Mode:	Mode 1 & Mode 2
Final Test Mode:	Mode 1 & Mode 2	Final Test Mode:	Mode 2

Note 1 : All test modes have been tested, but only the worst case data recorded in the report.

Note 2: All placing positions of the EUT have been assessed, only the worst case data recorded in the report.

**7.2.6. Test Results – below 1GHz**

Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz

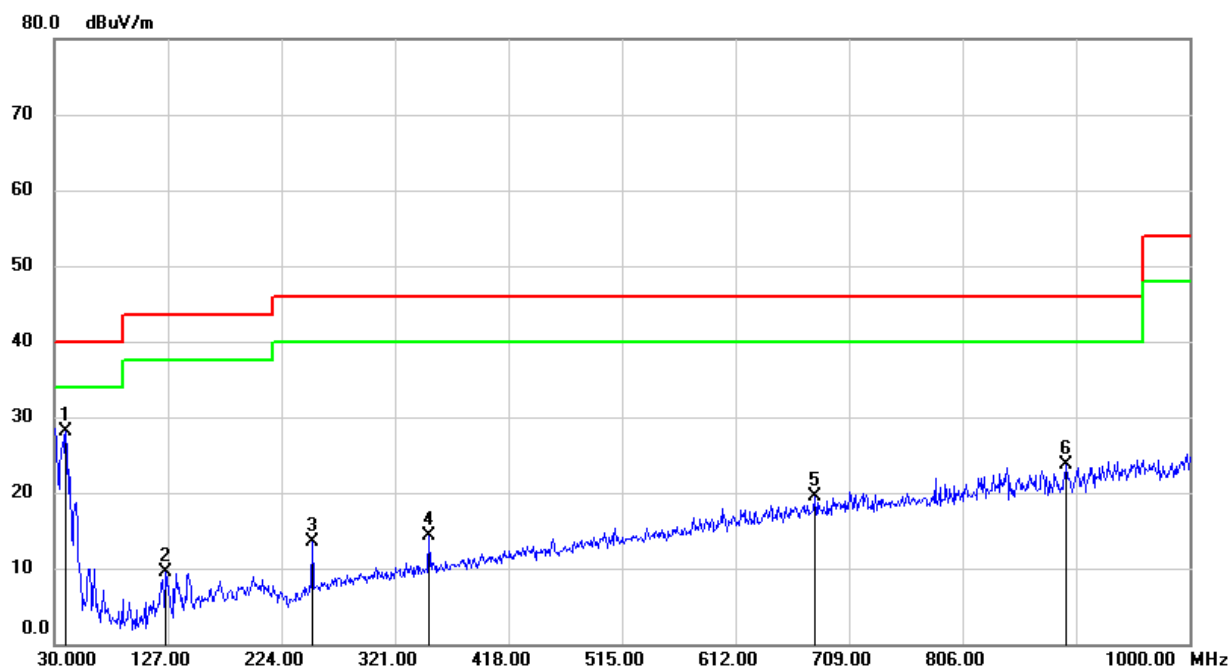Polarization: Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	46.03	-17.93	28.10	40.00	-11.90	QP
2	125.0600	29.61	-20.17	9.44	43.50	-34.06	QP
3	250.1900	29.63	-16.12	13.51	46.00	-32.49	QP
4	350.1000	27.47	-13.16	14.31	46.00	-31.69	QP
5	679.9000	26.49	-6.95	19.54	46.00	-26.46	QP
6	894.2700	27.92	-4.15	23.77	46.00	-22.23	QP


Remark:

Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit



Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz

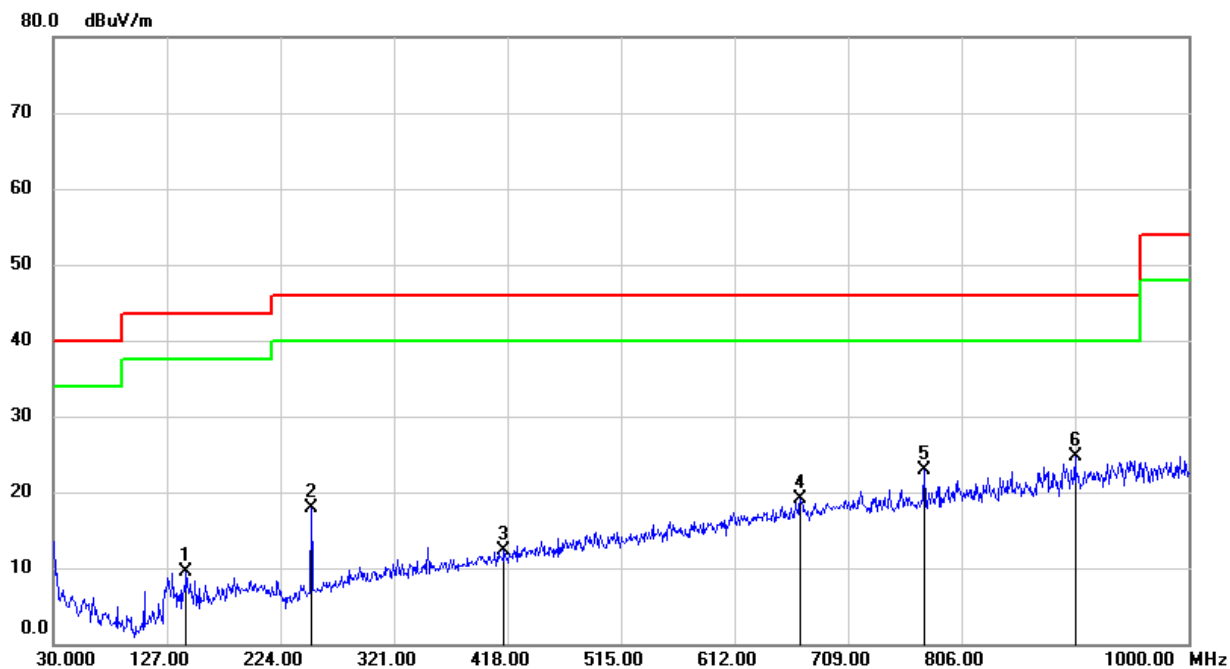Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	143.4900	28.43	-18.86	9.57	43.50	-33.93	QP
2	250.1900	33.96	-16.12	17.84	46.00	-28.16	QP
3	415.0900	24.38	-12.06	12.32	46.00	-33.68	QP
4	668.2600	26.33	-7.21	19.12	46.00	-26.88	QP
5	773.9900	28.61	-5.74	22.87	46.00	-23.13	QP
6	903.0000	28.77	-4.07	24.70	46.00	-21.30	QP

Remark:


Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit



Test Mode: Mode 2

Polarization: Vertical

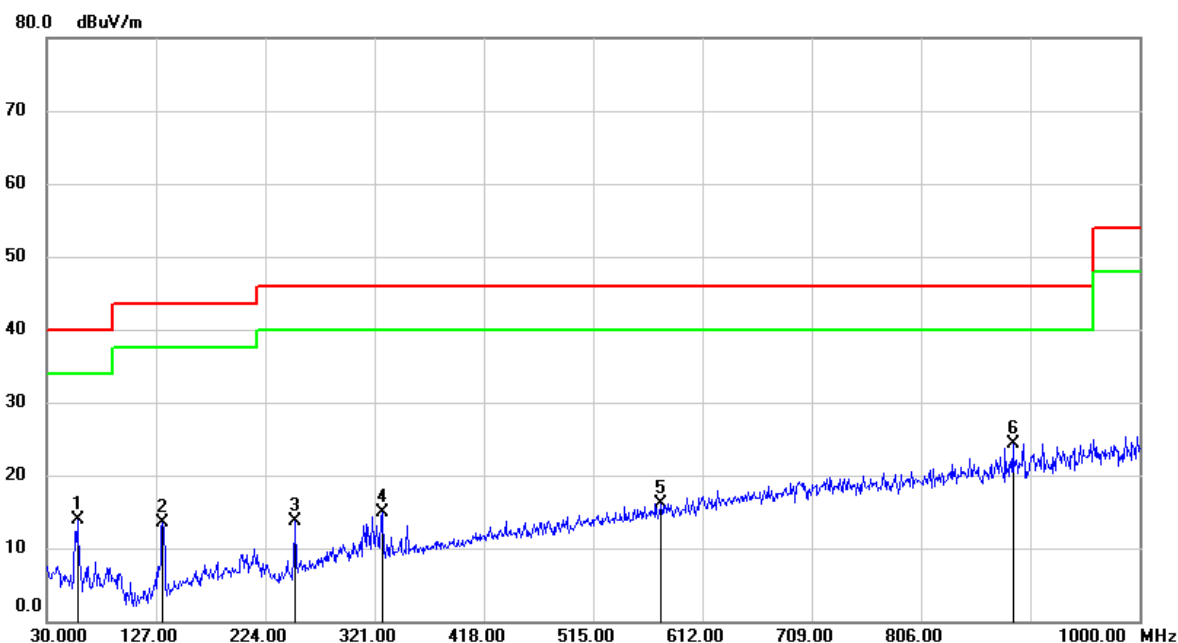

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	32.87	-19.04	13.83	40.00	-26.17	QP
2	132.8200	33.09	-19.53	13.56	43.50	-29.94	QP
3	250.1900	29.77	-16.12	13.65	46.00	-32.35	QP
4	327.7900	28.43	-13.58	14.85	46.00	-31.15	QP
5	575.1400	25.03	-8.85	16.18	46.00	-29.82	QP
6	887.4800	28.56	-4.20	24.36	46.00	-21.64	QP

Remark:


Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit



Test Mode: Mode 2

Polarization: Horizontal

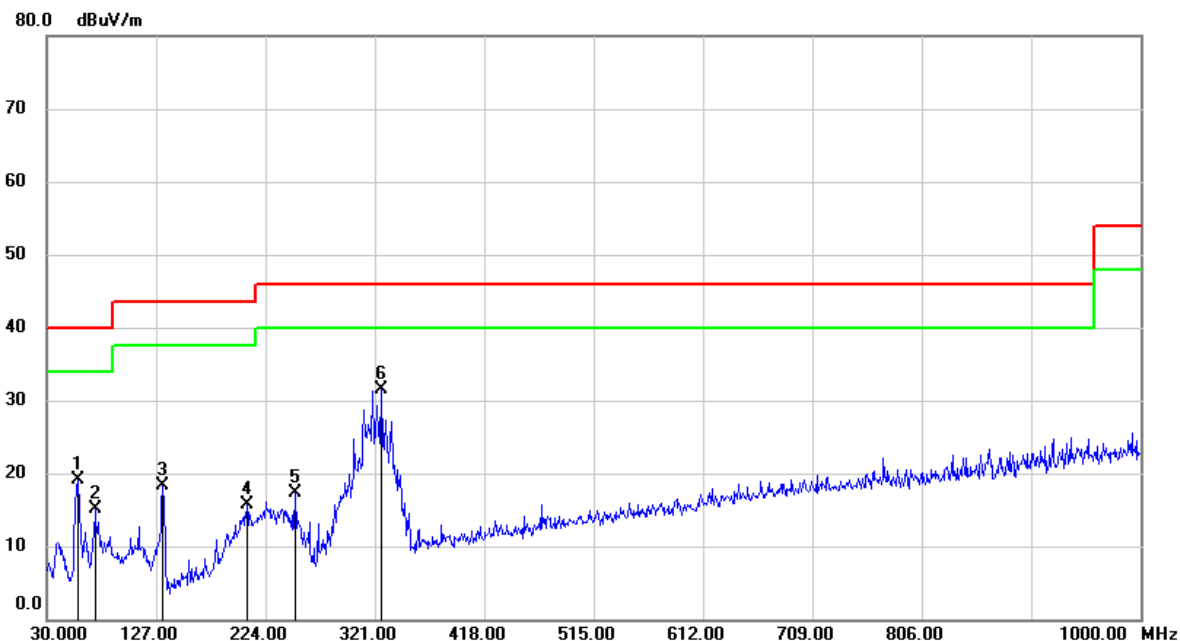

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	38.06	-19.04	19.02	40.00	-20.98	QP
2	72.6800	35.38	-20.32	15.06	40.00	-24.94	QP
3	132.8200	37.83	-19.53	18.30	43.50	-25.20	QP
4	207.5100	31.88	-16.15	15.73	43.50	-27.77	QP
5	250.1900	33.34	-16.12	17.22	46.00	-28.78	QP
6	326.8200	45.14	-13.59	31.55	46.00	-14.45	QP

Remark:

Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)


Margin = Result - Limit



7.2.7. Test Results – above 1GHz

Test Mode: Mode 2

Polarization: Vertical

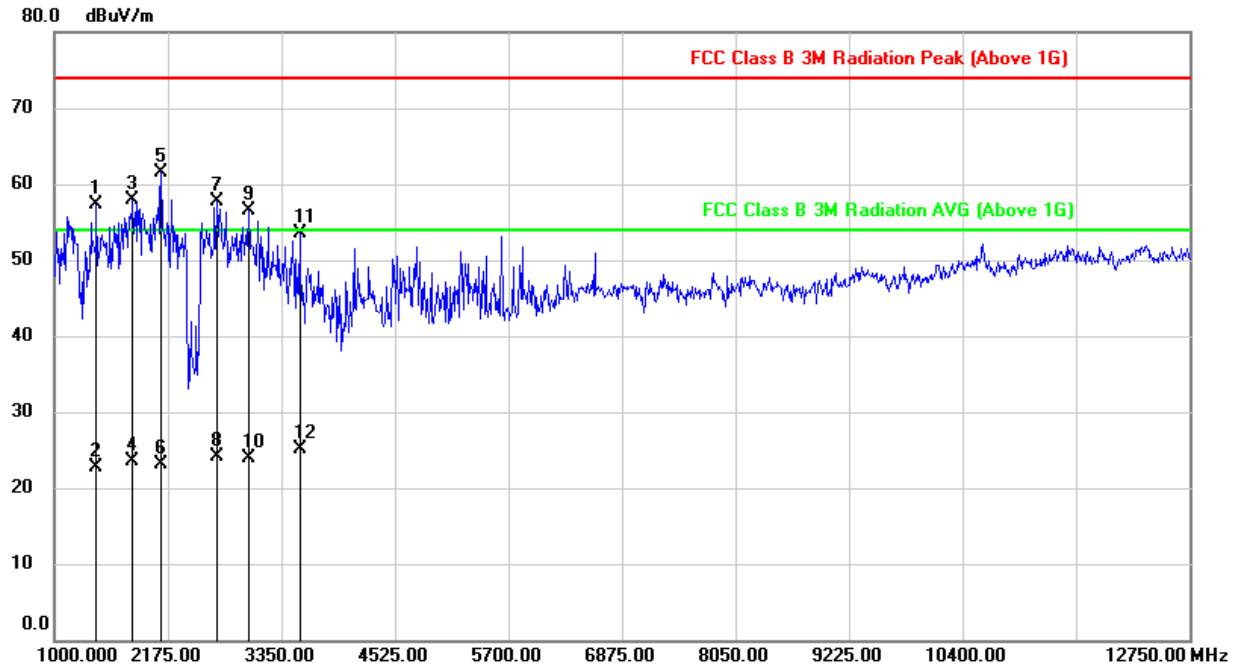

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1434.750	70.58	-13.22	57.36	74.00	-16.64	peak
2	1434.750	35.91	-13.22	22.69	54.00	-31.31	AVG
3	1810.750	68.88	-10.90	57.98	74.00	-16.02	peak
4	1810.750	34.41	-10.90	23.51	54.00	-30.49	AVG
5	2104.500	71.67	-10.17	61.50	74.00	-12.50	peak
6	2104.500	33.27	-10.17	23.10	54.00	-30.90	AVG
7	2680.250	65.79	-8.04	57.75	74.00	-16.25	peak
8	2680.250	32.16	-8.04	24.12	54.00	-29.88	AVG
9	3009.250	62.64	-6.20	56.44	74.00	-17.56	peak
10	3009.250	30.08	-6.20	23.88	54.00	-30.12	AVG
11	3538.000	58.72	-5.20	53.52	74.00	-20.48	peak
12	3538.000	30.30	-5.20	25.10	54.00	-28.90	AVG

Remark:


Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit



Test Mode: Mode 2

Polarization: Horizontal

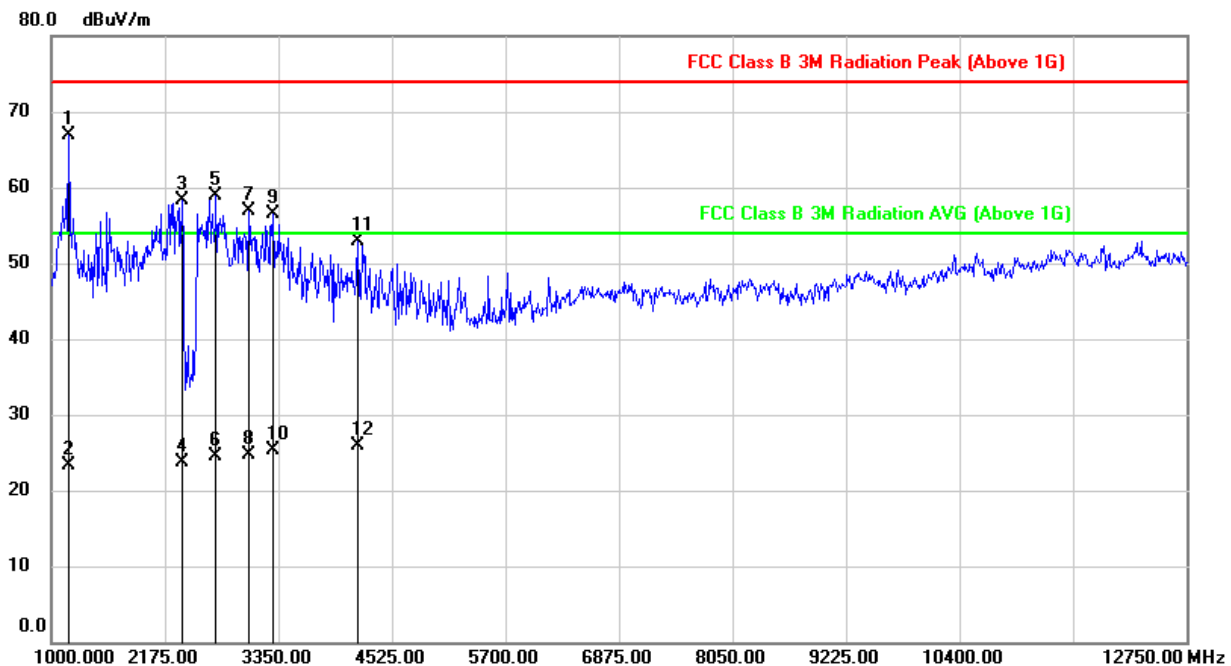

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1176.250	80.70	-13.73	66.97	74.00	-7.03	peak
2	1176.250	37.00	-13.73	23.27	54.00	-30.73	AVG
3	2351.250	67.54	-9.27	58.27	74.00	-15.73	peak
4	2351.250	32.95	-9.27	23.68	54.00	-30.32	AVG
5	2703.750	66.75	-7.88	58.87	74.00	-15.13	peak
6	2703.750	32.41	-7.88	24.53	54.00	-29.47	AVG
7	3044.500	62.96	-5.97	56.99	74.00	-17.01	peak
8	3044.500	30.65	-5.97	24.68	54.00	-29.32	AVG
9	3291.250	62.21	-5.61	56.60	74.00	-17.40	peak
10	3291.250	30.97	-5.61	25.36	54.00	-28.64	AVG
11	4172.500	56.03	-3.10	52.93	74.00	-21.07	peak
12	4172.500	28.97	-3.10	25.87	54.00	-28.13	AVG

Remark:

Result = Reading + Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

END OF REPORT