
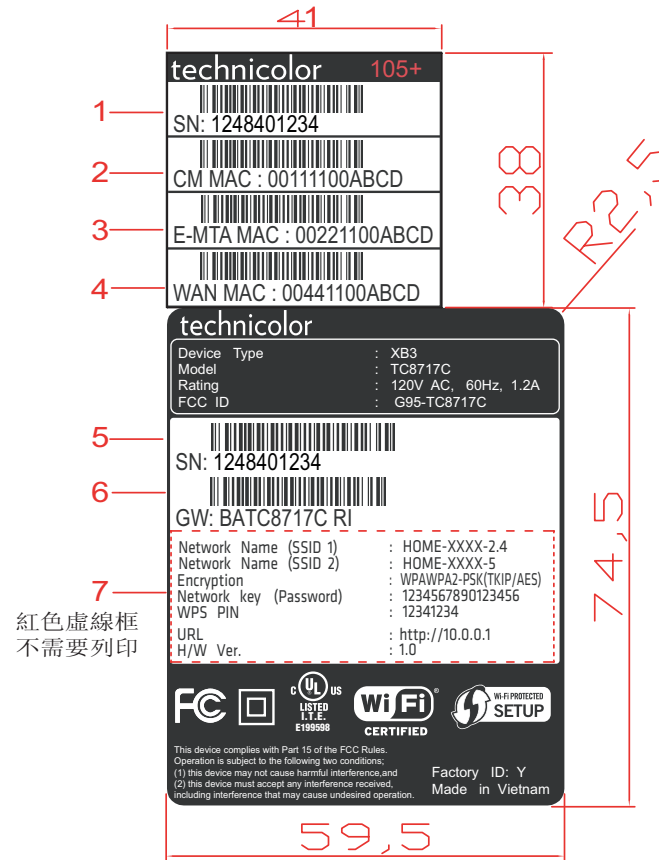


D		C		B	A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	13.08.30	First Release	Jenny xie
01			13.09.18	update the font defination at 7th point and '105+'	yanfen

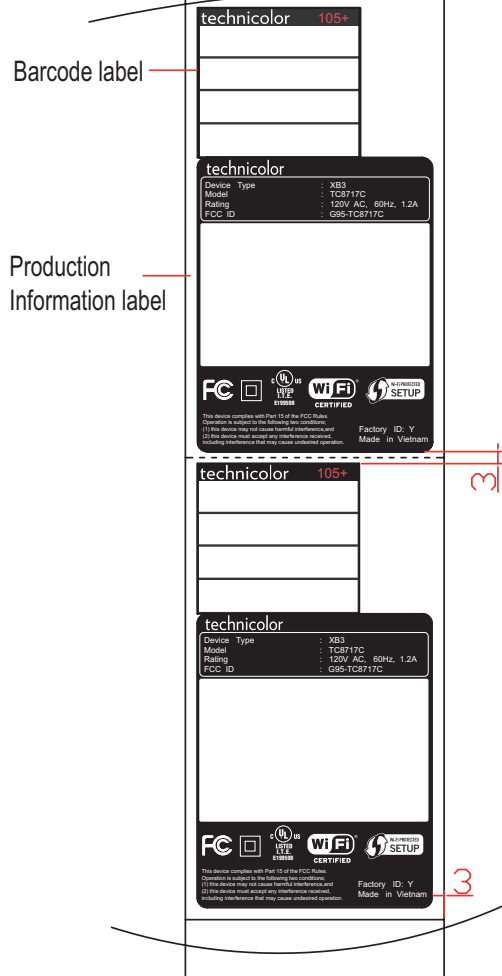


vendor supply

2合1 label
列印説明見下頁.

MATERIAL (SPEC.) 50#壓花Mylar(Screen printing mesh adhesive)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG					
FINISH N/A										SHEET 1/1							
Select										UNIT		PART NAME					
Dim. Tol. A B C EPS EPE BAG CTN Label USR										MM		Barcode label					
0~6 0.05 0.05 0.10 0.20 0.20										SIZE		MODEL		PART NO.		DESIGNED	
6~30 0.10 0.15 0.20 0.50 0.50 3.00 0.20										A4		U46C222.06		500.01653.005		yanfen	
30~120 0.15 0.20 0.30 0.50 0.50 5.00 2.00 0.25																	
120~300 0.20 0.30 0.40 1.00 1.00 10.00 3.00 0.30																	
300~450 0.25 0.40 0.50 2.00 2.00 15.00 5.00 0.50																	
450~600 0.30 0.50 0.60 3.00 3.00 20.00 5.00 0.80																	
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *												CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED	
												TC8717C				sunny	

標籤製作黏貼方式/U46C222.06/00/3 of 11

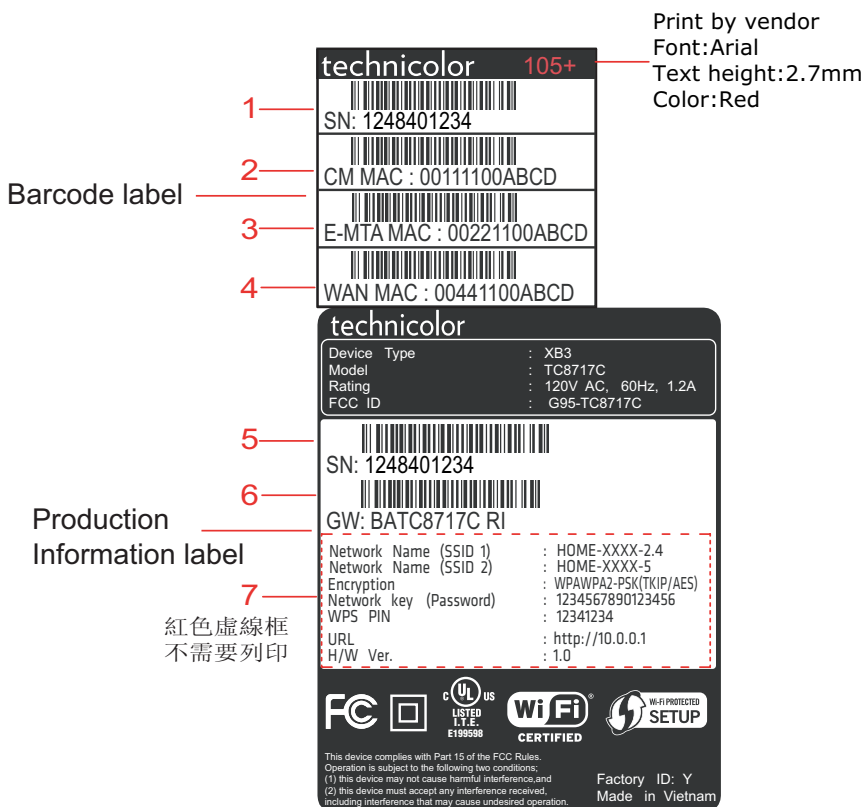

2合1 label

Print rule:

Barcode texts: Arial Narrow, 2.7mm height

Barcode format: Code 128 auto, narrow bar width 0.13mm, space correction 1
There needs to be 5mm space in front and back of each barcode.

Barcode Height: 4.0mm

Narrow bar width: 3 dots / 0.13mm / 18.18 cpi

1.Serial Number: YYWWDSSSSS

YY : Production year (2012 => "YY" = 12).
WW : Production week (Week 48 => "WW" = 48).
D : Production day ("D" => Mon:0 ~ Sun:6).
SSSS : Serial number up to 99999
R : Realisation variant, part of the additional commercial product code.

Example :

S/N : 1248401234

12 : 2012
48 : week-48
4 : day-4 (Mon:0 ~ Sun:6)
01234 : serial number up to 99999.

2. CM MAC

Format: "00:00:00:00"; i.e. "00:24:d1:d4:e7:f5"

3. E-MTA MAC

Format: "00:00:00:00:00:00", (sequential after CM-MAC); i.e. "00:24:d1:d4:e7:f6"

4. WAN MAC

Format: "00:00:00:00:00:00", (sequential after EMTA MAC); i.e., "00:24:d1:d4:e7:f7"

5. SN: same as barcode label.

6. GW: BATC8717C RI

"BATC8717C" is fixed content

"R" = Realisation Variant.

"I" = ICS (Remark: for alfa's this ICS step should always be "A" and for beta's it should always be "B".)

Remark: The space between "C" and "RI" only for the text, NOT for the barcode.

To be printed with CAPITAL digits only.

7. Text: Klavika, 7.5pt(85% width, "WPAWPA2-PSK(TKIP/AES)" in 70% width)

SSID

Format: "HOME-XXXX-2.4

"HOME-XXXX-5",

where "XXXX" is the last 4 digits of the Cm MAC address.

Network Key

Format: 16 character (alphanumeric, all caps, 0-9/A-F, generated.)

dot11WpaPreSharedKey

1.3.6.1.4.1.4413.2.2.2.1.5.2.7.0


WPS PIN

Format: 8 character (numeric, 0-9, generated)

dot11WPSDevicePin

1.3.6.1.4.1.4413.2.99.1.1.2.5.3.3.0

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	13.09.17	First Release	yanfen

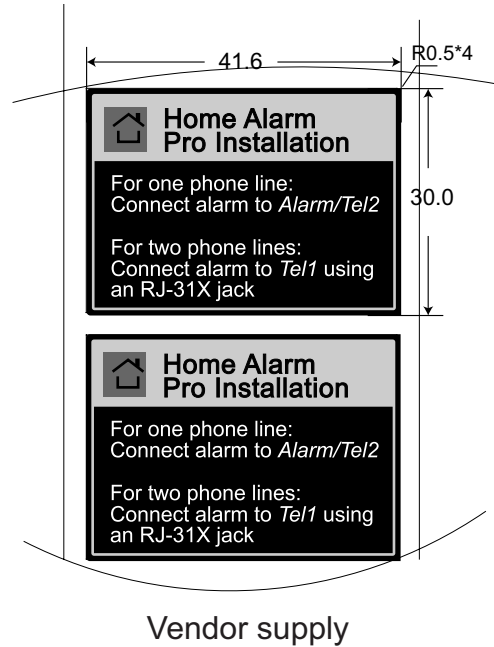

label position



標籤製作黏貼方式/U46C222.06/00/5 of 11

Notes:

- 1.Material:50#壓花Mylar(Screen printing mesh adhesive)
- 2.Adhesive thickness:0.024+/-0.003mm
- 3.Package style:Reel
4. Background: Black , Pantone 443C and Pantone Cool Gray 4C
- 5.“Home Alarm Pro Installation” font: Arial, 2.7mm
Others text font Arial,2.2mm.


MATERIAL (SPEC.) 50#壓花Mylar(Screen printing mesh adhesive)										SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG		
FINISH N/A										SHEET 1/1			
Select								*		UNIT MM	PART NAME Home Alarm Installation label		
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	SIZE A4	MODEL U46C222.06	PART NO. 504.01008.005	DESIGNED yanfen
0~6	0.05	0.05	0.10					0.20					
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20					
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25					
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30					
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50					
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80					
DRAFT TOLERANCE	±0.2°			CRITICAL DIM. MARK			*				CUSTOMER MODEL TC8717C	CUSTOMER PART NO.	APPROVED Sunny

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	13.08.30	First Release	yanfen

Battery Label	
Label dimensions (h x w)	14.9mm x 38.1mm (4x R1.6mm on each corner)
Category	Housing label
Position	Bottom side of the plastic housing on the battery door
Text	As described drawing
Font	Franklin Gothic Medium
Text Height	2.0mm



Battery label Position
貼于label框內

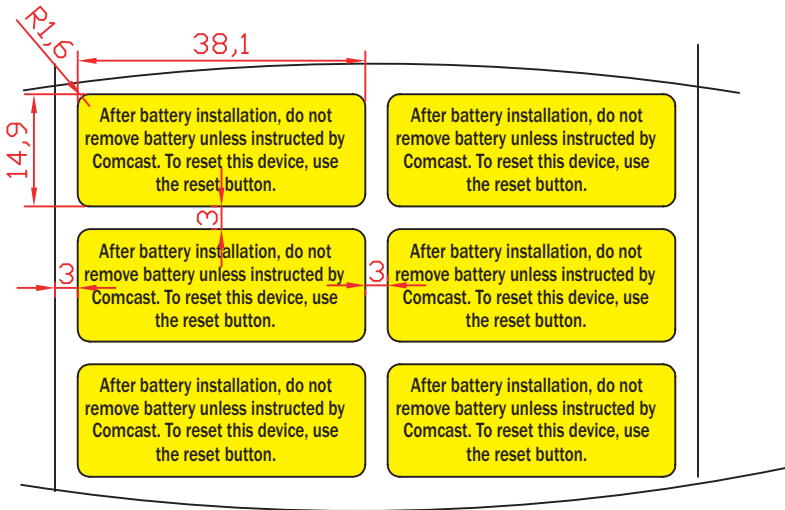

Printing by vendor

標籤製作黏貼方式/U46C222.06/00/6 of 11

MATERIAL (SPEC.)										SCALE		FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG					
50#壓花Mylar(Screen printing mesh adhesive)										1:1							
FINISH										SHEET							
N/A										1/1							
Select										UNIT		PART NAME					
Dim. Tol.										MM		Battery abel					
A B C EPS EPE BAG CTN Label USR																	
0~6 0.05 0.05 0.10 0.20																	
6~30 0.10 0.15 0.20 0.50 0.50 3.00 0.20																	
30~120 0.15 0.20 0.30 0.50 0.50 5.00 2.00 0.25										SIZE		MODEL		PART NO.		DESIGNED	
120~300 0.20 0.30 0.40 1.00 1.00 10.00 3.00 0.30										A4		U46C222.06		504.00975.015		yanfen	
300~450 0.25 0.40 0.50 2.00 2.00 15.00 5.00 0.50												CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED	
450~600 0.30 0.50 0.60 3.00 3.00 20.00 5.00 0.80												TC8717C				Sunny	
DRAFT TOLERANCE ± 0.2°										CRITICAL DIM. MARK							
										*							

- Notes:
1. Background color:Pantone Yellow C
 2. Text font:Franklin Gothic Medium
 3. Text color:Black.
 4. Text height:2mm
 5. Material:50#壓花Mylar(Screen printing mesh adhesive)
 6. Adhesive thickness:0.024+/-0.003mm
 7. Package style:Reel

F		E		D	C		B		A
Tampering Label				REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
Label dimensions (h x w)				00	N/A	N/A	13.09.18	First Release	yanfen
Category									
Position									
Text									
Text color									
Font (if not defined => Klavika Regular)									
Text Height									
Text Height									

Comcast®

PROPERTY OF COMCAST. NOT FOR RESALE. REMOVING THIS STICKER OR TAMPERING WITH THIS EQUIPMENT IS A VIOLATION OF FEDERAL AND STATE LAW. THIS EQUIPMENT MUST BE SURRENDERED TO COMCAST UPON DEMAND OR DISCONNECTION OF SERVICE; IF NOT, A FEE OF UP TO \$500 AND LEGAL PENALTIES CAN RESULT. FOR INFORMATION ON HOW TO RETURN CALL 1-800-266-2278.

ESTE EQUIPO ES PROPIEDAD EXCLUSIVA DE COMCAST Y QUEDA PROHIBIDA SU REVENTA. RETIRAR ESTE LETRERO O ALTERAR ESTE EQUIPO CONSTITUYE UNA VIOLACIÓN A LA LEY FEDERAL Y ESTATAL. ESTE EQUIPO DEBE DEVOLVERSE A COMCAST CUANDO ASI SE SOLICITE O TRAS HABER DESCONECTADO EL SERVICIO. NO HACERLO RESULTARÁ EN UN CARGO POR EQUIPO DE HASTA \$500 Y TAMBIÉN PUEDE RESULTAR EN CARGOS CIVILES Y PENALES. PARA OBTENER MAS INFORMACIÓN SOBRE COMO DEVOLVERLO, LLAME AL 1-800-266-2278.

SCALE:1:1

label position



85

19

R=2mm*4

3

3

2

INCOMING WAY

NOTES:

1. Surface Material:50#压花mylar (matte white)

* 2. Surface Material tolerance:0.050±0.005mm

3. Surface Material color:white

4. printing color is as color defined in artwork

5. Adhesive:壓花膠

* 6. Adhesive thickness:0.035±0.003mm

* 7. Adhesion to steel(180度磨鋼粘着力):1.0-2.2 kg/inch

* 8. Initial Tack (初期力):1~6 #

* 9. Holding Power(持粘力測試法): : 1hr/kg*inch2

10. When label is adhesived on housing smooth face(material ABS) after it is tested under test condition -40~70℃ 90%R.H. 72hrs, it must be fine.

11. Package Style:Reel

12. This part must comply with ROHs.

標籤製作黏貼方式/U46C222.06/00/7 of 11

MATERIAL (SPEC.)										SCALE	1:1					
50#压花mylar										SHEET	1/1					
FINISH										N/A						
Select										UNIT	MM					
Dim.	Col.	A	B	C	EPS	EPE	BAG	CTN	*Label	USR	PART NAME	tampering label				
0~6		0.05	0.05	0.10					0.20		MODEL	U46C222. 06	PART NO.	504.01095.005	DESIGNED	yanfen
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20		CUSTOMER MODEL	TC8717C	CUSTOMER PART NO.		APPROVED	sunny
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25							
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30							
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50							
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80							
DRAFT TOLERANCE										±0.2°	CRITICAL DIM. MARK	*				