
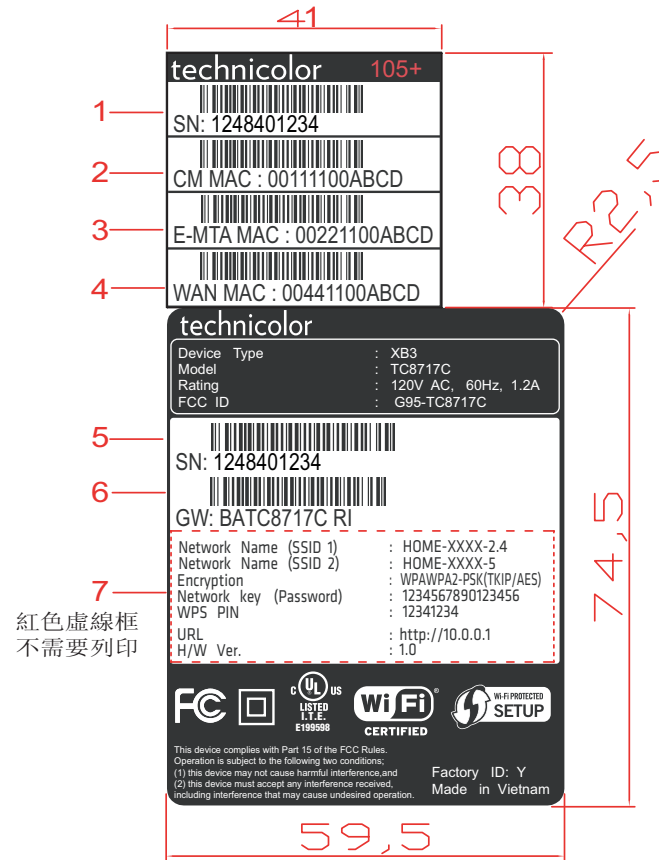


D		C		B	A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	13.08.30	First Release	Jenny xie
01			13.09.18	update the font defination at 7th point and '105+'	yanfen

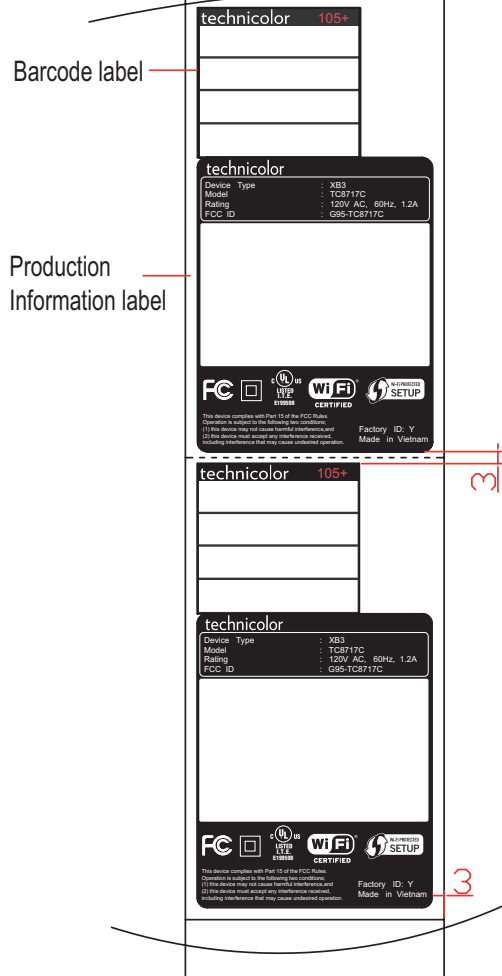


vendor supply

2合1 label
列印説明見下頁.

MATERIAL (SPEC.) 50#壓花Mylar(Screen printing mesh adhesive)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG					
FINISH N/A										SHEET 1/1							
Select										UNIT		PART NAME					
Dim. Tol. A B C EPS EPE BAG CTN Label USR										MM		Barcode label					
0~6 0.05 0.05 0.10 0.20 0.20										SIZE		MODEL		PART NO.		DESIGNED	
6~30 0.10 0.15 0.20 0.50 0.50 3.00 0.20										A4		U46C222.06		500.01653.005		yanfen	
30~120 0.15 0.20 0.30 0.50 0.50 5.00 2.00 0.25																	
120~300 0.20 0.30 0.40 1.00 1.00 10.00 3.00 0.30																	
300~450 0.25 0.40 0.50 2.00 2.00 15.00 5.00 0.50																	
450~600 0.30 0.50 0.60 3.00 3.00 20.00 5.00 0.80																	
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *												CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED	
												TC8717C				sunny	

標籤製作黏貼方式/U46C222.06/00/3 of 11

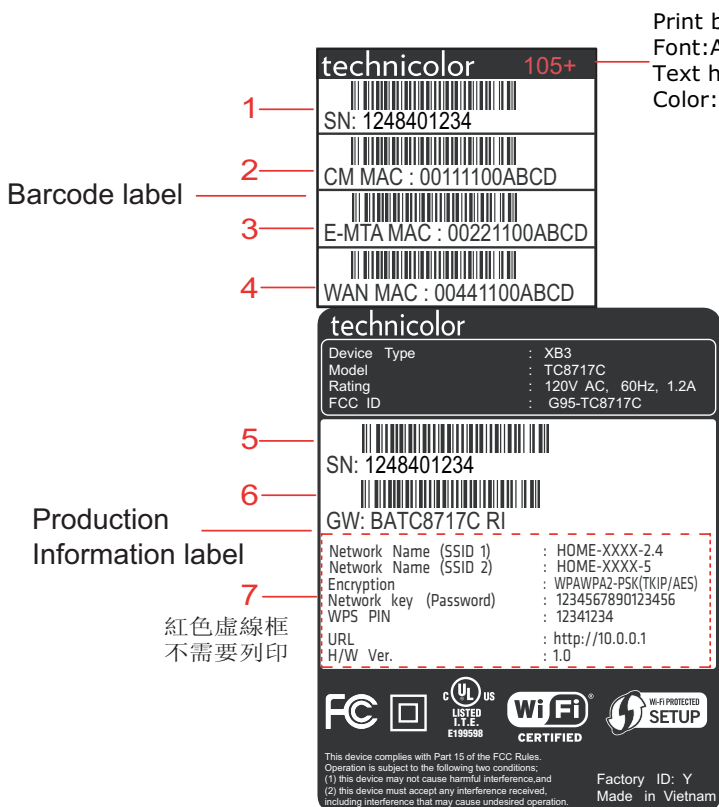

2合1 label

Print rule:

Barcode texts: Arial Narrow, 2.7mm height

Barcode format: Code 128 auto, narrow bar width 0.13mm, space correction 1
There needs to be 5mm space in front and back of each barcode.

Barcode Height: 4.0mm

Narrow bar width: 3 dots / 0.13mm / 18.18 cpi

1. Serial Number: YYWWDSSSSS

YY : Production year (2012 => "YY" = 12).

WW : Production week (Week 48 => "WW" = 48).

D : Production day ("D" => Mon:0 ~ Sun:6).

SSSSS : Serial number up to 99999

R : Realisation variant, part of the additional commercial product code.

Example :

S/N : 1248401234

12 : 2012

48 : week-48

4 : day-4 (Mon:0 ~ Sun:6)

01234 : serial number up to 99999.

2. CM MAC

Format: "00:00:00:00"; i.e. "00:24:d1:d4:e7:f5"

3. E-MTA MAC

Format: "00:00:00:00:00:00", (sequential after CM-MAC); i.e. "00:24:d1:d4:e7:f6"

4. WAN MAC

Format: "00:00:00:00:00:00", (sequential after EMTA MAC); i.e., "00:24:d1:d4:e7:f7"

5. SN: same as barcode label.

6. GW: BATC8717C RI

"BATC8717C" is fixed content

"R" = Realisation Variant.

"I" = ICS (Remark: for alfa's this ICS step should always be "A" and for beta's it should always be "B".)

Remark: The space between "C" and "RI" only for the text, NOT for the barcode.

To be printed with CAPITAL digits only.

7. Text: Klavika, 7.5pt(85% width, "WPAWPA2-PSK(TKIP/AES)" in 70% width)

SSID

Format: "HOME-XXXX-2.4

"HOME-XXXX-5",

where "XXXX" is the last 4 digits of the Cm MAC address.

Network Key

Format: 16 character (alphanumeric, all caps, 0-9/A-F, generated.)

dot11WpaPreSharedKey

1.3.6.1.4.1.4413.2.2.2.1.5.2.7.0

WPS PIN

Format: 8 character (numeric, 0-9, generated)

dot11WPSDevicePin

1.3.6.1.4.1.4413.2.99.1.1.2.5.3.3.0

41.6

R0.5*4

30.0

 **Home Alarm Pro Installation**

For one phone line:
Connect alarm to *Alarm/Tel2*

For two phone lines:
Connect alarm to *Tel1* using
an RJ-31X jack

 **Home Alarm Pro Installation**

For one phone line:
Connect alarm to *Alarm/Tel2*

For two phone lines:
Connect alarm to *Tel1* using
an RJ-31X jack

label position



- 1.Material:50#墨花Mylar(Screen printing mesh adhesive)
- 2.Adhesive thickness:0.024+/-0.003mm
- 3.Package style:Reel
4. Background: Black , Pantone 443C and Pantone Cool Gray 4C
- 5.“Home Alarm Pro Installation” font: Arial, 2.7mm
Others text font Arial,2.2mm.

MATERIAL (SPEC.) 50#壓花Mylar(Screen printing mesh adhesive)										SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG					
FINISH N/A										SHEET 1/1						
Select										UNIT	PART NAME					
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	MM	Home Alarm Installation label					
0~6		0.05	0.05	0.10					0.20							
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20							
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25							
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30							
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50							
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80							
DRAFT TOLERANCE					± 0.2°					CRITICAL DIM. MARK	*					
											MODEL U46C222.06		PART NO. 504.01008.005		DESIGNED yanfen	
											CUSTOMER MODEL TC8717C		CUSTOMER PART NO.		APPROVED Sunny	

F		E		D	C		B		A
Tampering Label				REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
Label dimensions (h x w)		19mm x 85mm (label background color is black)		00	N/A	N/A	13.09.18	First Release	yanfen
Category		Housing label							
Position		Beside battery door with same readable direction as battery label							
Text		Comcast®	others						
Text color		White	White						
Font (if not defined => Klavika Regular)		Century Gothic	Helvetica Neue Bold						
Text Height		8pt	4pt						
Text Height		2.717mm		1.317mm					

Comcast®

PROPERTY OF COMCAST. NOT FOR RESALE. REMOVING THIS STICKER OR TAMPERING WITH THIS EQUIPMENT IS A VIOLATION OF FEDERAL AND STATE LAW. THIS EQUIPMENT MUST BE SURRENDERED TO COMCAST UPON DEMAND OR DISCONNECTION OF SERVICE. IF NOT, A FEE OF UP TO \$500 AND LEGAL PENALTIES CAN RESULT. FOR INFORMATION ON HOW TO RETURN CALL 1-800-266-2278.

ESTE EQUIPO ES PROPIEDAD EXCLUSIVA DE COMCAST Y QUEDA PROHIBIDA SU REVENTA. RETIRAR ESTE LETRERO O ALTERAR ESTE EQUIPO CONSTITUYE UNA VIOLACIÓN A LA LEY FEDERAL Y ESTATAL. ESTE EQUIPO DEBE DEVOLVERSE A COMCAST CUANDO ASI SE SOLICITE O TRAS HABER DESCONECTADO EL SERVICIO. NO HACERLO RESULTARÁ EN UN CARGO POR EQUIPO DE HASTA \$500 Y TAMBIEN PUEDE RESULTAR EN CARGOS CIVILES Y PENALES. PARA OBTENER MAS INFORMACIÓN SOBRE COMO DEVOLVERLO, LLAME AL 1-800-266-2278.

SCALE:1:1

label position

85

19

R=2mm*4

3

3

INCOMING WAY

NOTES:

1.Surface Material:50#压花mylar (matte white)

* 2.Surface Material tolerance:0.050±0.005mm

3.Surface Material color:white

4.printing color is as color defined in artwork

5.Adhesive:壓花膠

* 6.Adhesive thickness:0.035±0.003mm

* 7.Adhesion to steel(180度磨钢粘着力):1.0-2.2 kg/inch

* 8.Initial Tack (初期力) :1~6 #

* 9.Holding Power(持粘力測試法): : 1hr/kg*inch2

10.When label is adhesived on housing smooth face(material ABS) after it is tested under test condition -40~70℃ 90%R.H. 72hrs, it must be fine.

11.Package Style:Reel

12.This part must comply with ROHS.

標籤製作黏貼方式/U46C222.06/00/7 of 11

MATERIAL (SPEC.)										SCALE	FOXCONN				
50#压花mylar										1:1					
FINISH										SHEET	HON HAI PRECISION IND. CO., LTD.				
N/A										1/1					
Select										UNIT	PART NAME				
										MM					
Dim.	Col.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	tampering label				
0~6		0.05	0.05	0.10						0.20					
6~30		0.10	0.15	0.20		0.50	3.00			0.20					
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00		0.25					
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00		0.30					
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00		0.50					
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00		0.80					
DRAFT TOLERANCE										±0.2°	CRITICAL DIM. MARK	*	MODEL		
													PART NO.		
													DESIGNED		
													APPROVED		
													sunny		