



FCC RF Test Report

APPLICANT : Vantiva USA LLC
EQUIPMENT : DOCSIS 3.1
BRAND NAME : Vantiva
MODEL NAME : CGM4981COM2
FCC ID : G954981X2
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 28, 2023 ~ Dec. 05, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Specification of Accessory.....	6
1.7 Testing Location	6
1.8 Test Software.....	6
1.9 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Spurious Emission Measurement in the Restricted Band	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 LIST OF MEASURING EQUIPMENT.....	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR391301B	Rev. 01	Initial issue of report	Dec. 18, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.17 dB at 9330.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.13 dB at 2.736 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Vantiva USA LLC

4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

1.2 Manufacturer

Vantiva USA LLC

4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	DOCSIS 3.1
Brand Name	Vantiva
Model Name	CGM4981COM2
FCC ID	G954981X2
HW Version	FGR1
SW Version	6.2p30s1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	20.35 dBm (0.1084 W)
Antenna Type / Gain	PCB Antenna with gain 5.26 dBi
Type of Modulation	O-QPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Netbit	Model Name	NBC56A120460VU
AC Adapter 2	Brand Name	Netbit	Model Name	NBC56B120460VU
AC Adapter 3	Brand Name	Acbel	Model Name	ADK002

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z, and Wall installation plane. The worst cases (Wall installation plane, the wall is non-metal panels) were recorded in this report.
- AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: ZigBee Tx + WLAN Tx(2.4G) + BLE Tx + Power from Adapter
Remark: For Radiated TCs, the tests were performance with Adapter and RJ45/RJ11/Coaxial Cable.	

2.3 Connection Diagram of Test System

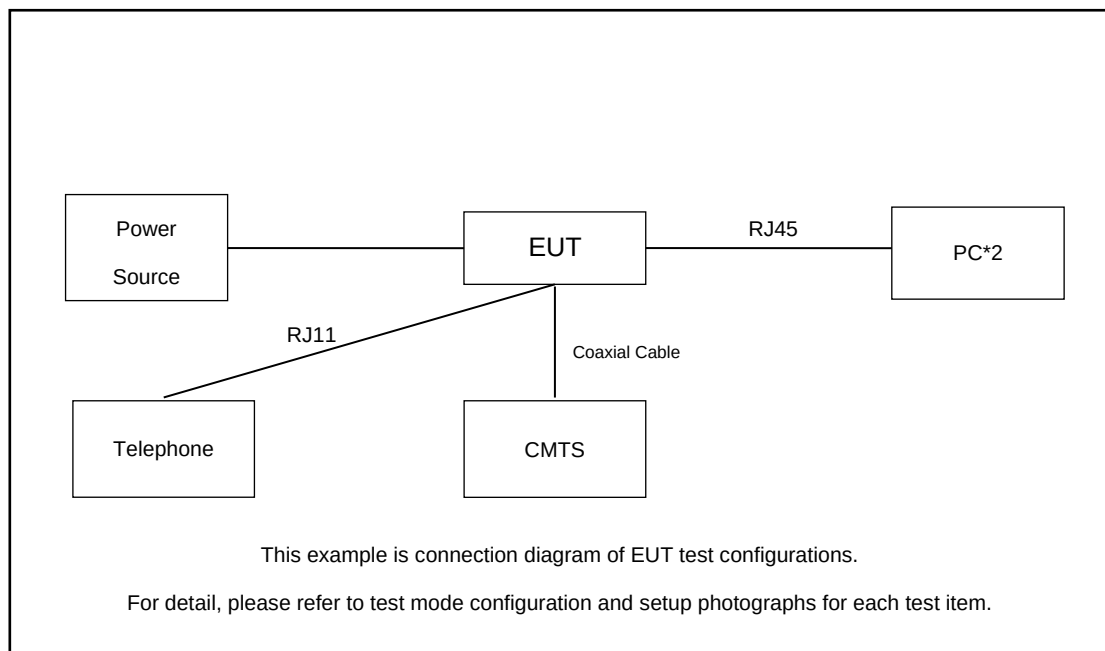

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	PC	Lenovo	Yangtian M4900c	Fcc DoC	N/A	Unshielded,1.8m
2.	(USB)Mouse	Lenovo	OEUUOA	Fcc DoC	Shielded, 1.8m	N/A
3.	(USB)Keyboard	Lenovo	SK-8821	Fcc DoC	Shielded, 1.8m	N/A
4.	Monitor	Lenovo	LS2033wA	Fcc DoC	N/A	Unshielded,1.8m
5.	PC	Dell	D12M	Fcc DoC	N/A	Unshielded,1.8m
6.	(USB)Mouse	Dell	MS111-P	Fcc DoC	Shielded, 1.8m	N/A
7.	(USB)Keyboard	Dell	SK-8120	Fcc DoC	Shielded, 1.8m	N/A
8.	Telephone	bubugao	HCD007(6082)TSD	N/A	N/A	N/A
9.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A
10.	RJ11 Cable	N/A	N/A	N/A	N/A	N/A
11.	CMTS	TOPISION	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For ZigBee function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.30 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.30 + 10 = 12.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

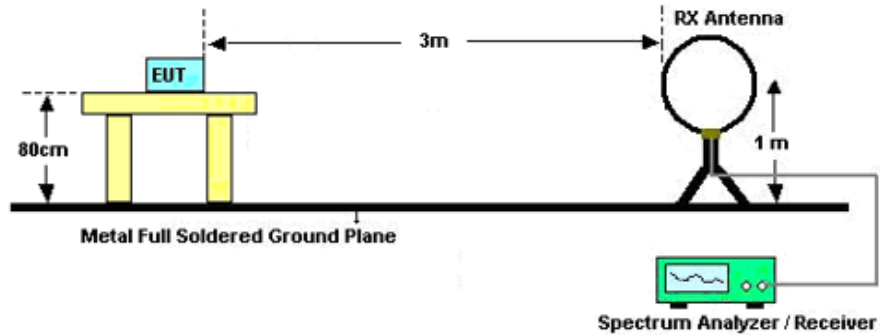

For radiated emissions from 30MHz to 1GHz

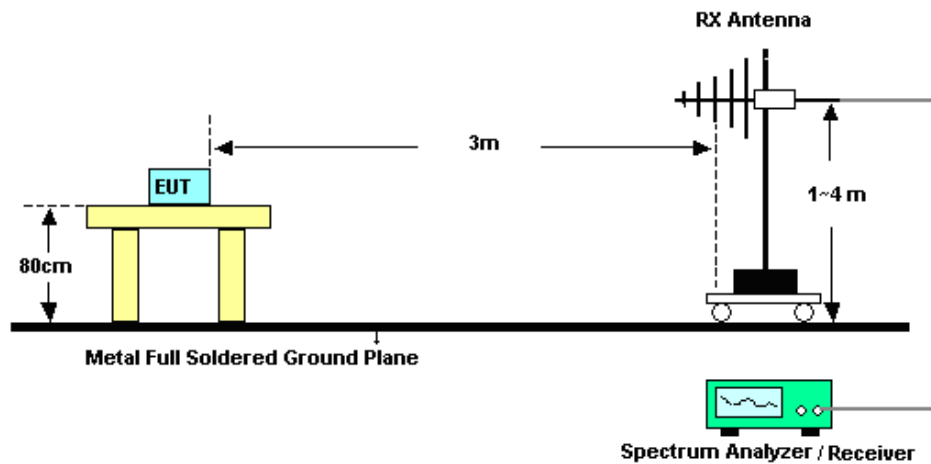

For radiated emissions above 1GHz

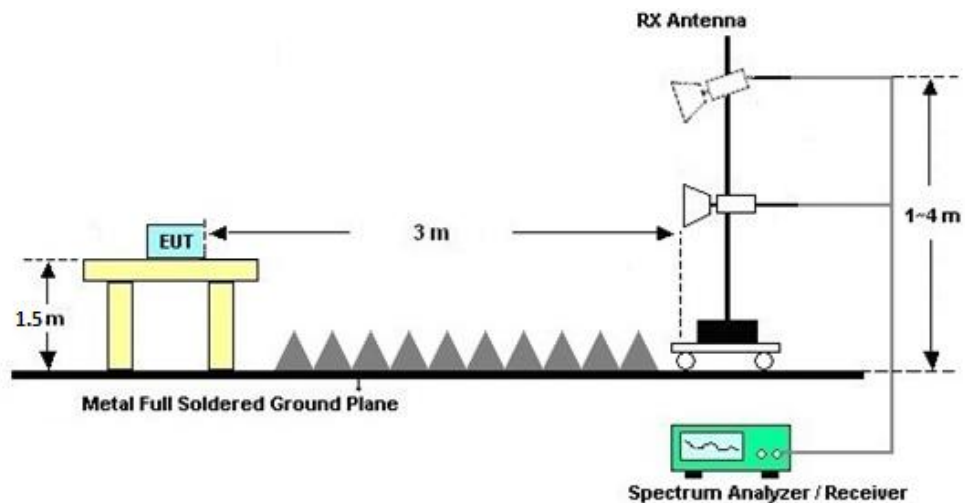



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

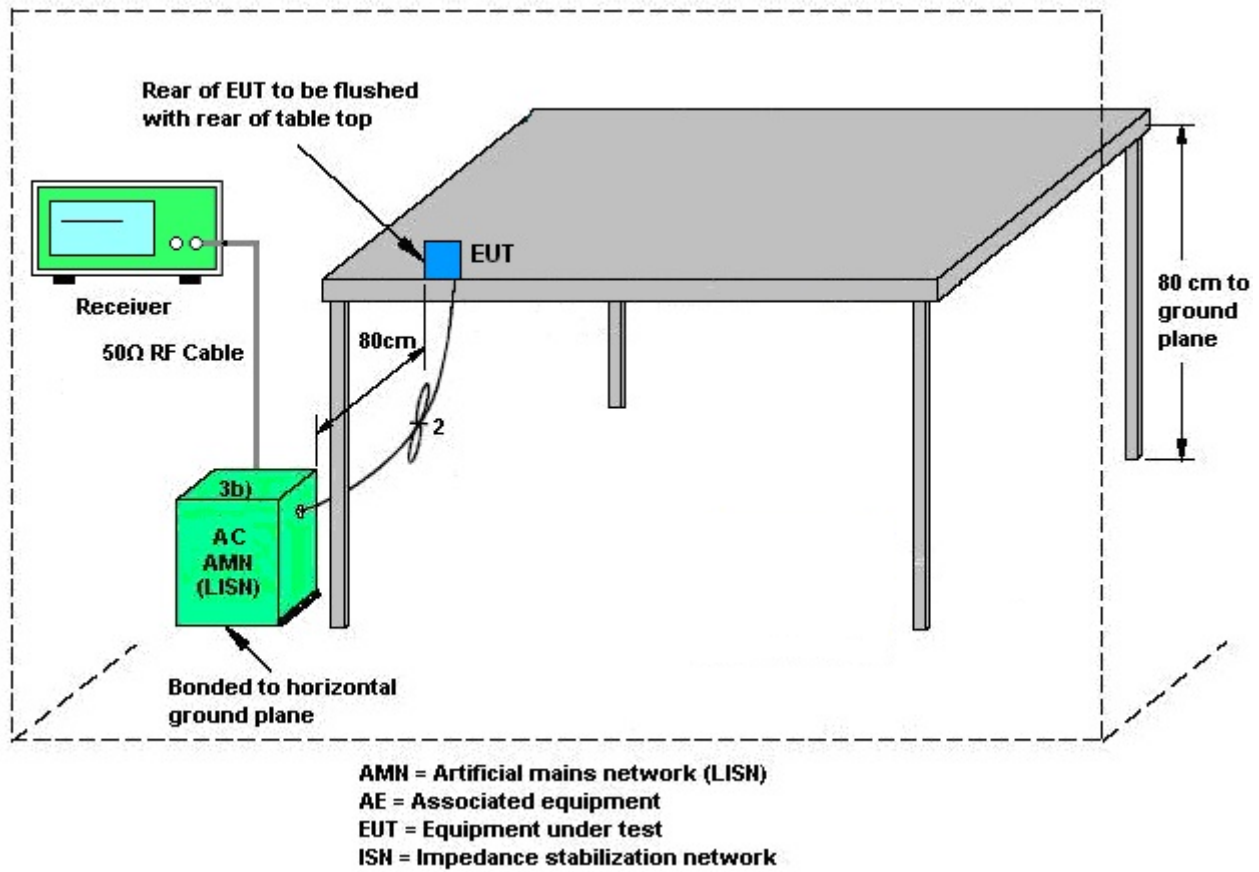

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Dec 05, 2023	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Dec 05, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Dec 05, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 10, 2023	Nov. 28, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 10, 2023	Nov. 28, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Nov. 28, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Nov. 28, 2023	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Nov. 28, 2023	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Nov. 28, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Nov. 28, 2023	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Nov. 28, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2023	Nov. 28, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 10, 2023	Nov. 28, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 28, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 28, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 28, 2023	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Dec. 01, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Dec. 01, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Dec. 01, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Dec. 01, 2023	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Denstiy	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.32dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2023/12/05

Test Engineer: Jiang Jun


DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
ZIGBEE_2M	Ant8	2405	1.66	2404.18	2405.84	0.5	PASS
		2445	1.65	2444.18	2445.83	0.5	PASS
		2475	1.68	2474.17	2475.85	0.5	PASS
		2480	1.66	2479.18	2480.84	0.5	PASS



Test Graphs

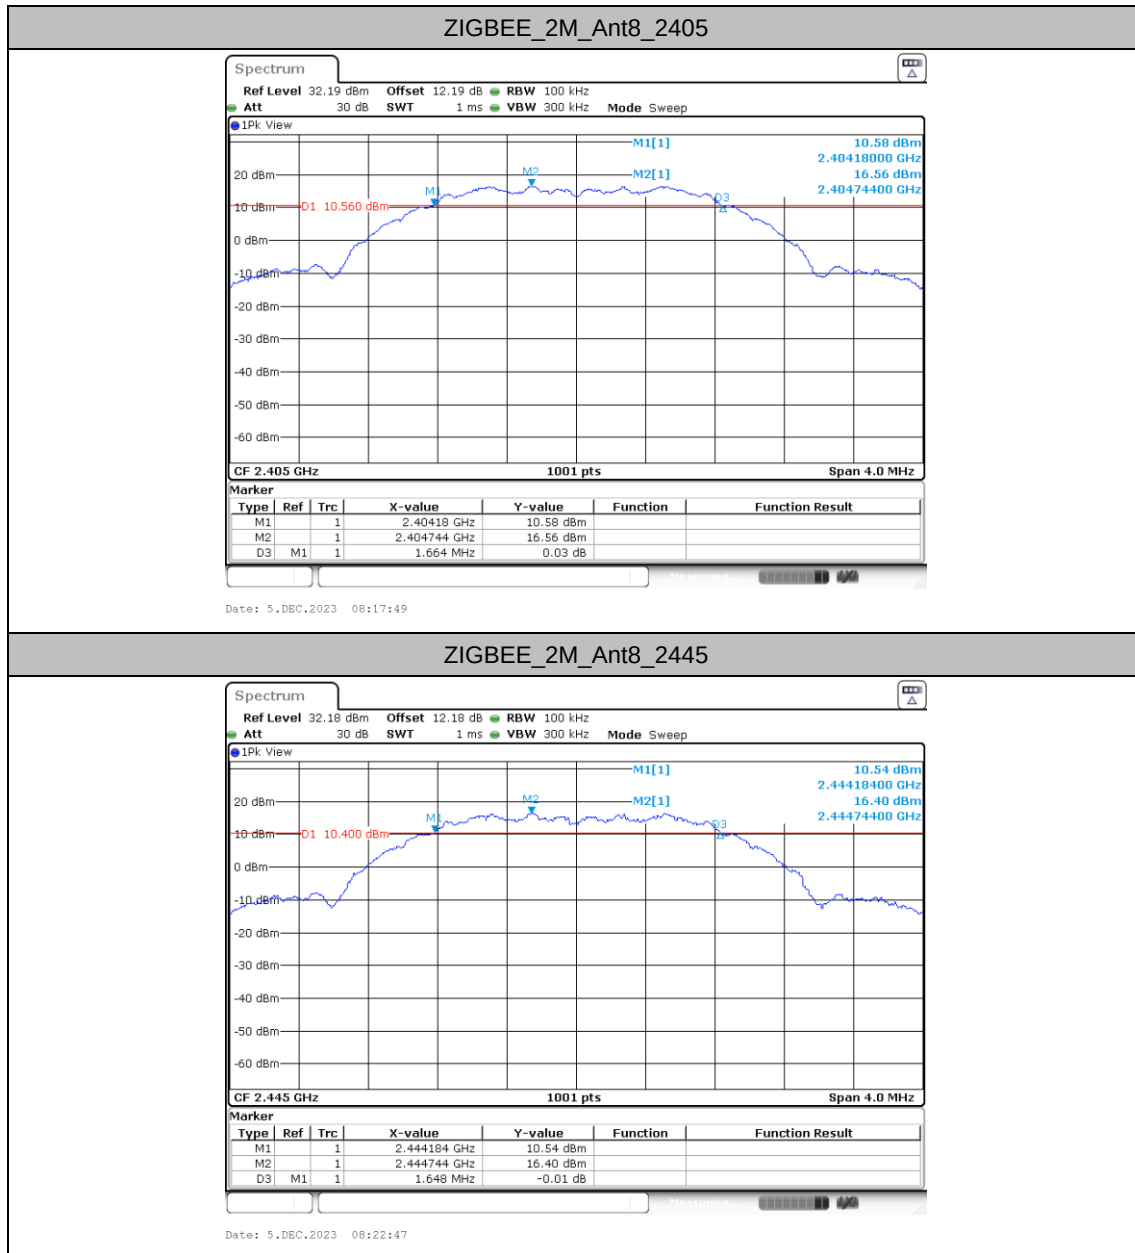

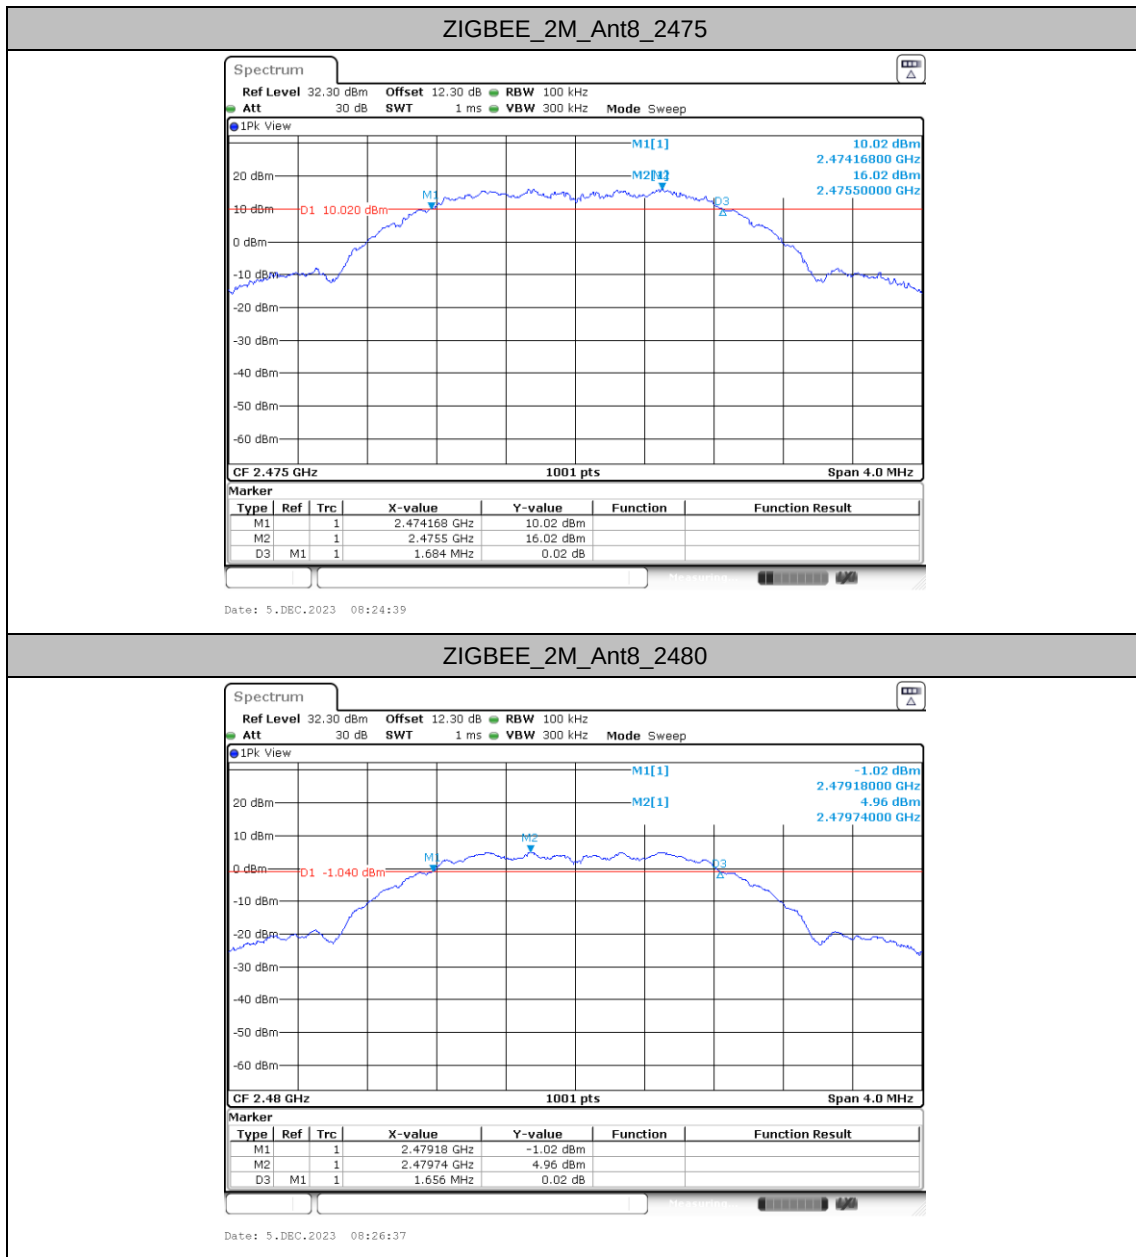




Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
ZIGBEE_2M	Ant8	2405	2.254	2403.8731	2406.1269	---	---
		2445	2.258	2443.8691	2446.1269	---	---
		2475	2.254	2473.8731	2476.1269	---	---
		2480	2.254	2478.8731	2481.1269	---	---



Test Graphs

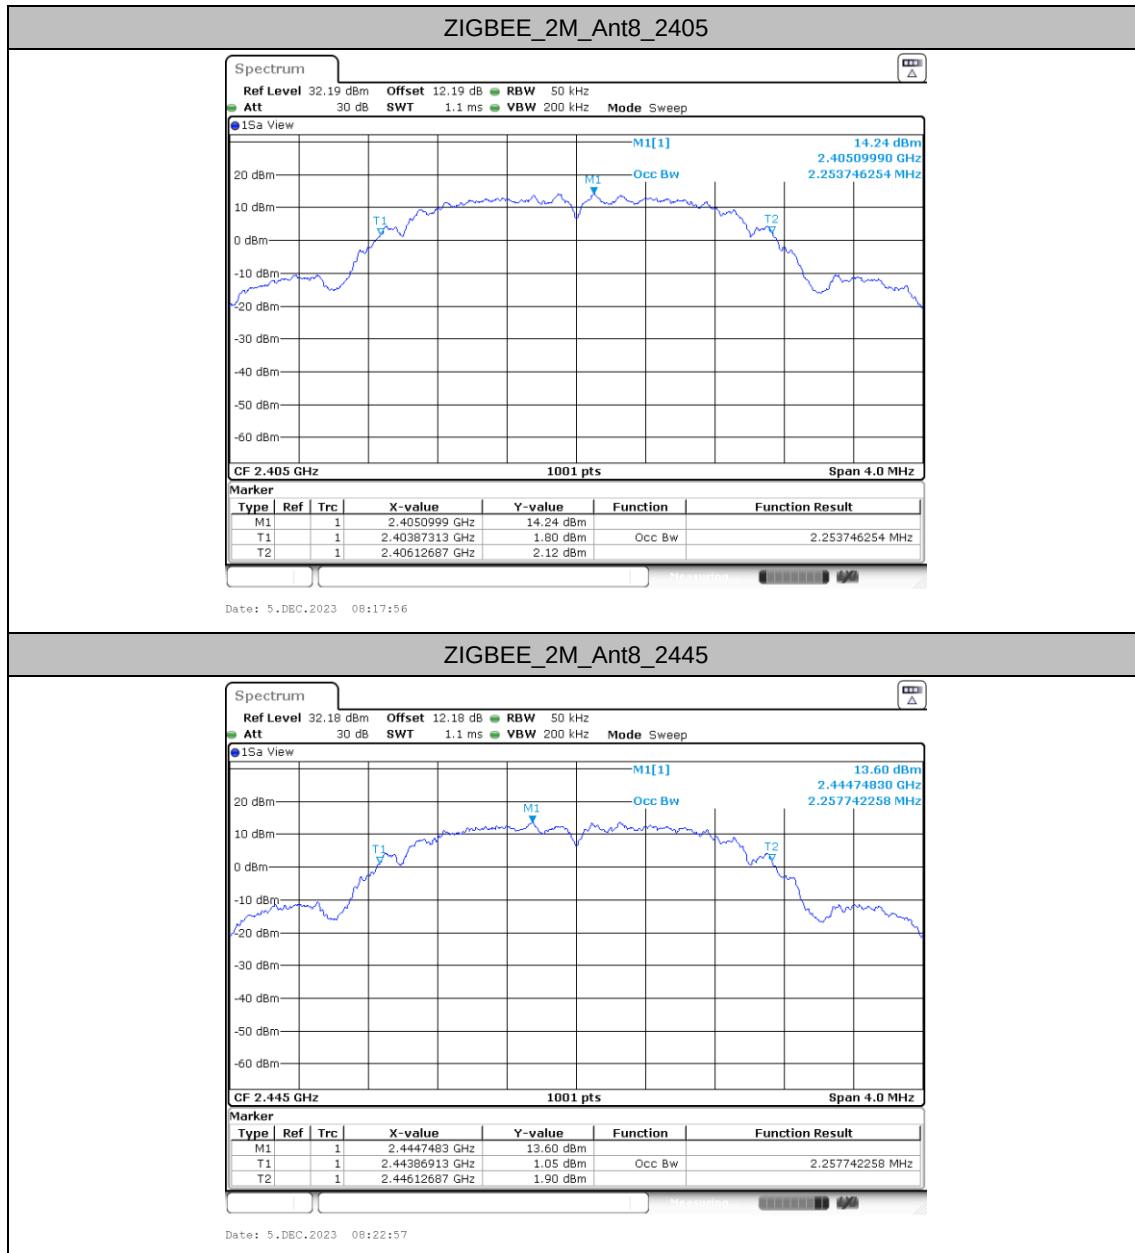

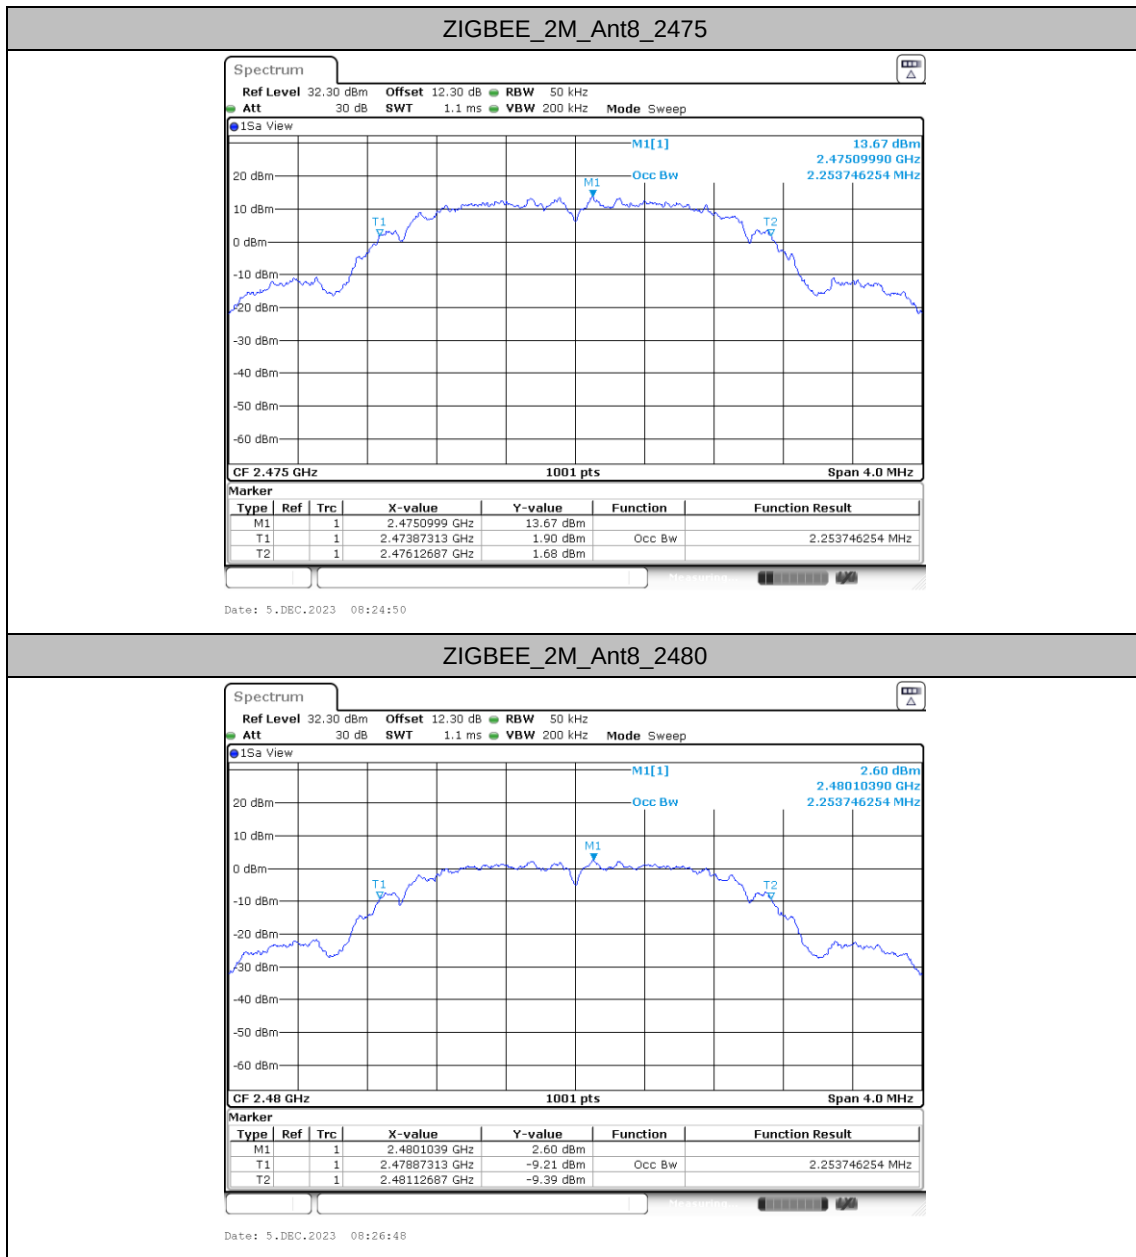



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Setting	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
Zigbee	Ant8	11	0	20.35	30.00	5.26	25.61	36.00	Pass
		19	0	20.08	30.00	5.26	25.34	36.00	Pass
		25	0	19.88	30.00	5.26	25.14	36.00	Pass
		26	-8	7.90	30.00	5.26	13.16	36.00	Pass




Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
ZIGBEE_2M	Ant8	2405	5.13	≤8.00	PASS
		2445	4.83	≤8.00	PASS
		2475	4.71	≤8.00	PASS
		2480	-6.43	≤8.00	PASS



Test Graphs

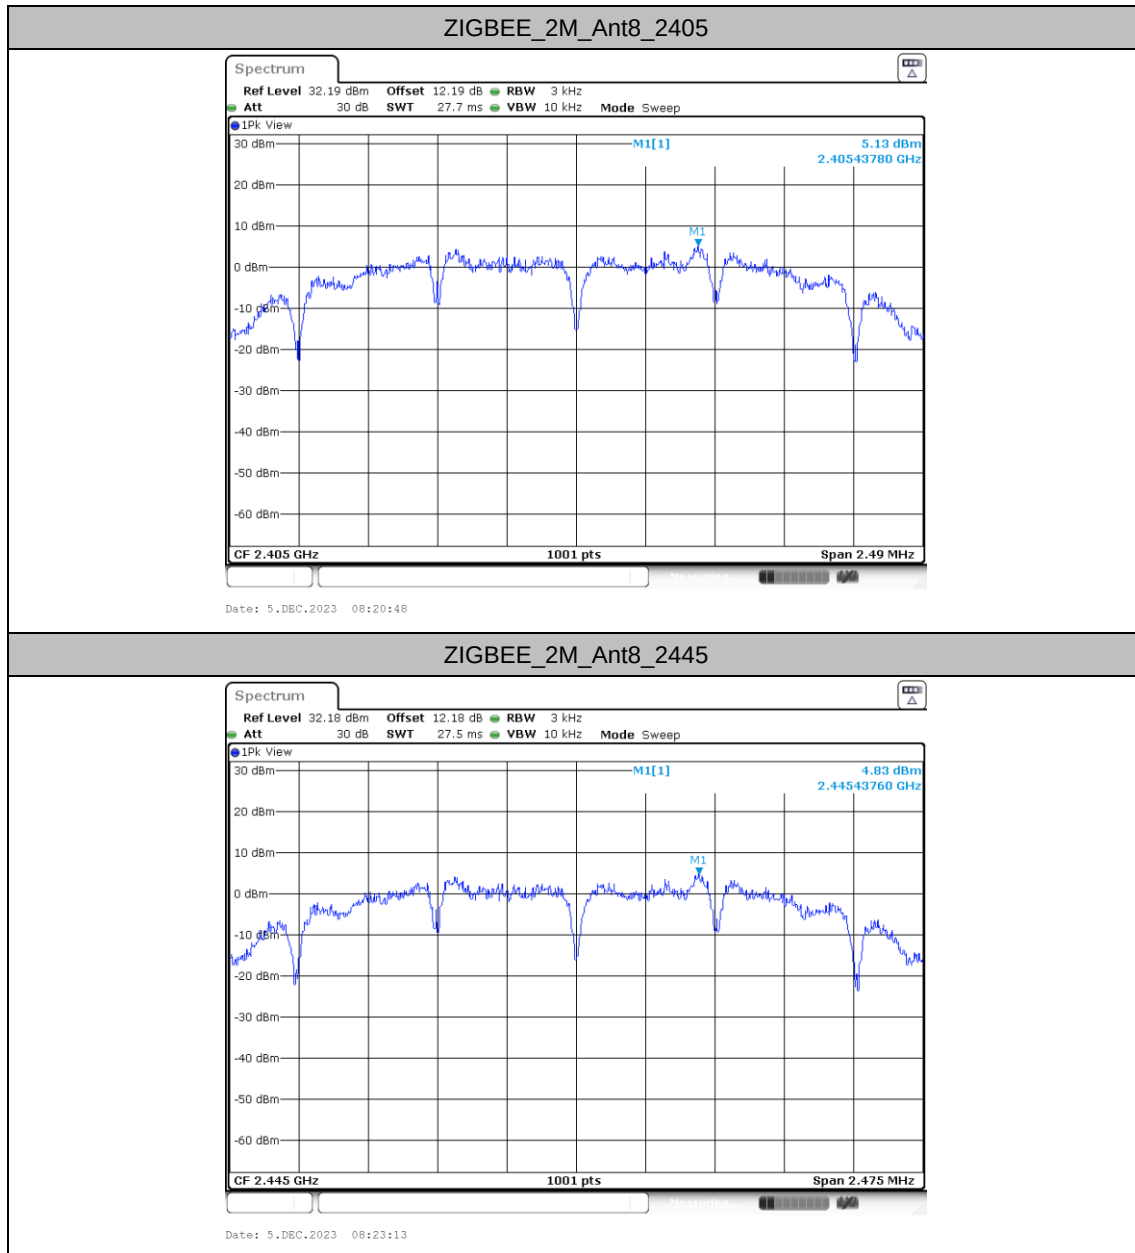

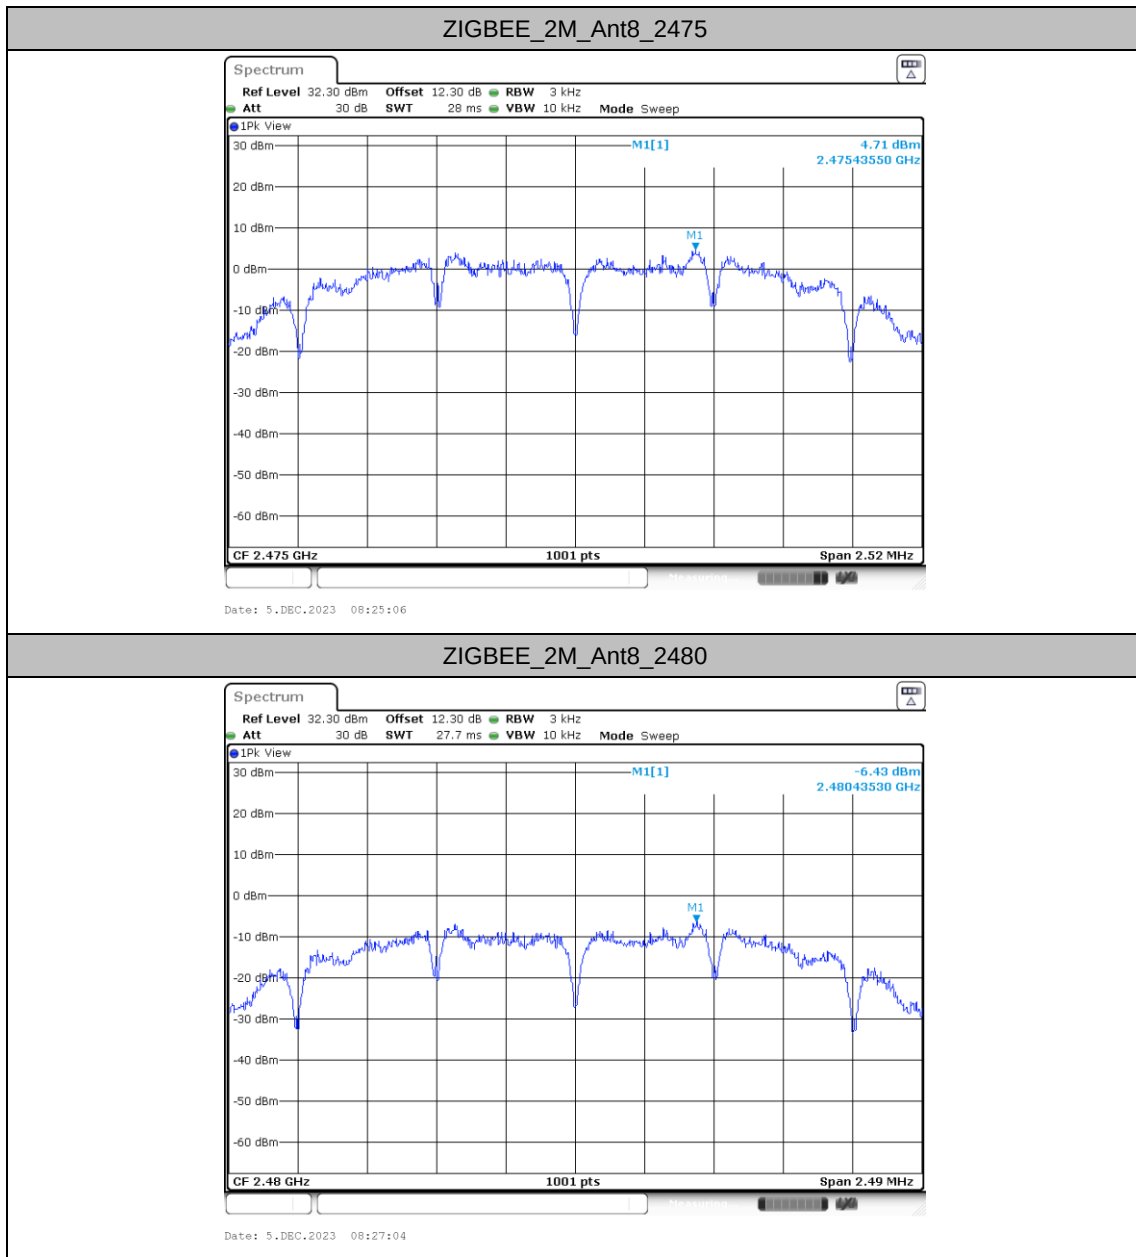




Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
ZIGBEE_2M	Ant8	2405	2404.74	16.52
		2445	2444.74	16.34
		2475	2474.74	16.00
		2480	2479.75	4.94



Test Graphs

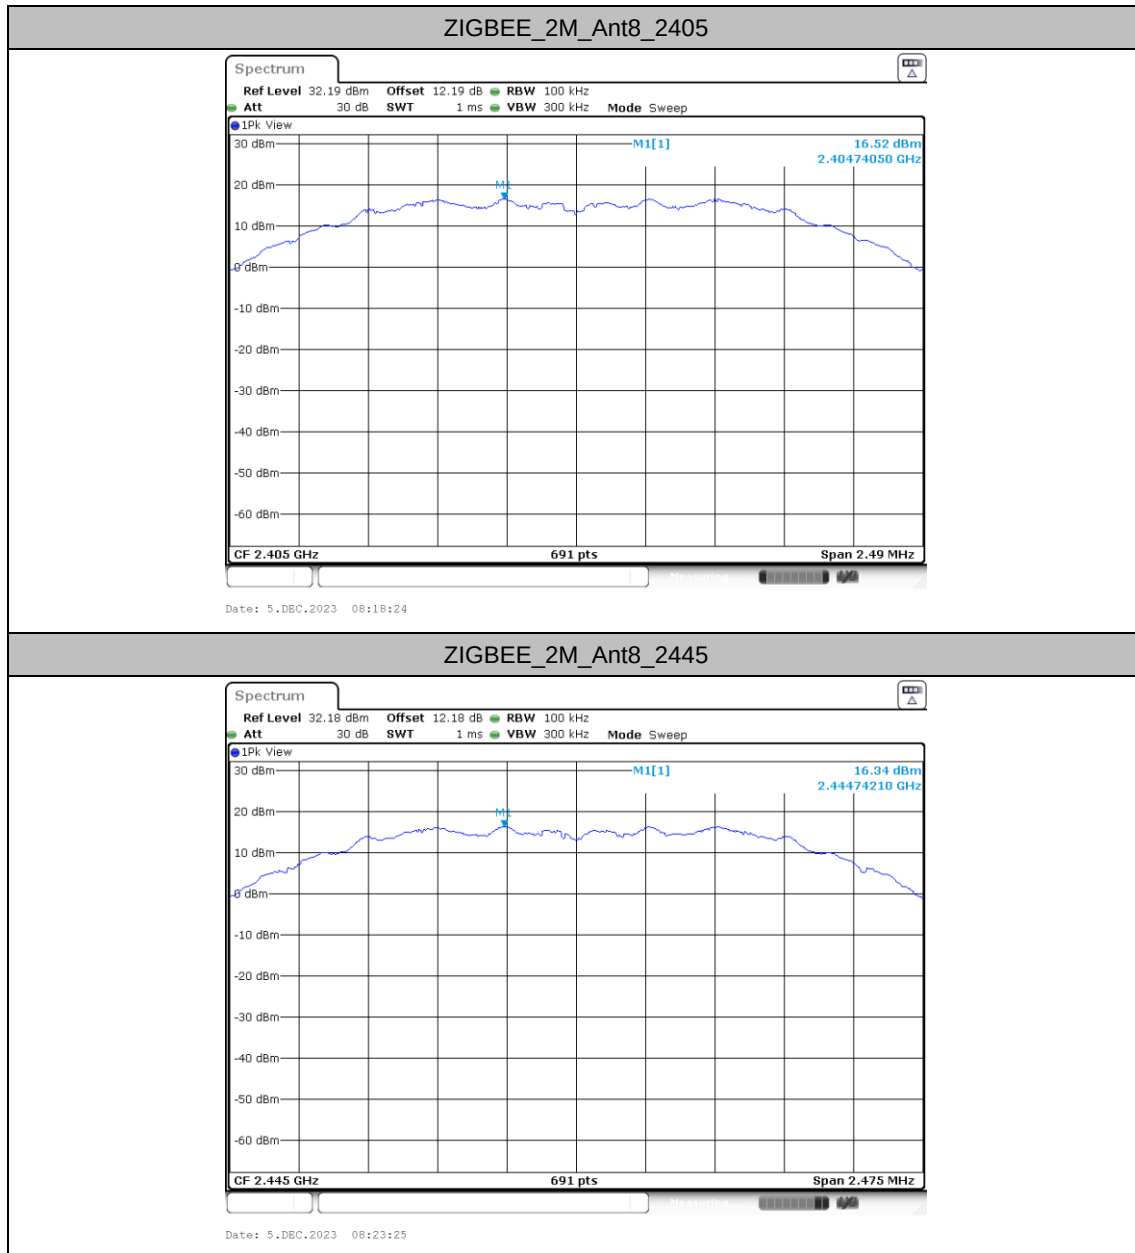

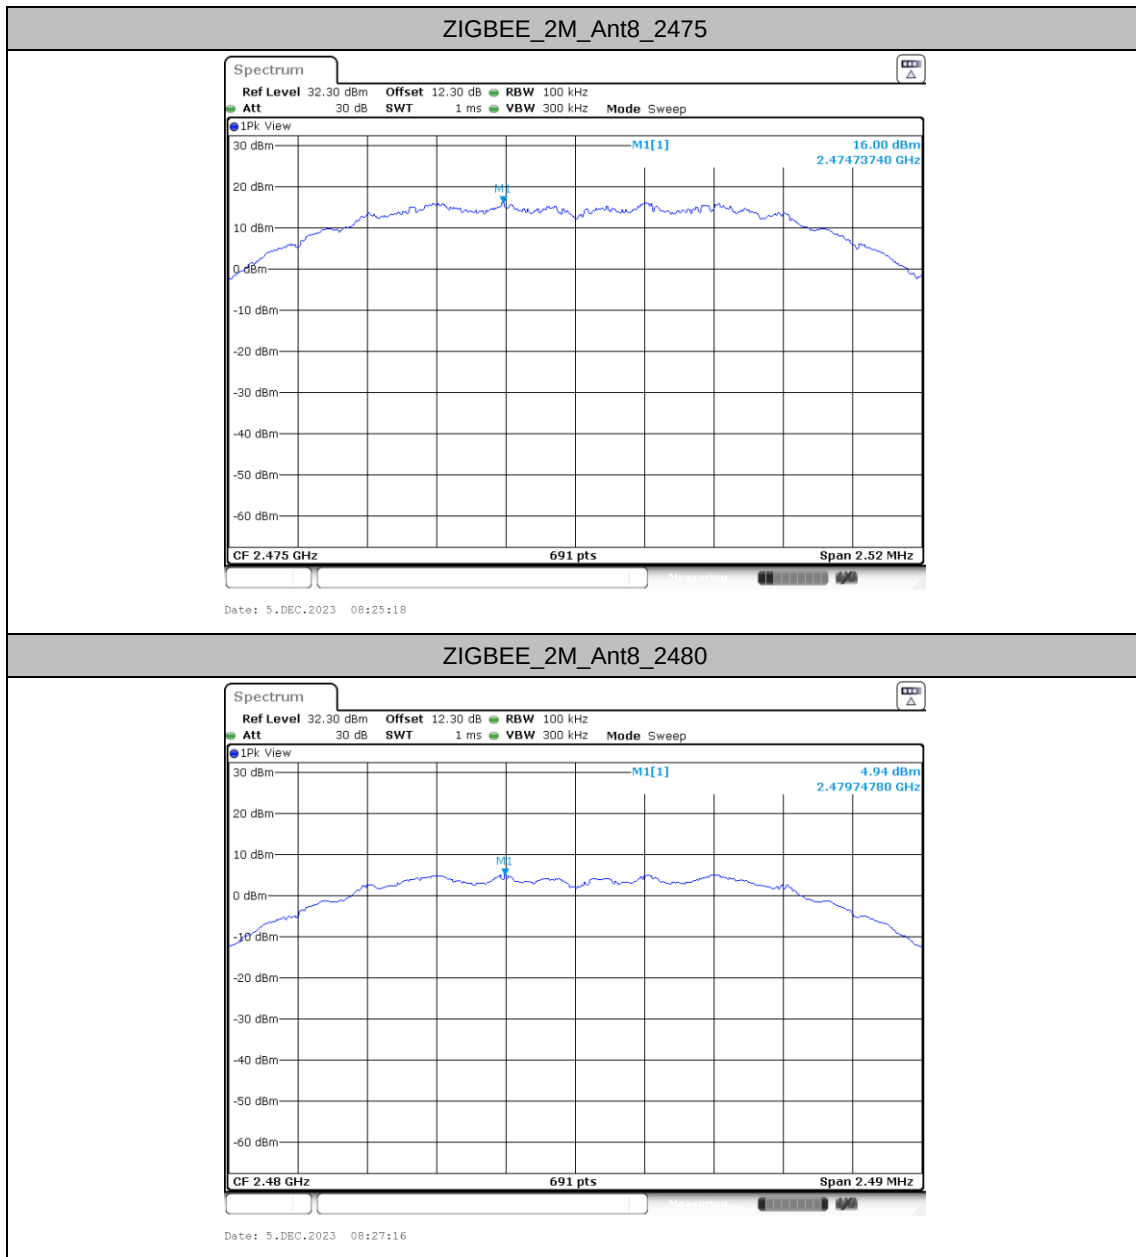




Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
ZIGBEE_2M	Ant8	Low	2405	16.52	-36.56	≤ -3.48	PASS
		High	2475	16.00	-42.6	≤ -4	PASS
			2480	4.94	-42.15	≤ -15.06	PASS



Test Graphs

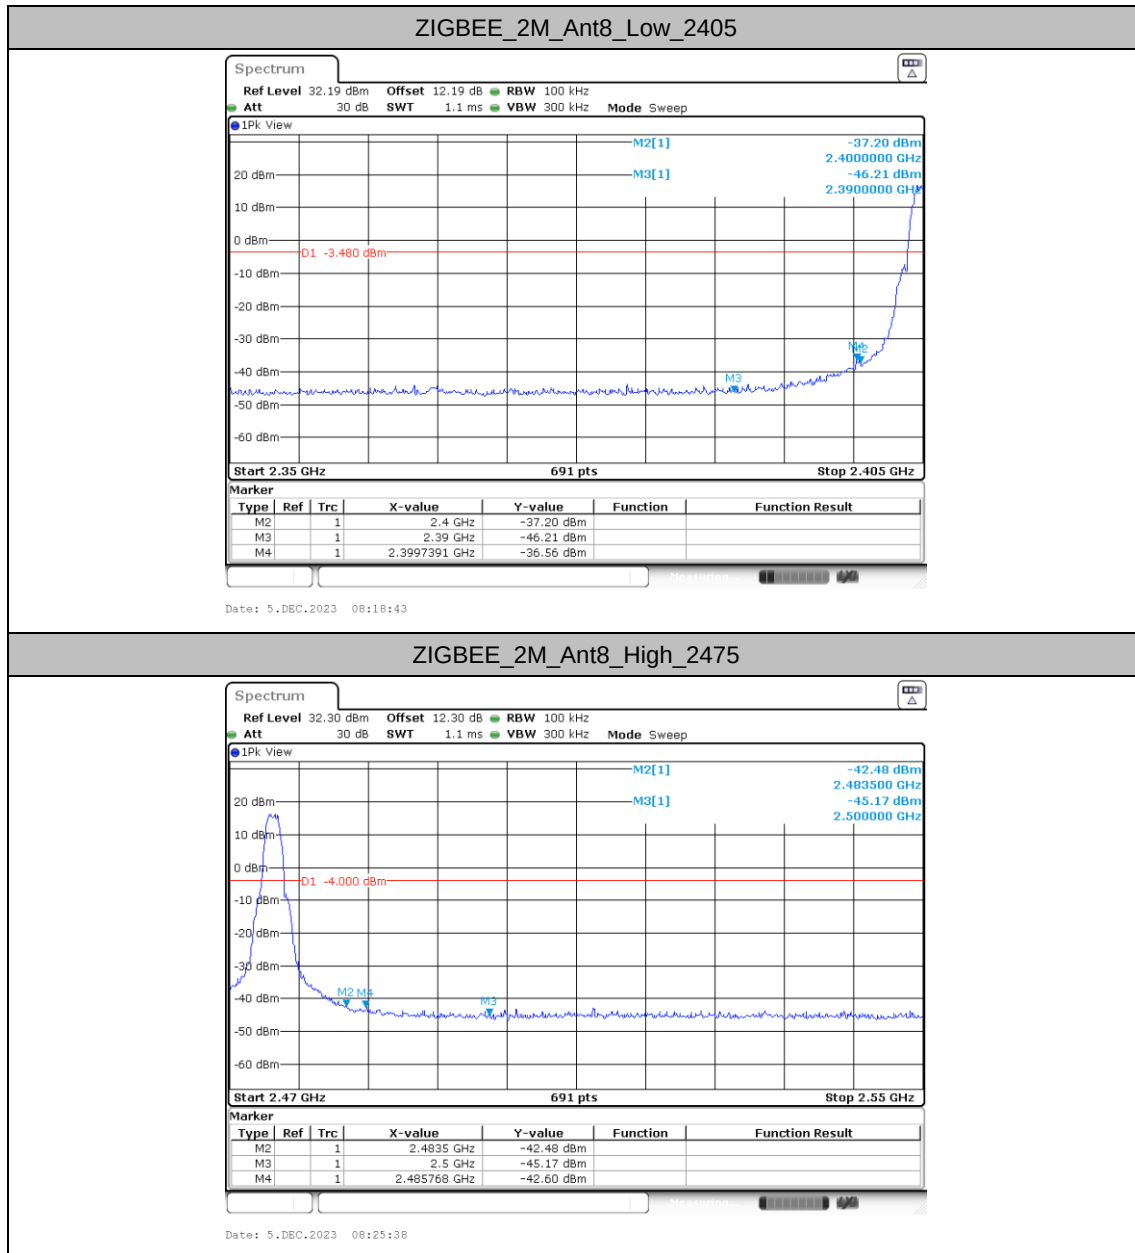

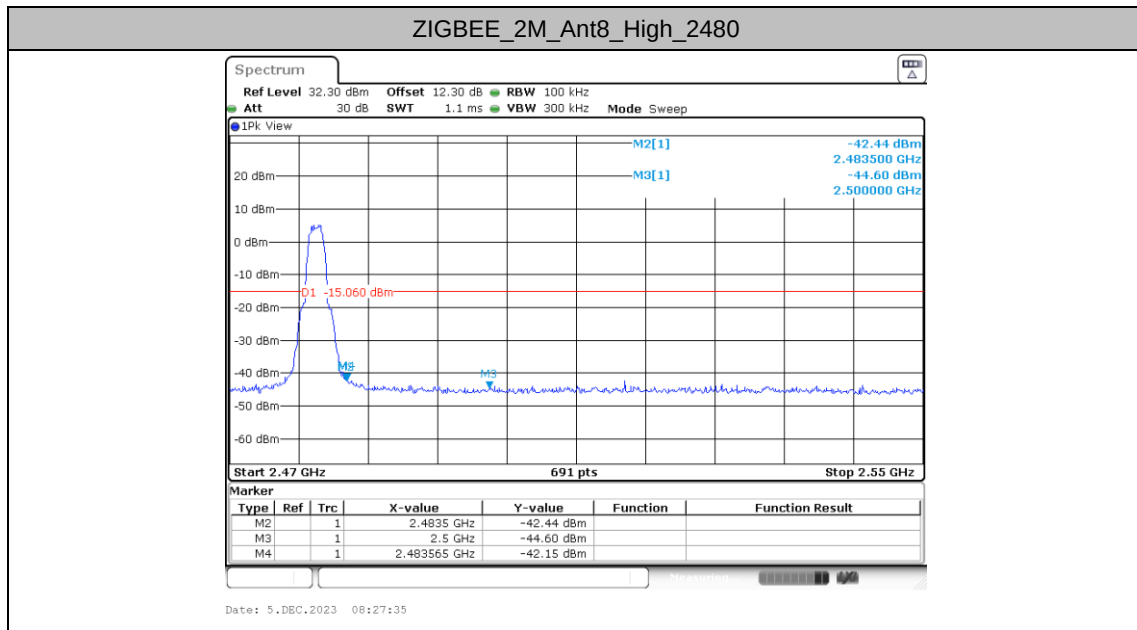




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
ZIGBEE_2M	Ant8	2405	30~1000	16.52	-44.69	≤ -3.48	PASS
			1000~26500	16.52	-12.75	≤ -3.48	PASS
		2445	30~1000	16.34	-45.88	≤ -3.66	PASS
			1000~26500	16.34	-36.83	≤ -3.66	PASS
		2475	30~1000	16.00	-44.76	≤ -4	PASS
			1000~26500	16.00	-36.32	≤ -4	PASS
		2480	30~1000	4.94	-45.58	≤ -15.06	PASS
			1000~26500	4.94	-36.66	≤ -15.06	PASS




Test Graphs

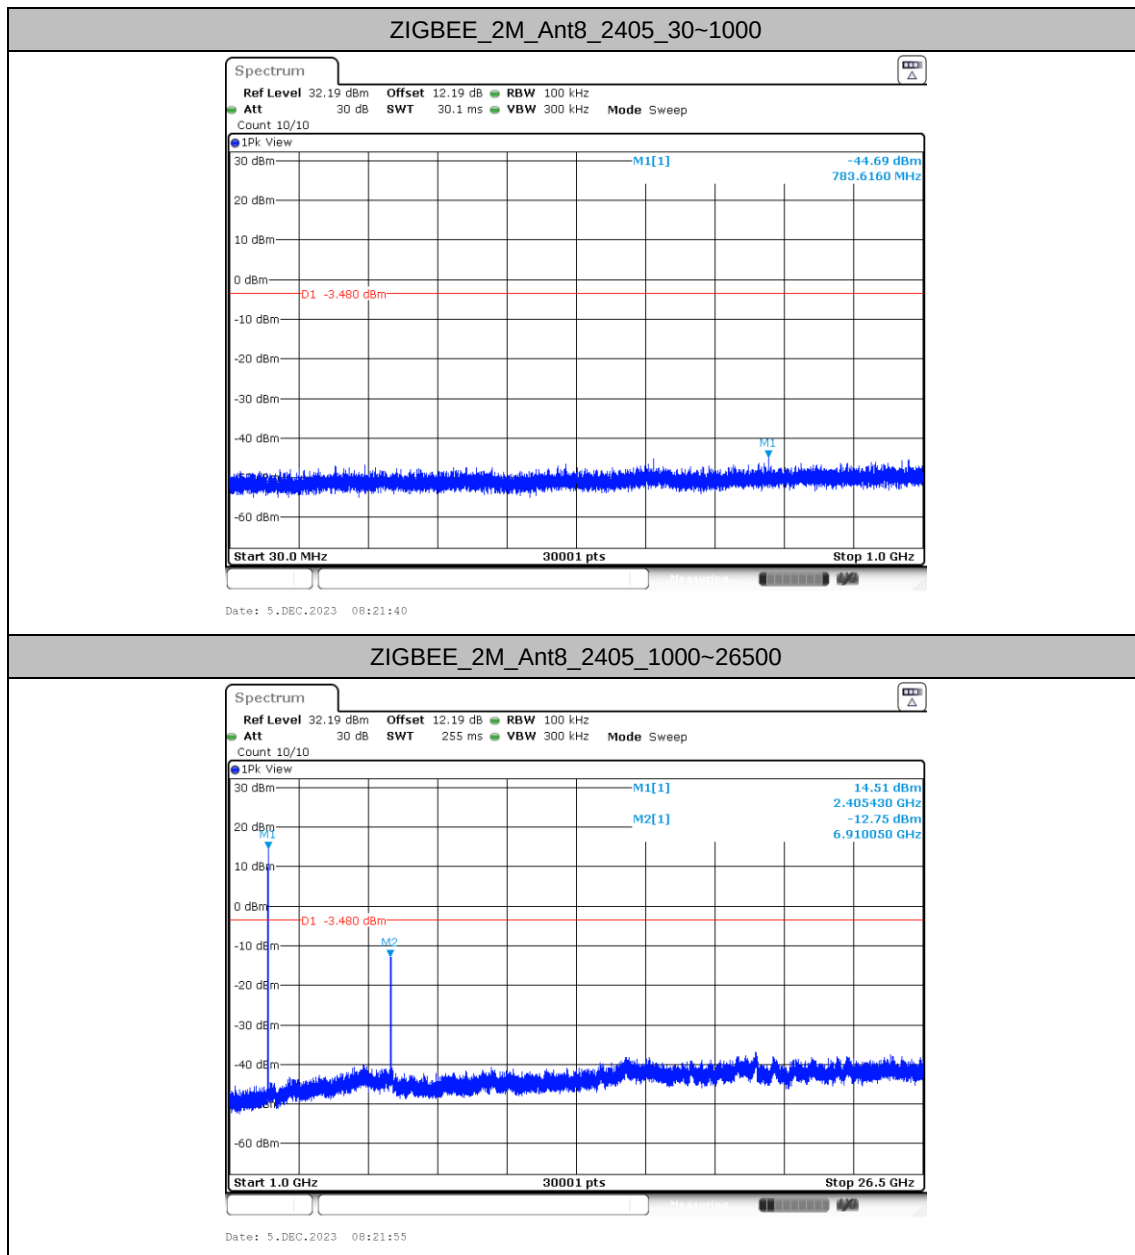

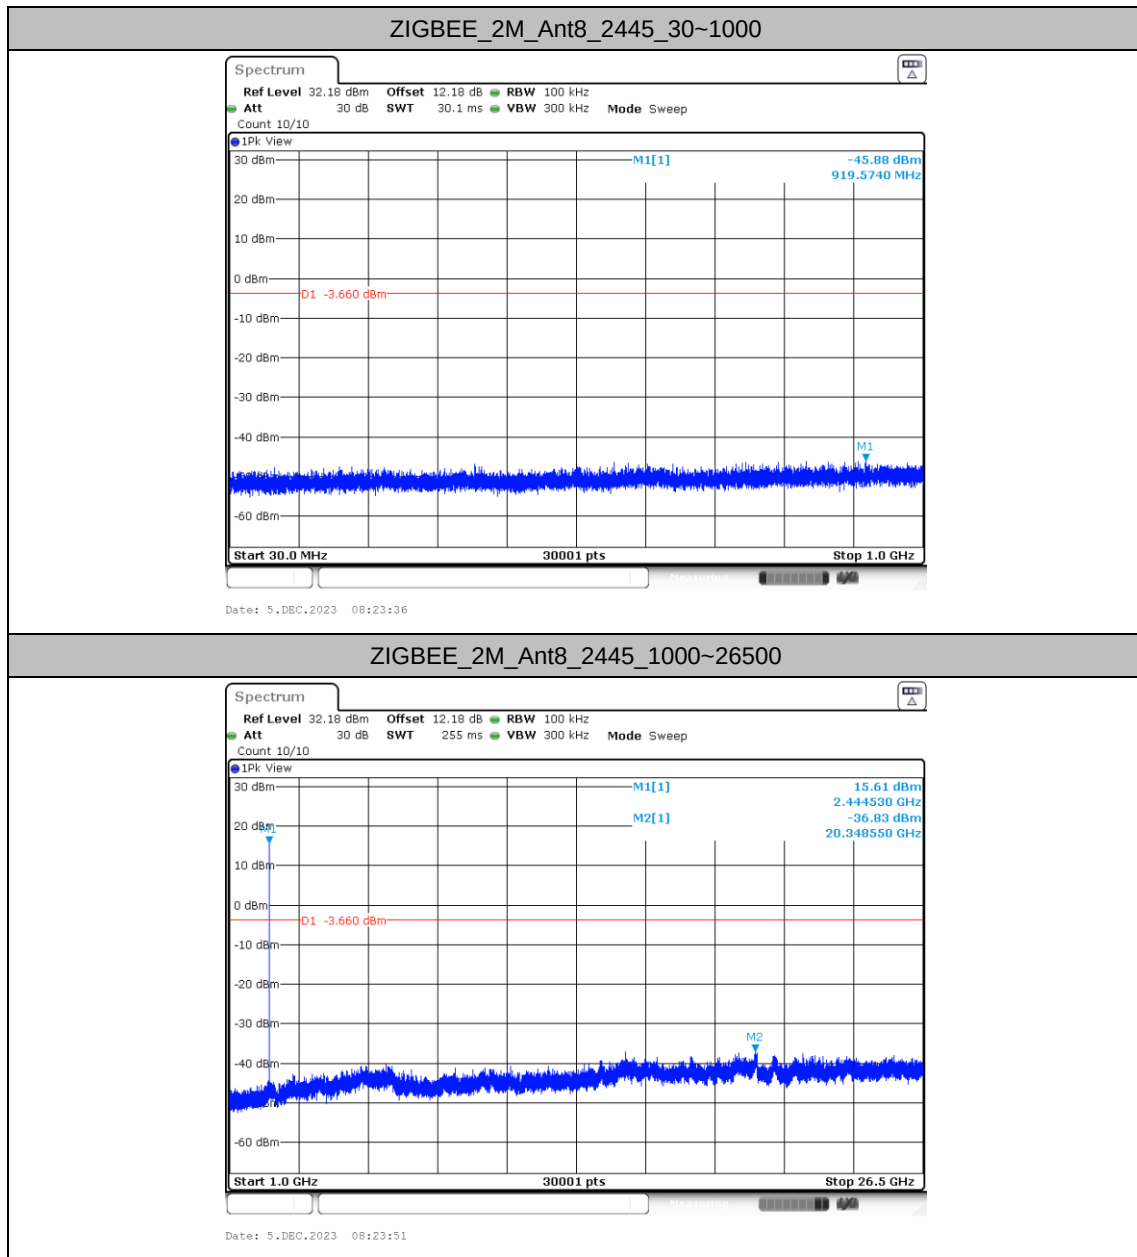


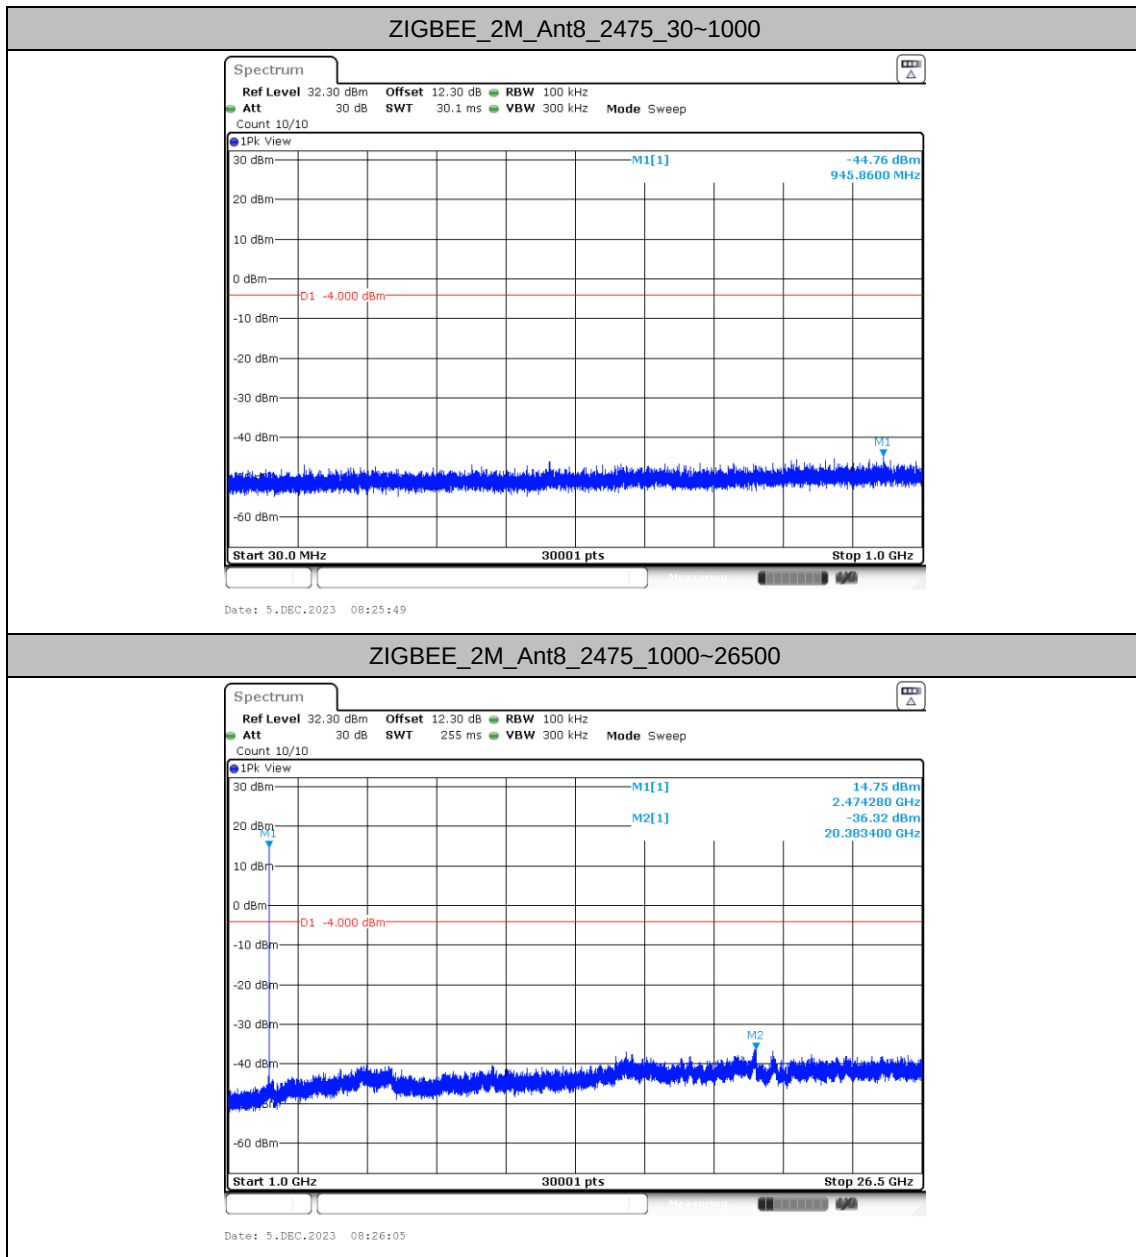

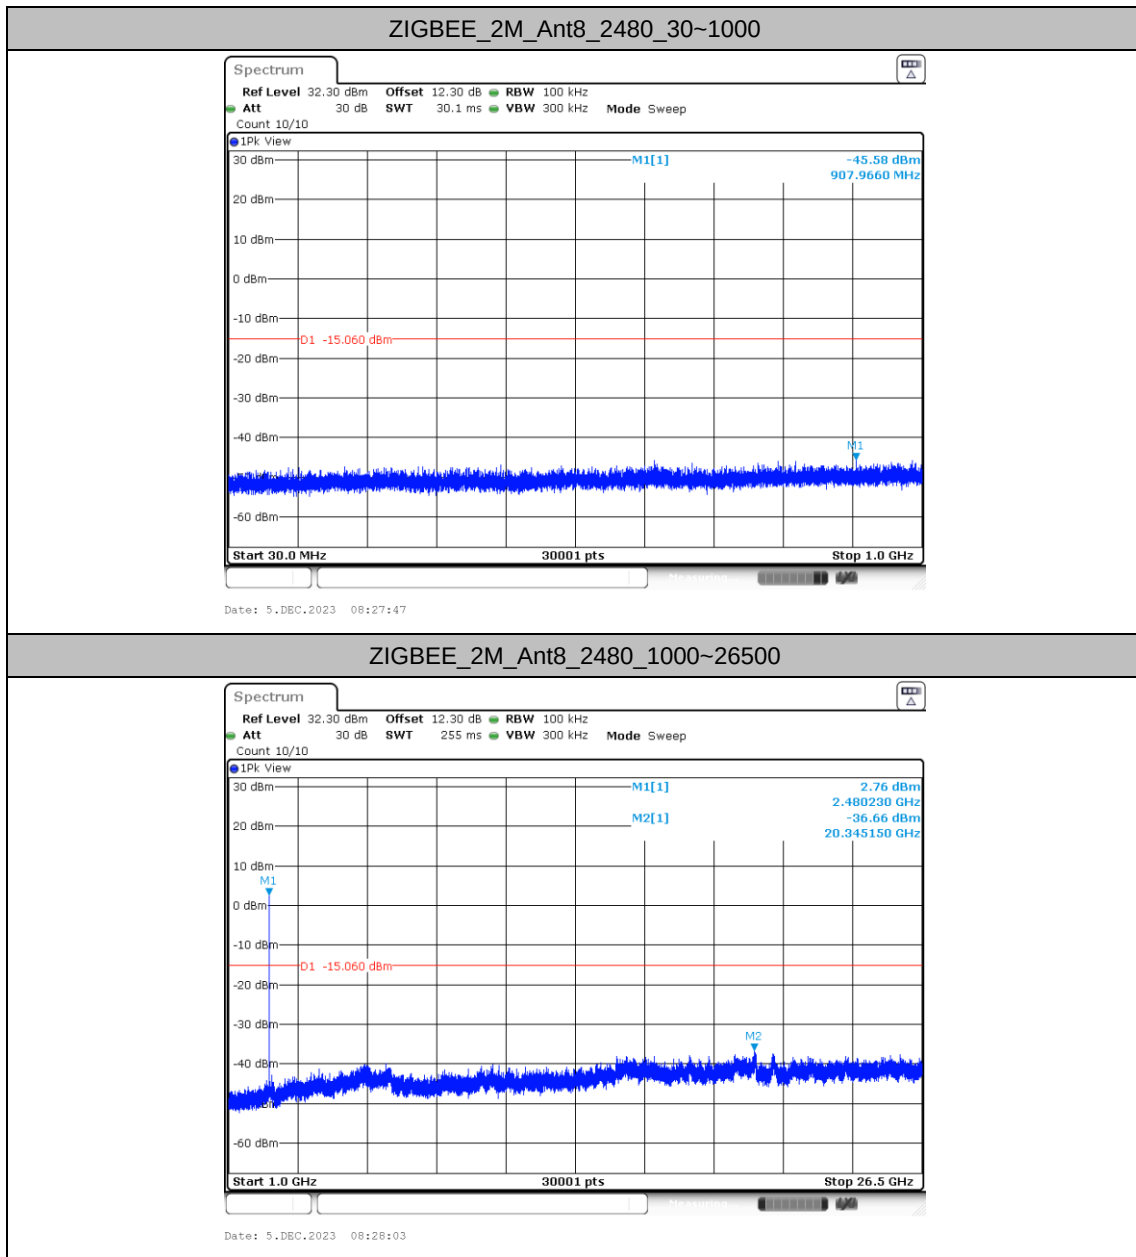




Appendix B. AC Conducted Emission Test Results

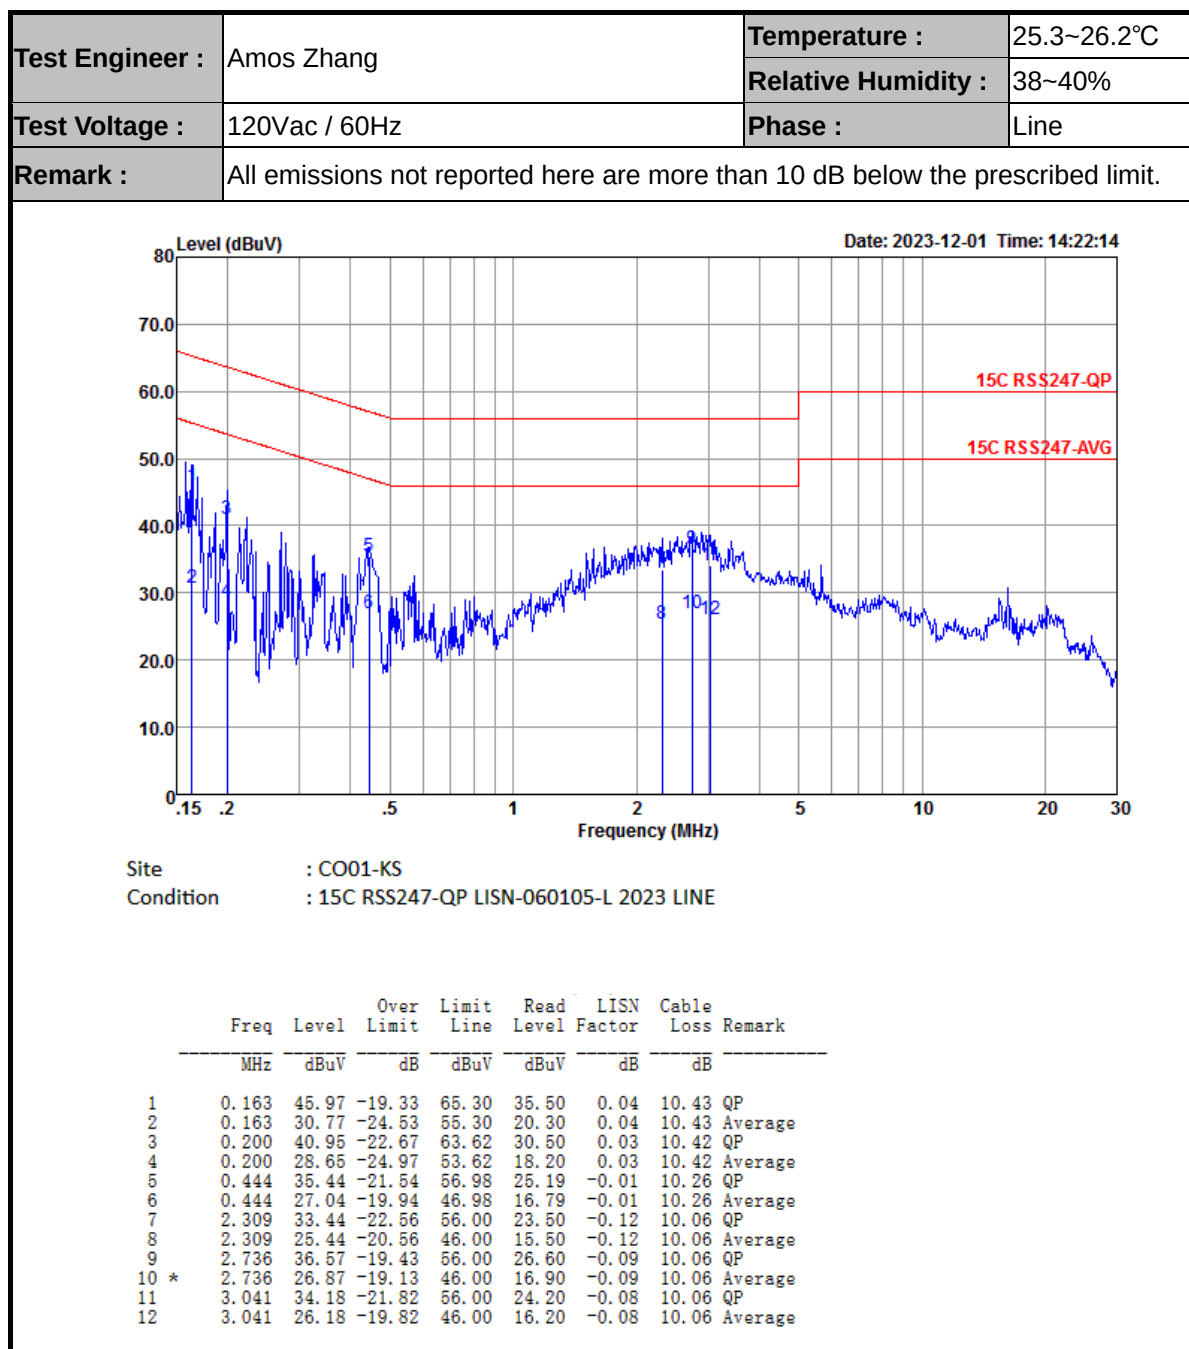



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

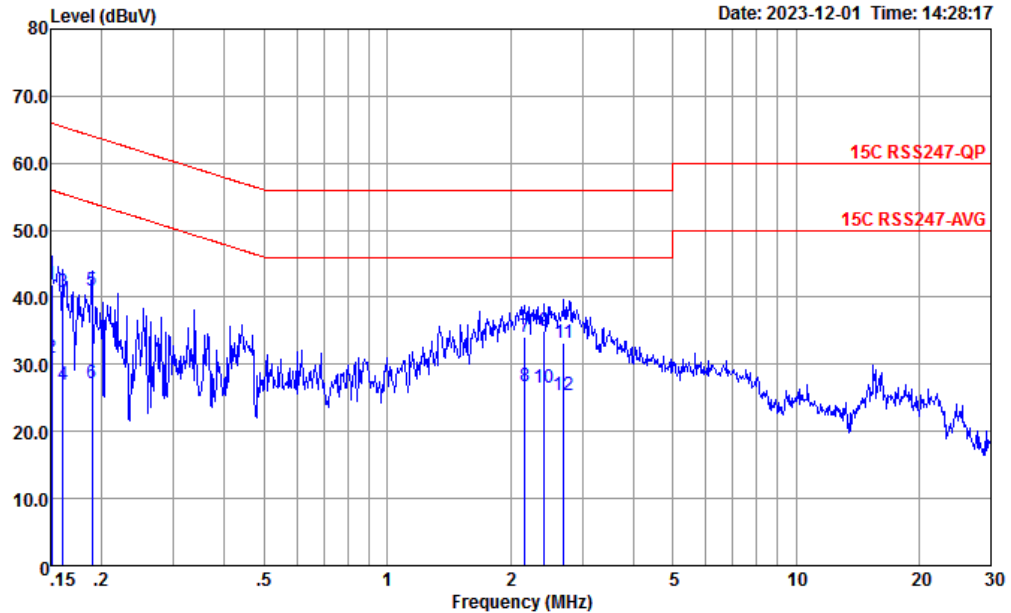

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.151	41.97	-23.99	65.96	31.50	0.04	10.43	QP
2	0.151	30.97	-24.99	55.96	20.50	0.04	10.43	Average
3	0.161	40.67	-24.76	65.43	30.20	0.04	10.43	QP
4	0.161	27.07	-28.36	55.43	16.60	0.04	10.43	Average
5	0.189	41.03	-23.03	64.06	30.56	0.05	10.42	QP
6	0.189	27.10	-26.96	54.06	16.63	0.05	10.42	Average
7	2.167	34.14	-21.86	56.00	24.20	-0.12	10.06	QP
8 *	2.167	26.74	-19.26	46.00	16.80	-0.12	10.06	Average
9	2.422	35.03	-20.97	56.00	25.09	-0.12	10.06	QP
10	2.422	26.43	-19.57	46.00	16.49	-0.12	10.06	Average
11	2.707	33.13	-22.87	56.00	23.20	-0.13	10.06	QP
12	2.707	25.43	-20.57	46.00	15.50	-0.13	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Ryan Xu	Relative Humidity :	41~42%
		Temperature :	22~23℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 25	2400-2483.5	8	ZIGBEE	11	2405	250kbps	-	-
Mode 26	2400-2483.5	8	ZIGBEE	19	2445	250kbps	-	-
Mode 27	2400-2483.5	8	ZIGBEE	26	2480	250kbps	-	-
Mode 32	2400-2483.5	8	ZIGBEE	25	2475	250kbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
25	ZIGBEE	11	2366.16	46.96	54.00	-7.04	H	AVERAGE	Pass	Band Edge
	ZIGBEE	11	9330.00	51.32	54.00	-2.68	V	AVERAGE	Pass	Harmonic
26	ZIGBEE	19	2484.10	44.58	54.00	-9.42	H	AVERAGE	Pass	Band Edge
	ZIGBEE	19	9330.00	51.49	54.00	-2.51	H	AVERAGE	Pass	Harmonic
27	ZIGBEE	26	2483.50	52.47	54.00	-1.53	V	AVERAGE	Pass	Band Edge
	ZIGBEE	26	9330.00	51.55	54.00	-2.45	V	AVERAGE	Pass	Harmonic
32	ZIGBEE	25	2483.50	49.13	54.00	-4.87	H	AVERAGE	Pass	Band Edge
	ZIGBEE	25	9330.00	52.83	54.00	-1.17	V	AVERAGE	Pass	Harmonic
32	ZIGBEE	25	399.57	30.92	46.00	-15.08	H	PEAK	Pass	LF

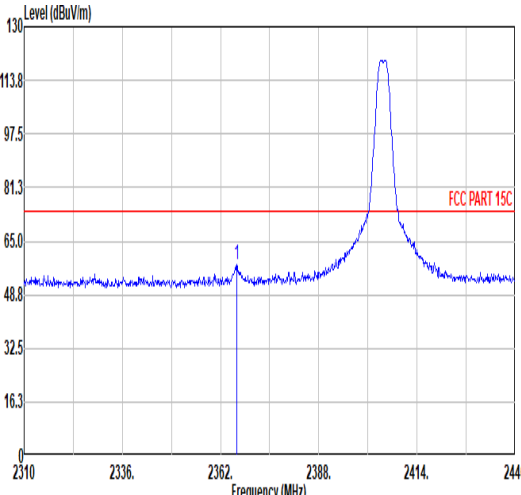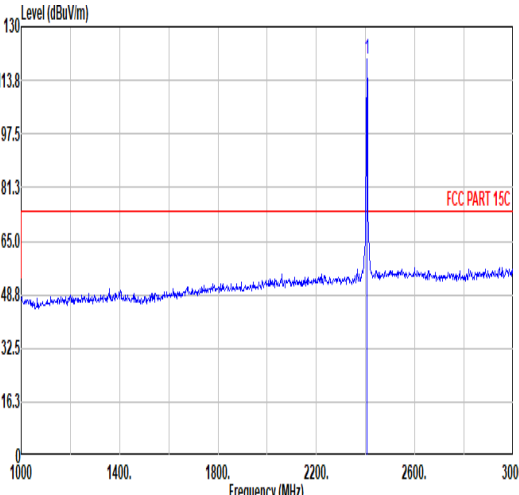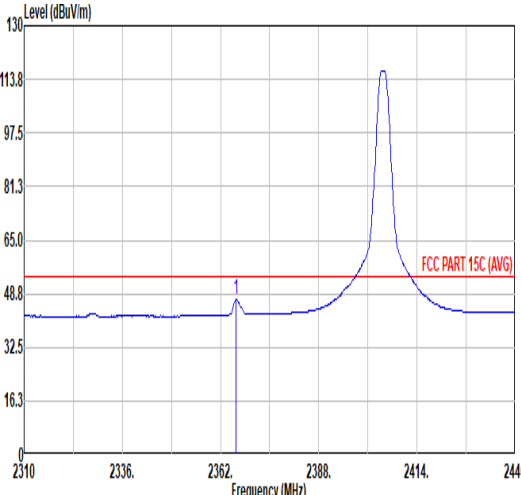
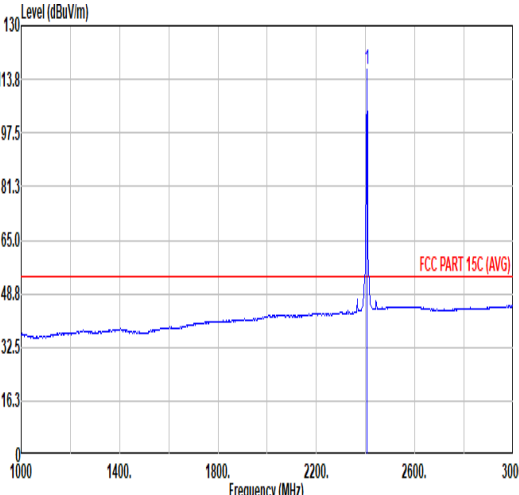


Mode	25																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_ZIGBEE_CH11_2405MHz																																																																																																														
ANT	8																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.29</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>46.27</td><td>31.73</td><td>6.57</td><td>32.90</td><td>6.00</td><td>111</td><td>360</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.29	57.67	74.00	-16.33	46.27	31.73	6.57	32.90	6.00	111	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>120.06</td><td>-----</td><td>-----</td><td>108.02</td><td>32.24</td><td>6.63</td><td>32.83</td><td>6.00</td><td>111</td><td>360</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	120.06	-----	-----	108.02	32.24	6.63	32.83	6.00	111	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2366.29	57.67	74.00	-16.33	46.27	31.73	6.57	32.90	6.00	111	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2405.00	120.06	-----	-----	108.02	32.24	6.63	32.83	6.00	111	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.16</td><td>46.96</td><td>54.00</td><td>-7.04</td><td>35.56</td><td>31.73</td><td>6.57</td><td>32.90</td><td>6.00</td><td>111</td><td>360</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.16	46.96	54.00	-7.04	35.56	31.73	6.57	32.90	6.00	111	360	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>116.65</td><td>-----</td><td>-----</td><td>104.61</td><td>32.24</td><td>6.63</td><td>32.83</td><td>6.00</td><td>111</td><td>360</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	116.65	-----	-----	104.61	32.24	6.63	32.83	6.00	111	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2366.16	46.96	54.00	-7.04	35.56	31.73	6.57	32.90	6.00	111	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2405.00	116.65	-----	-----	104.61	32.24	6.63	32.83	6.00	111	360	AVERAGE																																																																																																			

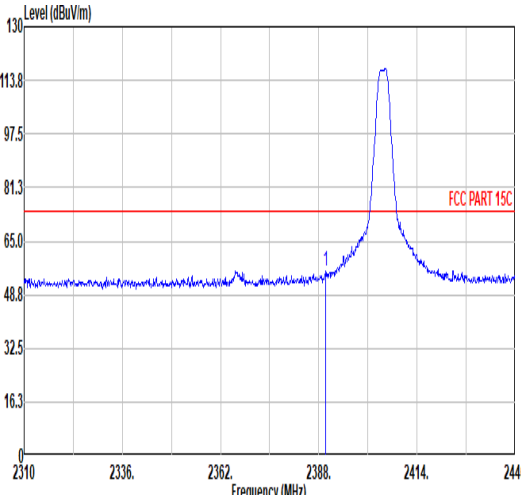
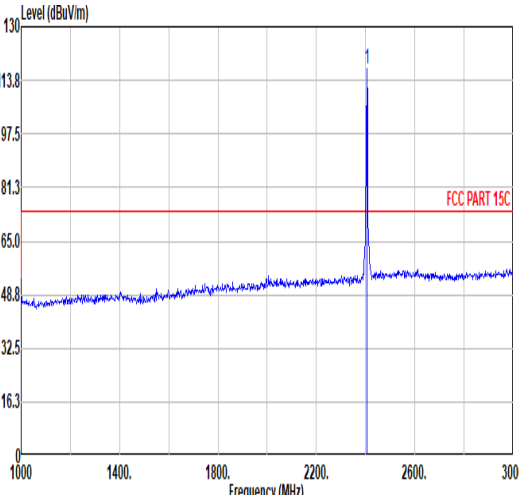
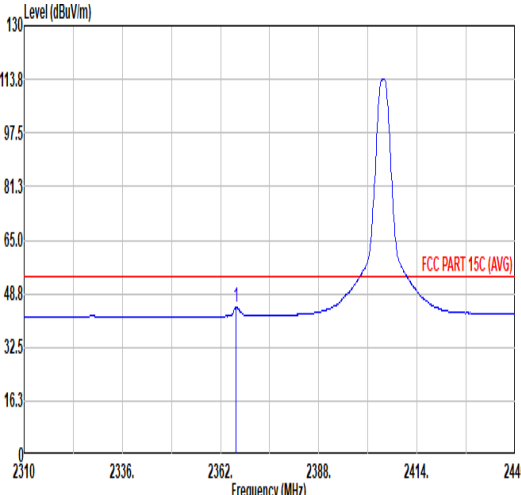
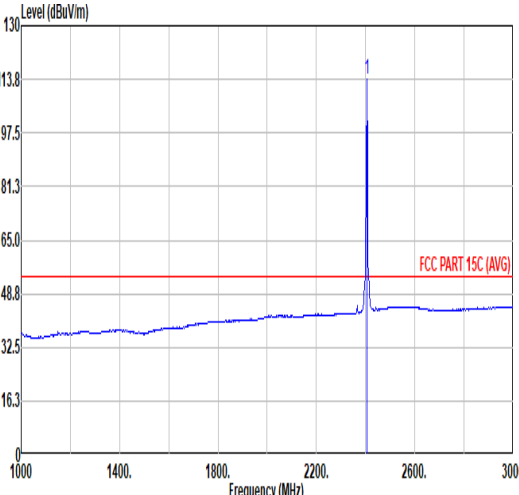


Mode	25																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_ZIGBEE_CH11_2405MHz																																																																																																		
ANT	8																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>44.31</td><td>32.06</td><td>6.60</td><td>32.86</td><td>6.00</td><td>296</td><td>47</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	56.11	74.00	-17.89	44.31	32.06	6.60	32.86	6.00	296	47	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>117.36</td><td>-----</td><td>-----</td><td>105.32</td><td>32.24</td><td>6.63</td><td>32.83</td><td>6.00</td><td>296</td><td>47</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	117.36	-----	-----	105.32	32.24	6.63	32.83	6.00	296	47
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.82	56.11	74.00	-17.89	44.31	32.06	6.60	32.86	6.00	296	47	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	117.36	-----	-----	105.32	32.24	6.63	32.83	6.00	296	47	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.03</td><td>44.53</td><td>54.00</td><td>-9.47</td><td>33.14</td><td>31.72</td><td>6.57</td><td>32.90</td><td>6.00</td><td>296</td><td>47</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.03	44.53	54.00	-9.47	33.14	31.72	6.57	32.90	6.00	296	47	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>113.88</td><td>-----</td><td>-----</td><td>101.84</td><td>32.24</td><td>6.63</td><td>32.83</td><td>6.00</td><td>296</td><td>47</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	113.88	-----	-----	101.84	32.24	6.63	32.83	6.00	296	47
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2366.03	44.53	54.00	-9.47	33.14	31.72	6.57	32.90	6.00	296	47	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	113.88	-----	-----	101.84	32.24	6.63	32.83	6.00	296	47	AVERAGE																																																																																							

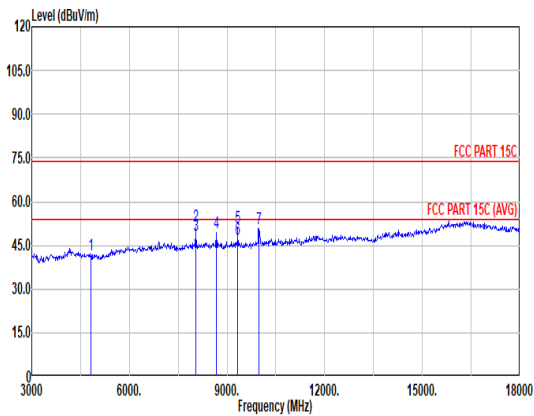
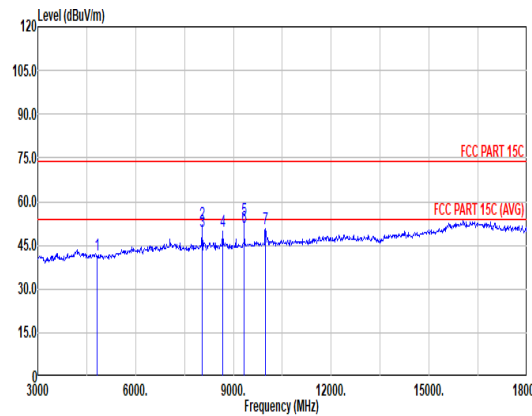


Mode	25																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_ZIGBEE_CH11_2405MHz																																																																																																																																			
ANT	8																																																																																																																																			
Pol.	Horizontal																																																																																																																																			
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>41.50</td><td>74.00</td><td>-32.50</td><td>59.55</td><td>34.20</td><td>9.45</td><td>61.70</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>8040.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>63.69</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>154</td><td>Peak</td></tr><tr><td>3</td><td>8040.00</td><td>48.50</td><td>54.00</td><td>-5.50</td><td>60.69</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>154</td><td>Average</td></tr><tr><td>4</td><td>8670.00</td><td>49.47</td><td>94.59</td><td>-45.12</td><td>61.19</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>9330.00</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>61.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>279</td><td>235</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>47.14</td><td>54.00</td><td>-6.86</td><td>57.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>279</td><td>235</td><td>Average</td></tr><tr><td>7</td><td>9990.00</td><td>50.91</td><td>94.59</td><td>-43.68</td><td>60.46</td><td>37.48</td><td>13.88</td><td>60.91</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4810.00	41.50	74.00	-32.50	59.55	34.20	9.45	61.70	0.00	---	---	PEAK	2	8040.00	51.50	74.00	-22.50	63.69	35.88	12.44	60.51	0.00	102	154	Peak	3	8040.00	48.50	54.00	-5.50	60.69	35.88	12.44	60.51	0.00	102	154	Average	4	8670.00	49.47	94.59	-45.12	61.19	36.04	12.95	60.71	0.00	---	---	Peak	5	9330.00	51.14	74.00	-22.86	61.99	36.60	13.32	60.77	0.00	279	235	Peak	6	9330.00	47.14	54.00	-6.86	57.99	36.60	13.32	60.77	0.00	279	235	Average	7	9990.00	50.91	94.59	-43.68	60.46	37.48	13.88	60.91	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1	4810.00	41.50	74.00	-32.50	59.55	34.20	9.45	61.70	0.00	---	---	PEAK																																																																																																																								
2	8040.00	51.50	74.00	-22.50	63.69	35.88	12.44	60.51	0.00	102	154	Peak																																																																																																																								
3	8040.00	48.50	54.00	-5.50	60.69	35.88	12.44	60.51	0.00	102	154	Average																																																																																																																								
4	8670.00	49.47	94.59	-45.12	61.19	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																								
5	9330.00	51.14	74.00	-22.86	61.99	36.60	13.32	60.77	0.00	279	235	Peak																																																																																																																								
6	9330.00	47.14	54.00	-6.86	57.99	36.60	13.32	60.77	0.00	279	235	Average																																																																																																																								
7	9990.00	50.91	94.59	-43.68	60.46	37.48	13.88	60.91	0.00	---	---	Peak																																																																																																																								
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>41.76</td><td>74.00</td><td>-32.24</td><td>59.81</td><td>34.20</td><td>9.45</td><td>61.70</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>8040.00</td><td>52.50</td><td>74.00</td><td>-21.50</td><td>64.69</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>123</td><td>151</td><td>Peak</td></tr><tr><td>3</td><td>8040.00</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>61.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>123</td><td>151</td><td>Average</td></tr><tr><td>4</td><td>8670.00</td><td>49.86</td><td>92.26</td><td>-42.40</td><td>61.58</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>9330.00</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>64.74</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>171</td><td>142</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>51.32</td><td>54.00</td><td>-2.68</td><td>62.17</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>171</td><td>142</td><td>Average</td></tr><tr><td>7</td><td>9990.00</td><td>50.82</td><td>92.26</td><td>-41.44</td><td>60.37</td><td>37.48</td><td>13.88</td><td>60.91</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4810.00	41.76	74.00	-32.24	59.81	34.20	9.45	61.70	0.00	---	---	PEAK	2	8040.00	52.50	74.00	-21.50	64.69	35.88	12.44	60.51	0.00	123	151	Peak	3	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	123	151	Average	4	8670.00	49.86	92.26	-42.40	61.58	36.04	12.95	60.71	0.00	---	---	Peak	5	9330.00	53.89	74.00	-20.11	64.74	36.60	13.32	60.77	0.00	171	142	Peak	6	9330.00	51.32	54.00	-2.68	62.17	36.60	13.32	60.77	0.00	171	142	Average	7	9990.00	50.82	92.26	-41.44	60.37	37.48	13.88	60.91	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1	4810.00	41.76	74.00	-32.24	59.81	34.20	9.45	61.70	0.00	---	---	PEAK																																																																																																																								
2	8040.00	52.50	74.00	-21.50	64.69	35.88	12.44	60.51	0.00	123	151	Peak																																																																																																																								
3	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	123	151	Average																																																																																																																								
4	8670.00	49.86	92.26	-42.40	61.58	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																								
5	9330.00	53.89	74.00	-20.11	64.74	36.60	13.32	60.77	0.00	171	142	Peak																																																																																																																								
6	9330.00	51.32	54.00	-2.68	62.17	36.60	13.32	60.77	0.00	171	142	Average																																																																																																																								
7	9990.00	50.82	92.26	-41.44	60.37	37.48	13.88	60.91	0.00	---	---	Peak																																																																																																																								

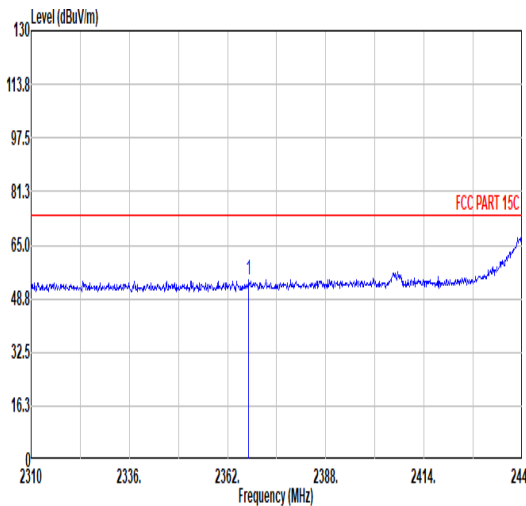
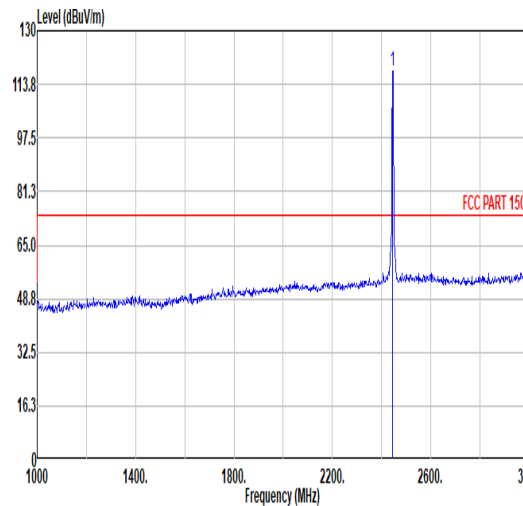
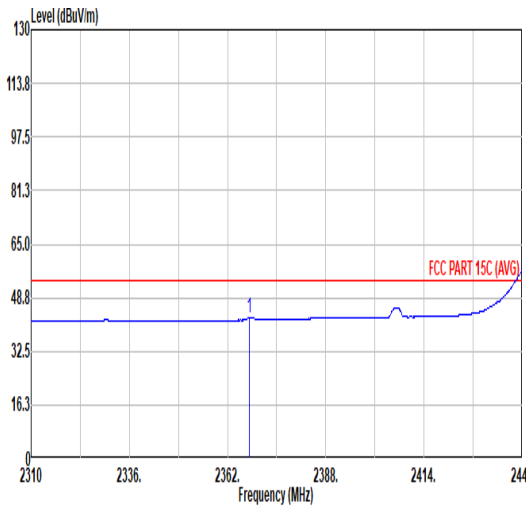
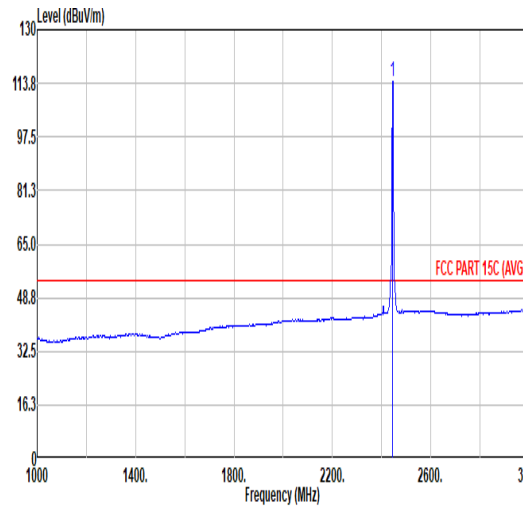


Mode	26																																																																																																														
	Band Edge - L																																																																																																														
	2400-2483.5_ZIGBEE_CH19_2445MHz																																																																																																														
ANT	8																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.59</td><td>54.63</td><td>74.00</td><td>-19.37</td><td>43.21</td><td>31.75</td><td>6.57</td><td>32.90</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.59	54.63	74.00	-19.37	43.21	31.75	6.57	32.90	6.00	100	349	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2445.00</td><td>117.75</td><td>-----</td><td>-----</td><td>105.31</td><td>32.48</td><td>6.68</td><td>32.72</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	117.75	-----	-----	105.31	32.48	6.68	32.72	6.00	100	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2367.59	54.63	74.00	-19.37	43.21	31.75	6.57	32.90	6.00	100	349	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2445.00	117.75	-----	-----	105.31	32.48	6.68	32.72	6.00	100	349	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.85</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>31.37</td><td>31.75</td><td>6.57</td><td>32.90</td><td>6.00</td><td>100</td><td>349</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.85	42.79	54.00	-11.21	31.37	31.75	6.57	32.90	6.00	100	349	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2445.00</td><td>114.26</td><td>-----</td><td>-----</td><td>101.82</td><td>32.48</td><td>6.68</td><td>32.72</td><td>6.00</td><td>100</td><td>349</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	114.26	-----	-----	101.82	32.48	6.68	32.72	6.00	100	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2367.85	42.79	54.00	-11.21	31.37	31.75	6.57	32.90	6.00	100	349	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2445.00	114.26	-----	-----	101.82	32.48	6.68	32.72	6.00	100	349	AVERAGE																																																																																																			

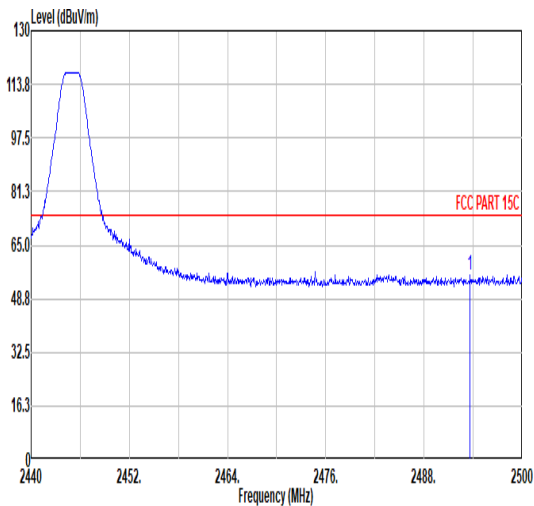
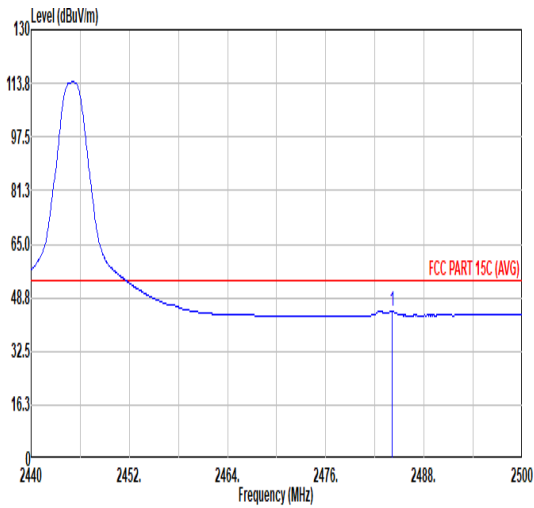


Mode	26																																																							
	Band Edge - R																																																							
	2400-2483.5_ZIGBEE_CH19_2445MHz																																																							
ANT	8																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2493.64</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>43.16</td><td>32.85</td><td>6.75</td><td>32.60</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2493.64	56.16	74.00	-17.84	43.16	32.85	6.75	32.60	6.00	100	349	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2493.64	56.16	74.00	-17.84	43.16	32.85	6.75	32.60	6.00	100	349	PEAK																																												
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.10</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>31.70</td><td>32.77</td><td>6.73</td><td>32.62</td><td>6.00</td><td>100</td><td>349</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.10	44.58	54.00	-9.42	31.70	32.77	6.73	32.62	6.00	100	349	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2484.10	44.58	54.00	-9.42	31.70	32.77	6.73	32.62	6.00	100	349	AVERAGE																																												

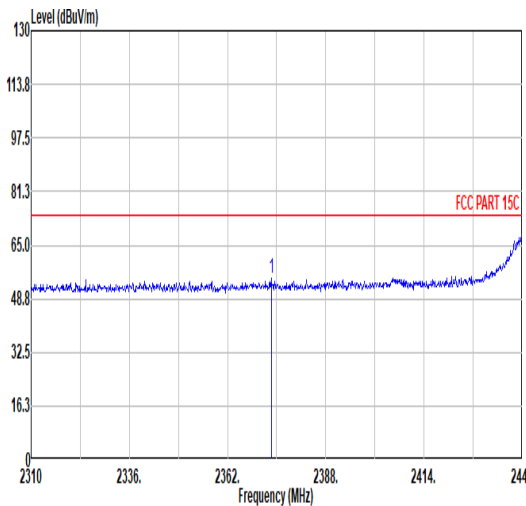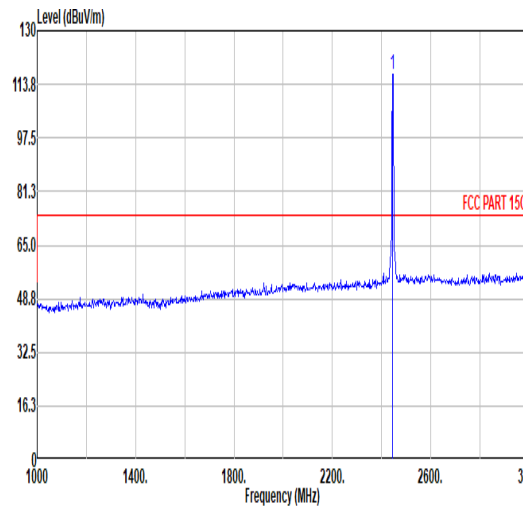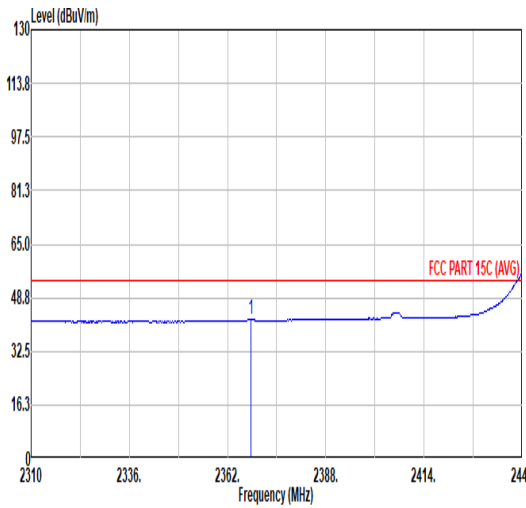
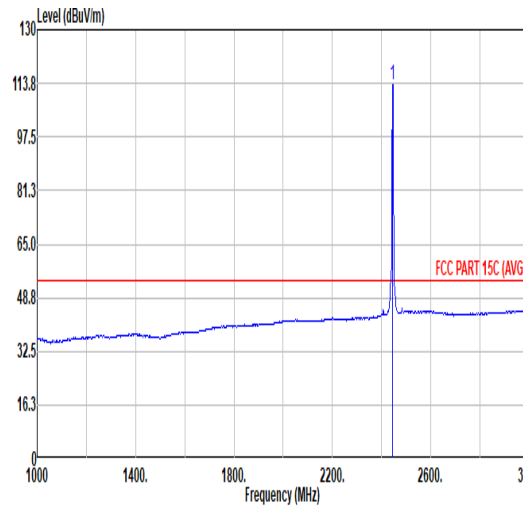


Mode	26																																																				
	Band Edge - L																																																				
	2400-2483.5_ZIGBEE_CH19_2445MHz																																																				
ANT	8																																																				
Pol.	Vertical						Fundamental																																														
Peak																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.57</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>43.20</td><td>31.83</td><td>6.58</td><td>32.89</td><td>6.00</td><td>204</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.57	54.72	74.00	-19.28	43.20	31.83	6.58	32.89	6.00	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2373.57	54.72	74.00	-19.28	43.20	31.83	6.58	32.89	6.00	204	0 PEAK																																										
Fundamental																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>116.74</td><td>-----</td><td>-----</td><td>104.30</td><td>32.48</td><td>6.68</td><td>32.72</td><td>6.00</td><td>204</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	116.74	-----	-----	104.30	32.48	6.68	32.72	6.00	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2445.00	116.74	-----	-----	104.30	32.48	6.68	32.72	6.00	204	0 PEAK																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.11</td><td>42.18</td><td>54.00</td><td>-11.82</td><td>30.76</td><td>31.75</td><td>6.57</td><td>32.90</td><td>6.00</td><td>204</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.11	42.18	54.00	-11.82	30.76	31.75	6.57	32.90	6.00	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2368.11	42.18	54.00	-11.82	30.76	31.75	6.57	32.90	6.00	204	0 AVERAGE																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>113.24</td><td>-----</td><td>-----</td><td>100.80</td><td>32.48</td><td>6.68</td><td>32.72</td><td>6.00</td><td>204</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	113.24	-----	-----	100.80	32.48	6.68	32.72	6.00	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2445.00	113.24	-----	-----	100.80	32.48	6.68	32.72	6.00	204	0 AVERAGE																																										



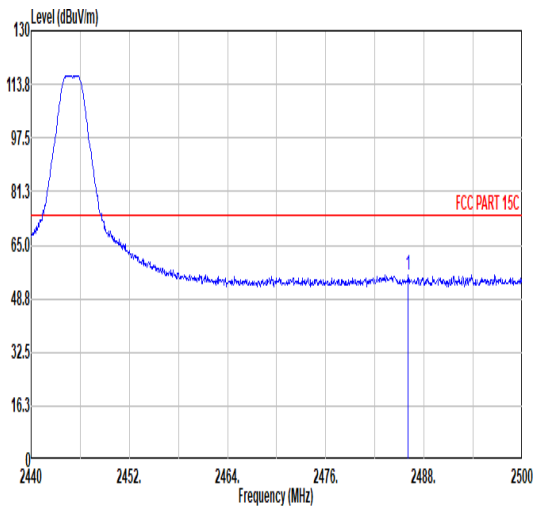
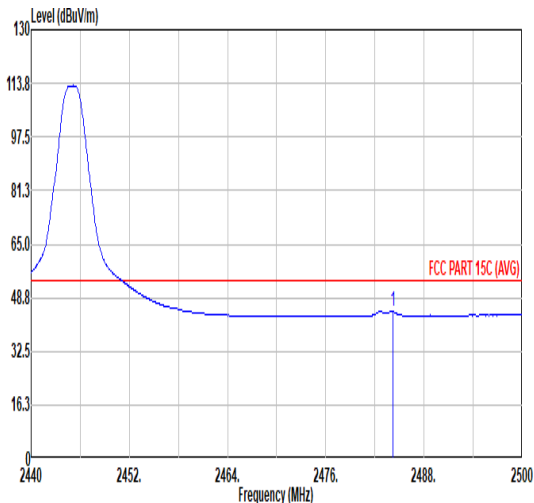


Mode	26																																															
	Band Edge - R																																															
	2400-2483.5_ZIGBEE_CH19_2445MHz																																															
ANT	8																																															
Pol.	Vertical						Fundamental																																									
Peak							Blank																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.08</td><td>56.04</td><td>74.00</td><td>-17.96</td><td>43.13</td><td>32.79</td><td>6.74</td><td>32.62</td><td>6.00</td><td>204</td><td>0 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.08	56.04	74.00	-17.96	43.13
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	2486.08	56.04	74.00	-17.96	43.13	32.79	6.74	32.62	6.00	204	0 PEAK																																					
Avg							Blank																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.16</td><td>44.54</td><td>54.00</td><td>-9.46</td><td>31.66</td><td>32.77</td><td>6.73</td><td>32.62</td><td>6.00</td><td>204</td><td>0 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.16	44.54	54.00	-9.46	31.66
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	2484.16	44.54	54.00	-9.46	31.66	32.77	6.73	32.62	6.00	204	0 AVERAGE																																					



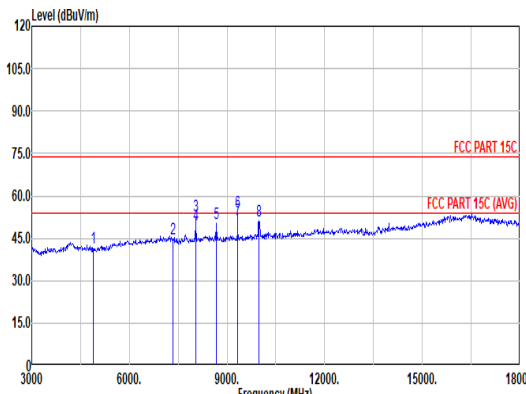
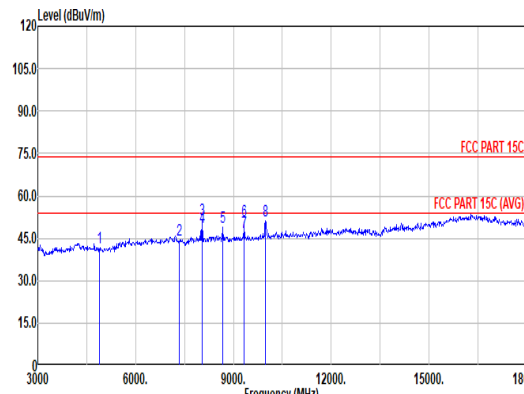


		26																																																																																																																																																																																																																																																																																							
Mode	Harmonic																																																																																																																																																																																																																																																																																								
	2400-2483.5_ZIGBEE_CH19_2445MHz																																																																																																																																																																																																																																																																																								
ANT	8																																																																																																																																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>41.54</td><td>74.00</td><td>-32.46</td><td>59.42</td><td>34.20</td><td>9.54</td><td>61.62</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7335.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>57.79</td><td>35.74</td><td>11.70</td><td>60.50</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8040.00</td><td>52.80</td><td>74.00</td><td>-21.20</td><td>64.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>123</td><td>150</td><td>Peak</td></tr><tr><td>4</td><td>8040.00</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>61.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>123</td><td>150</td><td>Average</td></tr><tr><td>5</td><td>8670.00</td><td>50.21</td><td>93.66</td><td>-43.45</td><td>61.93</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>54.14</td><td>74.00</td><td>-19.86</td><td>64.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>159</td><td>139</td><td>Peak</td></tr><tr><td>7</td><td>9330.00</td><td>51.49</td><td>54.00</td><td>-2.51</td><td>62.34</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>159</td><td>139</td><td>Average</td></tr><tr><td>8</td><td>9990.00</td><td>51.16</td><td>93.66</td><td>-42.50</td><td>60.71</td><td>37.48</td><td>13.88</td><td>60.91</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4890.00	41.54	74.00	-32.46	59.42	34.20	9.54	61.62	0.00	---	---	PEAK	2	7335.00	44.73	74.00	-29.27	57.79	35.74	11.70	60.50	0.00	---	---	PEAK	3	8040.00	52.80	74.00	-21.20	64.99	35.88	12.44	60.51	0.00	123	150	Peak	4	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	123	150	Average	5	8670.00	50.21	93.66	-43.45	61.93	36.04	12.95	60.71	0.00	---	---	Peak	6	9330.00	54.14	74.00	-19.86	64.99	36.60	13.32	60.77	0.00	159	139	Peak	7	9330.00	51.49	54.00	-2.51	62.34	36.60	13.32	60.77	0.00	159	139	Average	8	9990.00	51.16	93.66	-42.50	60.71	37.48	13.88	60.91	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>41.53</td><td>74.00</td><td>-32.47</td><td>59.41</td><td>34.20</td><td>9.54</td><td>61.62</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7335.00</td><td>44.44</td><td>74.00</td><td>-29.56</td><td>57.50</td><td>35.74</td><td>11.70</td><td>60.50</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8040.00</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>63.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>154</td><td>Peak</td></tr><tr><td>4</td><td>8040.00</td><td>48.74</td><td>54.00</td><td>-5.26</td><td>60.93</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>154</td><td>Average</td></tr><tr><td>5</td><td>8670.00</td><td>49.01</td><td>91.21</td><td>-42.20</td><td>60.73</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>61.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>281</td><td>235</td><td>Peak</td></tr><tr><td>7</td><td>9330.00</td><td>47.14</td><td>54.00</td><td>-6.86</td><td>57.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>281</td><td>235</td><td>Average</td></tr><tr><td>8</td><td>9990.00</td><td>51.07</td><td>91.21</td><td>-40.14</td><td>60.62</td><td>37.48</td><td>13.88</td><td>60.91</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4890.00	41.53	74.00	-32.47	59.41	34.20	9.54	61.62	0.00	---	---	PEAK	2	7335.00	44.44	74.00	-29.56	57.50	35.74	11.70	60.50	0.00	---	---	PEAK	3	8040.00	51.80	74.00	-22.20	63.99	35.88	12.44	60.51	0.00	102	154	Peak	4	8040.00	48.74	54.00	-5.26	60.93	35.88	12.44	60.51	0.00	102	154	Average	5	8670.00	49.01	91.21	-42.20	60.73	36.04	12.95	60.71	0.00	---	---	Peak	6	9330.00	51.14	74.00	-22.86	61.99	36.60	13.32	60.77	0.00	281	235	Peak	7	9330.00	47.14	54.00	-6.86	57.99	36.60	13.32	60.77	0.00	281	235	Average	8	9990.00	51.07	91.21	-40.14	60.62	37.48	13.88	60.91	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																															
1	4890.00	41.54	74.00	-32.46	59.42	34.20	9.54	61.62	0.00	---	---	PEAK																																																																																																																																																																																																																																																																													
2	7335.00	44.73	74.00	-29.27	57.79	35.74	11.70	60.50	0.00	---	---	PEAK																																																																																																																																																																																																																																																																													
3	8040.00	52.80	74.00	-21.20	64.99	35.88	12.44	60.51	0.00	123	150	Peak																																																																																																																																																																																																																																																																													
4	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	123	150	Average																																																																																																																																																																																																																																																																													
5	8670.00	50.21	93.66	-43.45	61.93	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																																																																																																																																																																													
6	9330.00	54.14	74.00	-19.86	64.99	36.60	13.32	60.77	0.00	159	139	Peak																																																																																																																																																																																																																																																																													
7	9330.00	51.49	54.00	-2.51	62.34	36.60	13.32	60.77	0.00	159	139	Average																																																																																																																																																																																																																																																																													
8	9990.00	51.16	93.66	-42.50	60.71	37.48	13.88	60.91	0.00	---	---	Peak																																																																																																																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																															
1	4890.00	41.53	74.00	-32.47	59.41	34.20	9.54	61.62	0.00	---	---	PEAK																																																																																																																																																																																																																																																																													
2	7335.00	44.44	74.00	-29.56	57.50	35.74	11.70	60.50	0.00	---	---	PEAK																																																																																																																																																																																																																																																																													
3	8040.00	51.80	74.00	-22.20	63.99	35.88	12.44	60.51	0.00	102	154	Peak																																																																																																																																																																																																																																																																													
4	8040.00	48.74	54.00	-5.26	60.93	35.88	12.44	60.51	0.00	102	154	Average																																																																																																																																																																																																																																																																													
5	8670.00	49.01	91.21	-42.20	60.73	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																																																																																																																																																																													
6	9330.00	51.14	74.00	-22.86	61.99	36.60	13.32	60.77	0.00	281	235	Peak																																																																																																																																																																																																																																																																													
7	9330.00	47.14	54.00	-6.86	57.99	36.60	13.32	60.77	0.00	281	235	Average																																																																																																																																																																																																																																																																													
8	9990.00	51.07	91.21	-40.14	60.62	37.48	13.88	60.91	0.00	---	---	Peak																																																																																																																																																																																																																																																																													

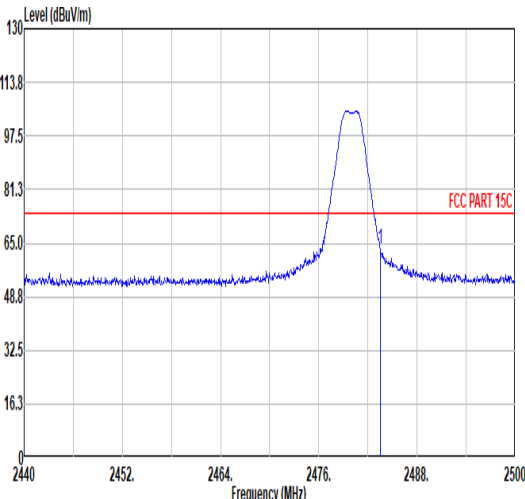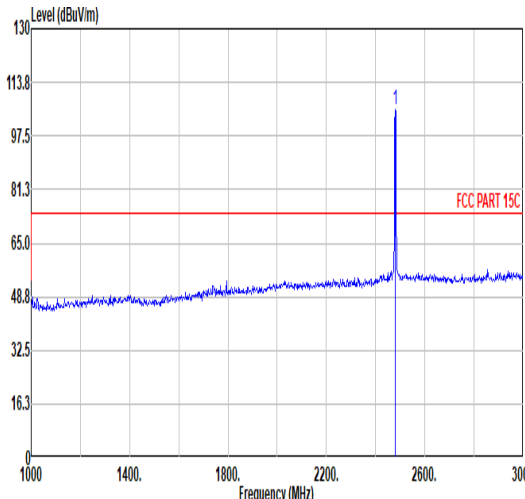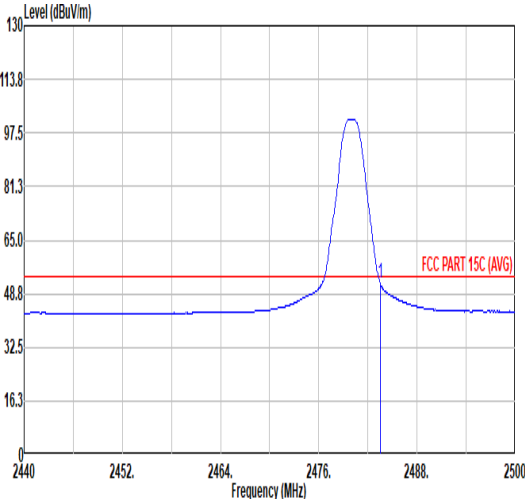
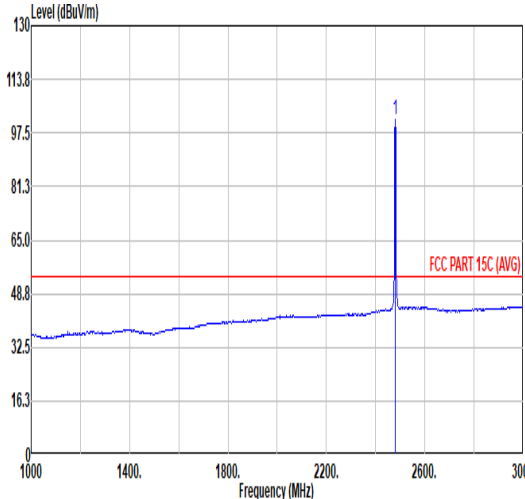


		27																																																					
Mode		Band Edge																																																					
		2400-2483.5_ZIGBEE_CH26_2480MHz																																																					
ANT		8																																																					
Pol.		Horizontal																																																					
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>63.45</td><td>74.00</td><td>-10.55</td><td>50.58</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>119</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	63.45	74.00	-10.55	50.58	32.77	6.73	32.63	6.00	119	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	63.45	74.00	-10.55	50.58	32.77	6.73	32.63	6.00	119	360	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.33</td><td>-----</td><td>-----</td><td>92.49</td><td>32.74</td><td>6.73</td><td>32.63</td><td>6.00</td><td>119</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.33	-----	-----	92.49	32.74	6.73	32.63	6.00	119	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	105.33	-----	-----	92.49	32.74	6.73	32.63	6.00	119	360	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>51.90</td><td>54.00</td><td>-2.10</td><td>39.03</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>119</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	51.90	54.00	-2.10	39.03	32.77	6.73	32.63	6.00	119	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	51.90	54.00	-2.10	39.03	32.77	6.73	32.63	6.00	119	360	AVERAGE																																											
AVERAGE																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.72</td><td>-----</td><td>-----</td><td>88.88</td><td>32.74</td><td>6.73</td><td>32.63</td><td>6.00</td><td>119</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.72	-----	-----	88.88	32.74	6.73	32.63	6.00	119	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	101.72	-----	-----	88.88	32.74	6.73	32.63	6.00	119	360	AVERAGE																																											

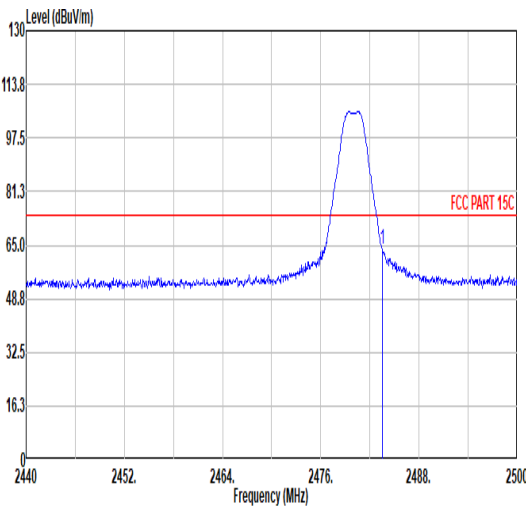
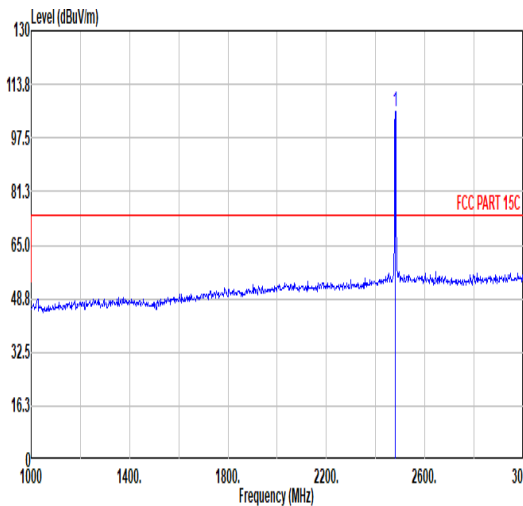
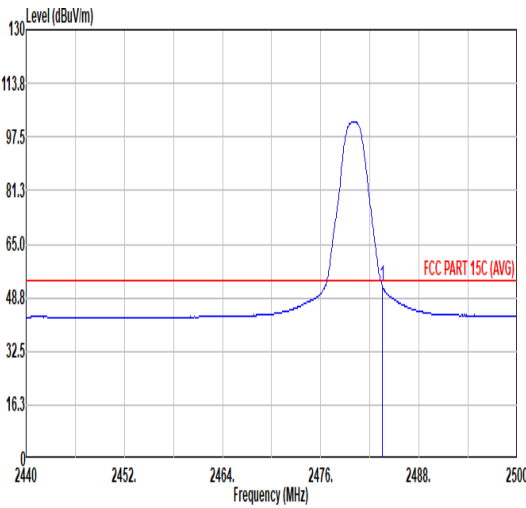
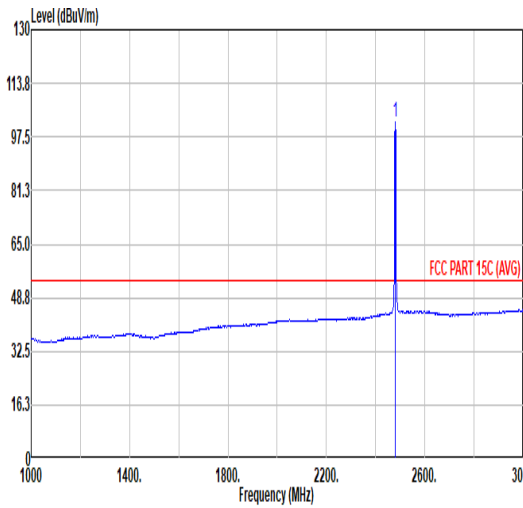


Mode	27																																																																																																
	Band Edge																																																																																																
	2400-2483.5_ZIGBEE_CH26_2480MHz																																																																																																
ANT	8																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>63.65</td><td>74.00</td><td>-10.35</td><td>50.78</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>160</td><td>0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	63.65	74.00	-10.35	50.78	32.77	6.73	32.63	6.00	160	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>105.55</td><td>-----</td><td>-----</td><td>92.71</td><td>32.74</td><td>6.73</td><td>32.63</td><td>6.00</td><td>160</td><td>0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.55	-----	-----	92.71	32.74	6.73	32.63	6.00	160
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	63.65	74.00	-10.35	50.78	32.77	6.73	32.63	6.00	160	0 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	105.55	-----	-----	92.71	32.74	6.73	32.63	6.00	160	0 PEAK																																																																																						
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.47</td><td>54.00</td><td>-1.53</td><td>39.60</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>160</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.47	54.00	-1.53	39.60	32.77	6.73	32.63	6.00	160	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.10</td><td>-----</td><td>-----</td><td>89.26</td><td>32.74</td><td>6.73</td><td>32.63</td><td>6.00</td><td>160</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.10	-----	-----	89.26	32.74	6.73	32.63	6.00	160
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	52.47	54.00	-1.53	39.60	32.77	6.73	32.63	6.00	160	0 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	102.10	-----	-----	89.26	32.74	6.73	32.63	6.00	160	0 AVERAGE																																																																																						



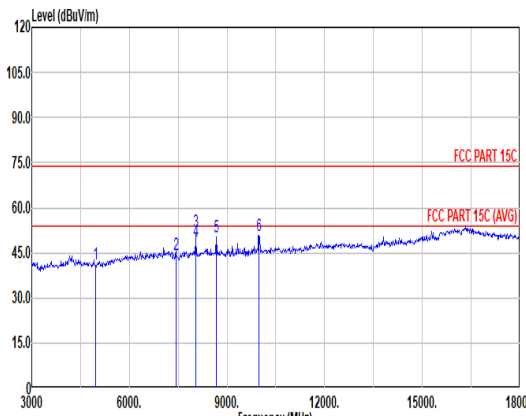
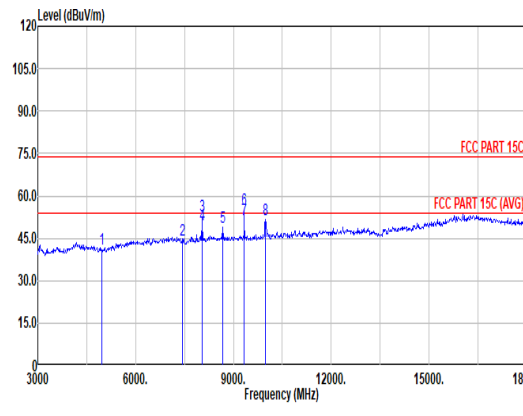


Mode	27																																																																																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																																																																																												
	2400-2483.5_ZIGBEE_CH26_2480MHz																																																																																																																																																																																																																																																												
ANT	8																																																																																																																																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																						
Peak Avg																																																																																																																																																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>59.18</td><td>34.18</td><td>9.61</td><td>61.56</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>57.49</td><td>35.70</td><td>11.77</td><td>60.66</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8040.00</td><td>52.10</td><td>74.00</td><td>-21.90</td><td>64.29</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>153</td><td>Peak</td></tr><tr><td>4</td><td>8040.00</td><td>48.00</td><td>54.00</td><td>-5.20</td><td>60.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>102</td><td>153</td><td>Average</td></tr><tr><td>5</td><td>8670.00</td><td>50.32</td><td>82.19</td><td>-31.87</td><td>62.04</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9975.00</td><td>50.67</td><td>82.19</td><td>-31.52</td><td>60.27</td><td>37.45</td><td>13.85</td><td>60.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4960.00	41.41	74.00	-32.59	59.18	34.18	9.61	61.56	0.00	---	---	PEAK	2	7440.00	44.30	74.00	-29.70	57.49	35.70	11.77	60.66	0.00	---	---	PEAK	3	8040.00	52.10	74.00	-21.90	64.29	35.88	12.44	60.51	0.00	102	153	Peak	4	8040.00	48.00	54.00	-5.20	60.99	35.88	12.44	60.51	0.00	102	153	Average	5	8670.00	50.32	82.19	-31.87	62.04	36.04	12.95	60.71	0.00	---	---	Peak	6	9975.00	50.67	82.19	-31.52	60.27	37.45	13.85	60.90	0.00	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>59.13</td><td>34.18</td><td>9.61</td><td>61.56</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>57.70</td><td>35.70</td><td>11.77</td><td>60.66</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8040.00</td><td>52.80</td><td>74.00</td><td>-21.20</td><td>64.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>117</td><td>151</td><td>Peak</td></tr><tr><td>4</td><td>8040.00</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>61.99</td><td>35.88</td><td>12.44</td><td>60.51</td><td>0.00</td><td>117</td><td>151</td><td>Average</td></tr><tr><td>5</td><td>8670.00</td><td>48.85</td><td>80.73</td><td>-31.88</td><td>60.57</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>65.99</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>160</td><td>139</td><td>Peak</td></tr><tr><td>7</td><td>9330.00</td><td>51.55</td><td>54.00</td><td>-2.45</td><td>62.40</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>160</td><td>139</td><td>Average</td></tr><tr><td>8</td><td>9990.00</td><td>51.58</td><td>80.73</td><td>-29.15</td><td>61.13</td><td>37.48</td><td>13.88</td><td>60.91</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4960.00	41.36	74.00	-32.64	59.13	34.18	9.61	61.56	0.00	---	---	PEAK	2	7440.00	44.51	74.00	-29.49	57.70	35.70	11.77	60.66	0.00	---	---	PEAK	3	8040.00	52.80	74.00	-21.20	64.99	35.88	12.44	60.51	0.00	117	151	Peak	4	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	117	151	Average	5	8670.00	48.85	80.73	-31.88	60.57	36.04	12.95	60.71	0.00	---	---	Peak	6	9330.00	55.14	74.00	-18.86	65.99	36.60	13.32	60.77	0.00	160	139	Peak	7	9330.00	51.55	54.00	-2.45	62.40	36.60	13.32	60.77	0.00	160	139	Average	8	9990.00	51.58	80.73	-29.15	61.13	37.48	13.88	60.91	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																					
1	4960.00	41.41	74.00	-32.59	59.18	34.18	9.61	61.56	0.00	---	---	PEAK																																																																																																																																																																																																																																																	
2	7440.00	44.30	74.00	-29.70	57.49	35.70	11.77	60.66	0.00	---	---	PEAK																																																																																																																																																																																																																																																	
3	8040.00	52.10	74.00	-21.90	64.29	35.88	12.44	60.51	0.00	102	153	Peak																																																																																																																																																																																																																																																	
4	8040.00	48.00	54.00	-5.20	60.99	35.88	12.44	60.51	0.00	102	153	Average																																																																																																																																																																																																																																																	
5	8670.00	50.32	82.19	-31.87	62.04	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																																																																																																																																																	
6	9975.00	50.67	82.19	-31.52	60.27	37.45	13.85	60.90	0.00	---	---	Peak																																																																																																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																					
1	4960.00	41.36	74.00	-32.64	59.13	34.18	9.61	61.56	0.00	---	---	PEAK																																																																																																																																																																																																																																																	
2	7440.00	44.51	74.00	-29.49	57.70	35.70	11.77	60.66	0.00	---	---	PEAK																																																																																																																																																																																																																																																	
3	8040.00	52.80	74.00	-21.20	64.99	35.88	12.44	60.51	0.00	117	151	Peak																																																																																																																																																																																																																																																	
4	8040.00	49.80	54.00	-4.20	61.99	35.88	12.44	60.51	0.00	117	151	Average																																																																																																																																																																																																																																																	
5	8670.00	48.85	80.73	-31.88	60.57	36.04	12.95	60.71	0.00	---	---	Peak																																																																																																																																																																																																																																																	
6	9330.00	55.14	74.00	-18.86	65.99	36.60	13.32	60.77	0.00	160	139	Peak																																																																																																																																																																																																																																																	
7	9330.00	51.55	54.00	-2.45	62.40	36.60	13.32	60.77	0.00	160	139	Average																																																																																																																																																																																																																																																	
8	9990.00	51.58	80.73	-29.15	61.13	37.48	13.88	60.91	0.00	---	---	Peak																																																																																																																																																																																																																																																	

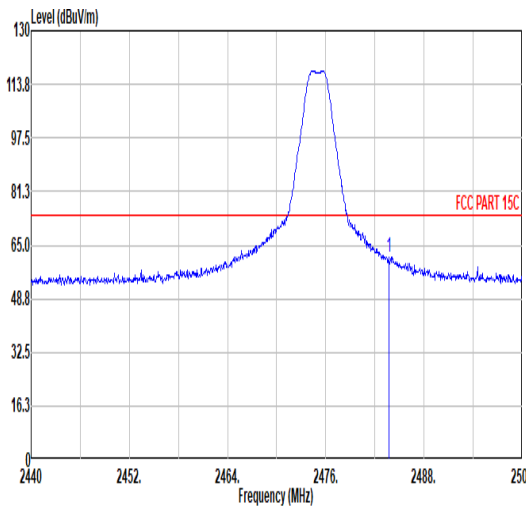
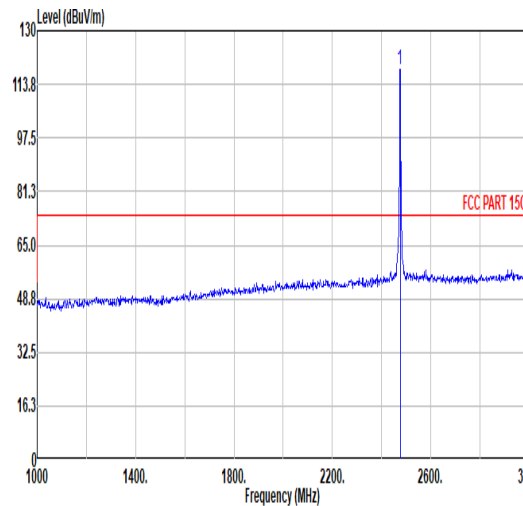
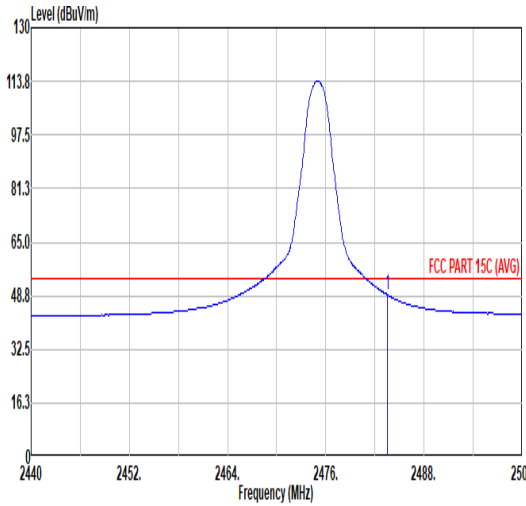
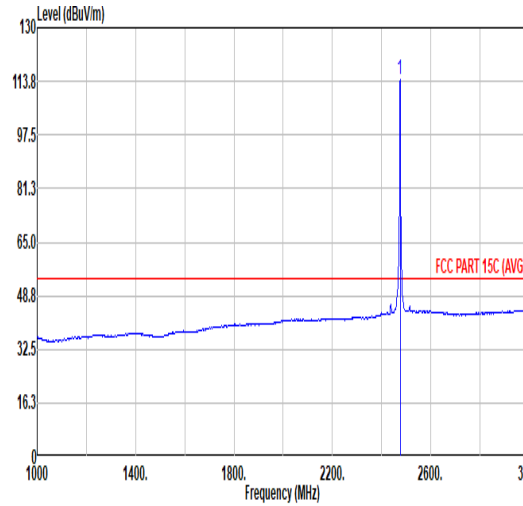


	32																																																																																																														
Mode	Band Edge																																																																																																														
	2400-2483.5_ZIGBEE_CH25_2475MHz																																																																																																														
ANT	8																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.74</td><td>61.52</td><td>74.00</td><td>-12.48</td><td>48.64</td><td>32.77</td><td>6.73</td><td>32.62</td><td>6.00</td><td>100</td><td>335</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	61.52	74.00	-12.48	48.64	32.77	6.73	32.62	6.00	100	335	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>118.10</td><td>-----</td><td>-----</td><td>105.32</td><td>32.71</td><td>6.72</td><td>32.65</td><td>6.00</td><td>100</td><td>335</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	118.10	-----	-----	105.32	32.71	6.72	32.65	6.00	100	335
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.74	61.52	74.00	-12.48	48.64	32.77	6.73	32.62	6.00	100	335	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2475.00	118.10	-----	-----	105.32	32.71	6.72	32.65	6.00	100	335	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>36.26</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100</td><td>335</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.13	54.00	-4.87	36.26	32.77	6.73	32.63	6.00	100	335	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>114.10</td><td>-----</td><td>-----</td><td>101.32</td><td>32.71</td><td>6.72</td><td>32.65</td><td>6.00</td><td>100</td><td>335</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	114.10	-----	-----	101.32	32.71	6.72	32.65	6.00	100	335
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	49.13	54.00	-4.87	36.26	32.77	6.73	32.63	6.00	100	335	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2475.00	114.10	-----	-----	101.32	32.71	6.72	32.65	6.00	100	335	AVERAGE																																																																																																			

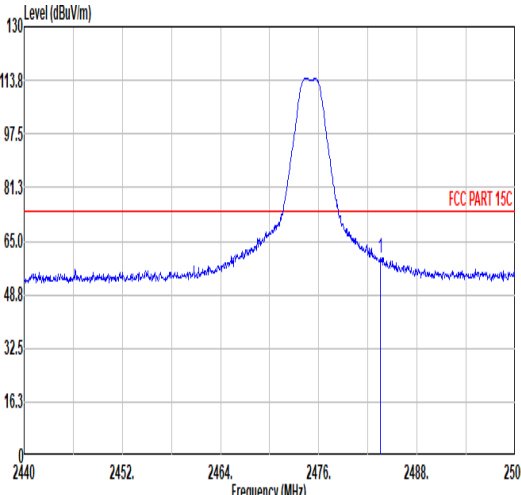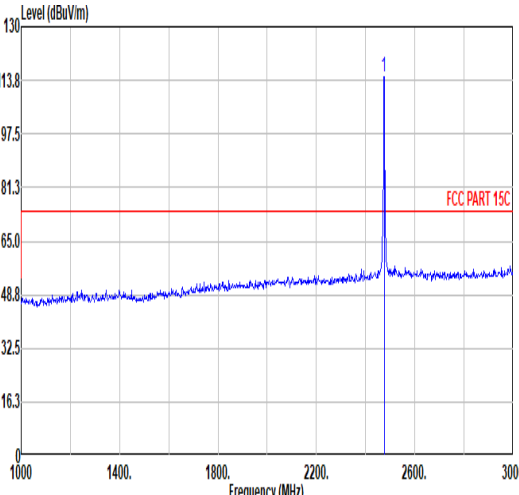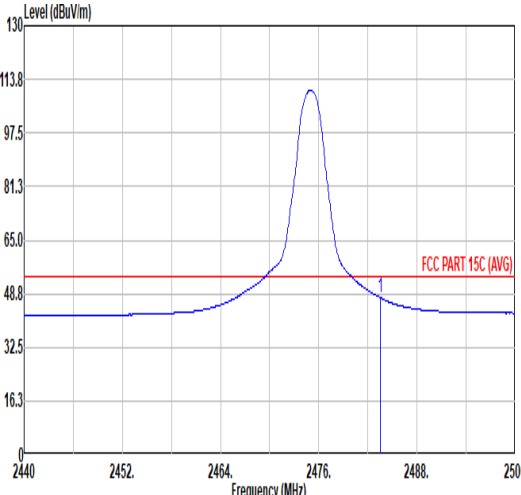
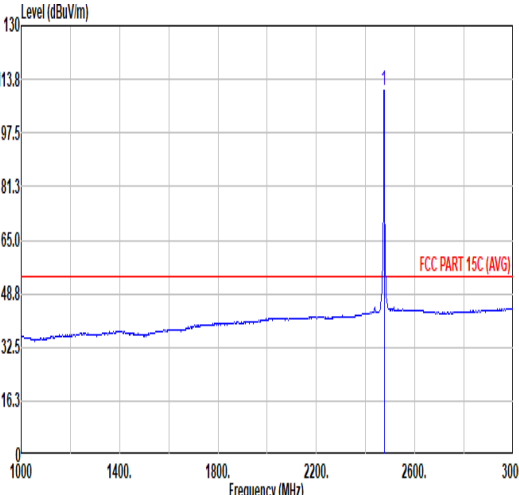


Mode	32																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_ZIGBEE_CH25_2475MHz																																																																																																		
ANT	8																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>59.79</td><td>74.00</td><td>-14.21</td><td>46.92</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>266</td><td>160</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	59.79	74.00	-14.21	46.92	32.77	6.73	32.63	6.00	266	160	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>114.79</td><td>-----</td><td>-----</td><td>102.03</td><td>32.69</td><td>6.72</td><td>32.65</td><td>6.00</td><td>266</td><td>160</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	114.79	-----	-----	102.03	32.69	6.72	32.65	6.00	266	160
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	59.79	74.00	-14.21	46.92	32.77	6.73	32.63	6.00	266	160	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2475.00	114.79	-----	-----	102.03	32.69	6.72	32.65	6.00	266	160	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>47.61</td><td>54.00</td><td>-6.39</td><td>34.74</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>266</td><td>160</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.61	54.00	-6.39	34.74	32.77	6.73	32.63	6.00	266	160	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>110.60</td><td>-----</td><td>-----</td><td>97.82</td><td>32.71</td><td>6.72</td><td>32.65</td><td>6.00</td><td>266</td><td>160</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	110.60	-----	-----	97.82	32.71	6.72	32.65	6.00	266	160
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	47.61	54.00	-6.39	34.74	32.77	6.73	32.63	6.00	266	160	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2475.00	110.60	-----	-----	97.82	32.71	6.72	32.65	6.00	266	160	AVERAGE																																																																																							

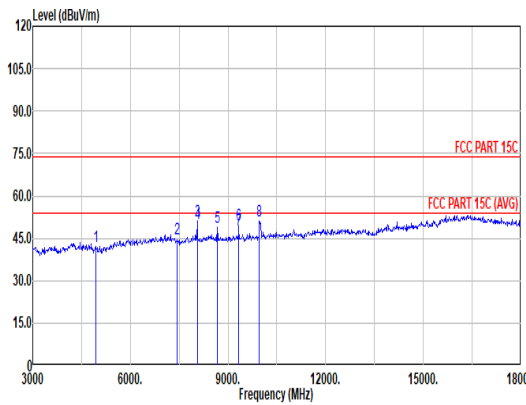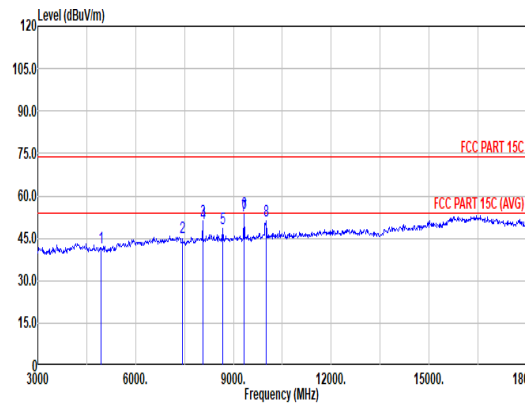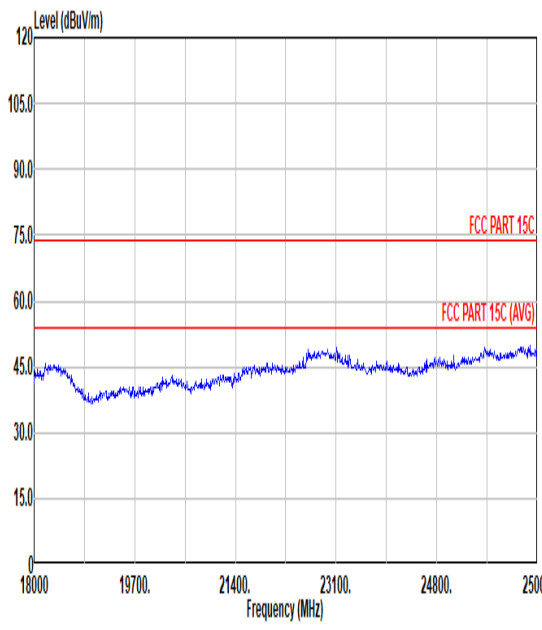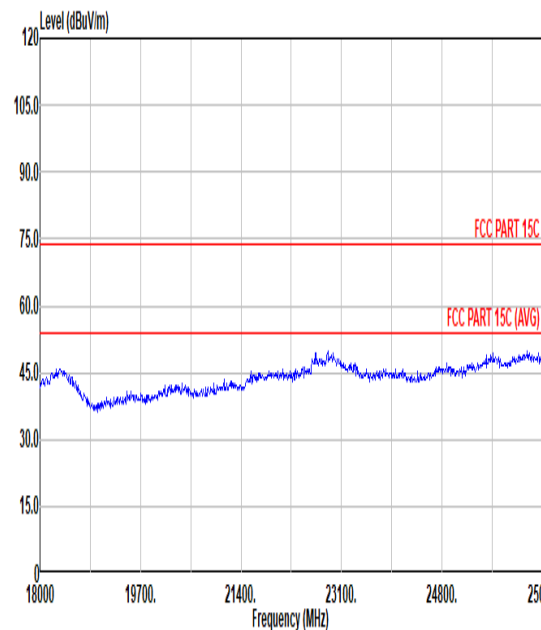

Mode	32																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_ZIGBEE_CH25_2475MHz																																																																																																																																									
ANT	8																																																																																																																																									
Pol.	Horizontal																																																																																																																																									
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>42.20</td><td>74.00</td><td>-31.80</td><td>59.97</td><td>34.20</td><td>9.60</td><td>61.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>58.14</td><td>35.70</td><td>11.76</td><td>60.64</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8055.00</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>63.52</td><td>35.90</td><td>12.44</td><td>60.52</td><td>0.00</td><td>100</td><td>155 Peak</td></tr><tr><td>4</td><td>8055.00</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>62.66</td><td>35.90</td><td>12.44</td><td>60.52</td><td>0.00</td><td>100</td><td>155 Average</td></tr><tr><td>5</td><td>8670.00</td><td>49.03</td><td>92.76</td><td>-43.73</td><td>60.75</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>49.86</td><td>74.00</td><td>-24.14</td><td>60.71</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>300</td><td>217 Peak</td></tr><tr><td>7</td><td>9330.00</td><td>48.13</td><td>54.00</td><td>-5.87</td><td>58.98</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>300</td><td>217 Average</td></tr><tr><td>8</td><td>9960.00</td><td>51.33</td><td>92.76</td><td>-41.43</td><td>60.98</td><td>37.42</td><td>13.83</td><td>60.90</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4950.00	42.20	74.00	-31.80	59.97	34.20	9.60	61.57	0.00	---	PEAK	2	7425.00	44.96	74.00	-29.04	58.14	35.70	11.76	60.64	0.00	---	PEAK	3	8055.00	51.34	74.00	-22.66	63.52	35.90	12.44	60.52	0.00	100	155 Peak	4	8055.00	50.48	54.00	-3.52	62.66	35.90	12.44	60.52	0.00	100	155 Average	5	8670.00	49.03	92.76	-43.73	60.75	36.04	12.95	60.71	0.00	---	Peak	6	9330.00	49.86	74.00	-24.14	60.71	36.60	13.32	60.77	0.00	300	217 Peak	7	9330.00	48.13	54.00	-5.87	58.98	36.60	13.32	60.77	0.00	300	217 Average	8	9960.00	51.33	92.76	-41.43	60.98	37.42	13.83	60.90	0.00	---	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4950.00	42.20	74.00	-31.80	59.97	34.20	9.60	61.57	0.00	---	PEAK																																																																																																																															
2	7425.00	44.96	74.00	-29.04	58.14	35.70	11.76	60.64	0.00	---	PEAK																																																																																																																															
3	8055.00	51.34	74.00	-22.66	63.52	35.90	12.44	60.52	0.00	100	155 Peak																																																																																																																															
4	8055.00	50.48	54.00	-3.52	62.66	35.90	12.44	60.52	0.00	100	155 Average																																																																																																																															
5	8670.00	49.03	92.76	-43.73	60.75	36.04	12.95	60.71	0.00	---	Peak																																																																																																																															
6	9330.00	49.86	74.00	-24.14	60.71	36.60	13.32	60.77	0.00	300	217 Peak																																																																																																																															
7	9330.00	48.13	54.00	-5.87	58.98	36.60	13.32	60.77	0.00	300	217 Average																																																																																																																															
8	9960.00	51.33	92.76	-41.43	60.98	37.42	13.83	60.90	0.00	---	Peak																																																																																																																															
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>59.39</td><td>34.20</td><td>9.60</td><td>61.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>58.37</td><td>35.70</td><td>11.76</td><td>60.64</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>8055.00</td><td>51.30</td><td>74.00</td><td>-22.70</td><td>63.48</td><td>35.90</td><td>12.44</td><td>60.52</td><td>0.00</td><td>100</td><td>138 Peak</td></tr><tr><td>4</td><td>8055.00</td><td>50.19</td><td>54.00</td><td>-3.81</td><td>62.37</td><td>35.90</td><td>12.44</td><td>60.52</td><td>0.00</td><td>100</td><td>138 Average</td></tr><tr><td>5</td><td>8670.00</td><td>48.59</td><td>89.84</td><td>-41.25</td><td>60.31</td><td>36.04</td><td>12.95</td><td>60.71</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9330.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>64.78</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>100</td><td>138 Peak</td></tr><tr><td>7</td><td>9330.00</td><td>52.83</td><td>54.00</td><td>-1.17</td><td>63.68</td><td>36.60</td><td>13.32</td><td>60.77</td><td>0.00</td><td>100</td><td>138 Average</td></tr><tr><td>8</td><td>10005.00</td><td>51.22</td><td>89.84</td><td>-38.62</td><td>60.75</td><td>37.49</td><td>13.89</td><td>60.91</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4950.00	41.62	74.00	-32.38	59.39	34.20	9.60	61.57	0.00	---	PEAK	2	7425.00	45.19	74.00	-28.81	58.37	35.70	11.76	60.64	0.00	---	PEAK	3	8055.00	51.30	74.00	-22.70	63.48	35.90	12.44	60.52	0.00	100	138 Peak	4	8055.00	50.19	54.00	-3.81	62.37	35.90	12.44	60.52	0.00	100	138 Average	5	8670.00	48.59	89.84	-41.25	60.31	36.04	12.95	60.71	0.00	---	Peak	6	9330.00	53.93	74.00	-20.07	64.78	36.60	13.32	60.77	0.00	100	138 Peak	7	9330.00	52.83	54.00	-1.17	63.68	36.60	13.32	60.77	0.00	100	138 Average	8	10005.00	51.22	89.84	-38.62	60.75	37.49	13.89	60.91	0.00	---	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4950.00	41.62	74.00	-32.38	59.39	34.20	9.60	61.57	0.00	---	PEAK																																																																																																																															
2	7425.00	45.19	74.00	-28.81	58.37	35.70	11.76	60.64	0.00	---	PEAK																																																																																																																															
3	8055.00	51.30	74.00	-22.70	63.48	35.90	12.44	60.52	0.00	100	138 Peak																																																																																																																															
4	8055.00	50.19	54.00	-3.81	62.37	35.90	12.44	60.52	0.00	100	138 Average																																																																																																																															
5	8670.00	48.59	89.84	-41.25	60.31	36.04	12.95	60.71	0.00	---	Peak																																																																																																																															
6	9330.00	53.93	74.00	-20.07	64.78	36.60	13.32	60.77	0.00	100	138 Peak																																																																																																																															
7	9330.00	52.83	54.00	-1.17	63.68	36.60	13.32	60.77	0.00	100	138 Average																																																																																																																															
8	10005.00	51.22	89.84	-38.62	60.75	37.49	13.89	60.91	0.00	---	Peak																																																																																																																															
Peak Avg																																																																																																																																										
																																																																																																																																										

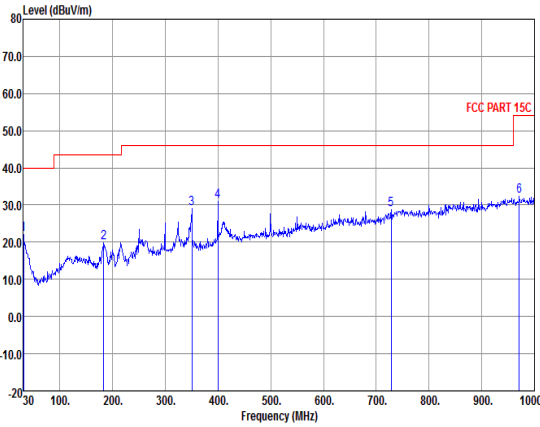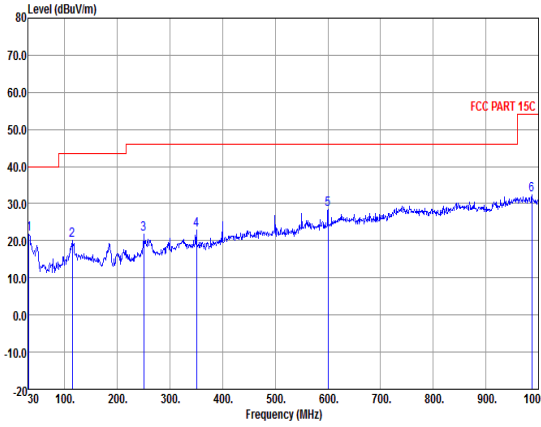

Mode	32																																																																																																							
	LF																																																																																																							
	2400-2483.5_ZIGBEE_CH25_2475MHz																																																																																																							
ANT	8																																																																																																							
Pol.	Horizontal						Vertical																																																																																																	
Peak QP																																																																																																								
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>21.99</td><td>-18.01</td><td>40.00</td><td>29.26</td><td>24.57</td><td>0.46</td><td>32.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>183.26</td><td>19.74</td><td>-23.76</td><td>43.50</td><td>35.08</td><td>15.01</td><td>1.82</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>350.10</td><td>29.06</td><td>-16.94</td><td>46.00</td><td>38.25</td><td>20.50</td><td>2.52</td><td>32.21</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4 p</td><td>399.57</td><td>30.92</td><td>-15.08</td><td>46.00</td><td>38.57</td><td>21.90</td><td>2.70</td><td>32.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>728.40</td><td>28.72</td><td>-17.28</td><td>46.00</td><td>29.73</td><td>27.55</td><td>3.65</td><td>32.21</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>970.90</td><td>32.28</td><td>-21.72</td><td>54.00</td><td>28.02</td><td>30.83</td><td>4.20</td><td>30.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.97	21.99	-18.01	40.00	29.26	24.57	0.46	32.30	---	---	Peak	2	183.26	19.74	-23.76	43.50	35.08	15.01	1.82	32.17	---	---	Peak	3	350.10	29.06	-16.94	46.00	38.25	20.50	2.52	32.21	---	---	Peak	4 p	399.57	30.92	-15.08	46.00	38.57	21.90	2.70	32.25	---	---	Peak	5	728.40	28.72	-17.28	46.00	29.73	27.55	3.65	32.21	---	---	Peak	6	970.90	32.28	-21.72	54.00	28.02	30.83	4.20	30.77	---	---
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																														
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	30.97	21.99	-18.01	40.00	29.26	24.57	0.46	32.30	---	---	Peak																																																																																													
2	183.26	19.74	-23.76	43.50	35.08	15.01	1.82	32.17	---	---	Peak																																																																																													
3	350.10	29.06	-16.94	46.00	38.25	20.50	2.52	32.21	---	---	Peak																																																																																													
4 p	399.57	30.92	-15.08	46.00	38.57	21.90	2.70	32.25	---	---	Peak																																																																																													
5	728.40	28.72	-17.28	46.00	29.73	27.55	3.65	32.21	---	---	Peak																																																																																													
6	970.90	32.28	-21.72	54.00	28.02	30.83	4.20	30.77	---	---	Peak																																																																																													
Peak QP																																																																																																								
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>21.83</td><td>-18.17</td><td>40.00</td><td>29.62</td><td>24.04</td><td>0.48</td><td>32.31</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>114.39</td><td>20.09</td><td>-23.41</td><td>43.50</td><td>33.56</td><td>17.27</td><td>1.43</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>250.19</td><td>21.88</td><td>-24.12</td><td>46.00</td><td>32.90</td><td>19.02</td><td>2.13</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>350.10</td><td>22.98</td><td>-23.02</td><td>46.00</td><td>32.17</td><td>20.50</td><td>2.52</td><td>32.21</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5 p</td><td>600.36</td><td>28.56</td><td>-17.44</td><td>46.00</td><td>31.83</td><td>25.80</td><td>3.31</td><td>32.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>987.39</td><td>32.31</td><td>-21.69</td><td>54.00</td><td>27.96</td><td>30.70</td><td>4.24</td><td>30.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	31.94	21.83	-18.17	40.00	29.62	24.04	0.48	32.31	---	---	Peak	2	114.39	20.09	-23.41	43.50	33.56	17.27	1.43	32.17	---	---	Peak	3	250.19	21.88	-24.12	46.00	32.90	19.02	2.13	32.17	---	---	Peak	4	350.10	22.98	-23.02	46.00	32.17	20.50	2.52	32.21	---	---	Peak	5 p	600.36	28.56	-17.44	46.00	31.83	25.80	3.31	32.38	---	---	Peak	6	987.39	32.31	-21.69	54.00	27.96	30.70	4.24	30.59	---	---
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																														
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	31.94	21.83	-18.17	40.00	29.62	24.04	0.48	32.31	---	---	Peak																																																																																													
2	114.39	20.09	-23.41	43.50	33.56	17.27	1.43	32.17	---	---	Peak																																																																																													
3	250.19	21.88	-24.12	46.00	32.90	19.02	2.13	32.17	---	---	Peak																																																																																													
4	350.10	22.98	-23.02	46.00	32.17	20.50	2.52	32.21	---	---	Peak																																																																																													
5 p	600.36	28.56	-17.44	46.00	31.83	25.80	3.31	32.38	---	---	Peak																																																																																													
6	987.39	32.31	-21.69	54.00	27.96	30.70	4.24	30.59	---	---	Peak																																																																																													

Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	100	-	-	10Hz

Zigbee 250kbps

