




FCC RADIO TEST REPORT

FCC ID : G95601TX
Equipment : DOCSIS 4.0 Residential Gateway
Brand Name : Vantiva
Model Name : CGM601TCOM, CGM601TCOX
Applicant : Vantiva USA LLC
4855 Peachtree Industrial Blvd. Suite 200
Norcross, Georgia 30092
Manufacturer : Vantiva
4855 Peachtree Industrial Blvd, Suite 200
Norcross GA 30092
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 01, 2024 and testing was performed from Nov. 13, 2024 to Jan. 14, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in Test Configuration and System	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 List of Measuring Equipment	21
5 Measurement Uncertainty	22
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4O1125C	01	Initial issue of report	Jan. 22, 2025



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different model name is for marketing segmentation.

Reviewed by: Wei Chen**Report Producer: Lucy Wu**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth - LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be, and ZigBee.		
Antenna Type ZigBee <Ant. 9>: Dipole Antenna <Ant. 10>: Dipole Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 9>: 4.40 <Ant. 10>: 5.01

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	ZigBee / OQPSK
	<Ant. 9> Mode 1: ZigBee Tx CH11_2405 MHz Mode 2: ZigBee Tx CH18_2440 MHz Mode 3: ZigBee Tx CH25_2475 MHz <Ant. 10> Mode 1: ZigBee Tx CH11_2405 MHz Mode 2: ZigBee Tx CH18_2440 MHz Mode 3: ZigBee Tx CH25_2475 MHz
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + ZigBee Link + LAN Link + AC Adapter
Remark: 1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

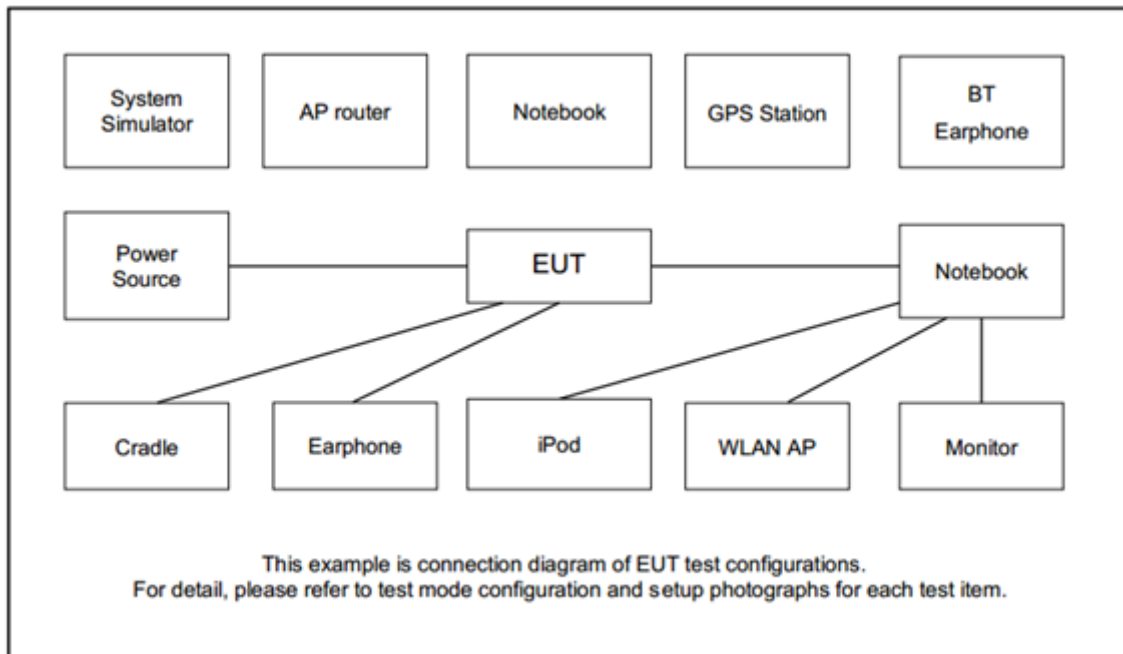

2.4 Support Unit used in Test Configuration and System

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility "PuTTY Release 0.70" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

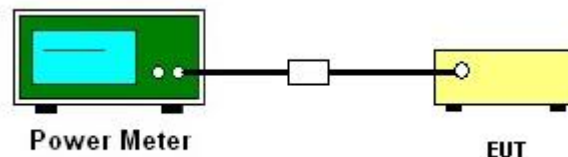

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

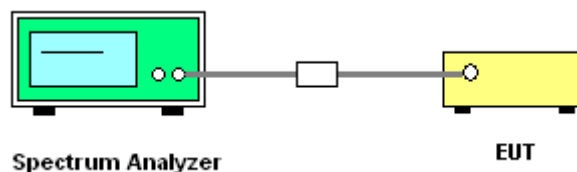

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

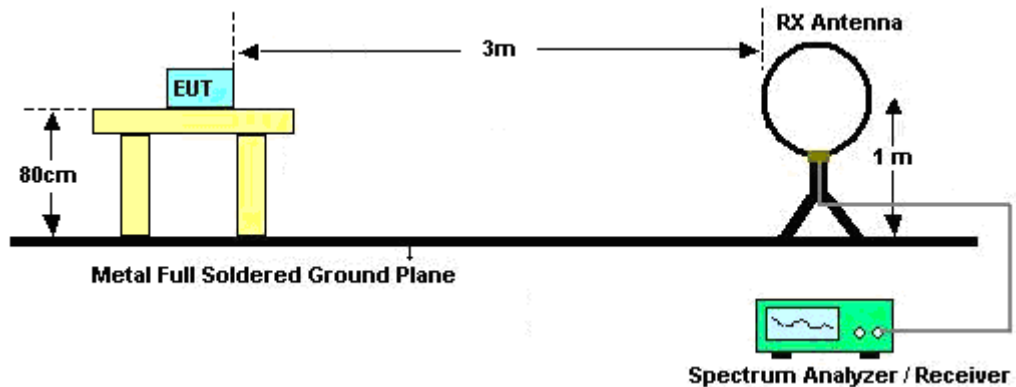


For radiated test from 30MHz to 1GHz

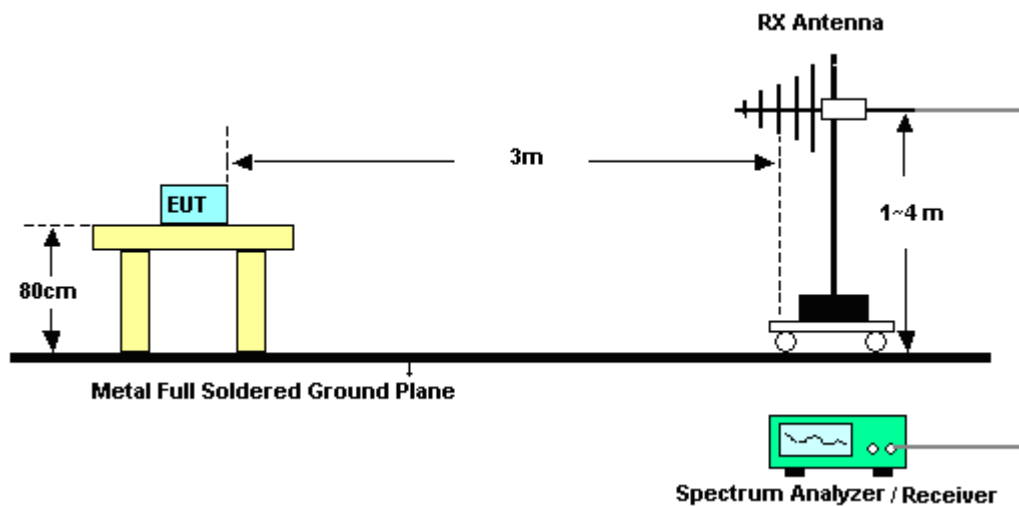

For radiated test from 1GHz to 18GHz

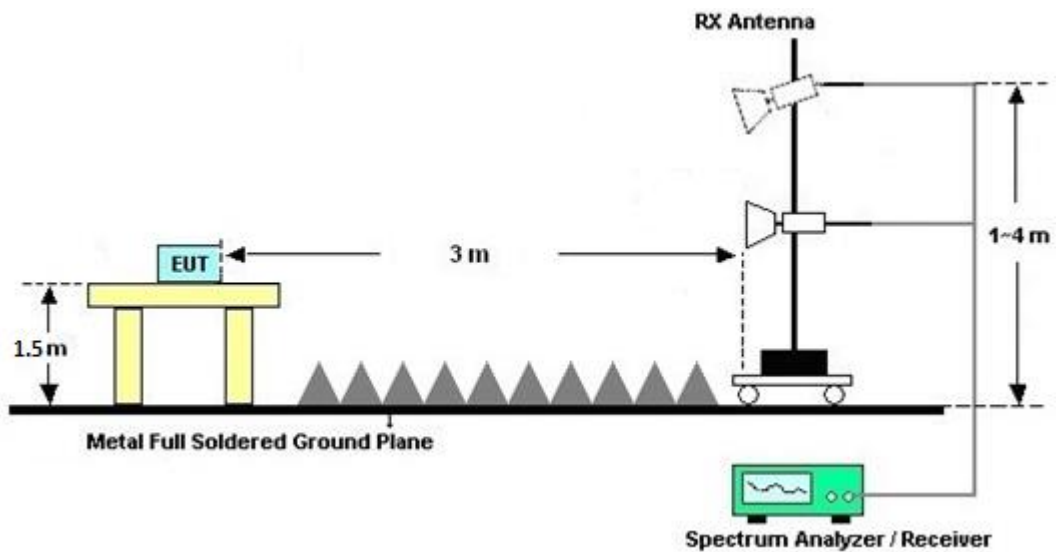

For radiated test above 18GHz

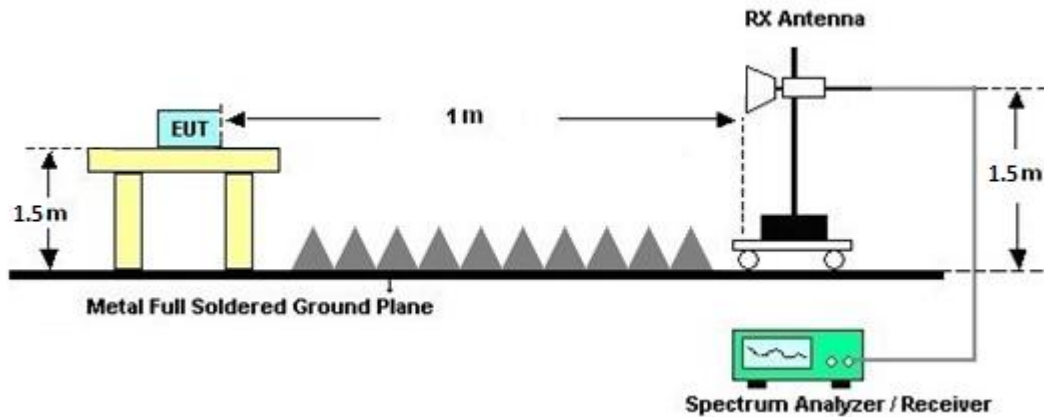

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

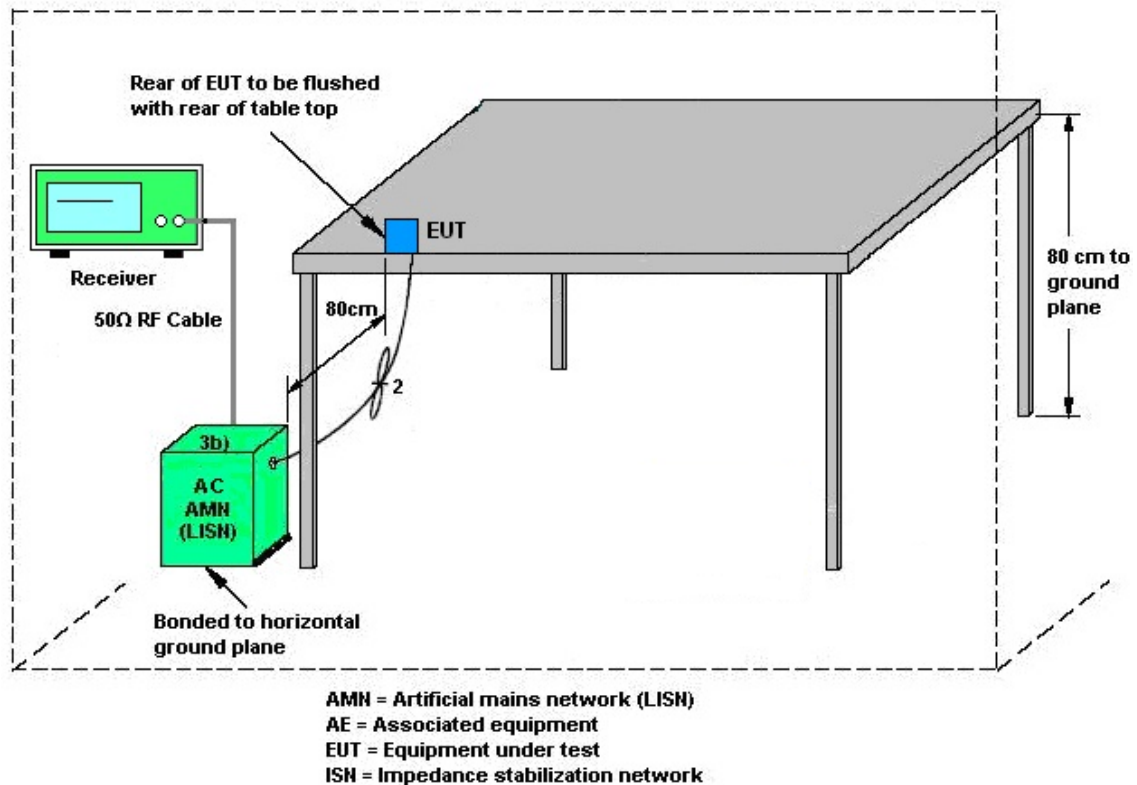

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Dec. 04, 2024~ Jan. 14, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Dec. 04, 2024~ Jan. 14, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Dec. 04, 2024~ Jan. 14, 2025	Aug. 22, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 04, 2024~ Jan. 14, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 04, 2024~ Jan. 14, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 04, 2024~ Jan. 14, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY57290111	N/A	Nov. 22, 2024	Dec. 04, 2024~ Jan. 14, 2025	Nov. 21, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800N 1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Dec. 04, 2024~ Jan. 14, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Dec. 04, 2024~ Jan. 14, 2025	Oct. 30, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz-40GHz	Oct. 25, 2024	Dec. 04, 2024~ Jan. 14, 2025	Oct. 24, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 01, 2024	Dec. 04, 2024~ Dec. 30, 2024	Dec. 31, 2024	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Dec. 31, 2024~ Jan. 14, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Dec. 04, 2024~ Jan. 14, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,8040 15/2,804027/2	N/A	Jan. 17, 2024	Dec. 04, 2024~ Jan. 14, 2025	Jan. 16, 2025	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Dec. 04, 2024~ Jan. 14, 2025	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Dec. 04, 2024~ Jan. 14, 2025	N/A	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Nov. 13, 2024~ Jan. 03, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Nov. 13, 2024~ Jan. 03, 2025	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Nov. 13, 2024~ Jan. 03, 2025	Jan. 23, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Nov. 13, 2024~ Jan. 03, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Nov. 13, 2024~ Jan. 03, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 27, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Nov. 27, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Nov. 27, 2024	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Nov. 27, 2024	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Nov. 27, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Nov. 27, 2024	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 15, 2024	Nov. 27, 2024	Oct. 14, 2025	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ju Chang	Temperature:	21~25	°C
Test Date:	2024/11/13-2025/01/03	Relative Humidity:	51~54	%

<Ant. 9>

TEST RESULTS DATA **6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.231	1.630	0.50	Pass
Zigbee	250K	1	18	2440	2.233	1.640	0.50	Pass
Zigbee	250K	1	25	2475	2.239	1.639	0.50	Pass

TEST RESULTS DATA **Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	18.20	30.00	4.40	22.60	36.00	Pass
Zigbee	250K	1	18	2440	18.30	30.00	4.40	22.70	36.00	Pass
Zigbee	250K	1	25	2475	18.30	30.00	4.40	22.70	36.00	Pass

TEST RESULTS DATA **Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	14.70	3.03	4.40	8.00	Pass
Zigbee	250K	1	18	2440	14.74	2.96	4.40	8.00	Pass
Zigbee	250K	1	25	2475	14.89	3.16	4.40	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 10>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.230	1.633	0.50	Pass
Zigbee	250K	1	18	2440	2.234	1.631	0.50	Pass
Zigbee	250K	1	25	2475	2.238	1.632	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	18.20	30.00	5.01	23.21	36.00	Pass
Zigbee	250K	1	18	2440	18.30	30.00	5.01	23.31	36.00	Pass
Zigbee	250K	1	25	2475	18.30	30.00	5.01	23.31	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	14.78	3.10	5.01	8.00	Pass
Zigbee	250K	1	18	2440	14.80	3.07	5.01	8.00	Pass
Zigbee	250K	1	25	2475	14.90	3.08	5.01	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




<Ant. 9>


6dB Bandwidth

<Zigbee>


6 dB Bandwidth Plot on Channel 11

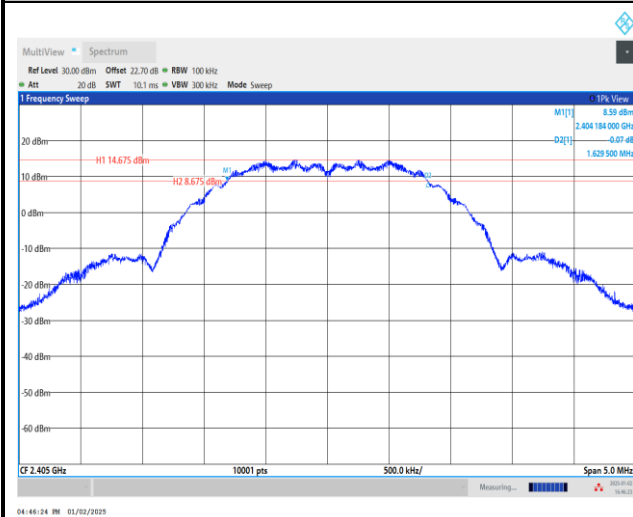

6 dB Bandwidth Plot on Channel 18



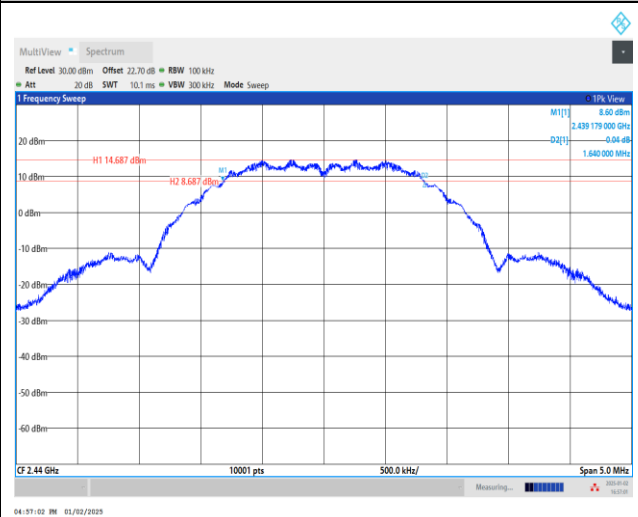


6 dB Bandwidth Plot on Channel 25

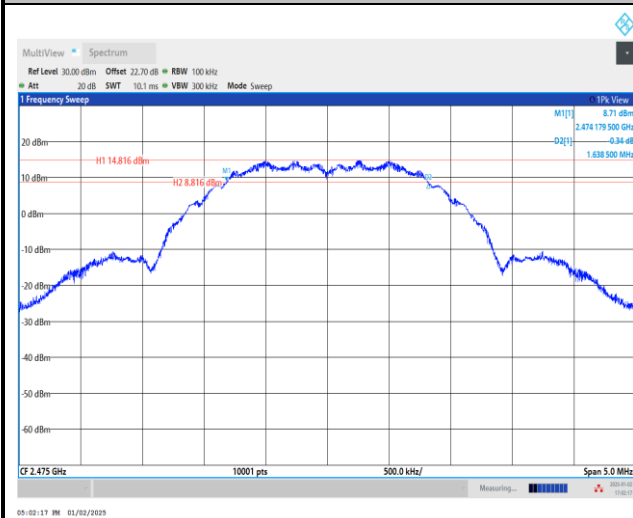




**99% Occupied Bandwidth**

<Zigbee>

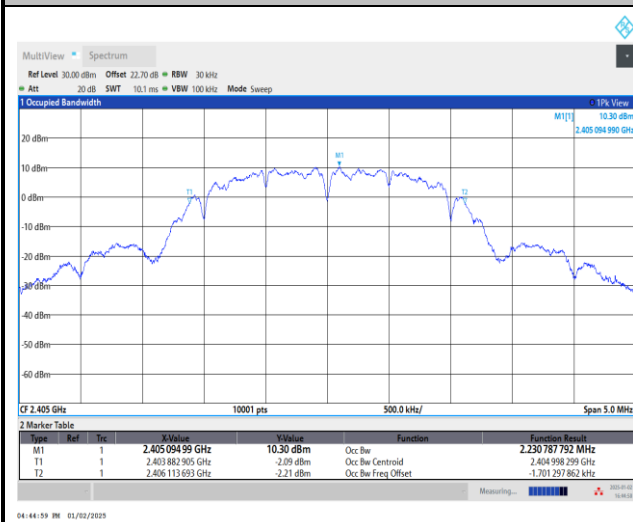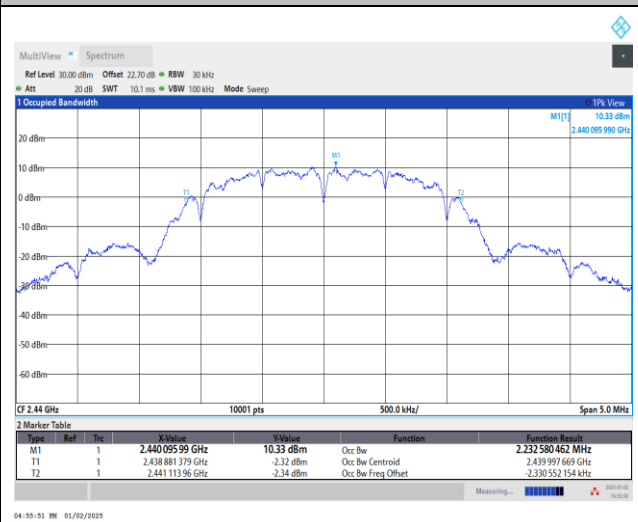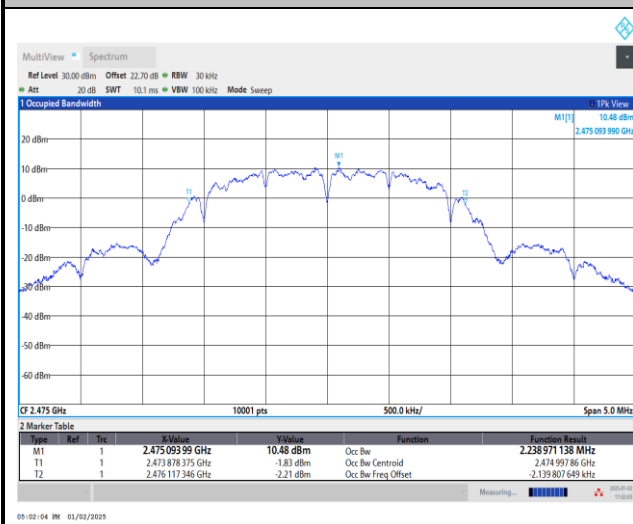99% Occupied Bandwidth Plot on Channel 11**99% Occupied Bandwidth Plot on Channel 18****99% Occupied Bandwidth Plot on Channel 25**





**Power Spectral Density (dBm/3kHz)**

<Zigbee>

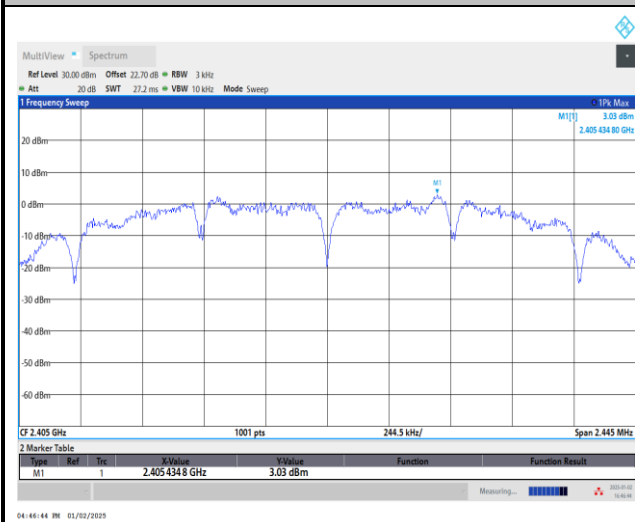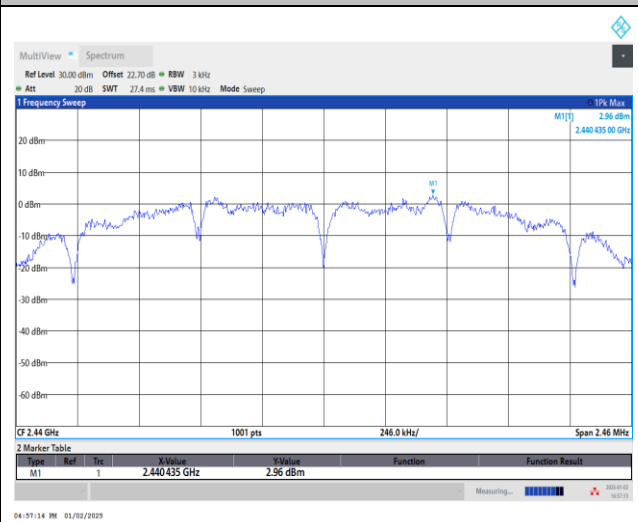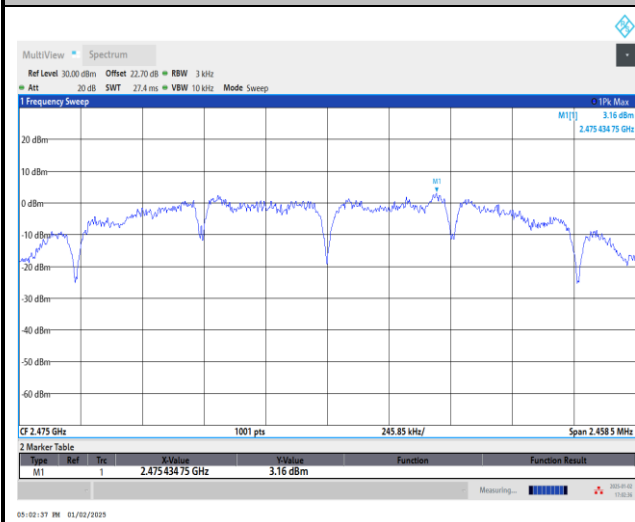Power Density (dBm/3kHz) Plot Channel 11**Power Density (dBm/3kHz) Plot Channel 18****Power Density (dBm/3kHz) Plot Channel 25**

**Band Edge and Conducted Spurious Emission**


<Zigbee>

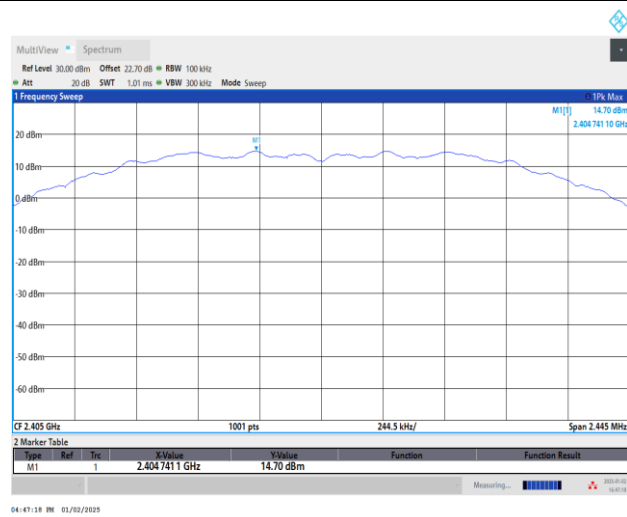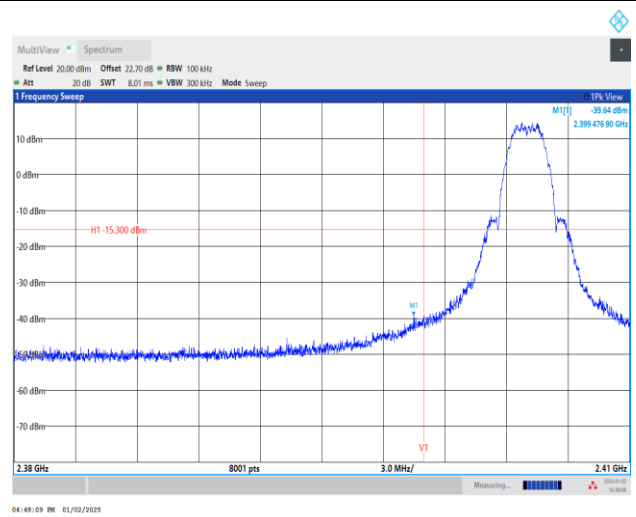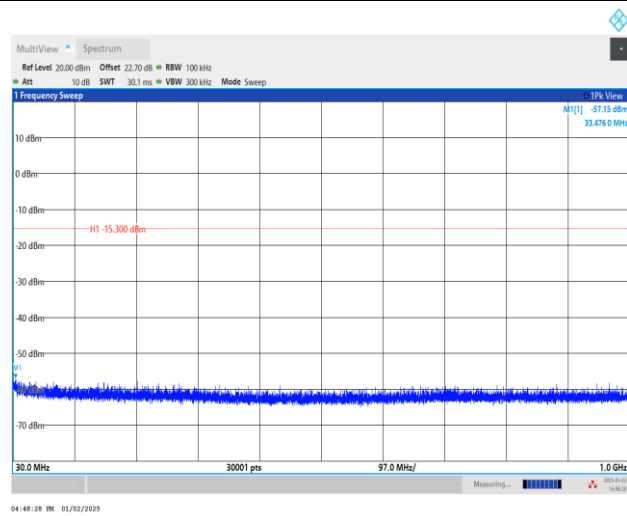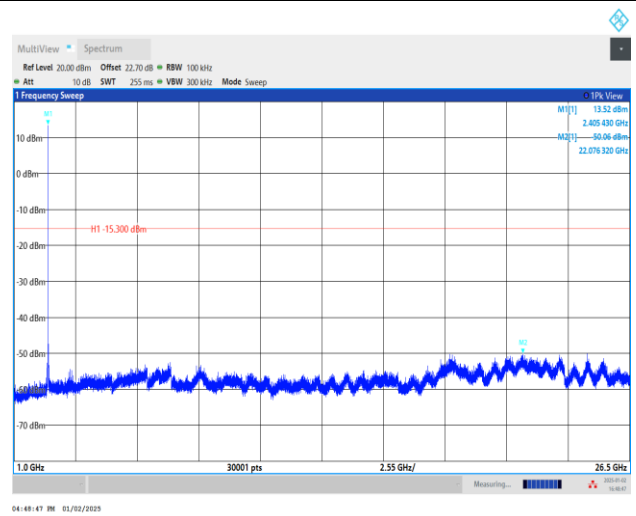Channel 11**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 18

100kHz PSD reference Level Plot

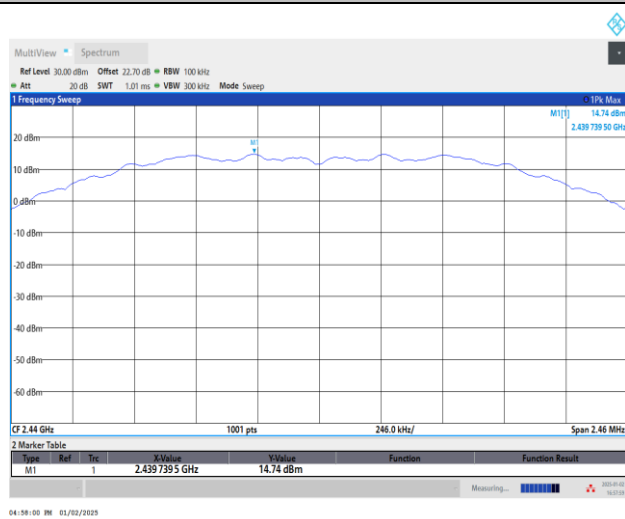


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

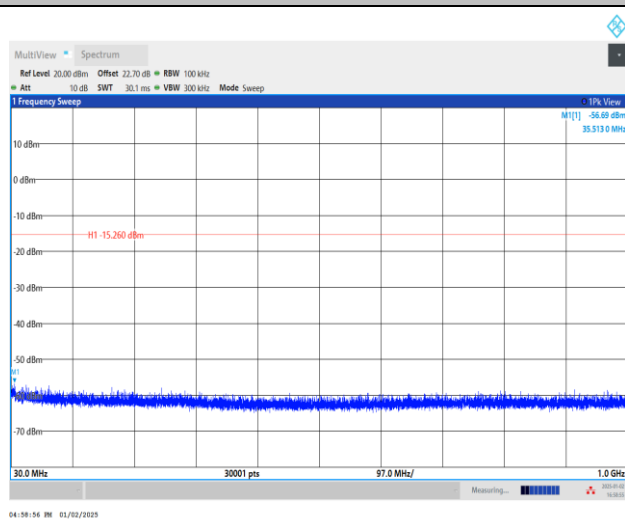


Spurious Emission 1GHz~26.5GHz Plot

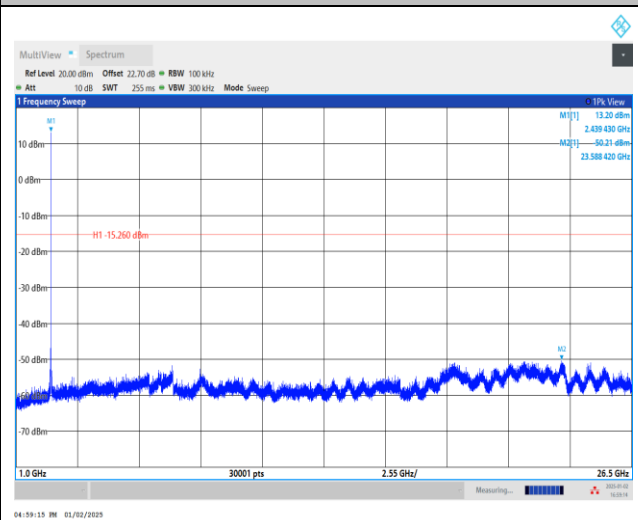




Channel 25


100kHz PSD reference Level Plot

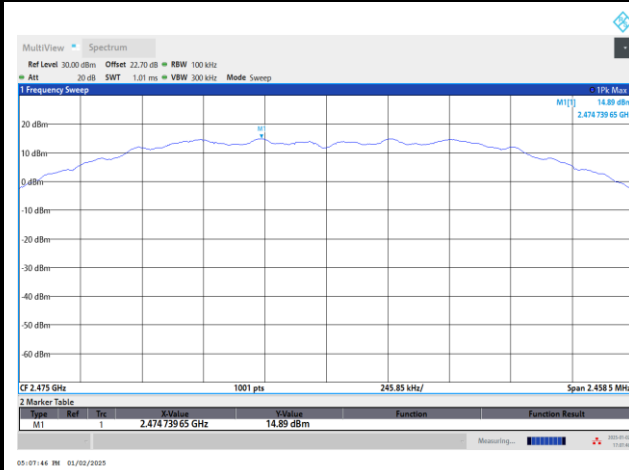


High Channel Plot

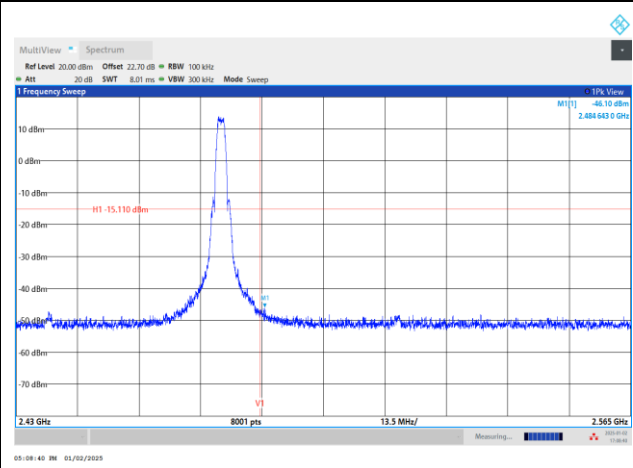

Spurious Emission 30MHz~1GHz Plot

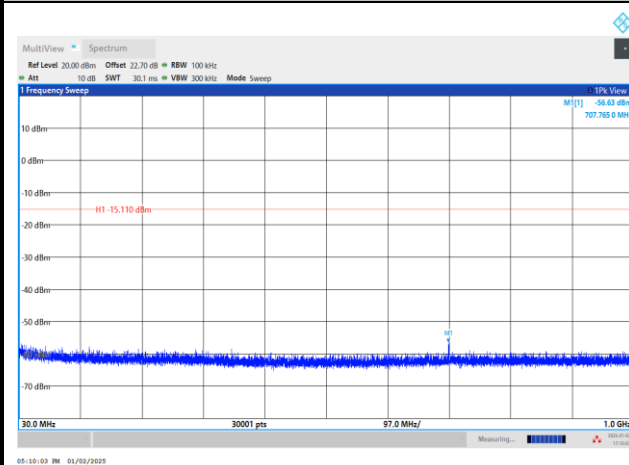

Spurious Emission 1GHz~26.5GHz Plot

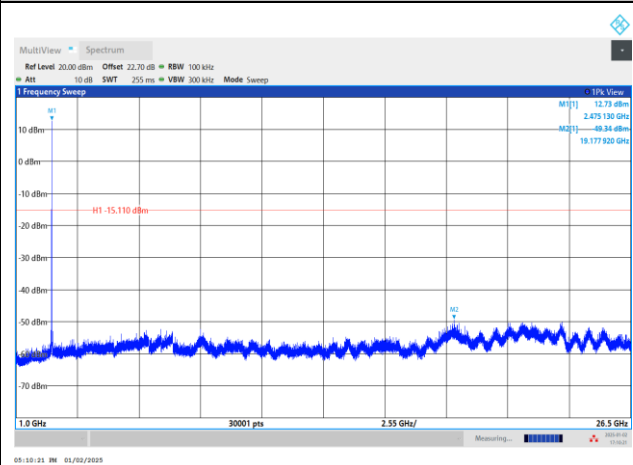




<Ant. 10>


6dB Bandwidth

<Zigbee>


6 dB Bandwidth Plot on Channel 11

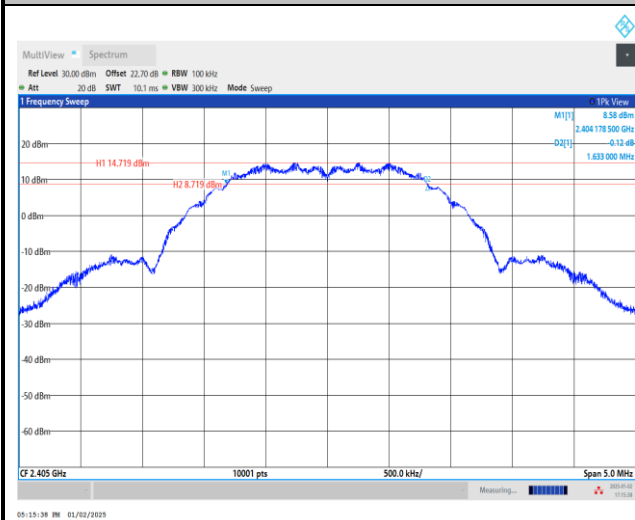

6 dB Bandwidth Plot on Channel 18



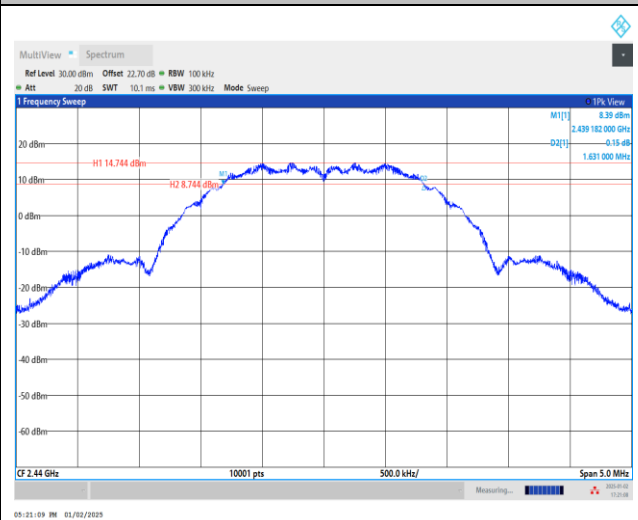


6 dB Bandwidth Plot on Channel 25

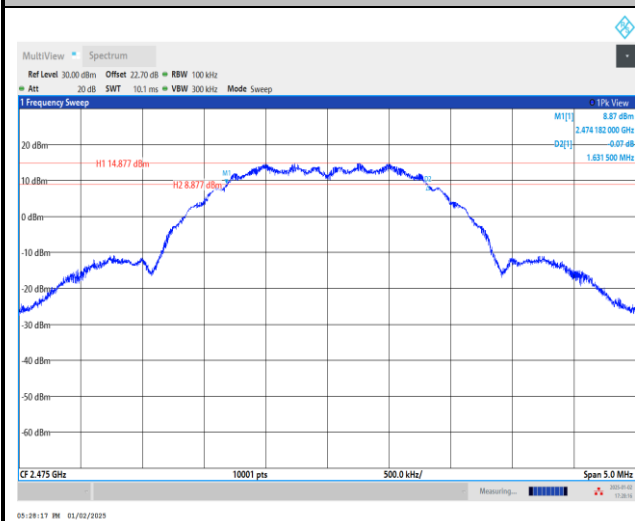




**99% Occupied Bandwidth**

<Zigbee>

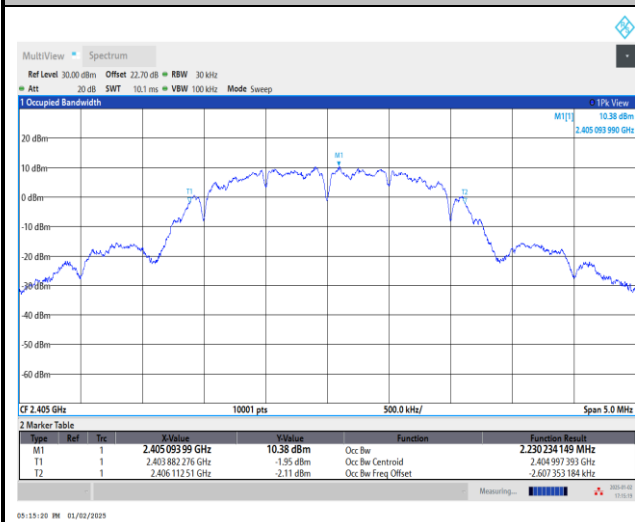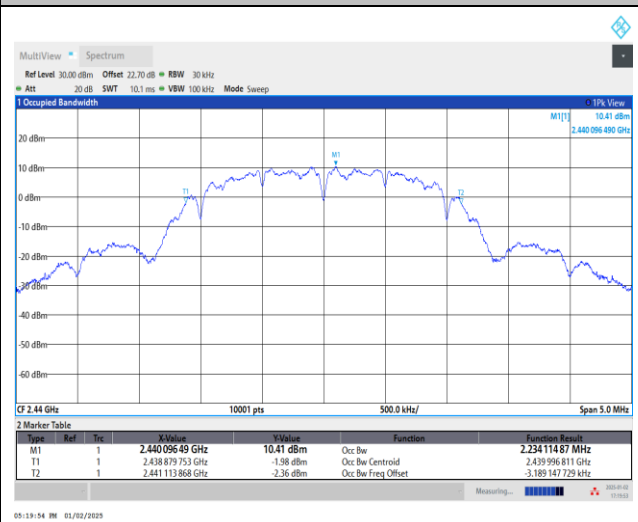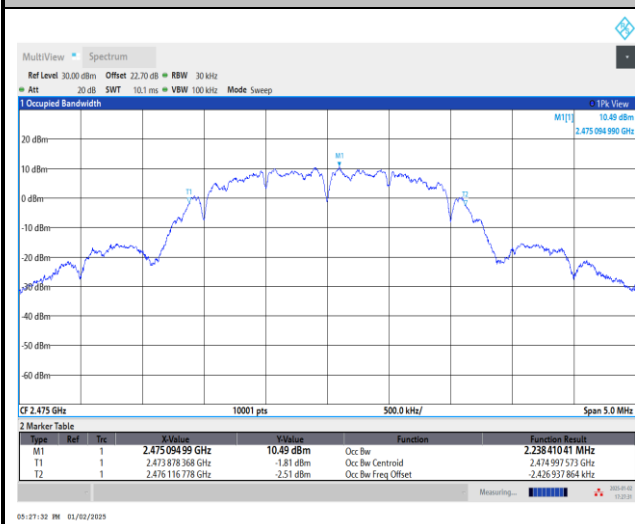99% Occupied Bandwidth Plot on Channel 11**99% Occupied Bandwidth Plot on Channel 18****99% Occupied Bandwidth Plot on Channel 25**





**Power Spectral Density (dBm/3kHz)**

<Zigbee>

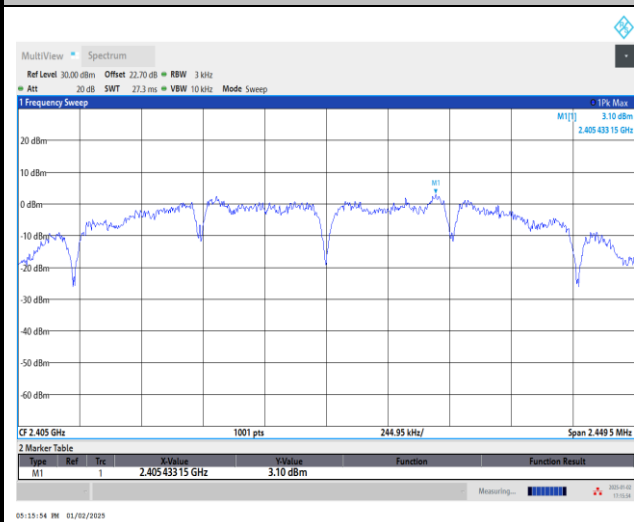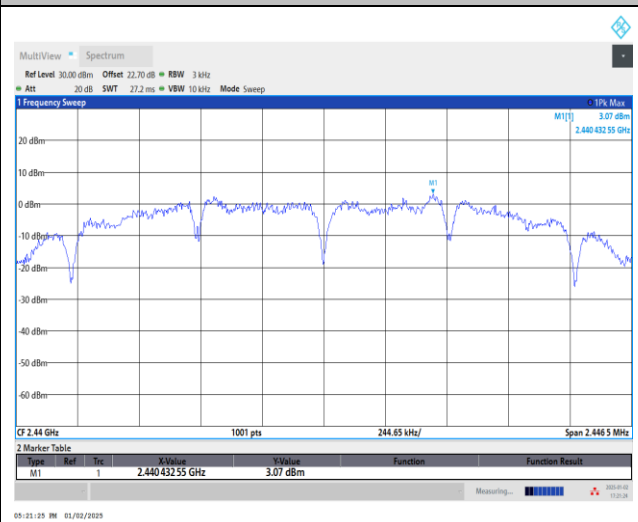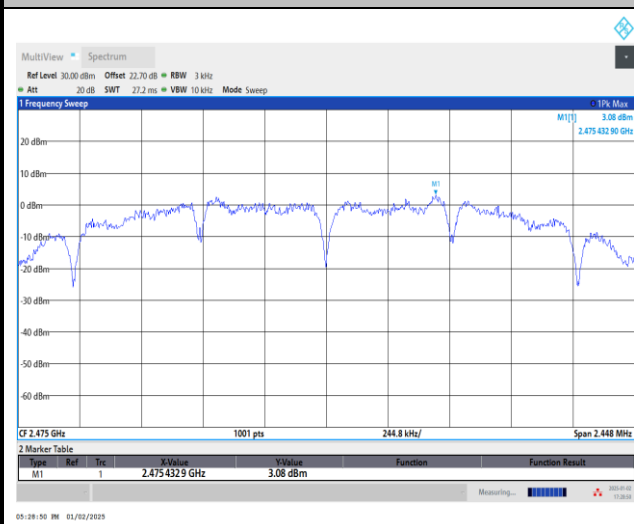Power Density (dBm/3kHz) Plot Channel 11**Power Density (dBm/3kHz) Plot Channel 18****Power Density (dBm/3kHz) Plot Channel 25**

**Band Edge and Conducted Spurious Emission**


<Zigbee>

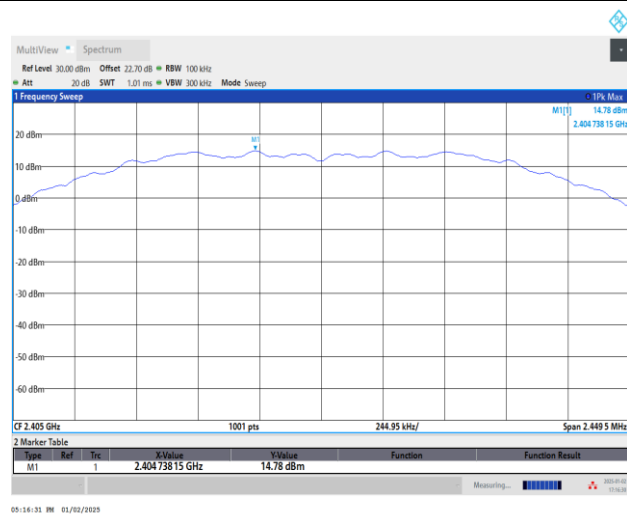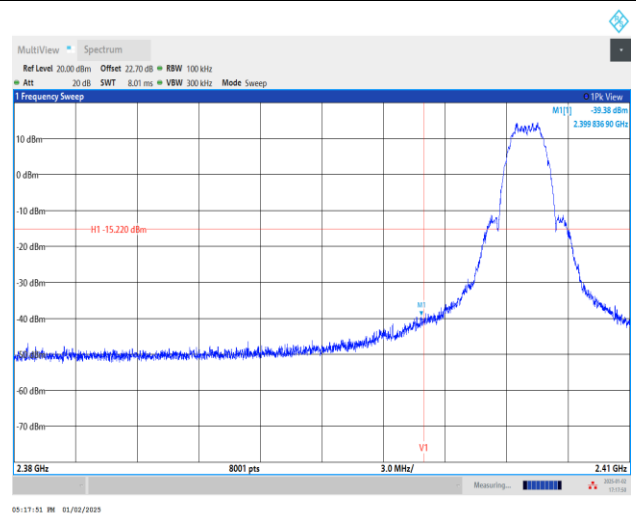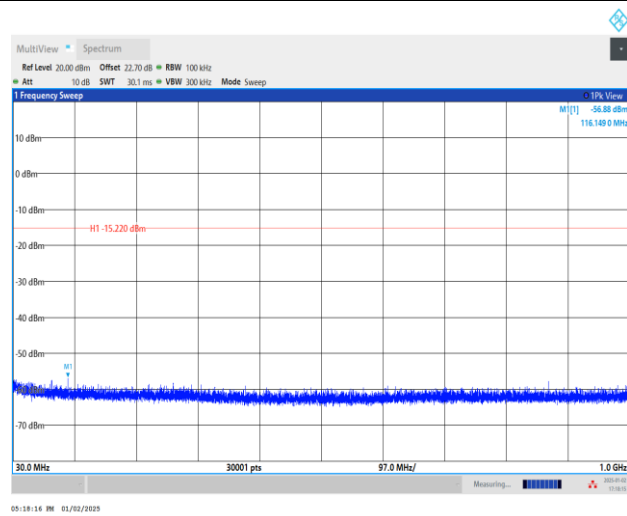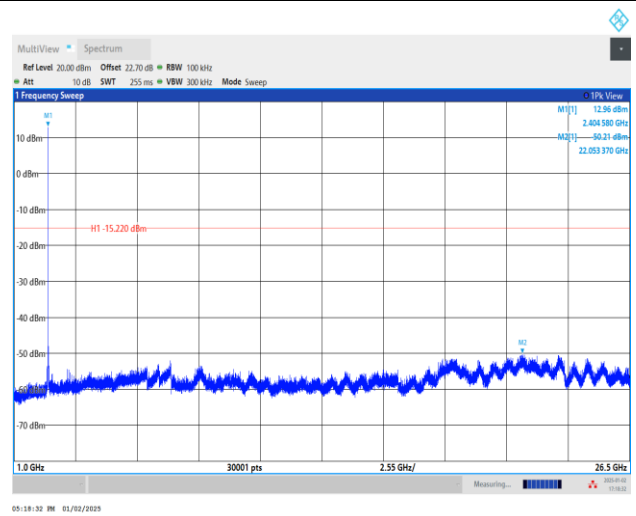Channel 11**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 18

100kHz PSD reference Level Plot

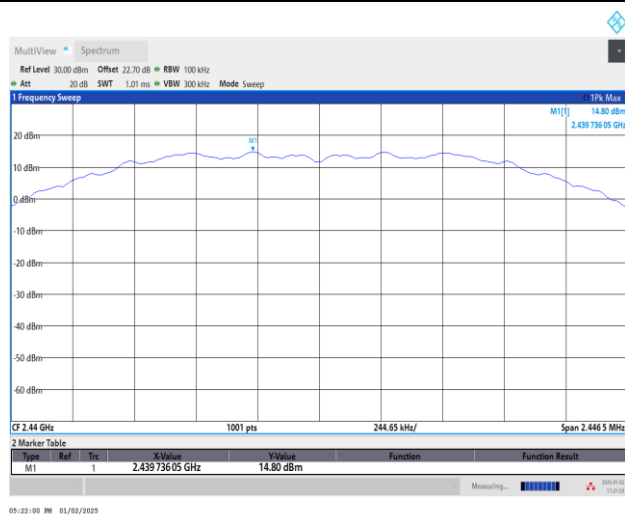


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

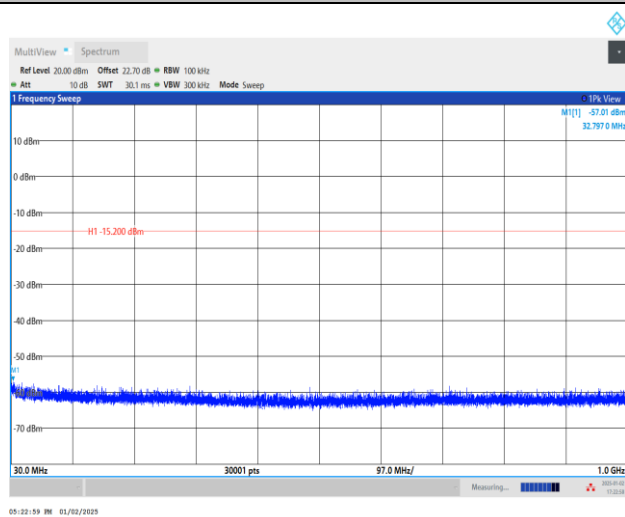


Spurious Emission 1GHz~26.5GHz Plot

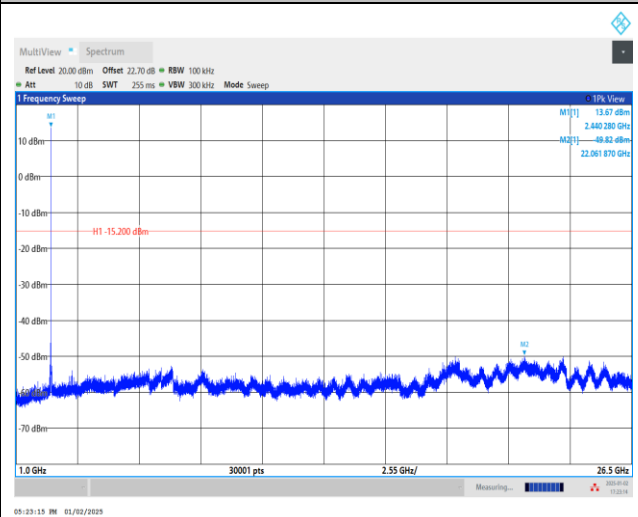




Channel 25


100kHz PSD reference Level Plot

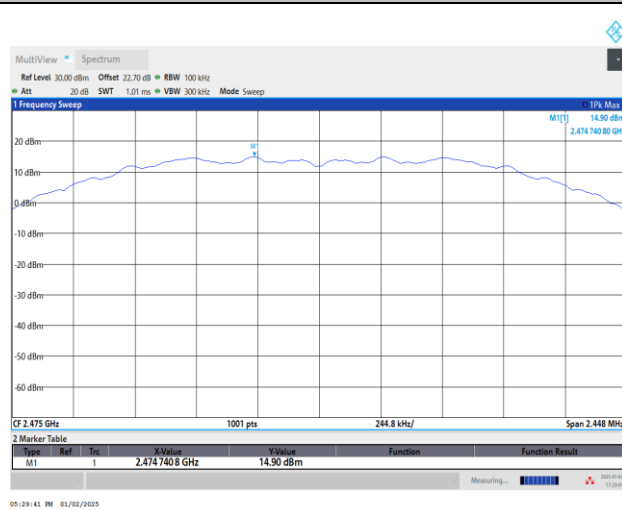


High Channel Plot

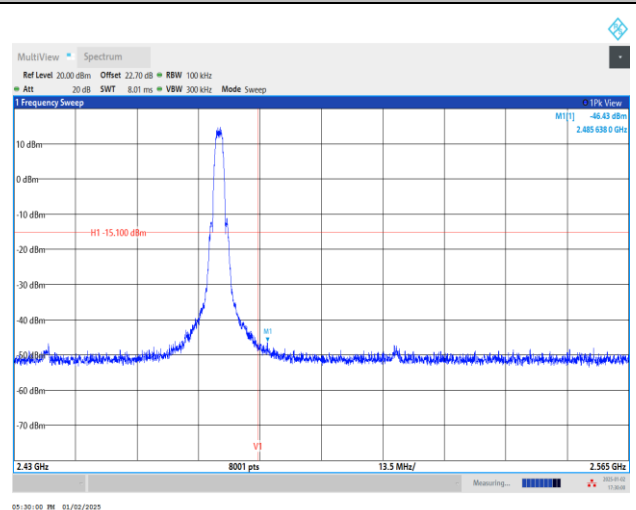

Spurious Emission 30MHz~1GHz Plot

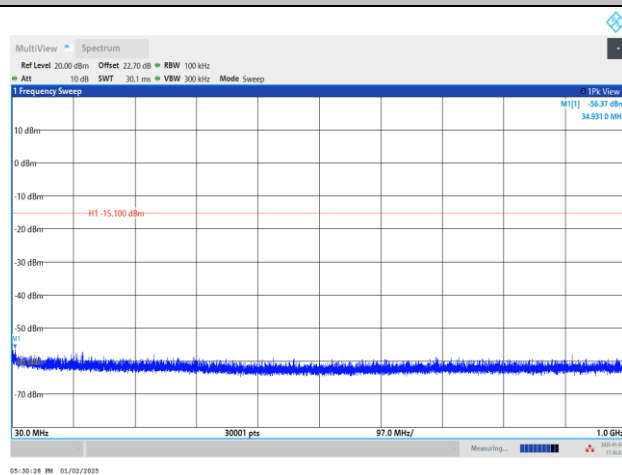

Spurious Emission 1GHz~26.5GHz Plot

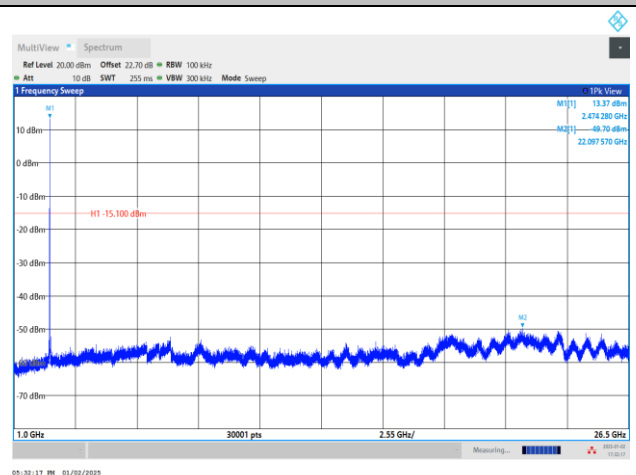



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4O1125
Mode 1
120Vac/60Hz
Line

Full Spectrum

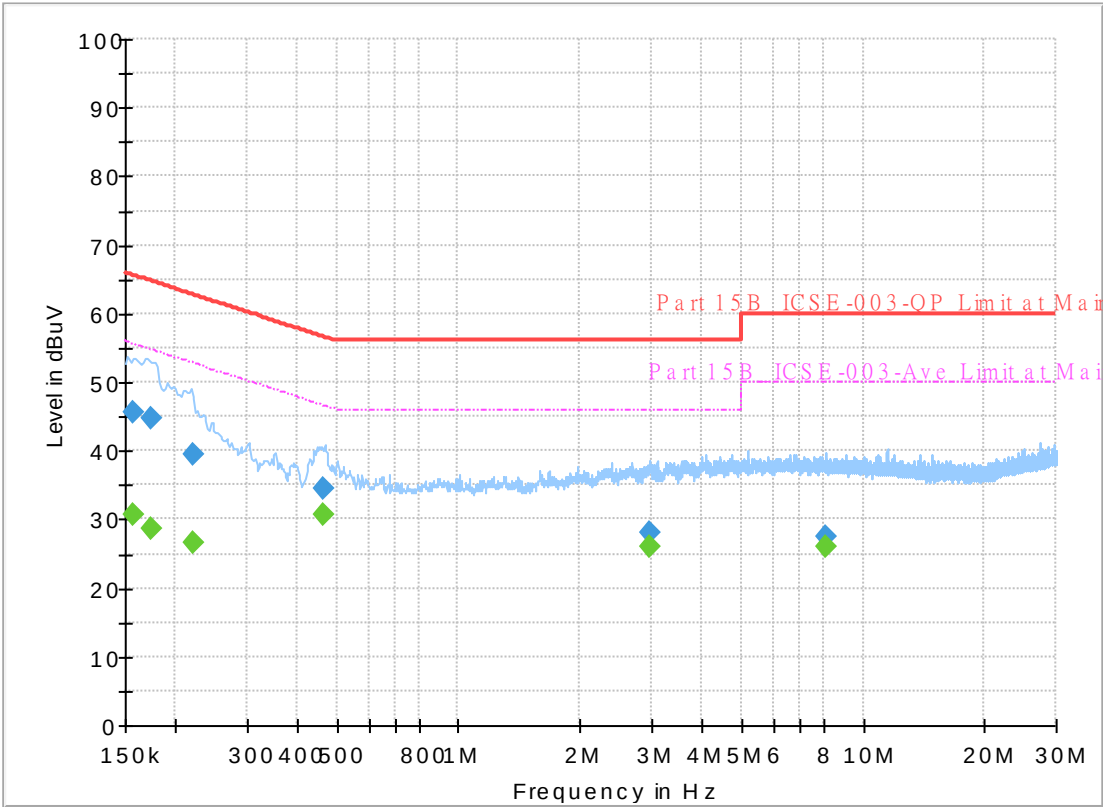

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	30.65	55.63	24.98	L1	OFF	19.8
0.156750	45.69	---	65.63	19.94	L1	OFF	19.8
0.174750	---	28.70	54.73	26.03	L1	OFF	19.8
0.174750	44.85	---	64.73	19.88	L1	OFF	19.8
0.219750	---	26.62	52.83	26.21	L1	OFF	19.8
0.219750	39.35	---	62.83	23.48	L1	OFF	19.8
0.465000	---	30.74	46.60	15.86	L1	OFF	19.8
0.465000	34.54	---	56.60	22.06	L1	OFF	19.8
2.960250	---	26.12	46.00	19.88	L1	OFF	19.9
2.960250	28.10	---	56.00	27.90	L1	OFF	19.9
8.076750	---	25.99	50.00	24.01	L1	OFF	20.2
8.076750	27.43	---	60.00	32.57	L1	OFF	20.2

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4O1125
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

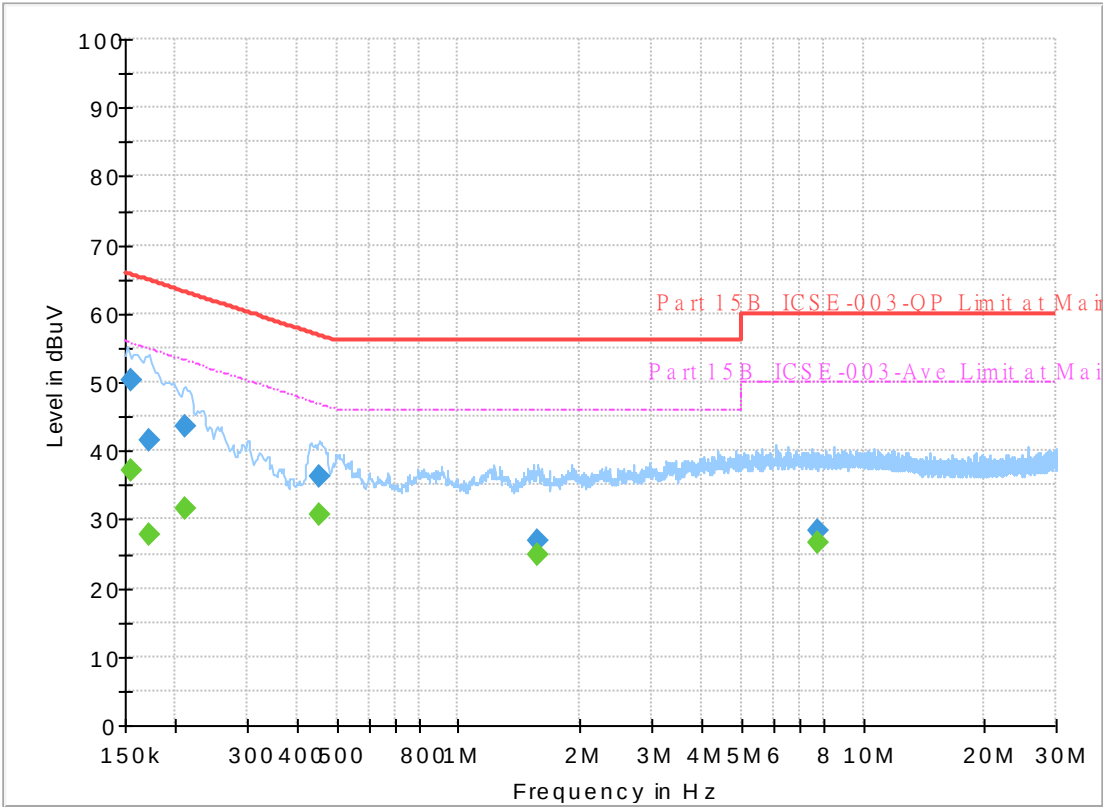

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	37.27	55.75	18.48	N	OFF	19.8
0.154500	50.38	---	65.75	15.37	N	OFF	19.8
0.172500	---	27.79	54.84	27.05	N	OFF	19.8
0.172500	41.37	---	64.84	23.47	N	OFF	19.8
0.210750	---	31.70	53.18	21.48	N	OFF	19.8
0.210750	43.52	---	63.18	19.66	N	OFF	19.8
0.453750	---	30.58	46.81	16.23	N	OFF	19.8
0.453750	36.33	---	56.81	20.48	N	OFF	19.8
1.576500	---	24.75	46.00	21.25	N	OFF	19.9
1.576500	26.76	---	56.00	29.24	N	OFF	19.9
7.766250	---	26.56	50.00	23.44	N	OFF	20.2
7.766250	28.47	---	60.00	31.53	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang, David Dai and Sam Chou	Temperature :	19.2~21.7°C
		Relative Humidity :	64.9~71.1%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	9	ZigBee	11	2405	250kbps	-	-
Mode 2	2400-2483.5	9	ZigBee	18	2440	250kbps	-	-
Mode 3	2400-2483.5	9	ZigBee	25	2475	250kbps	-	-
Mode 4	2400-2483.5	10	ZigBee	11	2405	250kbps	-	-
Mode 5	2400-2483.5	10	ZigBee	18	2440	250kbps	-	-
Mode 6	2400-2483.5	10	ZigBee	25	2475	250kbps	-	-
Mode 7	2400-2483.5	9	ZigBee	25	2475	250kbps	-	LF
Mode 8	2400-2483.5	9	ZigBee	25	2475	250kbps	-	SHF
Mode 9	2400-2483.5	10	ZigBee	25	2475	250kbps	-	LF
Mode 10	2400-2483.5	10	ZigBee	25	2475	250kbps	-	SHF







C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	ZigBee	11	2367.19	46.11	54.00	-7.89	H	Avg.	Pass	-	Band Edge
	ZigBee	11	4810.00	44.10	74.00	-29.90	V	Peak	Pass	-	Harmonic
2	ZigBee	18	2483.62	39.88	54.00	-14.12	H	Avg.	Pass	-	Band Edge
	ZigBee	18	7320.00	38.40	54.00	-15.60	V	Avg.	Pass	-	Harmonic
3	ZigBee	25	2483.53	49.73	54.00	-4.27	H	Avg.	Pass	-	Band Edge
	ZigBee	25	7425.00	46.97	74.00	-27.03	V	Peak	Pass	-	Harmonic
4	ZigBee	11	2367.19	45.57	54.00	-8.43	H	Avg.	Pass	-	Band Edge
	ZigBee	11	4810.00	43.87	74.00	-30.13	V	Peak	Pass	-	Harmonic
5	ZigBee	18	2484.58	39.67	54.00	-14.33	H	Avg.	Pass	-	Band Edge
	ZigBee	18	7320.00	47.97	74.00	-26.03	H	Peak	Pass	-	Harmonic
6	ZigBee	25	2483.53	49.87	54.00	-4.13	H	Avg.	Pass	-	Band Edge
	ZigBee	25	7425.00	47.10	74.00	-26.90	H	Peak	Pass	-	Harmonic
7	ZigBee	25	787.57	43.51	46.00	-2.49	H	QP	Pass	-	LF
8	ZigBee	25	25944.00	42.87	74.00	-31.13	V	Peak	Pass	-	SHF
9	ZigBee	25	63.95	36.00	40.00	-4.00	V	QP	Pass	-	LF
10	ZigBee	25	25640.00	42.60	74.00	-31.40	V	Peak	Pass	-	SHF

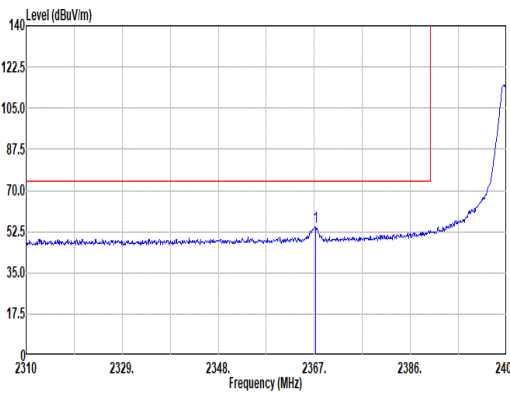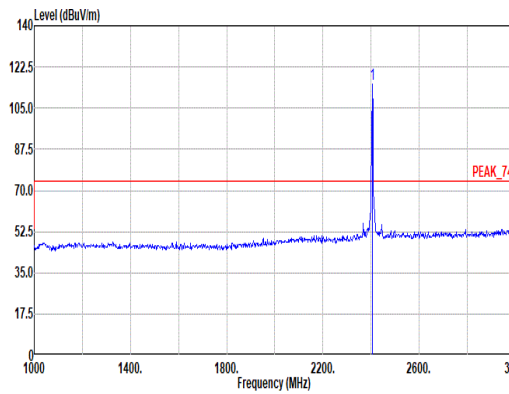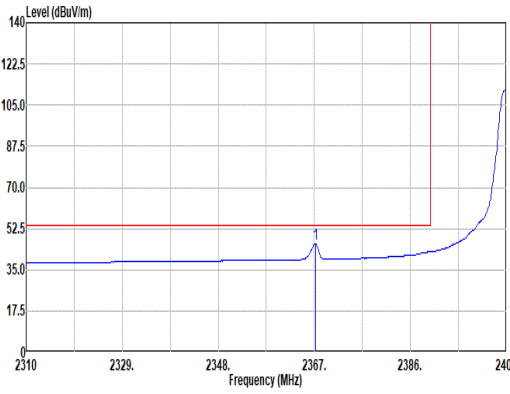
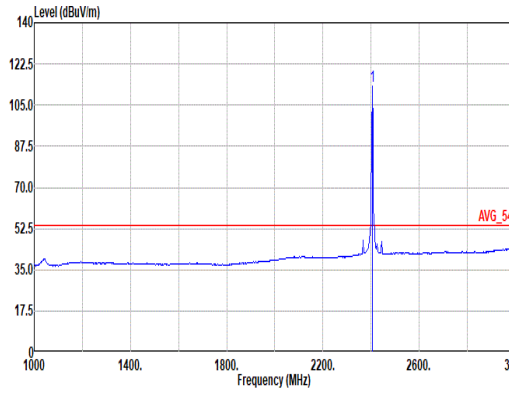


Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_ZigBee_CH11_2405MHz																																																																																																		
ANT	9																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.19</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>45.20</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>365</td><td>131</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.19	54.57	74.00	-19.43	45.20	27.30	8.65	36.26	9.68	365	131	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>115.10</td><td>-----</td><td>-----</td><td>105.51</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>365</td><td>131</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	115.10	-----	-----	105.51	27.46	8.72	36.27	9.68	365	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2367.19	54.57	74.00	-19.43	45.20	27.30	8.65	36.26	9.68	365	131	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	115.10	-----	-----	105.51	27.46	8.72	36.27	9.68	365	131	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.19</td><td>46.11</td><td>54.00</td><td>-7.89</td><td>36.74</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>365</td><td>131</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.19	46.11	54.00	-7.89	36.74	27.30	8.65	36.26	9.68	365	131	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>113.10</td><td>-----</td><td>-----</td><td>103.51</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>365</td><td>131</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	113.10	-----	-----	103.51	27.46	8.72	36.27	9.68	365	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2367.19	46.11	54.00	-7.89	36.74	27.30	8.65	36.26	9.68	365	131	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	113.10	-----	-----	103.51	27.46	8.72	36.27	9.68	365	131	AVERAGE																																																																																							

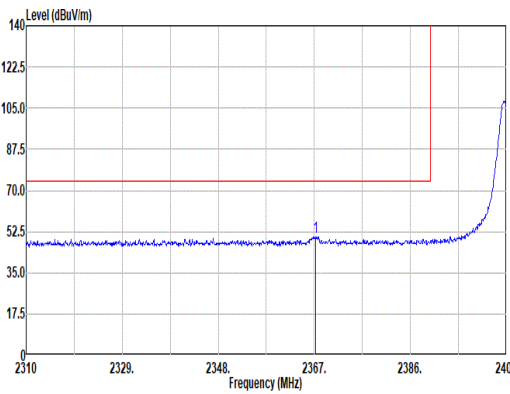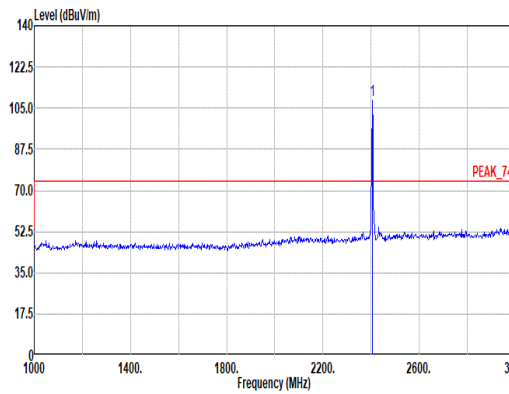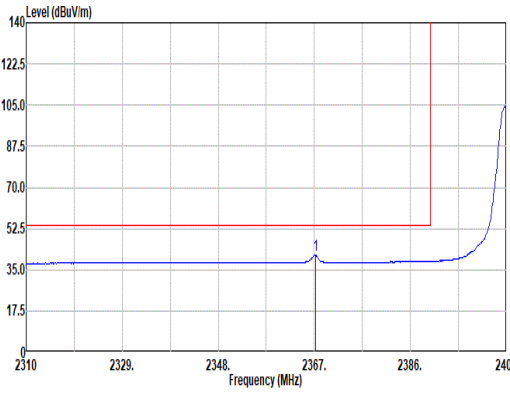
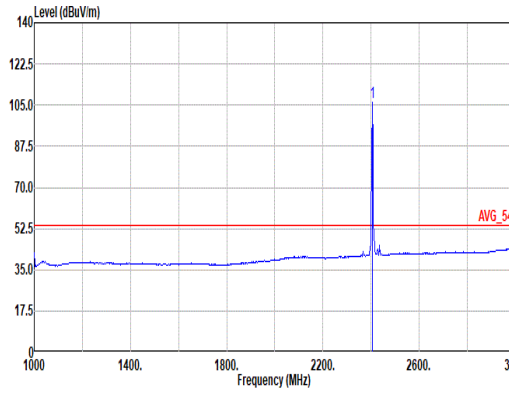


Mode	1																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_ZigBee_CH11_2405MHz																																																																																																										
ANT	9																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2367.29</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>40.96</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>314</td><td>32</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2367.29	50.33	74.00	-23.67	40.96	27.30	8.65	36.26	9.68	314	32	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2405.00</td><td>108.25</td><td>-----</td><td>-----</td><td>98.66</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>314</td><td>32</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2405.00	108.25	-----	-----	98.66	27.46	8.72	36.27	9.68	314	32
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2367.29	50.33	74.00	-23.67	40.96	27.30	8.65	36.26	9.68	314	32	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2405.00	108.25	-----	-----	98.66	27.46	8.72	36.27	9.68	314	32	PEAK																																																																																																
Avg.																																																																																																											
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2367.19</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>31.84</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>314</td><td>32</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2367.19	41.21	54.00	-12.79	31.84	27.30	8.65	36.26	9.68	314	32	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2405.00</td><td>106.20</td><td>-----</td><td>-----</td><td>96.61</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>314</td><td>32</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2405.00	106.20	-----	-----	96.61	27.46	8.72	36.27	9.68	314	32
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2367.19	41.21	54.00	-12.79	31.84	27.30	8.65	36.26	9.68	314	32	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 2405.00	106.20	-----	-----	96.61	27.46	8.72	36.27	9.68	314	32	AVERAGE																																																																																																

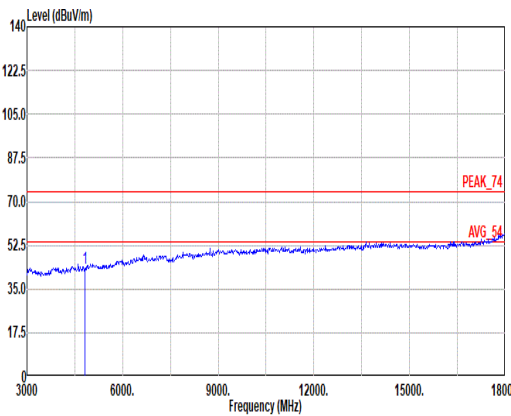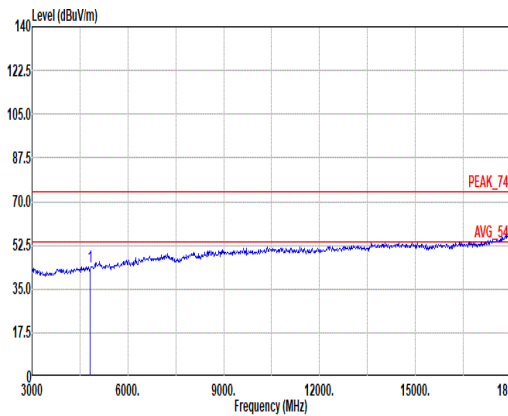

Mode	1																																																				
	Harmonic																																																				
	2400-2483.5_ZigBee_CH11_2405MHz																																																				
ANT	9																																																				
Pol.	Horizontal						Vertical																																														
Peak Avg.																																																					
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL																																														
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>43.41</td><td>74.00</td><td>-30.59</td><td>35.39</td><td>32.28</td><td>12.44</td><td>37.52</td><td>0.82</td><td>--</td><td>--</td><td>deg</td><td>PEAK</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	43.41	74.00	-30.59	35.39	32.28	12.44	37.52	0.82	--	--	deg	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	4810.00	43.41	74.00	-30.59	35.39	32.28	12.44	37.52	0.82	--	--	deg	PEAK																																								
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>36.08</td><td>32.28</td><td>12.44</td><td>37.52</td><td>0.82</td><td>--</td><td>--</td><td>deg</td><td>PEAK</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	44.10	74.00	-29.90	36.08	32.28	12.44	37.52	0.82	--	--	deg	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	4810.00	44.10	74.00	-29.90	36.08	32.28	12.44	37.52	0.82	--	--	deg	PEAK																																								

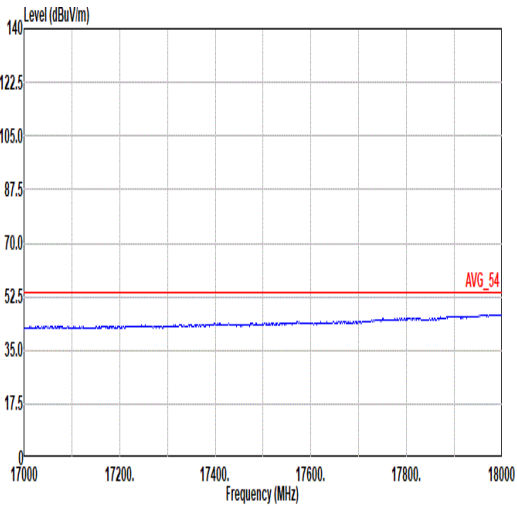
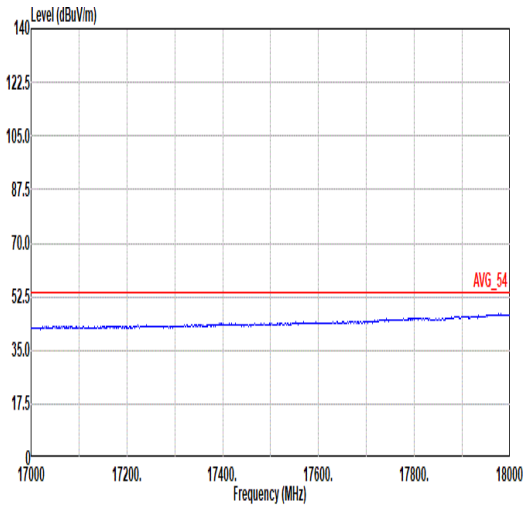


Mode	1	
	Harmonic	
	2400-2483.5_ZigBee_CH11_2405MHz	
ANT	9	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL







Mode	2																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_ZigBee_CH18_2440MHz																																																																																	
ANT	9																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2340.42</td><td>50.18</td><td>74.00</td><td>-23.82</td><td>40.95</td><td>27.20</td><td>8.60</td><td>36.25</td><td>9.68</td><td>106 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2340.42	50.18	74.00	-23.82	40.95	27.20	8.60	36.25	9.68	106 PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2440.00</td><td>117.00</td><td>-----</td><td>-----</td><td>107.22</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>106 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2440.00	117.00	-----	-----	107.22	27.60	8.78	36.28	9.68	106 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2340.42	50.18	74.00	-23.82	40.95	27.20	8.60	36.25	9.68	106 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2440.00	117.00	-----	-----	107.22	27.60	8.78	36.28	9.68	106 PEAK																																																																									
Avg.	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.82</td><td>38.81</td><td>54.00</td><td>-15.19</td><td>29.31</td><td>27.40</td><td>8.69</td><td>36.27</td><td>9.68</td><td>106 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.82	38.81	54.00	-15.19	29.31	27.40	8.69	36.27	9.68	106 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2440.00</td><td>114.93</td><td>-----</td><td>-----</td><td>105.15</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>106 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2440.00	114.93	-----	-----	105.15	27.60	8.78	36.28	9.68	106 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.82	38.81	54.00	-15.19	29.31	27.40	8.69	36.27	9.68	106 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2440.00	114.93	-----	-----	105.15	27.60	8.78	36.28	9.68	106 AVERAGE																																																																									

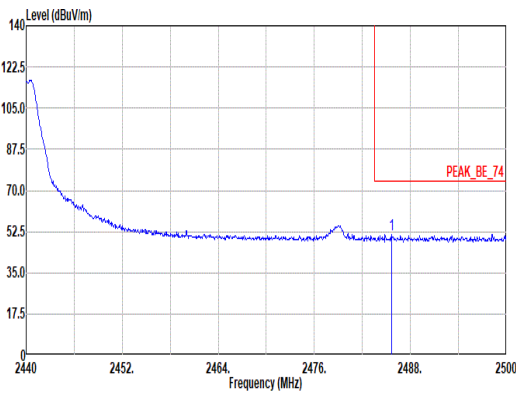
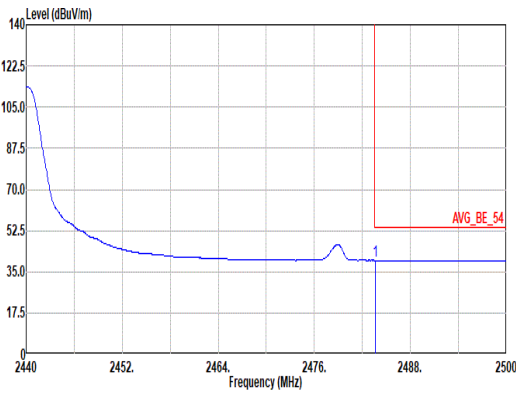


Mode	2																																																							
	Band Edge - R																																																							
	2400-2483.5_ZigBee_CH18_2440MHz																																																							
ANT	9																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.66</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>41.06</td><td>27.96</td><td>8.87</td><td>36.30</td><td>9.68</td><td>100</td><td>106</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.66	51.27	74.00	-22.73	41.06	27.96	8.87	36.30	9.68	100	106	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2485.66	51.27	74.00	-22.73	41.06	27.96	8.87	36.30	9.68	100	106	PEAK																																												
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>29.70</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>100</td><td>106</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	39.88	54.00	-14.12	29.70	27.94	8.86	36.30	9.68	100	106	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.62	39.88	54.00	-14.12	29.70	27.94	8.86	36.30	9.68	100	106	AVERAGE																																												

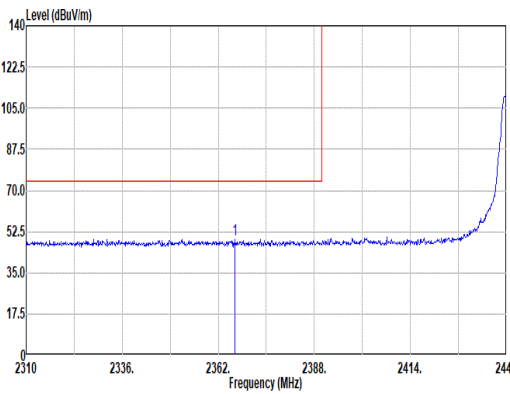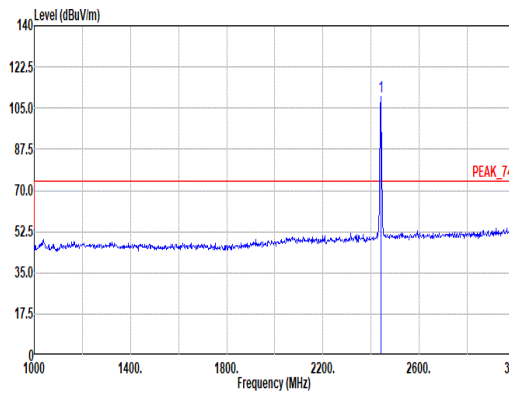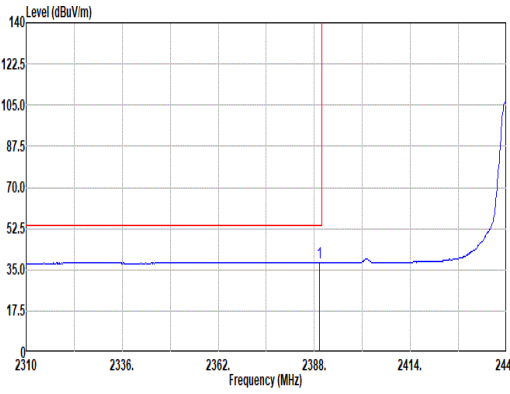
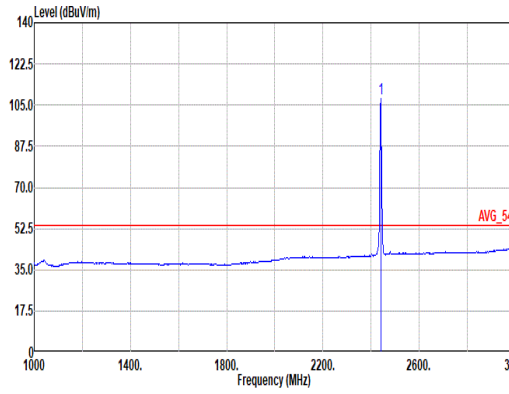


Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_ZigBee_CH18_2440MHz																																																																																																			
ANT	9																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.55</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>39.81</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>148</td><td>141</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.55	49.18	74.00	-24.82	39.81	27.30	8.65	36.26	9.68	148	141	PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>109.99</td><td>-----</td><td>-----</td><td>100.21</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>148</td><td>141</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	109.99	-----	-----	100.21	27.60	8.78	36.28	9.68	148	141	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2366.55	49.18	74.00	-24.82	39.81	27.30	8.65	36.26	9.68	148	141	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	109.99	-----	-----	100.21	27.60	8.78	36.28	9.68	148	141	PEAK																																																																																								
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>38.04</td><td>54.00</td><td>-15.96</td><td>28.55</td><td>27.39</td><td>8.69</td><td>36.27</td><td>9.68</td><td>148</td><td>141</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	38.04	54.00	-15.96	28.55	27.39	8.69	36.27	9.68	148	141	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>107.92</td><td>-----</td><td>-----</td><td>98.14</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>148</td><td>141</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.92	-----	-----	98.14	27.60	8.78	36.28	9.68	148	141	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.30	38.04	54.00	-15.96	28.55	27.39	8.69	36.27	9.68	148	141	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	107.92	-----	-----	98.14	27.60	8.78	36.28	9.68	148	141	AVERAGE																																																																																								

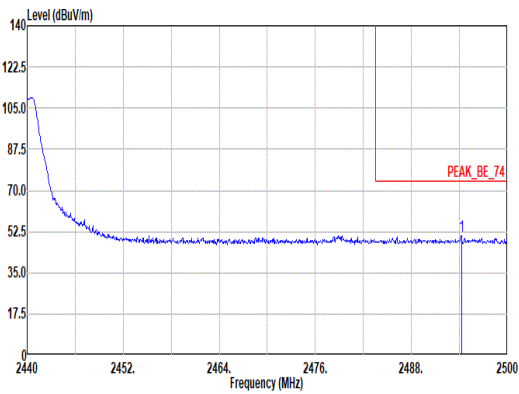
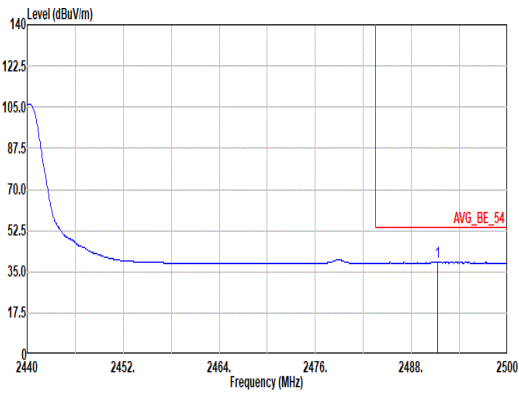


Mode	2																																																						
	Band Edge - R																																																						
	2400-2483.5_ZigBee_CH18_2440MHz																																																						
ANT	9																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.24</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>40.50</td><td>28.00</td><td>8.88</td><td>36.30</td><td>9.68</td><td>148</td><td>141</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2494.24	50.76	74.00	-23.24	40.50	28.00	8.88	36.30	9.68	148	141	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2494.24	50.76	74.00	-23.24	40.50	28.00	8.88	36.30	9.68	148	141	PEAK																																											
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.24</td><td>38.88</td><td>54.00</td><td>-15.12</td><td>28.62</td><td>28.00</td><td>8.88</td><td>36.30</td><td>9.68</td><td>148</td><td>141</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2491.24	38.88	54.00	-15.12	28.62	28.00	8.88	36.30	9.68	148	141	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2491.24	38.88	54.00	-15.12	28.62	28.00	8.88	36.30	9.68	148	141	AVERAGE																																											



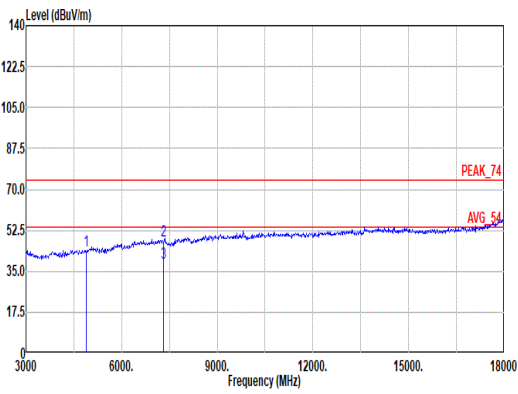
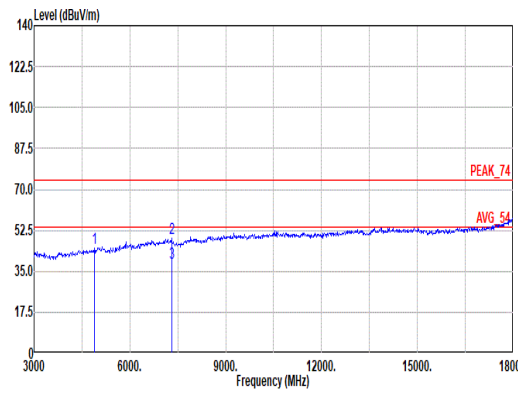


Mode	2																																																																													
	Harmonic																																																																													
	2400-2483.5_ZigBee_CH18_2440MHz																																																																													
ANT	9																																																																													
Pol.	Horizontal						Vertical																																																																							
Peak Avg.																																																																														
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>35.73</td><td>32.72</td><td>12.56</td><td>37.57</td><td>0.67</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>34.14</td><td>36.78</td><td>15.45</td><td>38.48</td><td>0.35</td><td>229</td><td>58 PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>38.38</td><td>54.00</td><td>-15.62</td><td>24.28</td><td>36.78</td><td>15.45</td><td>38.48</td><td>0.35</td><td>229</td><td>58 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	44.11	74.00	-29.89	35.73	32.72	12.56	37.57	0.67	--	PEAK	2	7320.00	48.24	74.00	-25.76	34.14	36.78	15.45	38.48	0.35	229	58 PEAK	3	7320.00	38.38	54.00	-15.62	24.28	36.78	15.45	38.48	0.35	229	58 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4880.00	44.11	74.00	-29.89	35.73	32.72	12.56	37.57	0.67	--	PEAK																																																																			
2	7320.00	48.24	74.00	-25.76	34.14	36.78	15.45	38.48	0.35	229	58 PEAK																																																																			
3	7320.00	38.38	54.00	-15.62	24.28	36.78	15.45	38.48	0.35	229	58 Average																																																																			

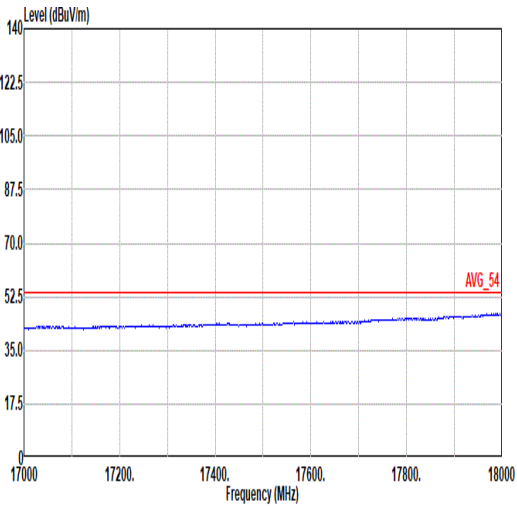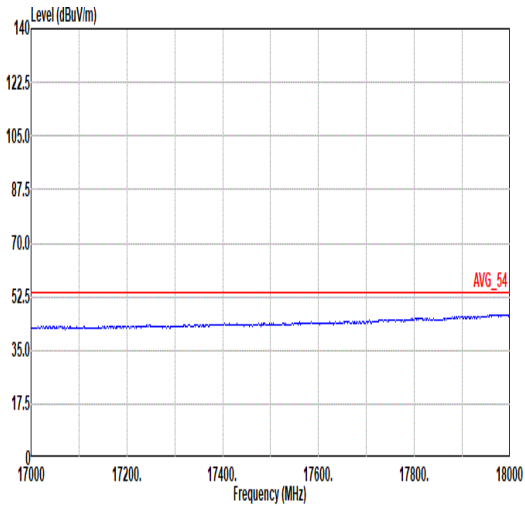

Mode	2	
	Harmonic	
	2400-2483.5_ZigBee_CH18_2440MHz	
ANT	9	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL

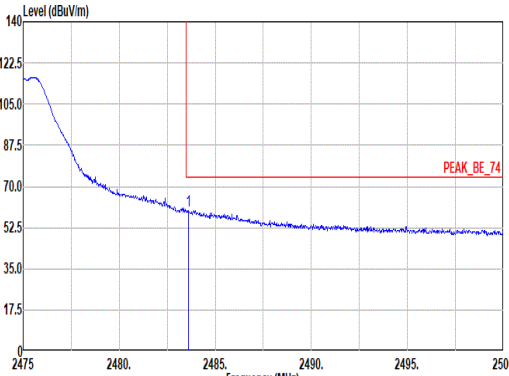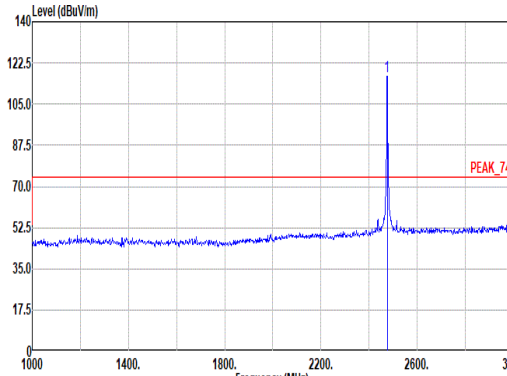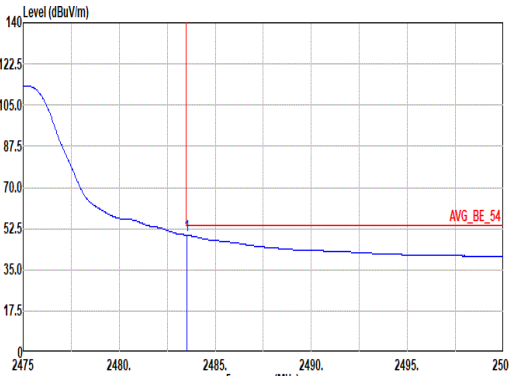
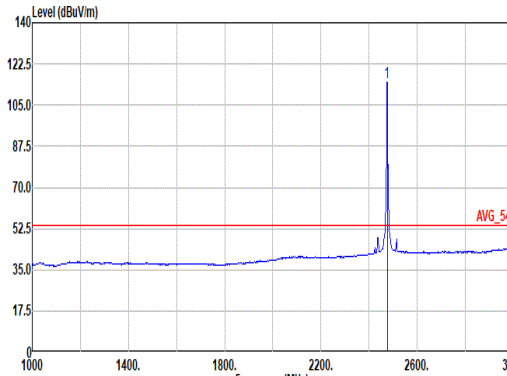


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																			
ANT	9																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>59.81</td><td>74.00</td><td>-14.19</td><td>49.63</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>100</td><td>104</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	59.81	74.00	-14.19	49.63	27.94	8.86	36.30	9.68	100	104	PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>116.60</td><td>-----</td><td>-----</td><td>106.50</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>100</td><td>104</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	116.60	-----	-----	106.50	27.86	8.85	36.29	9.68	100	104	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.60	59.81	74.00	-14.19	49.63	27.94	8.86	36.30	9.68	100	104	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	116.60	-----	-----	106.50	27.86	8.85	36.29	9.68	100	104	PEAK																																																																																								
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>49.73</td><td>54.00</td><td>-4.27</td><td>39.55</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>100</td><td>104</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	49.73	54.00	-4.27	39.55	27.94	8.86	36.30	9.68	100	104	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>114.61</td><td>-----</td><td>-----</td><td>104.51</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>100</td><td>104</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	114.61	-----	-----	104.51	27.86	8.85	36.29	9.68	100	104	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.53	49.73	54.00	-4.27	39.55	27.94	8.86	36.30	9.68	100	104	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	114.61	-----	-----	104.51	27.86	8.85	36.29	9.68	100	104	AVERAGE																																																																																								





Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																			
ANT	9																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.28</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>44.64</td><td>27.94</td><td>8.87</td><td>36.30</td><td>9.68</td><td>291</td><td>243</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.28	54.83	74.00	-19.17	44.64	27.94	8.87	36.30	9.68	291	243	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>109.02</td><td>-----</td><td>-----</td><td>98.92</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>291</td><td>243</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	109.02	-----	-----	98.92	27.86	8.85	36.29	9.68	291	243	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2484.28	54.83	74.00	-19.17	44.64	27.94	8.87	36.30	9.68	291	243	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	109.02	-----	-----	98.92	27.86	8.85	36.29	9.68	291	243	PEAK																																																																																								
Avg.	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>34.09</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>291</td><td>243</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	44.27	54.00	-9.73	34.09	27.94	8.86	36.30	9.68	291	243	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>106.99</td><td>-----</td><td>-----</td><td>96.89</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>291</td><td>243</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	106.99	-----	-----	96.89	27.86	8.85	36.29	9.68	291	243	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.53	44.27	54.00	-9.73	34.09	27.94	8.86	36.30	9.68	291	243	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	106.99	-----	-----	96.89	27.86	8.85	36.29	9.68	291	243	AVERAGE																																																																																								



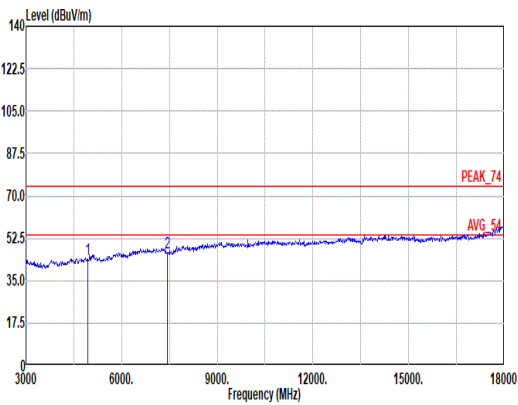
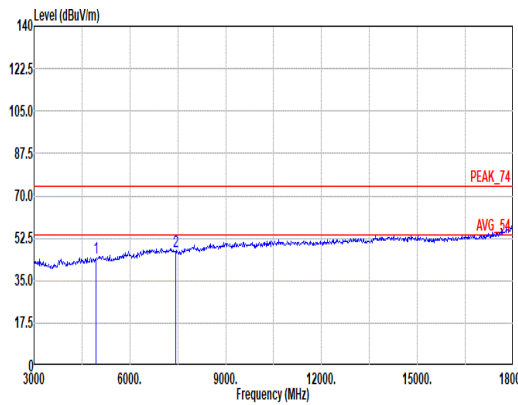


Mode	3																																																																			
	Harmonic																																																																			
	2400-2483.5_ZigBee_CH25_2475MHz																																																																			
ANT	9																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg.																																																																				
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>35.12</td><td>33.10</td><td>12.68</td><td>37.63</td><td>0.52</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>46.72</td><td>74.00</td><td>-27.28</td><td>33.15</td><td>36.25</td><td>15.56</td><td>38.57</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	43.79	74.00	-30.21	35.12	33.10	12.68	37.63	0.52	--	--	PEAK	2	7425.00	46.72	74.00	-27.28	33.15	36.25	15.56	38.57	0.33	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4950.00	43.79	74.00	-30.21	35.12	33.10	12.68	37.63	0.52	--	--	PEAK																																																								
2	7425.00	46.72	74.00	-27.28	33.15	36.25	15.56	38.57	0.33	--	--	PEAK																																																								
Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>44.25</td><td>74.00</td><td>-29.75</td><td>35.58</td><td>33.10</td><td>12.68</td><td>37.63</td><td>0.52</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>33.40</td><td>36.25</td><td>15.56</td><td>38.57</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	44.25	74.00	-29.75	35.58	33.10	12.68	37.63	0.52	--	--	PEAK	2	7425.00	46.97	74.00	-27.03	33.40	36.25	15.56	38.57	0.33	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4950.00	44.25	74.00	-29.75	35.58	33.10	12.68	37.63	0.52	--	--	PEAK																																																								
2	7425.00	46.97	74.00	-27.03	33.40	36.25	15.56	38.57	0.33	--	--	PEAK																																																								



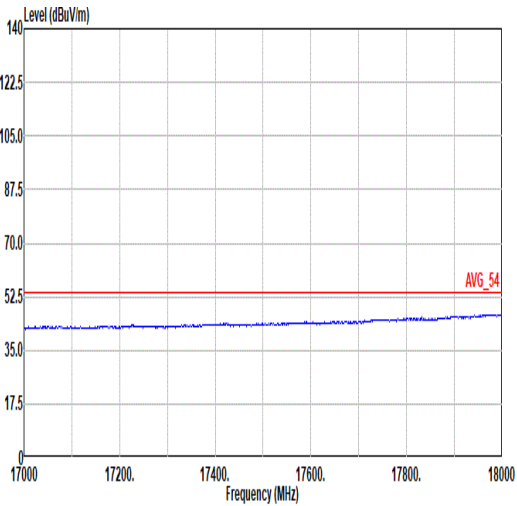
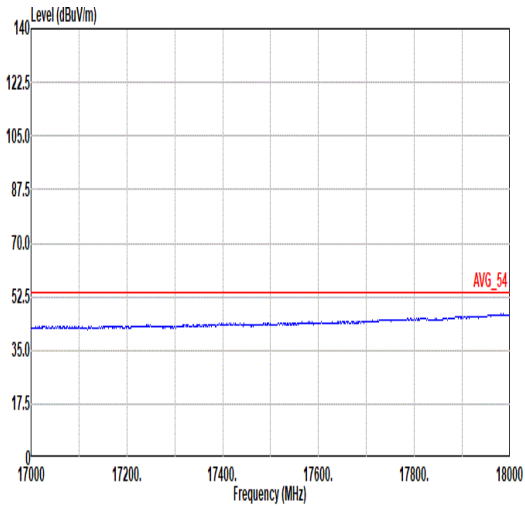


Mode	3	
	Harmonic	
	2400-2483.5_ZigBee_CH25_2475MHz	
ANT	9	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL

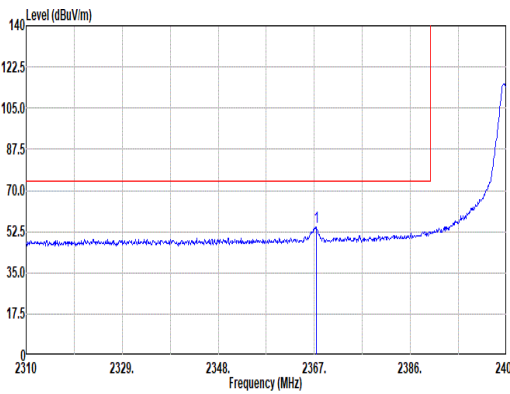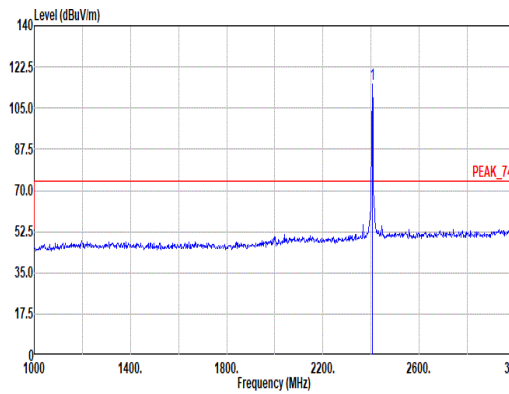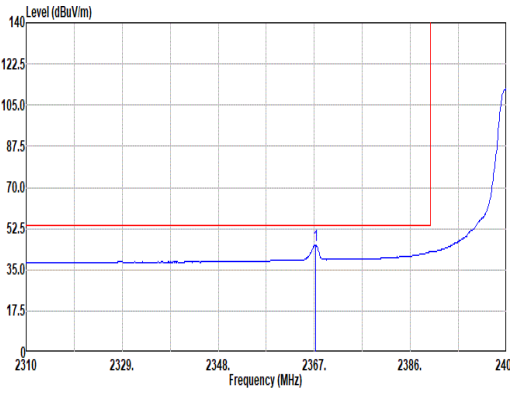
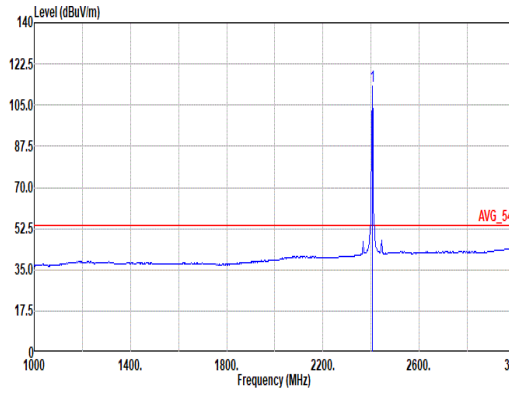


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_ZigBee_CH11_2405MHz																																																																																																		
ANT	10																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.38</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>45.16</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>278</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.38	54.53	74.00	-19.47	45.16	27.30	8.65	36.26	9.68	278	0	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>115.40</td><td>-----</td><td>-----</td><td>105.81</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>278</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	115.40	-----	-----	105.81	27.46	8.72	36.27	9.68	278	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2367.38	54.53	74.00	-19.47	45.16	27.30	8.65	36.26	9.68	278	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	115.40	-----	-----	105.81	27.46	8.72	36.27	9.68	278	0	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.19</td><td>45.57</td><td>54.00</td><td>-8.43</td><td>36.20</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>278</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.19	45.57	54.00	-8.43	36.20	27.30	8.65	36.26	9.68	278	0	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>113.31</td><td>-----</td><td>-----</td><td>103.72</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>278</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	113.31	-----	-----	103.72	27.46	8.72	36.27	9.68	278	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2367.19	45.57	54.00	-8.43	36.20	27.30	8.65	36.26	9.68	278	0	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	113.31	-----	-----	103.72	27.46	8.72	36.27	9.68	278	0	AVERAGE																																																																																							

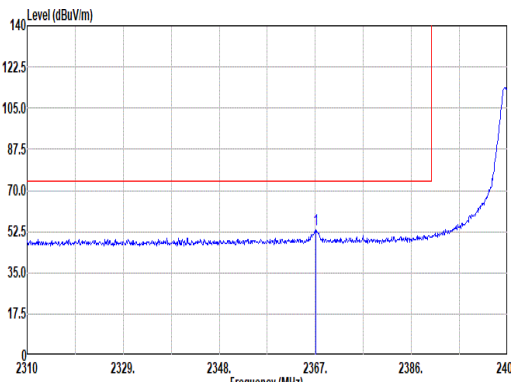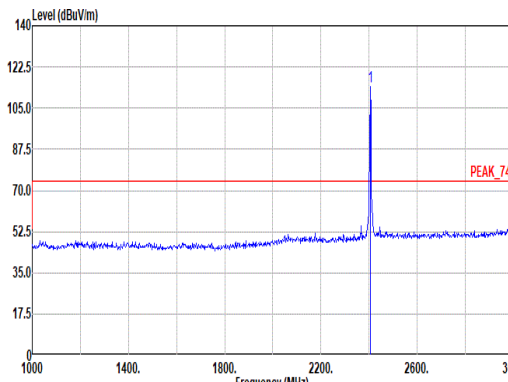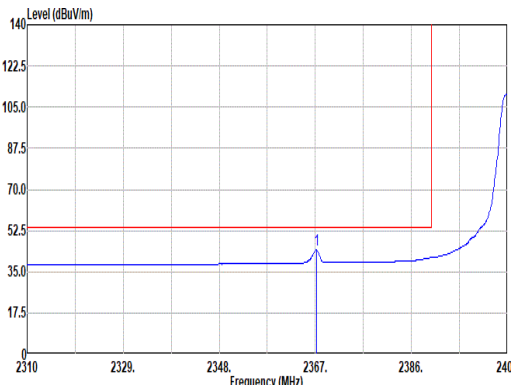
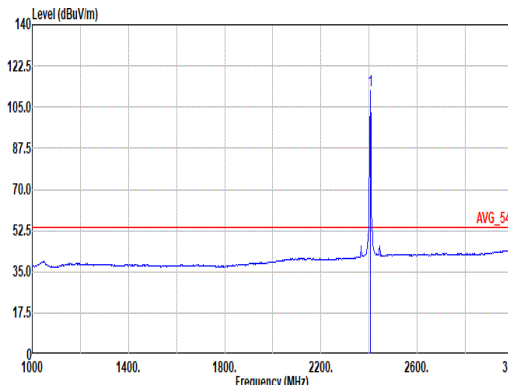


Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_ZigBee_CH11_2405MHz																																																																																	
ANT	10																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2367.10</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>44.12</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>327 97 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2367.10	53.49	74.00	-20.51	44.12	27.30	8.65	36.26	9.68	327 97 PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2405.00</td><td>114.04</td><td>-----</td><td>-----</td><td>104.45</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>327 97 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2405.00	114.04	-----	-----	104.45	27.46	8.72	36.27	9.68	327 97 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2367.10	53.49	74.00	-20.51	44.12	27.30	8.65	36.26	9.68	327 97 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2405.00	114.04	-----	-----	104.45	27.46	8.72	36.27	9.68	327 97 PEAK																																																																									
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2367.19</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>34.89</td><td>27.30</td><td>8.65</td><td>36.26</td><td>9.68</td><td>327 97 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2367.19	44.26	54.00	-9.74	34.89	27.30	8.65	36.26	9.68	327 97 AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2405.00</td><td>112.07</td><td>-----</td><td>-----</td><td>102.48</td><td>27.46</td><td>8.72</td><td>36.27</td><td>9.68</td><td>327 97 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2405.00	112.07	-----	-----	102.48	27.46	8.72	36.27	9.68	327 97 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2367.19	44.26	54.00	-9.74	34.89	27.30	8.65	36.26	9.68	327 97 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2405.00	112.07	-----	-----	102.48	27.46	8.72	36.27	9.68	327 97 AVERAGE																																																																									



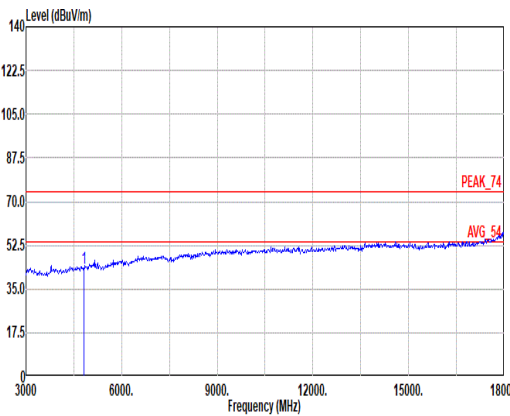
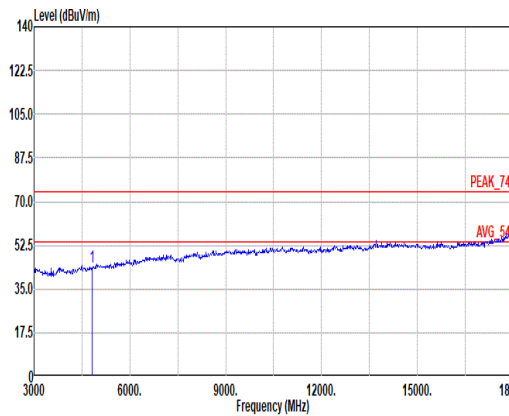


Mode	4																																																					
	Harmonic																																																					
	2400-2483.5_ZigBee_CH11_2405MHz																																																					
ANT	10																																																					
Pol.	Horizontal						Vertical																																															
Peak Avg.																																																						
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>43.30</td><td>74.00</td><td>-30.70</td><td>35.28</td><td>32.28</td><td>12.44</td><td>37.52</td><td>0.82</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	43.30	74.00	-30.70	35.28	32.28	12.44	37.52	0.82	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	4810.00	43.30	74.00	-30.70	35.28	32.28	12.44	37.52	0.82	--	PEAK																																											
Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL																																																						
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>43.87</td><td>74.00</td><td>-30.13</td><td>35.85</td><td>32.28</td><td>12.44</td><td>37.52</td><td>0.82</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	43.87	74.00	-30.13	35.85	32.28	12.44	37.52	0.82	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	4810.00	43.87	74.00	-30.13	35.85	32.28	12.44	37.52	0.82	--	PEAK																																											

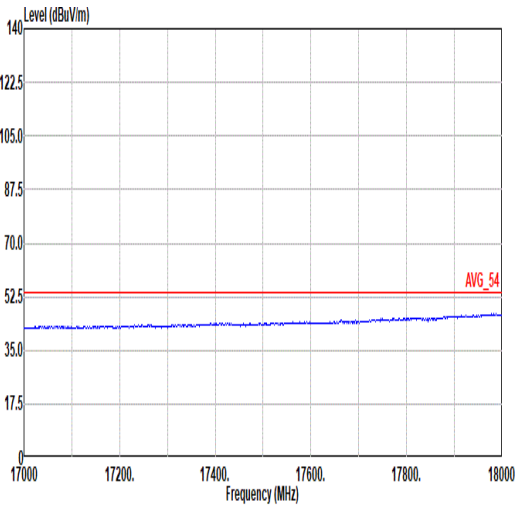
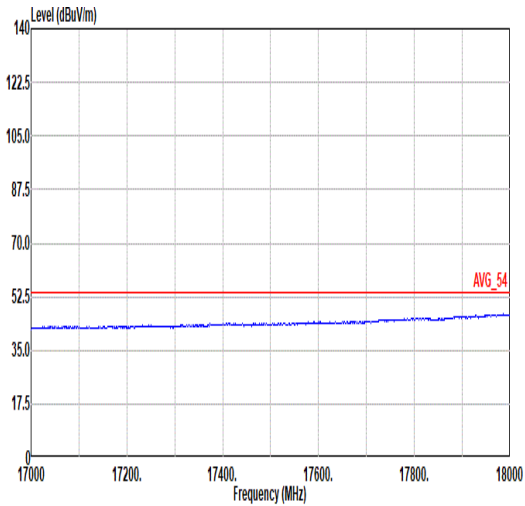


Mode	4	
	Harmonic	
	2400-2483.5_ZigBee_CH11_2405MHz	
ANT	10	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL

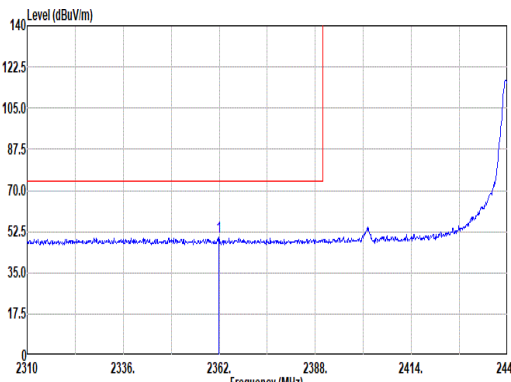
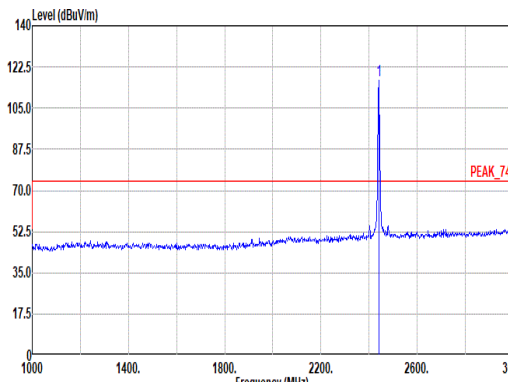
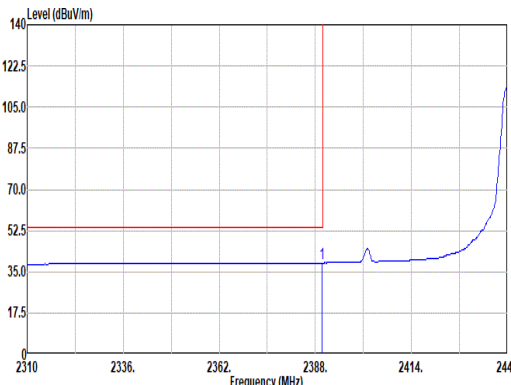
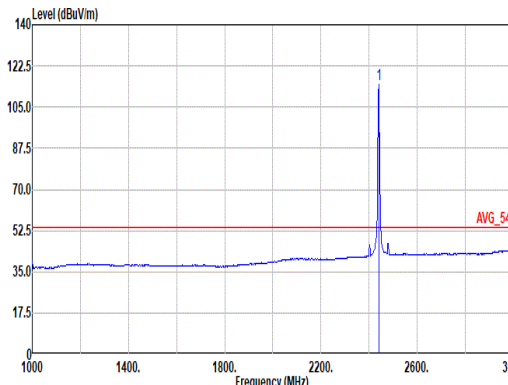


Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_ZigBee_CH18_2440MHz																																																																																																			
ANT	10																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.87</td><td>50.08</td><td>74.00</td><td>-23.92</td><td>40.72</td><td>27.30</td><td>8.64</td><td>36.26</td><td>9.68</td><td>298</td><td>342</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2361.87	50.08	74.00	-23.92	40.72	27.30	8.64	36.26	9.68	298	342	PEAK	 Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>116.81</td><td>-----</td><td>-----</td><td>107.03</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>298</td><td>342</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	116.81	-----	-----	107.03	27.60	8.78	36.28	9.68	298	342	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2361.87	50.08	74.00	-23.92	40.72	27.30	8.64	36.26	9.68	298	342	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	116.81	-----	-----	107.03	27.60	8.78	36.28	9.68	298	342	PEAK																																																																																								
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>38.81</td><td>54.00</td><td>-15.19</td><td>29.31</td><td>27.40</td><td>8.69</td><td>36.27</td><td>9.68</td><td>298</td><td>342</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	38.81	54.00	-15.19	29.31	27.40	8.69	36.27	9.68	298	342	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>114.72</td><td>-----</td><td>-----</td><td>104.94</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>298</td><td>342</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	114.72	-----	-----	104.94	27.60	8.78	36.28	9.68	298	342	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.82	38.81	54.00	-15.19	29.31	27.40	8.69	36.27	9.68	298	342	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	114.72	-----	-----	104.94	27.60	8.78	36.28	9.68	298	342	AVERAGE																																																																																								

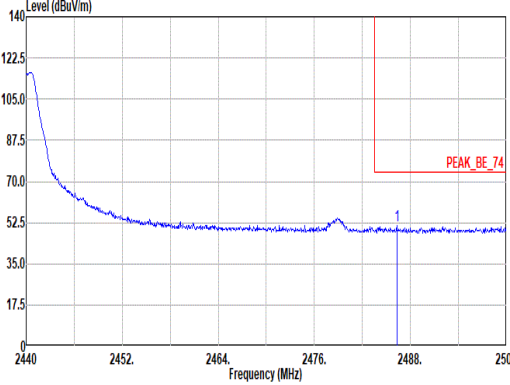
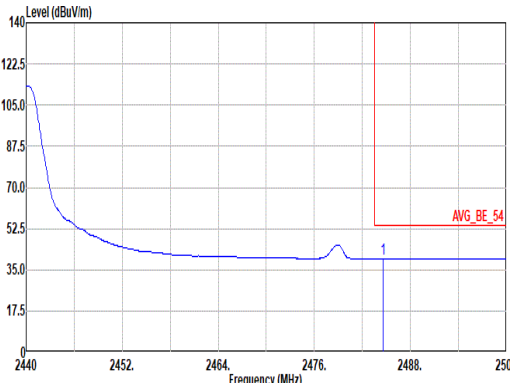


Mode	5																																																							
	Band Edge - R																																																							
	2400-2483.5_ZigBee_CH18_2440MHz																																																							
ANT	10																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.32</td><td>51.09</td><td>74.00</td><td>-22.91</td><td>40.88</td><td>27.96</td><td>8.87</td><td>36.30</td><td>9.68</td><td>298</td><td>342</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.32	51.09	74.00	-22.91	40.88	27.96	8.87	36.30	9.68	298	342	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2486.32	51.09	74.00	-22.91	40.88	27.96	8.87	36.30	9.68	298	342	PEAK																																												
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.58</td><td>39.67</td><td>54.00</td><td>-14.33</td><td>29.47</td><td>27.95</td><td>8.87</td><td>36.30</td><td>9.68</td><td>298</td><td>342</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.58	39.67	54.00	-14.33	29.47	27.95	8.87	36.30	9.68	298	342	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.58	39.67	54.00	-14.33	29.47	27.95	8.87	36.30	9.68	298	342	AVERAGE																																												

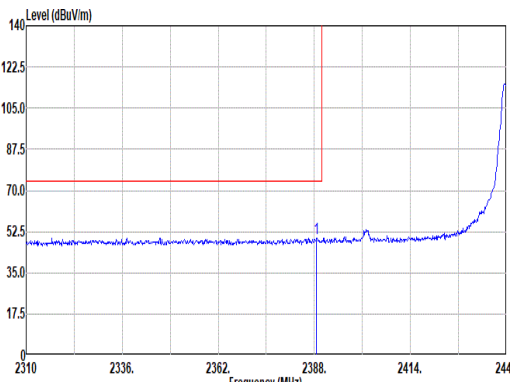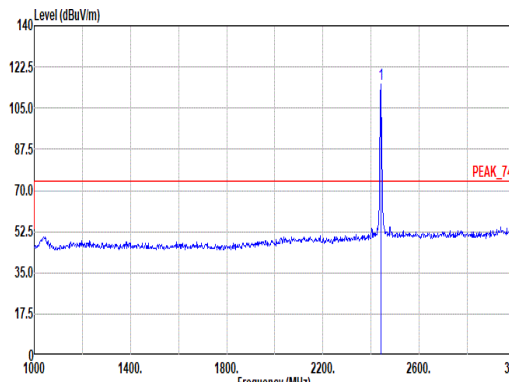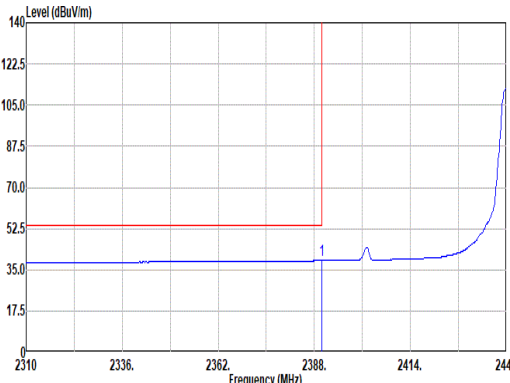
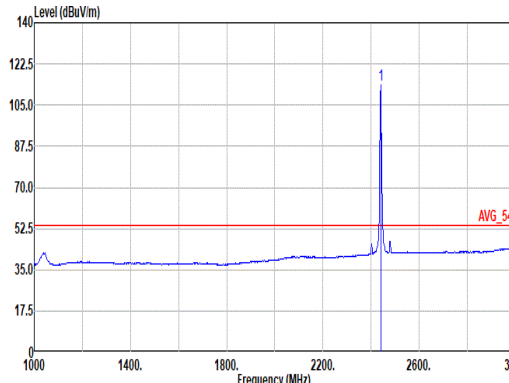


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_ZigBee_CH18_2440MHz																																																																																																		
ANT	10																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.65</td><td>49.67</td><td>74.00</td><td>-24.33</td><td>40.20</td><td>27.37</td><td>8.69</td><td>36.27</td><td>9.68</td><td>257</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	49.67	74.00	-24.33	40.20	27.37	8.69	36.27	9.68	257	305	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>115.41</td><td>-----</td><td>-----</td><td>105.63</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>257</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	115.41	-----	-----	105.63	27.60	8.78	36.28	9.68	257	305
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.65	49.67	74.00	-24.33	40.20	27.37	8.69	36.27	9.68	257	305	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	115.41	-----	-----	105.63	27.60	8.78	36.28	9.68	257	305	PEAK																																																																																							
Avg.																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>38.92</td><td>54.00</td><td>-15.08</td><td>29.42</td><td>27.40</td><td>8.69</td><td>36.27</td><td>9.68</td><td>257</td><td>305</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	38.92	54.00	-15.08	29.42	27.40	8.69	36.27	9.68	257	305	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>113.43</td><td>-----</td><td>-----</td><td>103.65</td><td>27.60</td><td>8.78</td><td>36.28</td><td>9.68</td><td>257</td><td>305</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	113.43	-----	-----	103.65	27.60	8.78	36.28	9.68	257	305
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	38.92	54.00	-15.08	29.42	27.40	8.69	36.27	9.68	257	305	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	113.43	-----	-----	103.65	27.60	8.78	36.28	9.68	257	305	AVERAGE																																																																																							

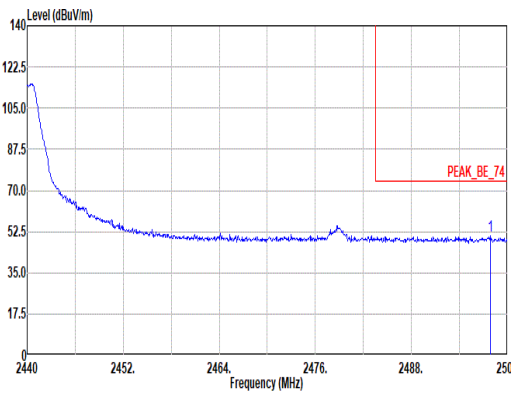
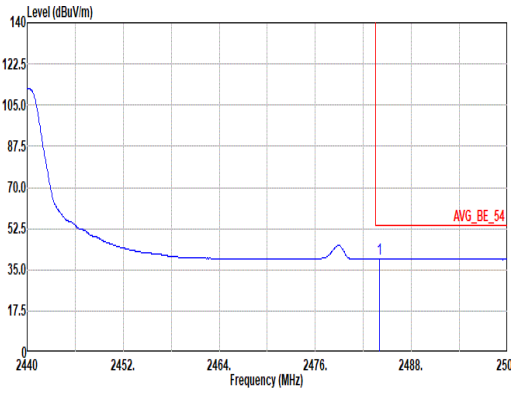


Mode	5																																																							
	Band Edge - R																																																							
	2400-2483.5_ZigBee_CH18_2440MHz																																																							
ANT	10																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.90</td><td>50.75</td><td>74.00</td><td>-23.25</td><td>40.48</td><td>28.00</td><td>8.89</td><td>36.30</td><td>9.68</td><td>257</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.90	50.75	74.00	-23.25	40.48	28.00	8.89	36.30	9.68	257	305	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2497.90	50.75	74.00	-23.25	40.48	28.00	8.89	36.30	9.68	257	305	PEAK																																												
Avg.	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.98</td><td>39.53</td><td>54.00</td><td>-14.47</td><td>29.34</td><td>27.94</td><td>8.87</td><td>36.30</td><td>9.68</td><td>257</td><td>305</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	39.53	54.00	-14.47	29.34	27.94	8.87	36.30	9.68	257	305	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.98	39.53	54.00	-14.47	29.34	27.94	8.87	36.30	9.68	257	305	AVERAGE																																												

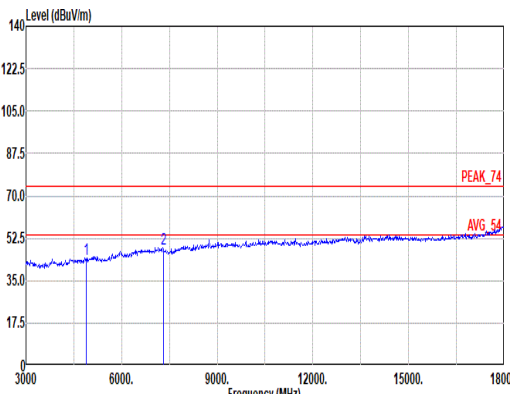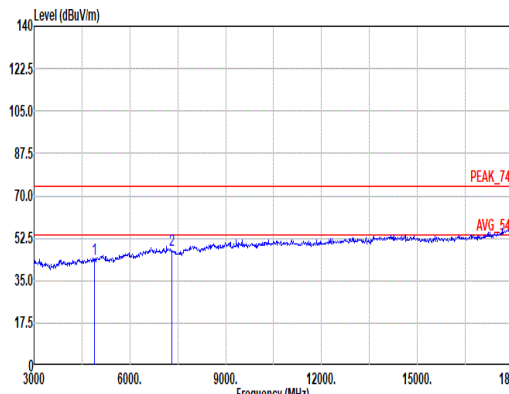

Mode	5																																																																																																																															
	Harmonic																																																																																																																															
	2400-2483.5_ZigBee_CH18_2440MHz																																																																																																																															
ANT	10																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg.																																																																																																																																
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>35.54</td><td>32.72</td><td>12.56</td><td>37.57</td><td>0.67</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>33.87</td><td>36.78</td><td>15.45</td><td>38.48</td><td>0.35</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	43.92	74.00	-30.08	35.54	32.72	12.56	37.57	0.67	--	PEAK	2	7320.00	47.97	74.00	-26.03	33.87	36.78	15.45	38.48	0.35	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>35.73</td><td>32.72</td><td>12.56</td><td>37.57</td><td>0.67</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>33.41</td><td>36.78</td><td>15.45</td><td>38.48</td><td>0.35</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	44.11	74.00	-29.89	35.73	32.72	12.56	37.57	0.67	--	PEAK	2	7320.00	47.51	74.00	-26.49	33.41	36.78	15.45	38.48	0.35	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	4880.00	43.92	74.00	-30.08	35.54	32.72	12.56	37.57	0.67	--	PEAK																																																																																																																					
2	7320.00	47.97	74.00	-26.03	33.87	36.78	15.45	38.48	0.35	--	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	4880.00	44.11	74.00	-29.89	35.73	32.72	12.56	37.57	0.67	--	PEAK																																																																																																																					
2	7320.00	47.51	74.00	-26.49	33.41	36.78	15.45	38.48	0.35	--	PEAK																																																																																																																					



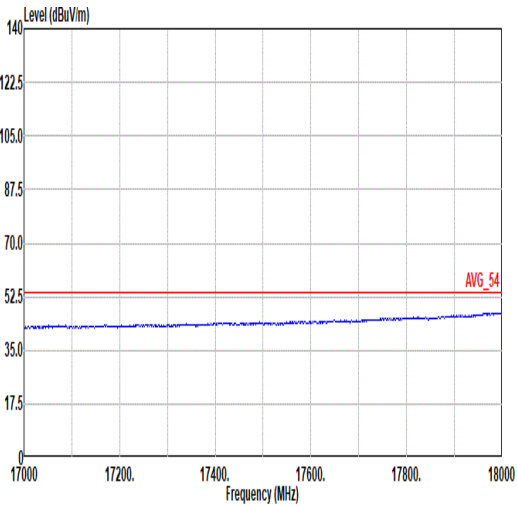
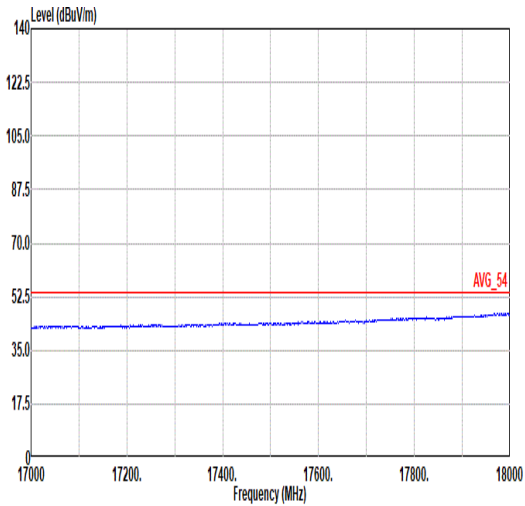


Mode	5	
	Harmonic	
	2400-2483.5_ZigBee_CH18_2440MHz	
ANT	10	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL





Mode	6																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																				
ANT	10																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.75</td><td>59.90</td><td>74.00</td><td>-14.10</td><td>49.72</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>257</td><td>2 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	59.90	74.00	-14.10	49.72	27.94	8.86	36.30	9.68	257	2 PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>117.19</td><td>-----</td><td>-----</td><td>107.09</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>257</td><td>2 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	117.19	-----	-----	107.09	27.86	8.85	36.29	9.68	257	2 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.75	59.90	74.00	-14.10	49.72	27.94	8.86	36.30	9.68	257	2 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2475.00	117.19	-----	-----	107.09	27.86	8.85	36.29	9.68	257	2 PEAK																																																																																										
Avg.	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.53</td><td>49.87</td><td>54.00</td><td>-4.13</td><td>39.69</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>257</td><td>2 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	49.87	54.00	-4.13	39.69	27.94	8.86	36.30	9.68	257	2 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>115.18</td><td>-----</td><td>-----</td><td>105.08</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>257</td><td>2 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	115.18	-----	-----	105.08	27.86	8.85	36.29	9.68	257	2 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.53	49.87	54.00	-4.13	39.69	27.94	8.86	36.30	9.68	257	2 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2475.00	115.18	-----	-----	105.08	27.86	8.85	36.29	9.68	257	2 AVERAGE																																																																																										

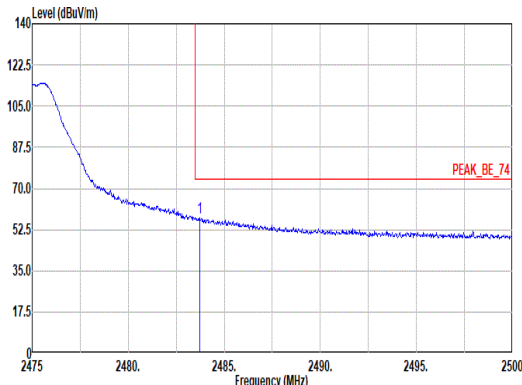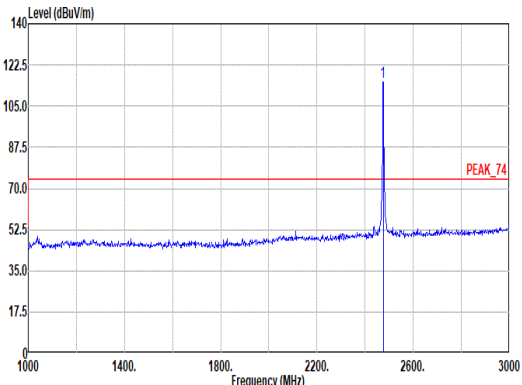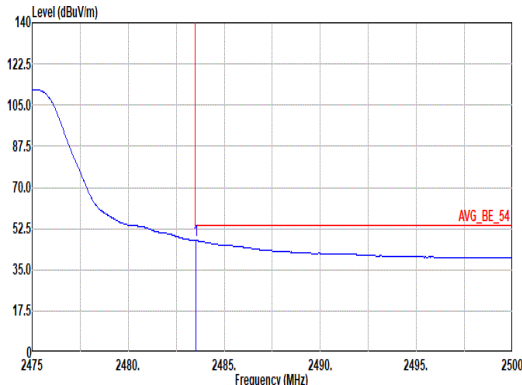
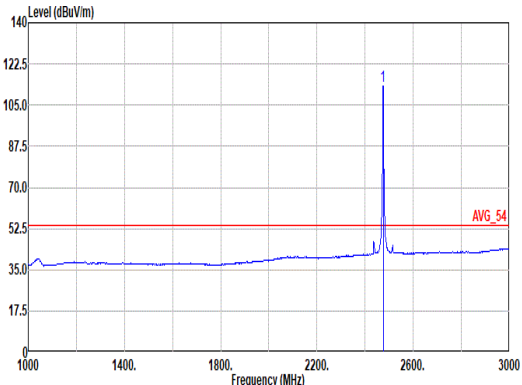


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																			
ANT	10																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.73</td><td>57.39</td><td>74.00</td><td>-16.61</td><td>47.21</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>300</td><td>312</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.73	57.39	74.00	-16.61	47.21	27.94	8.86	36.30	9.68	300	312	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK_74 Site : 03CH20-HY Condition: PEAK_74 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>115.06</td><td>-----</td><td>-----</td><td>104.96</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>300</td><td>312</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	115.06	-----	-----	104.96	27.86	8.85	36.29	9.68	300	312	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.73	57.39	74.00	-16.61	47.21	27.94	8.86	36.30	9.68	300	312	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	115.06	-----	-----	104.96	27.86	8.85	36.29	9.68	300	312	PEAK																																																																																								
Avg.	 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>47.42</td><td>54.00</td><td>-6.58</td><td>37.24</td><td>27.94</td><td>8.86</td><td>36.30</td><td>9.68</td><td>300</td><td>312</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	47.42	54.00	-6.58	37.24	27.94	8.86	36.30	9.68	300	312	AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>113.13</td><td>-----</td><td>-----</td><td>103.03</td><td>27.86</td><td>8.85</td><td>36.29</td><td>9.68</td><td>300</td><td>312</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	113.13	-----	-----	103.03	27.86	8.85	36.29	9.68	300	312	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.53	47.42	54.00	-6.58	37.24	27.94	8.86	36.30	9.68	300	312	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2475.00	113.13	-----	-----	103.03	27.86	8.85	36.29	9.68	300	312	AVERAGE																																																																																								

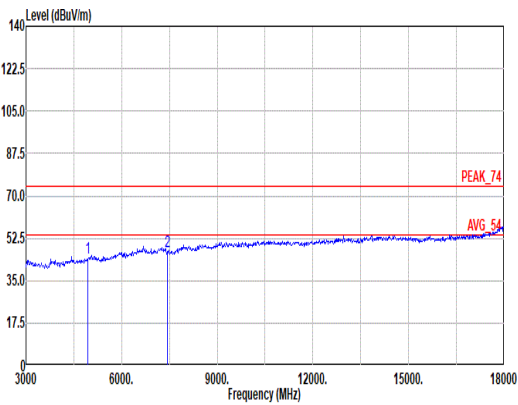
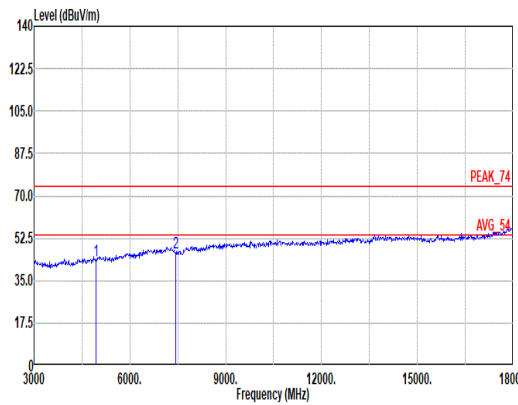


Mode	6																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																																												
ANT	10																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg.																																																																																																																													
	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>44.24</td><td>74.00</td><td>-29.76</td><td>35.57</td><td>33.10</td><td>12.68</td><td>37.63</td><td>0.52</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>33.53</td><td>36.25</td><td>15.56</td><td>38.57</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	44.24	74.00	-29.76	35.57	33.10	12.68	37.63	0.52	--	--	PEAK	2	7425.00	47.10	74.00	-26.90	33.53	36.25	15.56	38.57	0.33	--	--	PEAK	Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>43.32</td><td>74.00</td><td>-30.68</td><td>34.65</td><td>33.10</td><td>12.68</td><td>37.63</td><td>0.52</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7425.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>32.98</td><td>36.25</td><td>15.56</td><td>38.57</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	43.32	74.00	-30.68	34.65	33.10	12.68	37.63	0.52	--	--	PEAK	2	7425.00	46.55	74.00	-27.45	32.98	36.25	15.56	38.57	0.33	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4950.00	44.24	74.00	-29.76	35.57	33.10	12.68	37.63	0.52	--	--	PEAK																																																																																																																	
2	7425.00	47.10	74.00	-26.90	33.53	36.25	15.56	38.57	0.33	--	--	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4950.00	43.32	74.00	-30.68	34.65	33.10	12.68	37.63	0.52	--	--	PEAK																																																																																																																	
2	7425.00	46.55	74.00	-27.45	32.98	36.25	15.56	38.57	0.33	--	--	PEAK																																																																																																																	

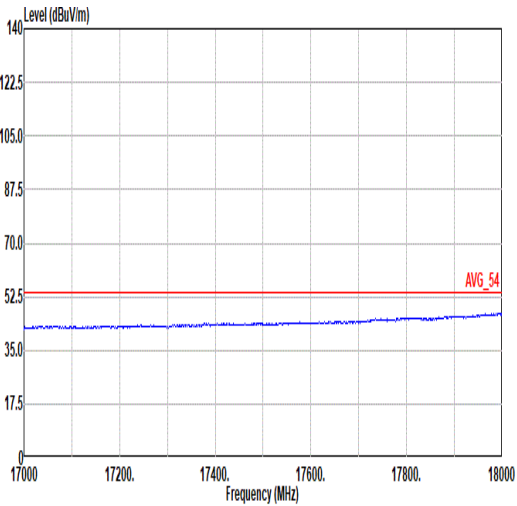
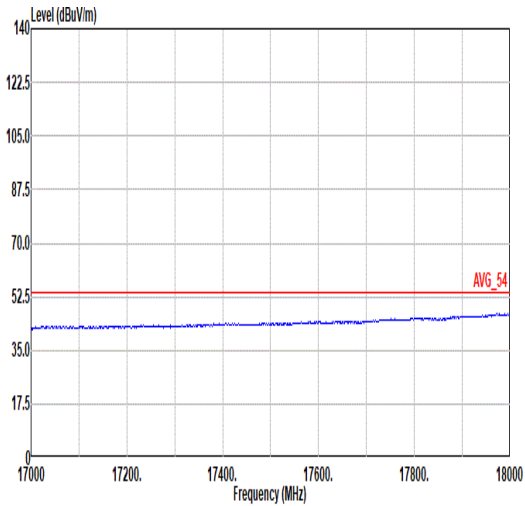


Mode	6	
	Harmonic	
	2400-2483.5_ZigBee_CH25_2475MHz	
ANT	10	
Pol.	Horizontal	Vertical
17G ~18G Avg.	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_241101 VERTICAL

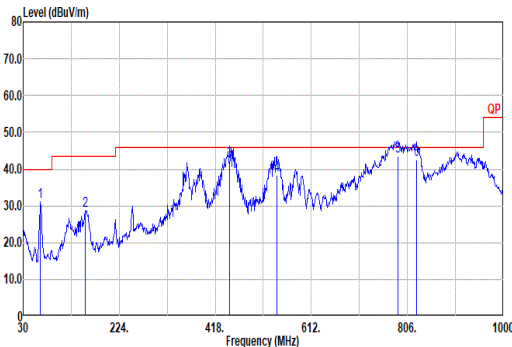
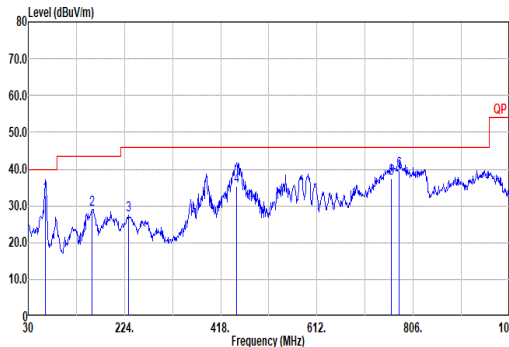


Mode	7																																																																																																																									
	LF																																																																																																																									
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																																									
ANT	9																																																																																																																									
Pol.	Horizontal							Vertical																																																																																																																		
QPI Peak																																																																																																																										
	Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 HORIZONTAL Mode : 7																																																																																																																									
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>64.92</td><td>31.17</td><td>40.00</td><td>-8.83</td><td>53.17</td><td>12.00</td><td>1.53</td><td>35.72</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>156.10</td><td>28.82</td><td>43.50</td><td>-14.68</td><td>44.94</td><td>16.95</td><td>2.33</td><td>35.59</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>447.10</td><td>42.37</td><td>46.00</td><td>-3.63</td><td>50.29</td><td>23.00</td><td>3.85</td><td>34.91</td><td>0.14</td><td>183</td><td>177</td><td>QP</td></tr><tr><td>4</td><td>542.16</td><td>38.29</td><td>46.00</td><td>-7.71</td><td>44.18</td><td>24.41</td><td>4.22</td><td>34.64</td><td>0.12</td><td>329</td><td>202</td><td>QP</td></tr><tr><td>5</td><td>787.57</td><td>43.51</td><td>46.00</td><td>-2.49</td><td>43.00</td><td>28.26</td><td>5.03</td><td>33.74</td><td>0.16</td><td>100</td><td>180</td><td>QP</td></tr><tr><td>6</td><td>824.43</td><td>42.59</td><td>46.00</td><td>-3.41</td><td>43.03</td><td>27.90</td><td>5.12</td><td>33.59</td><td>0.13</td><td>130</td><td>26</td><td>QP</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	1	64.92	31.17	40.00	-8.83	53.17	12.00	1.53	35.72	0.19	--	--	--	Peak	2	156.10	28.82	43.50	-14.68	44.94	16.95	2.33	35.59	0.19	--	--	--	Peak	3	447.10	42.37	46.00	-3.63	50.29	23.00	3.85	34.91	0.14	183	177	QP	4	542.16	38.29	46.00	-7.71	44.18	24.41	4.22	34.64	0.12	329	202	QP	5	787.57	43.51	46.00	-2.49	43.00	28.26	5.03	33.74	0.16	100	180	QP	6	824.43	42.59	46.00	-3.41	43.03	27.90	5.12	33.59	0.13	130	26
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																												
1	64.92	31.17	40.00	-8.83	53.17	12.00	1.53	35.72	0.19	--	--	--	Peak																																																																																																													
2	156.10	28.82	43.50	-14.68	44.94	16.95	2.33	35.59	0.19	--	--	--	Peak																																																																																																													
3	447.10	42.37	46.00	-3.63	50.29	23.00	3.85	34.91	0.14	183	177	QP																																																																																																														
4	542.16	38.29	46.00	-7.71	44.18	24.41	4.22	34.64	0.12	329	202	QP																																																																																																														
5	787.57	43.51	46.00	-2.49	43.00	28.26	5.03	33.74	0.16	100	180	QP																																																																																																														
6	824.43	42.59	46.00	-3.41	43.03	27.90	5.12	33.59	0.13	130	26	QP																																																																																																														
Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 00_241127 VERTICAL Mode : 7																																																																																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>64.92</td><td>32.97</td><td>40.00</td><td>-7.03</td><td>54.97</td><td>12.00</td><td>1.53</td><td>35.72</td><td>0.19</td><td>100</td><td>287</td><td>QP</td></tr><tr><td>2</td><td>158.04</td><td>29.03</td><td>43.50</td><td>-14.47</td><td>45.38</td><td>16.71</td><td>2.35</td><td>35.59</td><td>0.18</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>232.73</td><td>27.35</td><td>46.00</td><td>-18.65</td><td>43.27</td><td>16.53</td><td>2.80</td><td>35.44</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>450.01</td><td>35.32</td><td>46.00</td><td>-10.68</td><td>43.16</td><td>23.06</td><td>3.86</td><td>34.90</td><td>0.14</td><td>185</td><td>225</td><td>QP</td></tr><tr><td>5</td><td>762.35</td><td>37.38</td><td>46.00</td><td>-8.62</td><td>37.93</td><td>28.20</td><td>4.95</td><td>33.84</td><td>0.14</td><td>143</td><td>208</td><td>QP</td></tr><tr><td>6</td><td>777.87</td><td>39.58</td><td>46.00</td><td>-6.42</td><td>39.97</td><td>28.24</td><td>5.00</td><td>33.78</td><td>0.15</td><td>121</td><td>99</td><td>QP</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	1	64.92	32.97	40.00	-7.03	54.97	12.00	1.53	35.72	0.19	100	287	QP	2	158.04	29.03	43.50	-14.47	45.38	16.71	2.35	35.59	0.18	--	--	Peak	3	232.73	27.35	46.00	-18.65	43.27	16.53	2.80	35.44	0.19	--	--	Peak	4	450.01	35.32	46.00	-10.68	43.16	23.06	3.86	34.90	0.14	185	225	QP	5	762.35	37.38	46.00	-8.62	37.93	28.20	4.95	33.84	0.14	143	208	QP	6	777.87	39.58	46.00	-6.42	39.97	28.24	5.00	33.78	0.15	121	99	QP		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																												
1	64.92	32.97	40.00	-7.03	54.97	12.00	1.53	35.72	0.19	100	287	QP																																																																																																														
2	158.04	29.03	43.50	-14.47	45.38	16.71	2.35	35.59	0.18	--	--	Peak																																																																																																														
3	232.73	27.35	46.00	-18.65	43.27	16.53	2.80	35.44	0.19	--	--	Peak																																																																																																														
4	450.01	35.32	46.00	-10.68	43.16	23.06	3.86	34.90	0.14	185	225	QP																																																																																																														
5	762.35	37.38	46.00	-8.62	37.93	28.20	4.95	33.84	0.14	143	208	QP																																																																																																														
6	777.87	39.58	46.00	-6.42	39.97	28.24	5.00	33.78	0.15	121	99	QP																																																																																																														

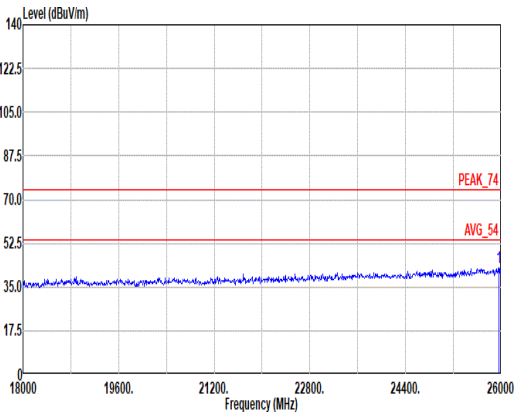
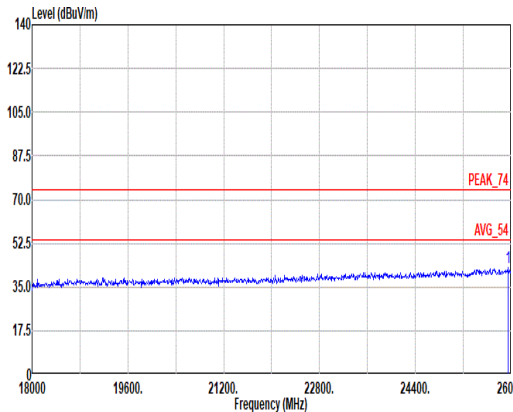


Mode	8																																																																																							
	SHF																																																																																							
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																							
ANT	9																																																																																							
Pol.	Horizontal						Vertical																																																																																	
Peak																																																																																								
	Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1230_241025 HORIZONTAL Mode : 8						Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1230_241025 VERTICAL Mode : 8																																																																																	
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>25960.00</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>36.75</td><td>38.98</td><td>29.67</td><td>53.10</td><td>-9.54</td><td>150</td><td>255</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	25960.00	42.76	74.00	-31.24	36.75	38.98	29.67	53.10	-9.54	150	255	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>25944.00</td><td>42.87</td><td>74.00</td><td>-31.13</td><td>36.87</td><td>38.98</td><td>29.66</td><td>53.10</td><td>-9.54</td><td>150</td><td>169</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	25944.00	42.87	74.00	-31.13	36.87	38.98	29.66	53.10	-9.54	150	169
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																												
1	25960.00	42.76	74.00	-31.24	36.75	38.98	29.67	53.10	-9.54	150	255	Peak																																																																												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																												
1	25944.00	42.87	74.00	-31.13	36.87	38.98	29.66	53.10	-9.54	150	169	Peak																																																																												

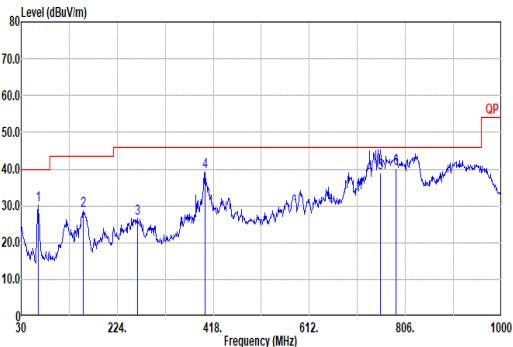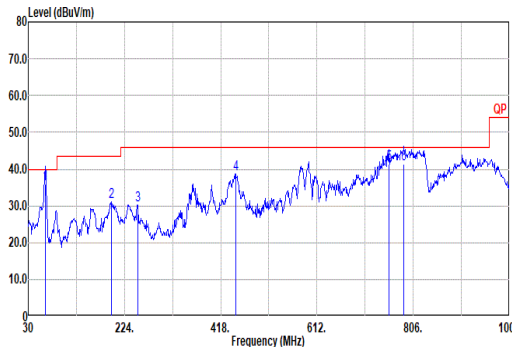

Mode	9																																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																																	
	2400-2483.5_ZigBee_CH25_2475MHz																																																																																																																																																																																																																																	
ANT	10																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																
QP/ Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 HORIZONTAL Mode : 9 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>63.95</td><td>30.14</td><td>40.00</td><td>-9.86</td><td>52.13</td><td>12.02</td><td>1.52</td><td>35.72</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2</td><td>155.13</td><td>28.57</td><td>43.50</td><td>-14.93</td><td>44.61</td><td>17.04</td><td>2.32</td><td>35.59</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>265.71</td><td>26.63</td><td>46.00</td><td>-19.37</td><td>38.00</td><td>20.02</td><td>2.98</td><td>35.36</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>401.51</td><td>39.35</td><td>46.00</td><td>-6.65</td><td>48.64</td><td>21.91</td><td>3.65</td><td>35.00</td><td>0.15</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>5</td><td>755.56</td><td>39.06</td><td>46.00</td><td>-6.94</td><td>39.68</td><td>28.17</td><td>4.94</td><td>33.87</td><td>0.14</td><td>100</td><td>17</td><td>QP</td><td></td></tr><tr><td>6</td><td>787.57</td><td>40.01</td><td>46.00</td><td>-5.99</td><td>40.30</td><td>28.26</td><td>5.03</td><td>33.74</td><td>0.16</td><td>187</td><td>351</td><td>QP</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	63.95	30.14	40.00	-9.86	52.13	12.02	1.52	35.72	0.19	--	--	Peak		2	155.13	28.57	43.50	-14.93	44.61	17.04	2.32	35.59	0.19	--	--	Peak		3	265.71	26.63	46.00	-19.37	38.00	20.02	2.98	35.36	0.19	--	--	Peak		4	401.51	39.35	46.00	-6.65	48.64	21.91	3.65	35.00	0.15	--	--	Peak		5	755.56	39.06	46.00	-6.94	39.68	28.17	4.94	33.87	0.14	100	17	QP		6	787.57	40.01	46.00	-5.99	40.30	28.26	5.03	33.74	0.16	187	351	QP		 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 VERTICAL Mode : 9 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>63.95</td><td>36.00</td><td>40.00</td><td>-4.00</td><td>57.99</td><td>12.02</td><td>1.52</td><td>35.72</td><td>0.19</td><td>105</td><td>310</td><td>QP</td><td></td></tr><tr><td>2</td><td>197.81</td><td>30.95</td><td>43.50</td><td>-12.55</td><td>48.64</td><td>15.03</td><td>2.59</td><td>35.51</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>251.16</td><td>30.33</td><td>46.00</td><td>-15.67</td><td>43.91</td><td>18.72</td><td>2.91</td><td>35.40</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>448.07</td><td>38.65</td><td>46.00</td><td>-7.35</td><td>46.54</td><td>23.02</td><td>3.85</td><td>34.90</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>5</td><td>756.53</td><td>41.43</td><td>46.00</td><td>-4.57</td><td>42.03</td><td>28.18</td><td>4.94</td><td>33.86</td><td>0.14</td><td>147</td><td>358</td><td>QP</td><td></td></tr><tr><td>6</td><td>787.57</td><td>41.39</td><td>46.00</td><td>-4.61</td><td>41.68</td><td>28.26</td><td>5.03</td><td>33.74</td><td>0.16</td><td>169</td><td>360</td><td>QP</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	63.95	36.00	40.00	-4.00	57.99	12.02	1.52	35.72	0.19	105	310	QP		2	197.81	30.95	43.50	-12.55	48.64	15.03	2.59	35.51	0.20	--	--	Peak		3	251.16	30.33	46.00	-15.67	43.91	18.72	2.91	35.40	0.19	--	--	Peak		4	448.07	38.65	46.00	-7.35	46.54	23.02	3.85	34.90	0.14	--	--	Peak		5	756.53	41.43	46.00	-4.57	42.03	28.18	4.94	33.86	0.14	147	358	QP		6	787.57	41.39	46.00	-4.61	41.68	28.26	5.03	33.74	0.16	169	360	QP	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																							
1	63.95	30.14	40.00	-9.86	52.13	12.02	1.52	35.72	0.19	--	--	Peak																																																																																																																																																																																																																						
2	155.13	28.57	43.50	-14.93	44.61	17.04	2.32	35.59	0.19	--	--	Peak																																																																																																																																																																																																																						
3	265.71	26.63	46.00	-19.37	38.00	20.02	2.98	35.36	0.19	--	--	Peak																																																																																																																																																																																																																						
4	401.51	39.35	46.00	-6.65	48.64	21.91	3.65	35.00	0.15	--	--	Peak																																																																																																																																																																																																																						
5	755.56	39.06	46.00	-6.94	39.68	28.17	4.94	33.87	0.14	100	17	QP																																																																																																																																																																																																																						
6	787.57	40.01	46.00	-5.99	40.30	28.26	5.03	33.74	0.16	187	351	QP																																																																																																																																																																																																																						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																							
1	63.95	36.00	40.00	-4.00	57.99	12.02	1.52	35.72	0.19	105	310	QP																																																																																																																																																																																																																						
2	197.81	30.95	43.50	-12.55	48.64	15.03	2.59	35.51	0.20	--	--	Peak																																																																																																																																																																																																																						
3	251.16	30.33	46.00	-15.67	43.91	18.72	2.91	35.40	0.19	--	--	Peak																																																																																																																																																																																																																						
4	448.07	38.65	46.00	-7.35	46.54	23.02	3.85	34.90	0.14	--	--	Peak																																																																																																																																																																																																																						
5	756.53	41.43	46.00	-4.57	42.03	28.18	4.94	33.86	0.14	147	358	QP																																																																																																																																																																																																																						
6	787.57	41.39	46.00	-4.61	41.68	28.26	5.03	33.74	0.16	169	360	QP																																																																																																																																																																																																																						

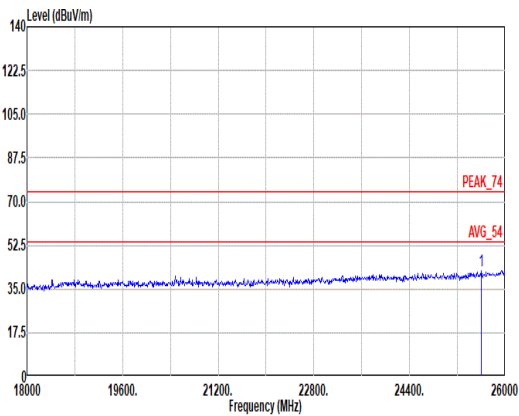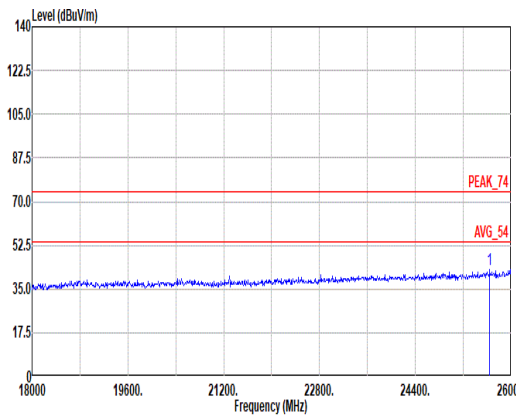

Mode	10																																																																											
	SHF																																																																											
	2400-2483.5_ZigBee_CH25_2475MHz																																																																											
ANT	10																																																																											
Pol.	Horizontal										Vertical																																																																	
Peak																																																																												
	Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1230_241025 HORIZONTAL Mode : 10										Site : 03CH20-HY Condition: PEAK_74 1m BBHA9170_1230_241025 VERTICAL Mode : 10																																																																	
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 25600.00</td><td>42.13</td><td>74.00</td><td>-31.87</td><td>36.32</td><td>39.00</td><td>29.45</td><td>53.10</td><td>-9.54</td><td>150</td><td>244 Peak</td></tr></table>										Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 25600.00	42.13	74.00	-31.87	36.32	39.00	29.45	53.10	-9.54	150	244 Peak	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 25640.00</td><td>42.60</td><td>74.00</td><td>-31.40</td><td>36.85</td><td>38.92</td><td>29.47</td><td>53.10</td><td>-9.54</td><td>150</td><td>244 Peak</td></tr></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 25640.00	42.60	74.00	-31.40	36.85	38.92	29.47	53.10	-9.54	150
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																		
1 25600.00	42.13	74.00	-31.87	36.32	39.00	29.45	53.10	-9.54	150	244 Peak																																																																		
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																		
1 25640.00	42.60	74.00	-31.40	36.85	38.92	29.47	53.10	-9.54	150	244 Peak																																																																		



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
9	ZigBee	100.00	-	-	10Hz
10	ZigBee	100.00	-	-	10Hz

<Ant. 9>

<Ant. 10>

