




# Plots of EUT ceased transmission in the time domain

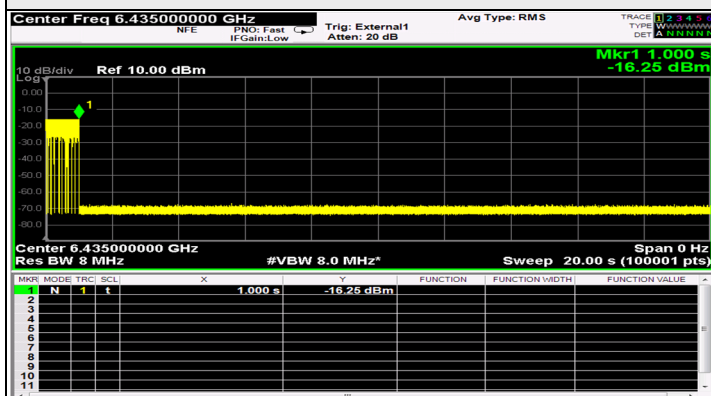


802.11ax (HE20) / CH97

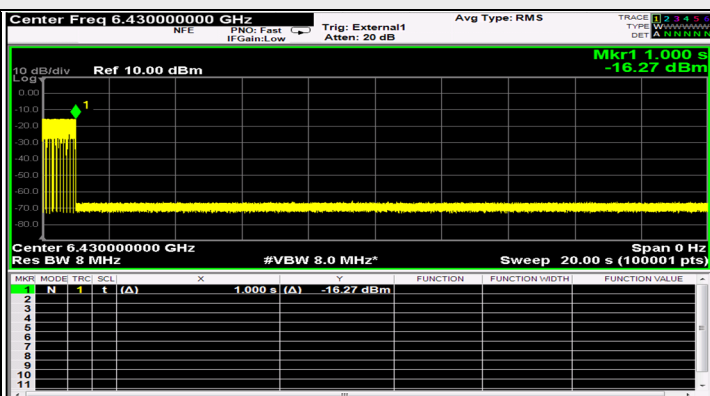

802.11ax (HE160) / CH111(Low Edge)

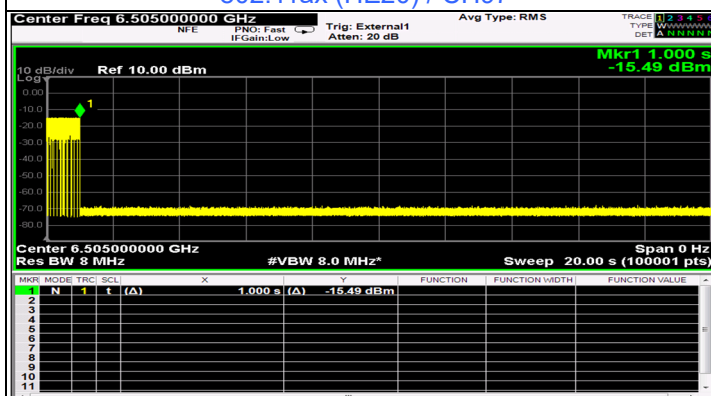

802.11ax (HE160) / CH111(Middle)

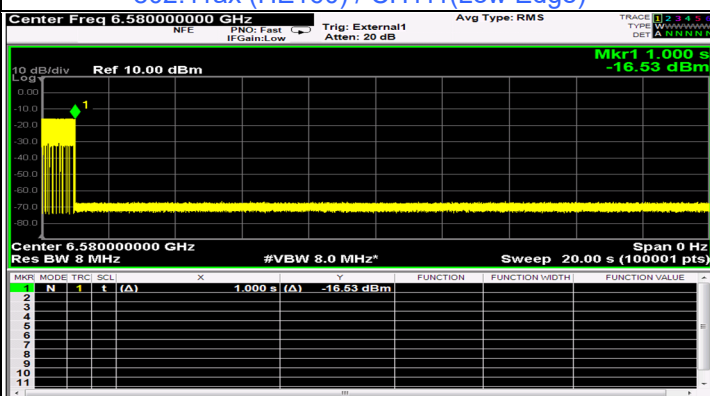

802.11ax (HE160) / CH111(High Edge)

For U-NII-7


| Contention Based Protocol Measurement |                         |                |                     |                        |             |                    |                         |                      |                 |               |
|---------------------------------------|-------------------------|----------------|---------------------|------------------------|-------------|--------------------|-------------------------|----------------------|-----------------|---------------|
| Operation Mode                        | Channel Bandwidth (MHz) | Channel Number | Channel Freq. (MHz) | Injected Signal (AWGN) |             | Antenna Gain (dBi) | Path Loss (dB) (Note 3) | Adjusted Power (dBm) | Detection Limit | EUT TX Status |
|                                       |                         |                |                     | Freq. (MHz)            | Power (dBm) |                    |                         |                      |                 |               |
| 802.11ax                              | 20                      | 129            | 6595                | 6595                   | -70.04      | 5.17               | 0                       | -75.21               | -62             | OFF           |
|                                       |                         |                |                     |                        | -70.54      | 5.17               | 0                       | -75.71               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.83      | 5.17               | 0                       | -82                  | -62             | ON            |
|                                       | 160                     | 143            | 6665                | 6590                   | -69.27      | 5.17               | 0                       | -74.44               | -62             | OFF           |
|                                       |                         |                |                     |                        | -69.77      | 5.17               | 0                       | -74.94               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.83      | 5.17               | 0                       | -82                  | -62             | ON            |
|                                       |                         |                |                     | 6665                   | -67         | 5.17               | 0                       | -72.17               | -62             | OFF           |
|                                       |                         |                |                     |                        | -67.5       | 5.17               | 0                       | -72.67               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.83      | 5.17               | 0                       | -82                  | -62             | ON            |
|                                       |                         |                |                     | 6740                   | -69.1       | 5.17               | 0                       | -74.27               | -62             | OFF           |
|                                       |                         |                |                     |                        | -69.6       | 5.17               | 0                       | -74.77               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.83      | 5.17               | 0                       | -82                  | -62             | ON            |

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

| Contention Based Protocol Detection Probability |                         |                         |     |     |     |     |     |     |     |     |     |     |                       |                 |             |
|-------------------------------------------------|-------------------------|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|-----------------|-------------|
| Operation Mode                                  | Channel Bandwidth (MHz) | AWGN Signal Freq. (MHz) | #01 | #02 | #03 | #04 | #05 | #06 | #07 | #08 | #09 | #10 | Detection Probability | Detection Limit | Test Result |
|                                                 |                         |                         |     |     |     |     |     |     |     |     |     |     |                       |                 |             |
| 802.11ax                                        | 20                      | 6595                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |
|                                                 | 160                     | 6590                    | v   | v   | v   | v   | v   | x   | v   | v   | v   | v   | 90%                   | 90%             | Pass        |
|                                                 |                         | 6665                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |
|                                                 |                         | 6740                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |

### Plots of EUT Tx waveform

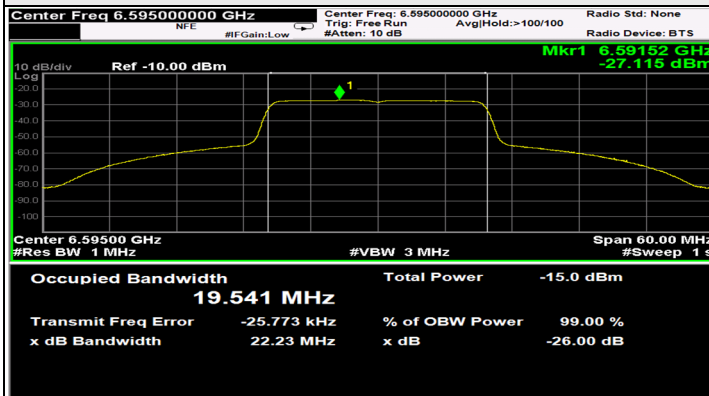


802.11ax (HE20) / CH129

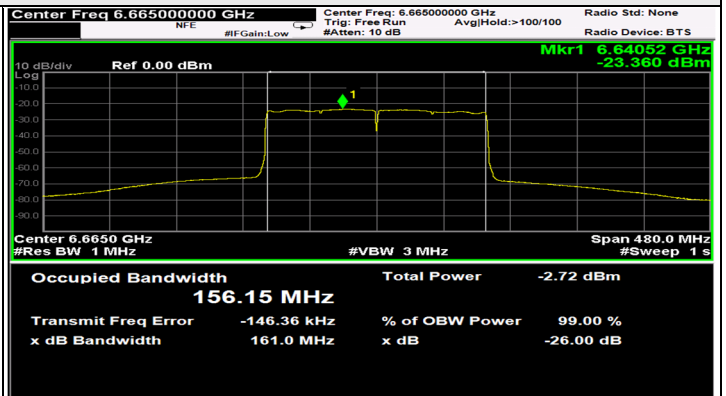


802.11ax (HE160) / CH143


### Plots of Injected signal (AWGN) level

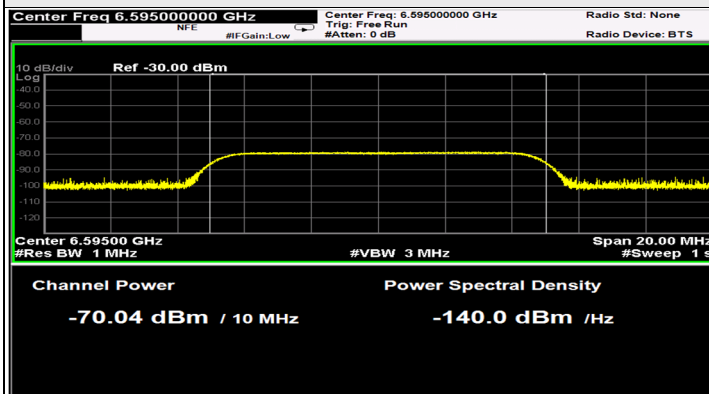


802.11ax (HE20) / CH129

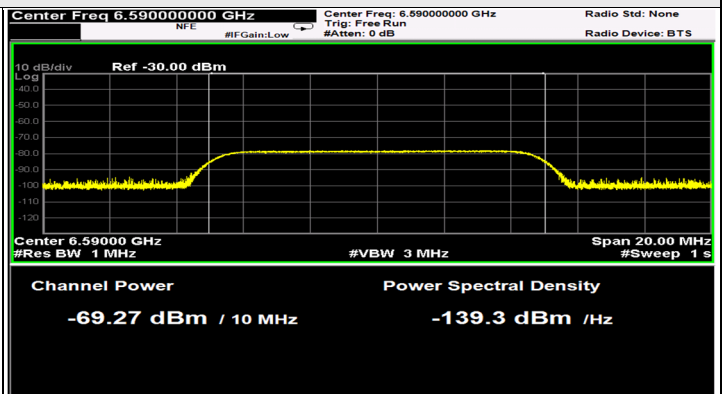

802.11ax (HE160) / CH143(Low Edge)

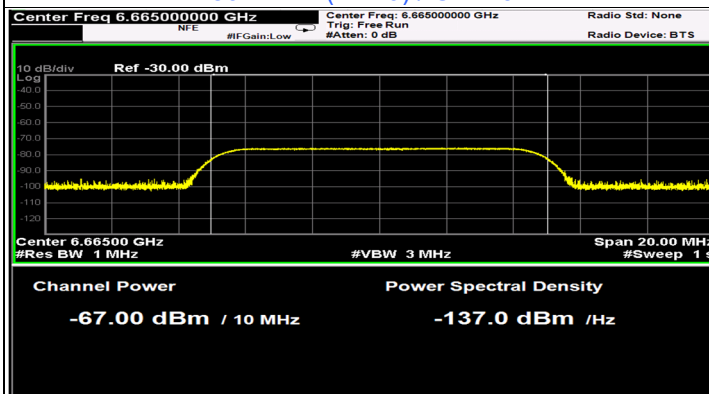


802.11ax (HE160) / CH143(Middle)

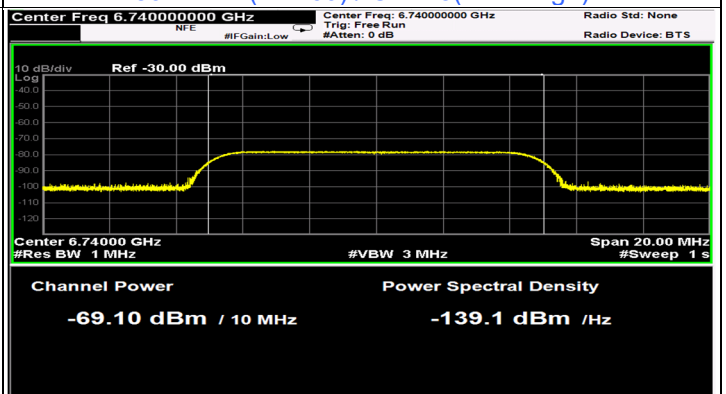


802.11ax (HE160) / CH143(High Edge)


# Plots of EUT ceased transmission in the time domain

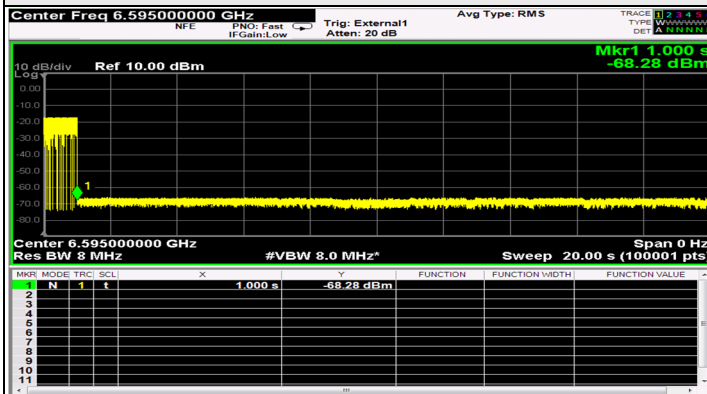


802.11ax (HE20) / CH129

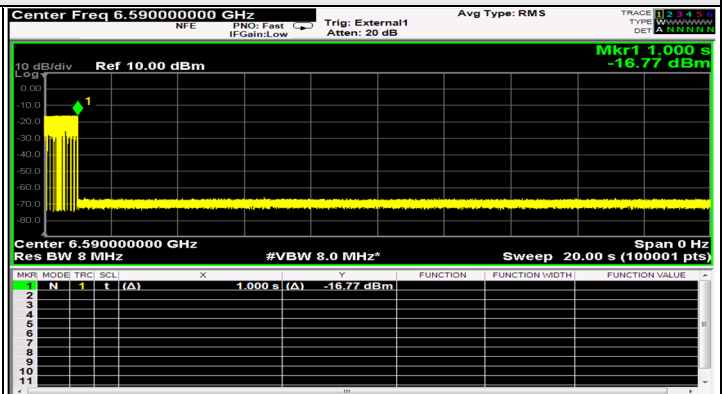

802.11ax (HE160) / CH143(Low Edge)

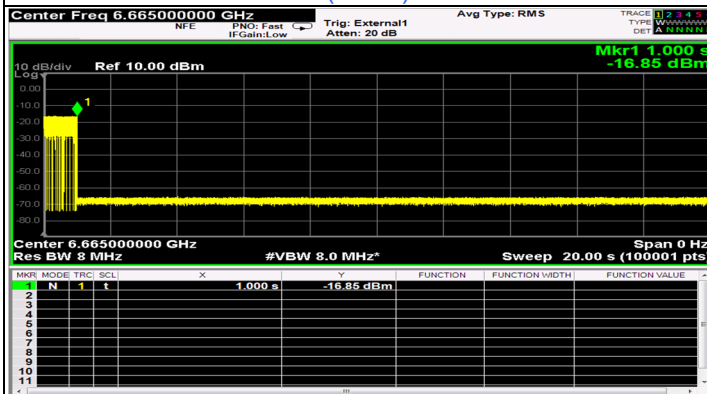

802.11ax (HE160) / CH143(Middle)

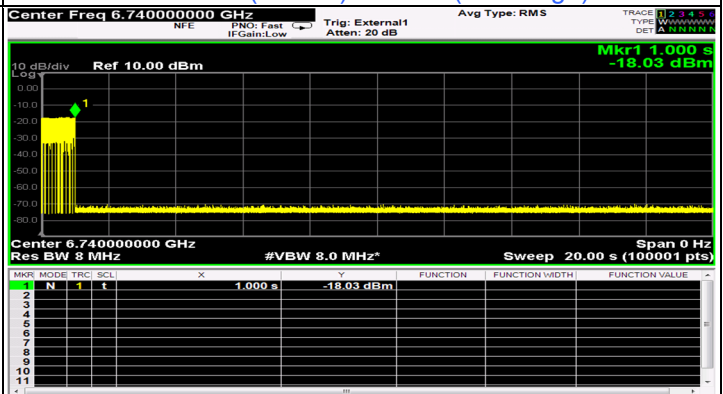

802.11ax (HE160) / CH143(High Edge)

## For U-NII-8


| Contention Based Protocol Measurement |                         |                |                     |                        |             |                    |                         |                      |                 |               |
|---------------------------------------|-------------------------|----------------|---------------------|------------------------|-------------|--------------------|-------------------------|----------------------|-----------------|---------------|
| Operation Mode                        | Channel Bandwidth (MHz) | Channel Number | Channel Freq. (MHz) | Injected Signal (AWGN) |             | Antenna Gain (dBi) | Path Loss (dB) (Note 3) | Adjusted Power (dBm) | Detection Limit | EUT TX Status |
|                                       |                         |                |                     | Freq. (MHz)            | Power (dBm) |                    |                         |                      |                 |               |
| 802.11ax                              | 20                      | 193            | 6915                | 6915                   | -70         | 5.48               | 0                       | -75.48               | -62             | OFF           |
|                                       |                         |                |                     |                        | -70.5       | 5.48               | 0                       | -75.98               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.52      | 5.48               | 0                       | -82                  | -62             | ON            |
|                                       | 160                     | 207            | 6985                | 6910                   | -68.03      | 5.48               | 0                       | -73.51               | -62             | OFF           |
|                                       |                         |                |                     |                        | -68.53      | 5.48               | 0                       | -74.01               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.52      | 5.48               | 0                       | -82                  | -62             | ON            |
|                                       |                         |                |                     | 6985                   | -67.04      | 5.48               | 0                       | -72.52               | -62             | OFF           |
|                                       |                         |                |                     |                        | -67.54      | 5.48               | 0                       | -73.02               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.52      | 5.48               | 0                       | -82                  | -62             | ON            |
|                                       |                         |                |                     | 7060                   | -67.04      | 5.48               | 0                       | -72.52               | -62             | OFF           |
|                                       |                         |                |                     |                        | -67.54      | 5.48               | 0                       | -73.02               | -62             | Minimal       |
|                                       |                         |                |                     |                        | -76.52      | 5.48               | 0                       | -82                  | -62             | ON            |

## Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

| Contention Based Protocol Detection Probability |                         |                         |     |     |     |     |     |     |     |     |     |     |                       |                 |             |
|-------------------------------------------------|-------------------------|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|-----------------|-------------|
| Operation Mode                                  | Channel Bandwidth (MHz) | AWGN Signal Freq. (MHz) | #01 | #02 | #03 | #04 | #05 | #06 | #07 | #08 | #09 | #10 | Detection Probability | Detection Limit | Test Result |
|                                                 |                         |                         |     |     |     |     |     |     |     |     |     |     |                       |                 |             |
| 802.11ax                                        | 20                      | 6915                    | v   | v   | v   | v   | v   | v   | v   | v   | x   | v   | 90%                   | 90%             | Pass        |
|                                                 | 160                     | 6910                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |
|                                                 |                         | 6985                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |
|                                                 |                         | 7060                    | v   | v   | v   | v   | v   | v   | v   | v   | v   | v   | 100%                  | 90%             | Pass        |

### Plots of EUT Tx waveform

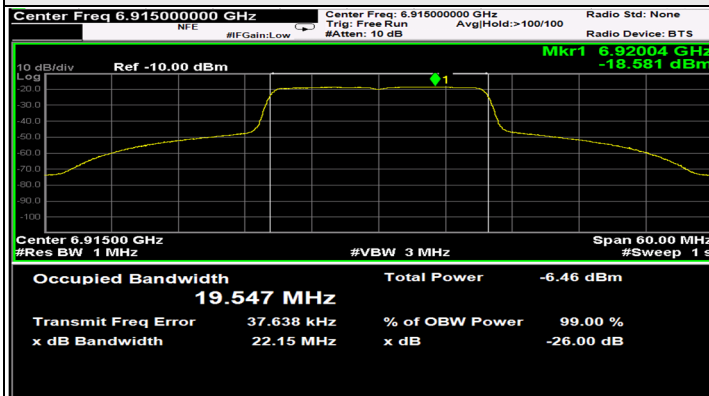


802.11ax (HE20) / CH193

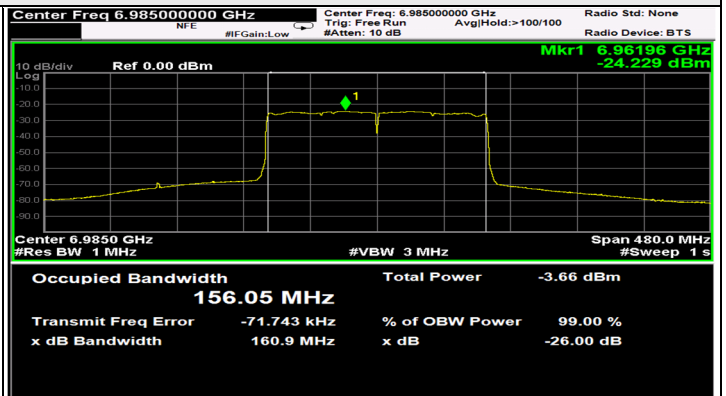


802.11ax (HE160) / CH207


### Plots of Injected signal (AWGN) level

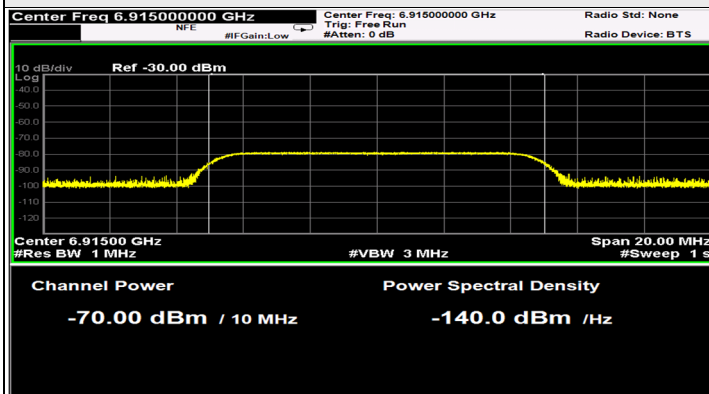


802.11ax (HE20) / CH193

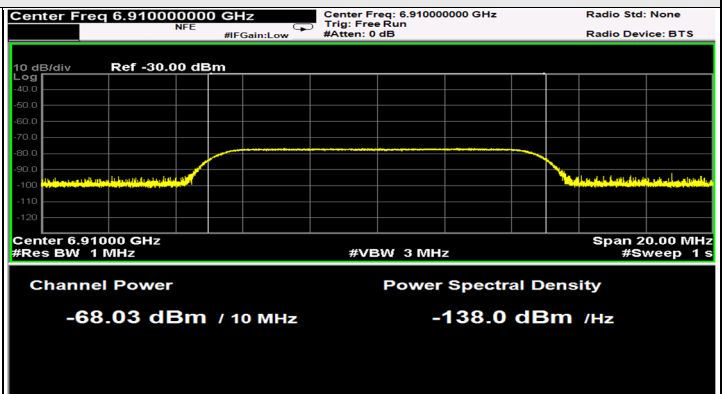

802.11ax (HE160) / CH207(Low Edge)

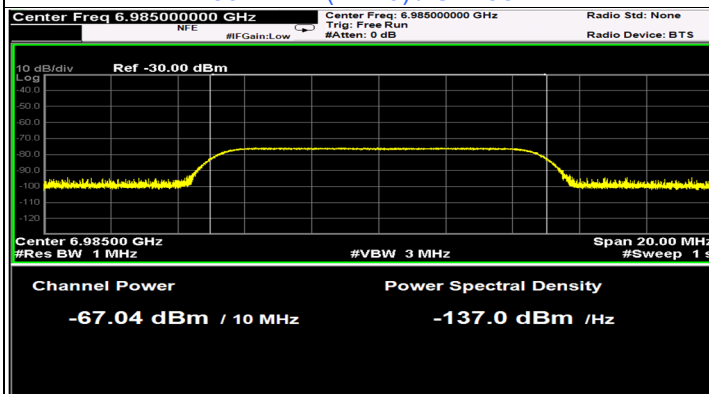


802.11ax (HE160) / CH207(Middle)

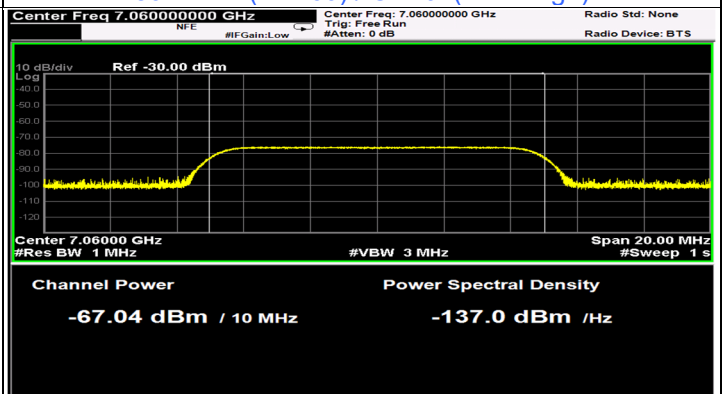


802.11ax (HE160) / CH207(High Edge)


# Plots of EUT ceased transmission in the time domain

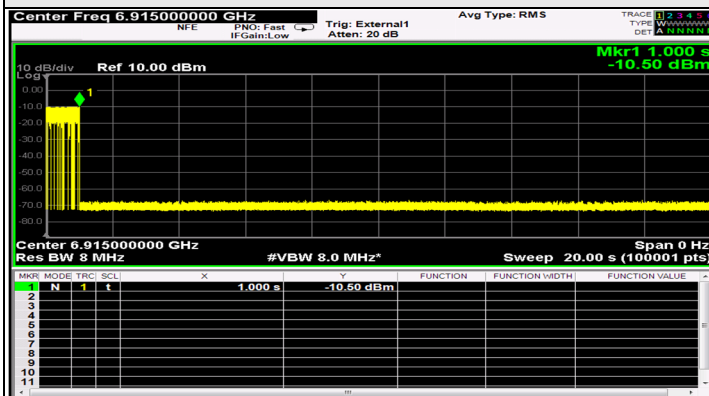


802.11ax (HE20) / CH193

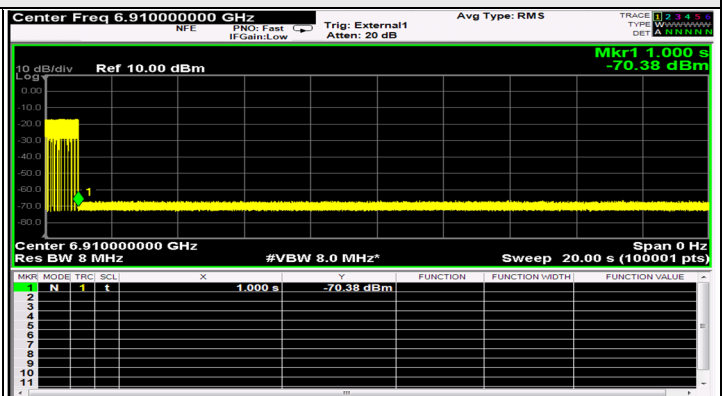

802.11ax (HE160) / CH207(Low Edge)

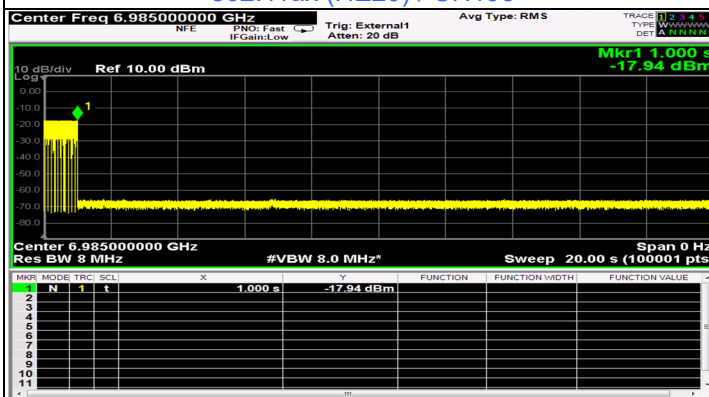

802.11ax (HE160) / CH207(Middle)

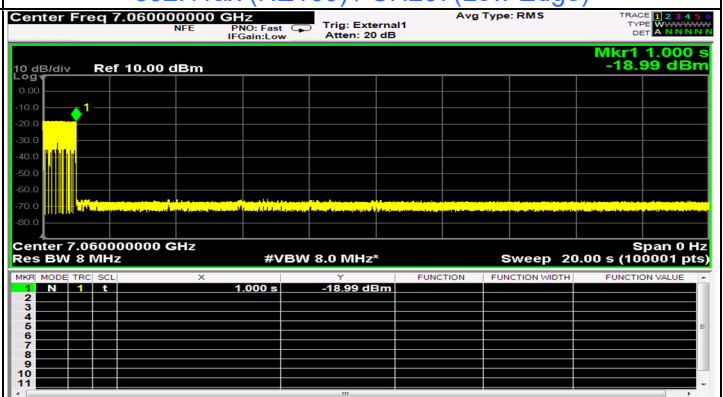

802.11ax (HE160) / CH207(High Edge)


## 7.8 AC Power Conducted Emissions

|                 |                  |                                          |                                       |
|-----------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                                  | CH 47 : 6185 MHz                      |
| Frequency Range | 150kHz ~ 30MHz   | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions                 | 25°C, 68% RH                          |
| Tested By       | Tom Yang         |                                          |                                       |

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.15781         | 9.98                   | 34.89                | 17.33 | 44.87                 | 27.31 | 65.58        | 55.58 | -20.71      | -28.27 |
| 2                         | 0.18516         | 9.98                   | 27.12                | 11.36 | 37.10                 | 21.34 | 64.25        | 54.25 | -27.15      | -32.91 |
| 3                         | 0.39219         | 9.99                   | 10.80                | 0.23  | 20.79                 | 10.22 | 58.02        | 48.02 | -37.23      | -37.80 |
| 4                         | 1.11328         | 10.04                  | 4.48                 | -1.07 | 14.52                 | 8.97  | 56.00        | 46.00 | -41.48      | -37.03 |
| 5                         | 10.36328        | 10.68                  | 13.09                | 6.83  | 23.77                 | 17.51 | 60.00        | 50.00 | -36.23      | -32.49 |
| 6                         | 17.33203        | 11.08                  | 14.20                | 6.40  | 25.28                 | 17.48 | 60.00        | 50.00 | -34.72      | -32.52 |

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

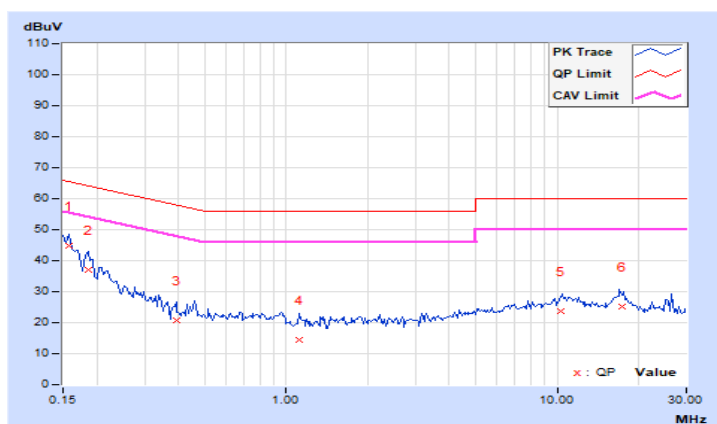


|                 |                  |                                          |                                       |
|-----------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                                  | CH 47 : 6185 MHz                      |
| Frequency Range | 150kHz ~ 30MHz   | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions                 | 25°C, 68% RH                          |
| Tested By       | Tom Yang         |                                          |                                       |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15000         | 10.02                  | 34.35                | 20.58 | 44.37                 | 30.60 | 66.00        | 56.00 | -21.63      | -25.40 |
| 2                            | 0.28672         | 10.03                  | 18.13                | 4.56  | 28.16                 | 14.59 | 60.62        | 50.62 | -32.46      | -36.03 |
| 3                            | 0.45469         | 10.04                  | 15.95                | 9.42  | 25.99                 | 19.46 | 56.79        | 46.79 | -30.80      | -27.33 |
| 4                            | 2.59375         | 10.19                  | 4.14                 | -5.35 | 14.33                 | 4.84  | 56.00        | 46.00 | -41.67      | -41.16 |
| 5                            | 10.62109        | 10.67                  | 14.52                | 8.34  | 25.19                 | 19.01 | 60.00        | 50.00 | -34.81      | -30.99 |
| 6                            | 17.58984        | 10.95                  | 12.30                | 4.55  | 23.25                 | 15.50 | 60.00        | 50.00 | -36.75      | -34.50 |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

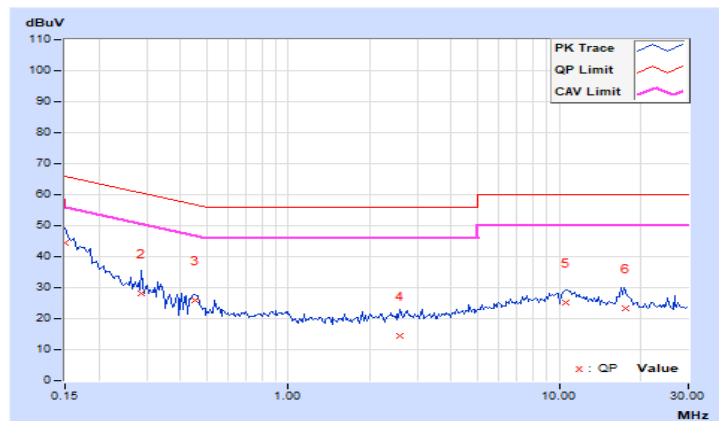


## 7.9 Unwanted Emissions below 1 GHz

|                 |                  |                               |                  |
|-----------------|------------------|-------------------------------|------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 47 : 6185 MHz |
| Frequency Range | 30 MHz ~ 1 GHz   | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 22°C, 67% RH     |
| Tested By       | Nick Tsou        |                               |                  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 33.66           | 30.7 QP                 | 40.0           | -9.3        | 1.50 H             | 23                   | 44.2             | -13.5                    |
| 2                                                    | 122.85          | 38.1 QP                 | 43.5           | -5.4        | 1.50 H             | 262                  | 52.4             | -14.3                    |
| 3                                                    | 217.72          | 41.5 QP                 | 46.0           | -4.5        | 1.50 H             | 258                  | 57.6             | -16.1                    |
| 4                                                    | 292.58          | 33.6 QP                 | 46.0           | -12.4       | 1.00 H             | 21                   | 45.9             | -12.3                    |
| 5                                                    | 424.55          | 29.0 QP                 | 46.0           | -17.0       | 1.50 H             | 23                   | 38.0             | -9.0                     |
| 6                                                    | 493.88          | 32.1 QP                 | 46.0           | -13.9       | 1.50 H             | 60                   | 39.7             | -7.6                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

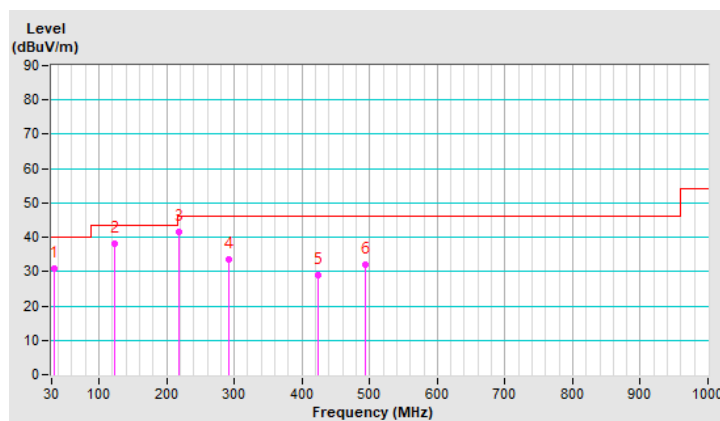


|                 |                  |                               |                  |
|-----------------|------------------|-------------------------------|------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 47 : 6185 MHz |
| Frequency Range | 30 MHz ~ 1 GHz   | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 22°C, 67% RH     |
| Tested By       | Nick Tsou        |                               |                  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 39.41           | 36.2 QP                 | 40.0           | -3.8        | 1.00 V             | 51                   | 49.2             | -13.0                    |
| 2                                                  | 73.72           | 35.7 QP                 | 40.0           | -4.3        | 1.00 V             | 144                  | 51.3             | -15.6                    |
| 3                                                  | 122.85          | 39.1 QP                 | 43.5           | -4.4        | 1.00 V             | 149                  | 53.4             | -14.3                    |
| 4                                                  | 217.72          | 34.7 QP                 | 46.0           | -11.3       | 1.50 V             | 49                   | 50.8             | -16.1                    |
| 5                                                  | 283.17          | 28.6 QP                 | 46.0           | -17.4       | 1.50 V             | 216                  | 41.1             | -12.5                    |
| 6                                                  | 493.30          | 32.0 QP                 | 46.0           | -14.0       | 1.00 V             | 79                   | 39.6             | -7.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

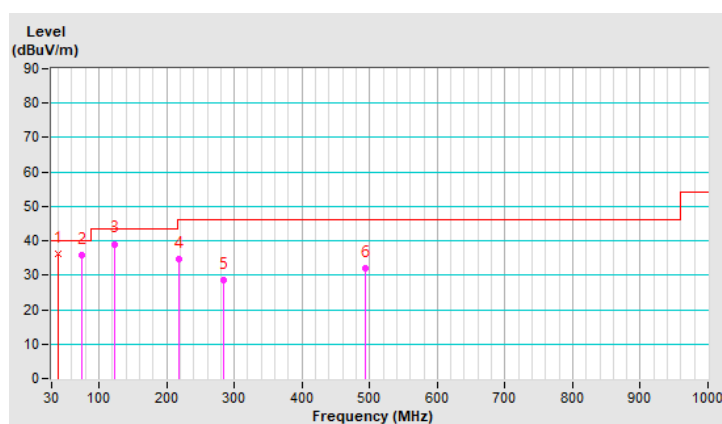


## 7.10 Unwanted Emissions above 1 GHz

|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 1 : 5955 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5000.00         | 48.7 PK                 | 74.0           | -25.3       | 3.00 H             | 235                  | 48.2             | 0.5                      |
| 2                                                    | 5000.00         | 47.9 AV                 | 54.0           | -6.1        | 3.00 H             | 235                  | 47.4             | 0.5                      |
| 3                                                    | #5925.00        | 50.0 PK                 | 88.2           | -38.2       | 1.51 H             | 348                  | 48.5             | 1.5                      |
| 4                                                    | #5925.00        | 39.3 AV                 | 68.2           | -28.9       | 1.51 H             | 348                  | 37.8             | 1.5                      |
| 5                                                    | *5955.00        | 103.0 PK                |                |             | 1.51 H             | 348                  | 101.4            | 1.6                      |
| 6                                                    | *5955.00        | 94.0 AV                 |                |             | 1.51 H             | 348                  | 92.4             | 1.6                      |
| 7                                                    | 8168.00         | 51.1 PK                 | 74.0           | -22.9       | 1.53 H             | 162                  | 43.7             | 7.4                      |
| 8                                                    | 8168.00         | 47.8 AV                 | 54.0           | -6.2        | 1.53 H             | 162                  | 40.4             | 7.4                      |
| 9                                                    | 11910.00        | 48.7 PK                 | 74.0           | -25.3       | 2.50 H             | 121                  | 37.6             | 11.1                     |
| 10                                                   | 11910.00        | 36.5 AV                 | 54.0           | -17.5       | 2.50 H             | 121                  | 25.4             | 11.1                     |
| 11                                                   | 17865.00        | 60.6 PK                 | 74.0           | -13.4       | 1.50 H             | 254                  | 38.5             | 22.1                     |
| 12                                                   | 17865.00        | 48.1 AV                 | 54.0           | -5.9        | 1.50 H             | 254                  | 26.0             | 22.1                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

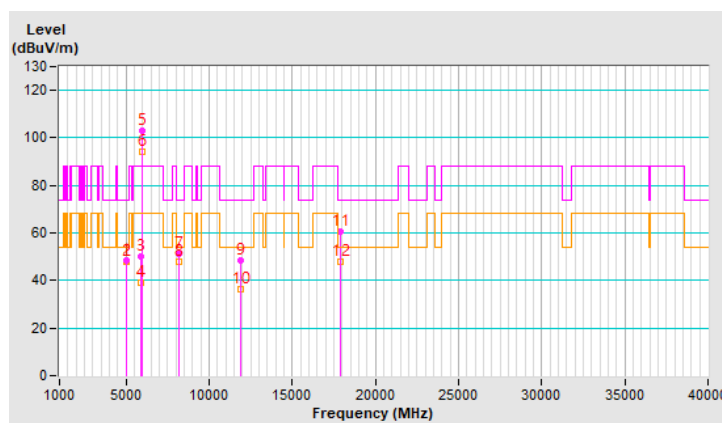


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 1 : 5955 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5000.00         | 51.8 PK                 | 74.0           | -22.2       | 1.11 V             | 323                  | 51.3             | 0.5                      |
| 2                                                  | 5000.00         | 50.6 AV                 | 54.0           | -3.4        | 1.11 V             | 323                  | 50.1             | 0.5                      |
| 3                                                  | #5925.00        | 50.5 PK                 | 88.2           | -37.7       | 2.09 V             | 160                  | 49.0             | 1.5                      |
| 4                                                  | #5925.00        | 40.0 AV                 | 68.2           | -28.2       | 2.09 V             | 160                  | 38.5             | 1.5                      |
| 5                                                  | *5955.00        | 106.3 PK                |                |             | 2.09 V             | 160                  | 104.7            | 1.6                      |
| 6                                                  | *5955.00        | 97.4 AV                 |                |             | 2.09 V             | 160                  | 95.8             | 1.6                      |
| 7                                                  | 8168.00         | 48.4 PK                 | 74.0           | -25.6       | 2.44 V             | 344                  | 41.0             | 7.4                      |
| 8                                                  | 8168.00         | 42.7 AV                 | 54.0           | -11.3       | 2.44 V             | 344                  | 35.3             | 7.4                      |
| 9                                                  | 11910.00        | 48.8 PK                 | 74.0           | -25.2       | 1.50 V             | 38                   | 37.7             | 11.1                     |
| 10                                                 | 11910.00        | 36.5 AV                 | 54.0           | -17.5       | 1.50 V             | 38                   | 25.4             | 11.1                     |
| 11                                                 | 17865.00        | 60.6 PK                 | 74.0           | -13.4       | 2.50 V             | 360                  | 38.5             | 22.1                     |
| 12                                                 | 17865.00        | 48.2 AV                 | 54.0           | -5.8        | 2.50 V             | 360                  | 26.1             | 22.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

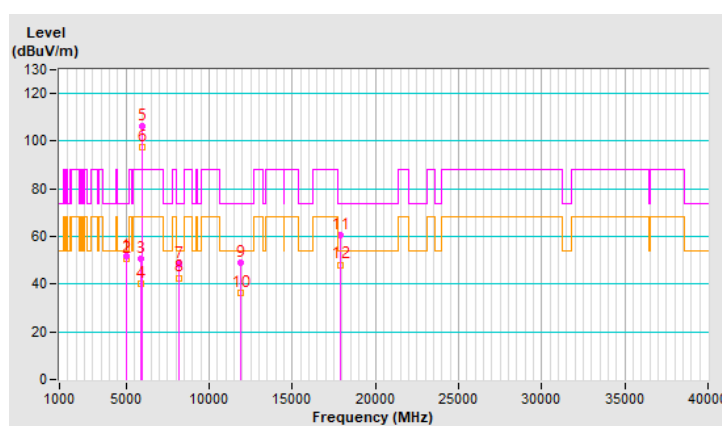


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 45 : 6175 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6175.00        | 104.7 PK                |                |             | 1.71 H             | 360                  | 102.7            | 2.0                      |
| 2                                                    | *6175.00        | 96.8 AV                 |                |             | 1.71 H             | 360                  | 94.8             | 2.0                      |
| 3                                                    | 12350.00        | 48.3 PK                 | 74.0           | -25.7       | 2.52 H             | 112                  | 38.2             | 10.1                     |
| 4                                                    | 12350.00        | 36.4 AV                 | 54.0           | -17.6       | 2.52 H             | 112                  | 26.3             | 10.1                     |
| 5                                                    | 18525.00        | 60.0 PK                 | 74.0           | -14.0       | 1.49 H             | 260                  | 66.6             | -6.6                     |
| 6                                                    | 18525.00        | 47.7 AV                 | 54.0           | -6.3        | 1.49 H             | 260                  | 54.3             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

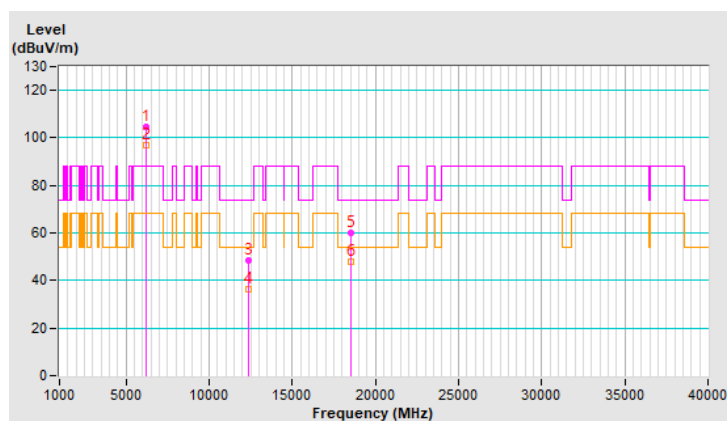


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 45 : 6175 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6175.00        | 108.2 PK                |                |             | 1.35 V             | 341                  | 106.2            | 2.0                      |
| 2                                                  | *6175.00        | 97.6 AV                 |                |             | 1.35 V             | 341                  | 95.6             | 2.0                      |
| 3                                                  | 12350.00        | 49.1 PK                 | 74.0           | -24.9       | 1.45 V             | 254                  | 39.0             | 10.1                     |
| 4                                                  | 12350.00        | 36.9 AV                 | 54.0           | -17.1       | 1.45 V             | 254                  | 26.8             | 10.1                     |
| 5                                                  | 18525.00        | 60.3 PK                 | 74.0           | -13.7       | 2.45 V             | 186                  | 66.9             | -6.6                     |
| 6                                                  | 18525.00        | 47.7 AV                 | 54.0           | -6.3        | 2.45 V             | 186                  | 54.3             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

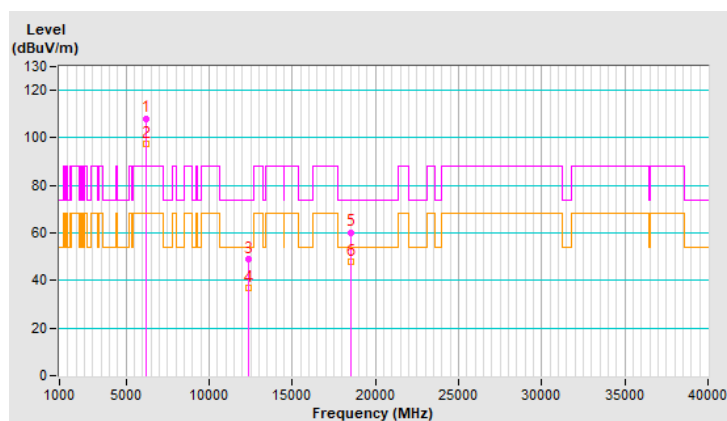


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 93 : 6415 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6415.00        | 106.4 PK                |                |             | 1.98 H             | 7                    | 103.4            | 3.0                      |
| 2                                                    | *6415.00        | 97.2 AV                 |                |             | 1.98 H             | 7                    | 94.2             | 3.0                      |
| 3                                                    | #12830.00       | 48.8 PK                 | 88.2           | -39.4       | 2.47 H             | 128                  | 38.2             | 10.6                     |
| 4                                                    | #12830.00       | 36.9 AV                 | 68.2           | -31.3       | 2.47 H             | 128                  | 26.3             | 10.6                     |
| 5                                                    | 19245.00        | 60.8 PK                 | 74.0           | -13.2       | 1.48 H             | 259                  | 67.2             | -6.4                     |
| 6                                                    | 19245.00        | 48.4 AV                 | 54.0           | -5.6        | 1.48 H             | 259                  | 54.8             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

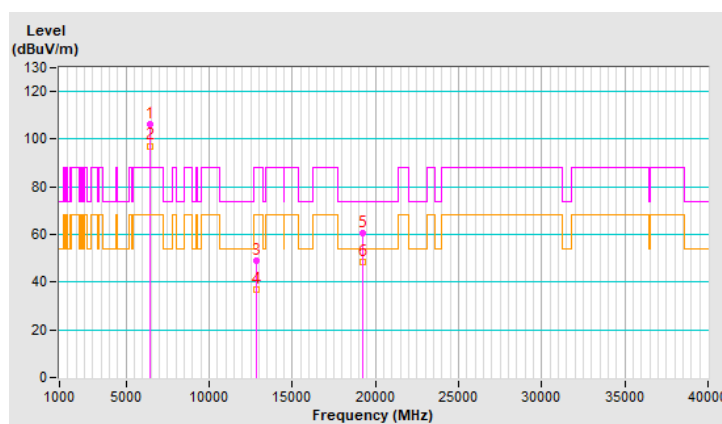


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 93 : 6415 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6415.00        | 108.7 PK                |                |             | 1.48 V             | 330                  | 105.7            | 3.0                      |
| 2                                                  | *6415.00        | 97.5 AV                 |                |             | 1.48 V             | 330                  | 94.5             | 3.0                      |
| 3                                                  | #12830.00       | 49.3 PK                 | 88.2           | -38.9       | 1.47 V             | 256                  | 38.7             | 10.6                     |
| 4                                                  | #12830.00       | 37.3 AV                 | 68.2           | -30.9       | 1.47 V             | 256                  | 26.7             | 10.6                     |
| 5                                                  | 19245.00        | 60.0 PK                 | 74.0           | -14.0       | 2.40 V             | 197                  | 66.4             | -6.4                     |
| 6                                                  | 19245.00        | 47.3 AV                 | 54.0           | -6.7        | 2.40 V             | 197                  | 53.7             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

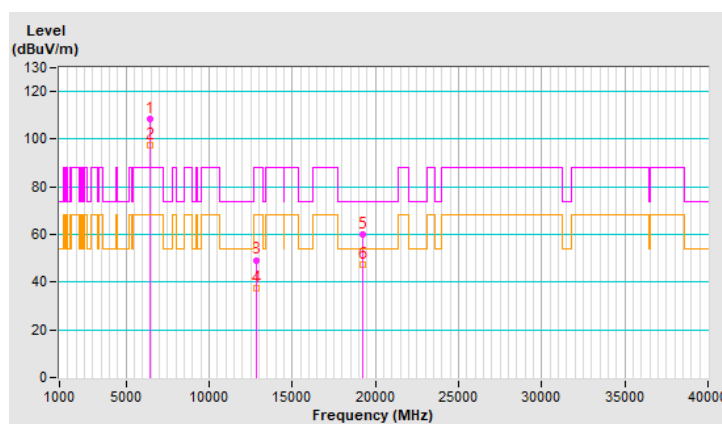


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 97 : 6435 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6435.00        | 107.2 PK                |                |             | 1.56 H             | 360                  | 104.2            | 3.0                      |
| 2                                                    | *6435.00        | 97.5 AV                 |                |             | 1.56 H             | 360                  | 94.5             | 3.0                      |
| 3                                                    | #12870.00       | 49.0 PK                 | 88.2           | -39.2       | 2.55 H             | 133                  | 38.4             | 10.6                     |
| 4                                                    | #12870.00       | 36.8 AV                 | 68.2           | -31.4       | 2.55 H             | 133                  | 26.2             | 10.6                     |
| 5                                                    | 19305.00        | 61.1 PK                 | 74.0           | -12.9       | 1.50 H             | 240                  | 67.7             | -6.6                     |
| 6                                                    | 19305.00        | 48.5 AV                 | 54.0           | -5.5        | 1.50 H             | 240                  | 55.1             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

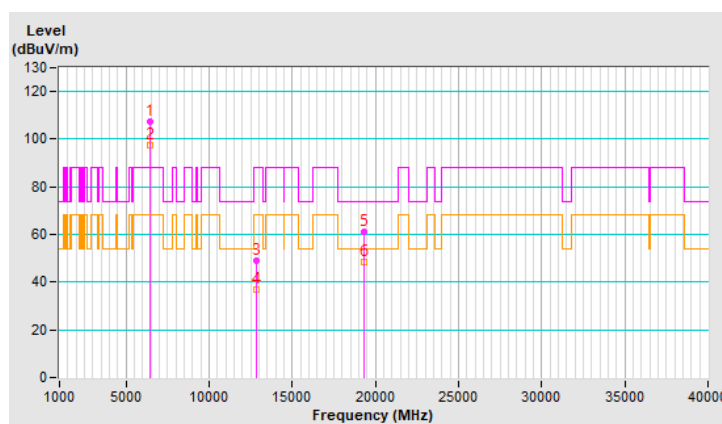


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 97 : 6435 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6435.00        | 108.9 PK                |                |             | 1.44 V             | 333                  | 105.9            | 3.0                      |
| 2                                                  | *6435.00        | 97.7 AV                 |                |             | 1.44 V             | 333                  | 94.7             | 3.0                      |
| 3                                                  | #12870.00       | 48.9 PK                 | 88.2           | -39.3       | 1.44 V             | 239                  | 38.3             | 10.6                     |
| 4                                                  | #12870.00       | 36.4 AV                 | 68.2           | -31.8       | 1.44 V             | 239                  | 25.8             | 10.6                     |
| 5                                                  | 19305.00        | 60.7 PK                 | 74.0           | -13.3       | 2.44 V             | 181                  | 67.3             | -6.6                     |
| 6                                                  | 19305.00        | 47.8 AV                 | 54.0           | -6.2        | 2.44 V             | 181                  | 54.4             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

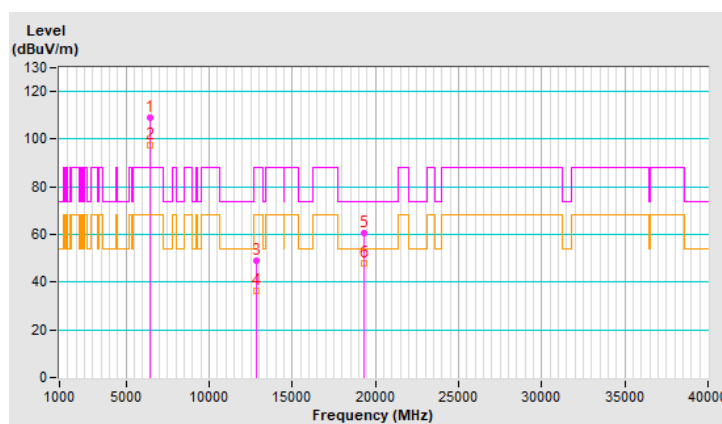


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 105 : 6475 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6475.00        | 106.3 PK                |                |             | 1.68 H             | 360                  | 103.1            | 3.2                      |
| 2                                                    | *6475.00        | 97.4 AV                 |                |             | 1.68 H             | 360                  | 94.2             | 3.2                      |
| 3                                                    | #12950.00       | 48.8 PK                 | 88.2           | -39.4       | 2.51 H             | 110                  | 38.2             | 10.6                     |
| 4                                                    | #12950.00       | 36.9 AV                 | 68.2           | -31.3       | 2.51 H             | 110                  | 26.3             | 10.6                     |
| 5                                                    | 19425.00        | 60.1 PK                 | 74.0           | -13.9       | 1.54 H             | 265                  | 66.5             | -6.4                     |
| 6                                                    | 19425.00        | 47.7 AV                 | 54.0           | -6.3        | 1.54 H             | 265                  | 54.1             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

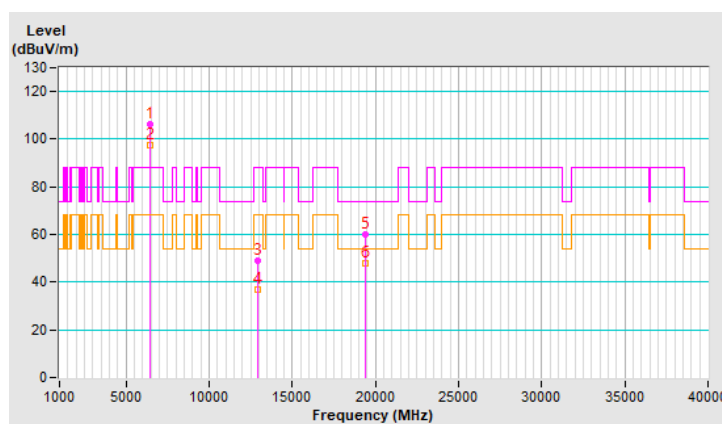


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 105 : 6475 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6475.00        | 108.4 PK                |                |             | 1.49 V             | 330                  | 105.2            | 3.2                      |
| 2                                                  | *6475.00        | 97.7 AV                 |                |             | 1.49 V             | 330                  | 94.5             | 3.2                      |
| 3                                                  | #12950.00       | 49.1 PK                 | 88.2           | -39.1       | 1.47 V             | 270                  | 38.5             | 10.6                     |
| 4                                                  | #12950.00       | 36.9 AV                 | 68.2           | -31.3       | 1.47 V             | 270                  | 26.3             | 10.6                     |
| 5                                                  | 19425.00        | 59.9 PK                 | 74.0           | -14.1       | 2.44 V             | 174                  | 66.3             | -6.4                     |
| 6                                                  | 19425.00        | 47.3 AV                 | 54.0           | -6.7        | 2.44 V             | 174                  | 53.7             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

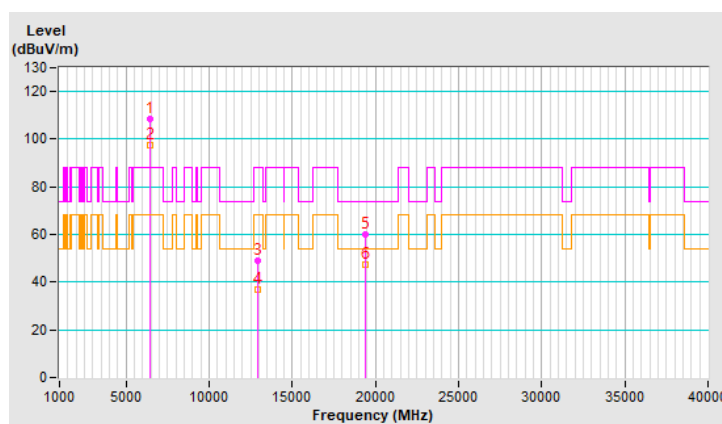


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 113 : 6515 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6515.00        | 107.3 PK                |                |             | 1.40 H             | 360                  | 103.8            | 3.5                      |
| 2                                                    | *6515.00        | 97.7 AV                 |                |             | 1.40 H             | 360                  | 94.2             | 3.5                      |
| 3                                                    | #13030.00       | 48.8 PK                 | 88.2           | -39.4       | 2.47 H             | 109                  | 38.1             | 10.7                     |
| 4                                                    | #13030.00       | 36.8 AV                 | 68.2           | -31.4       | 2.47 H             | 109                  | 26.1             | 10.7                     |
| 5                                                    | 19545.00        | 60.5 PK                 | 74.0           | -13.5       | 1.53 H             | 250                  | 66.7             | -6.2                     |
| 6                                                    | 19545.00        | 48.0 AV                 | 54.0           | -6.0        | 1.53 H             | 250                  | 54.2             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

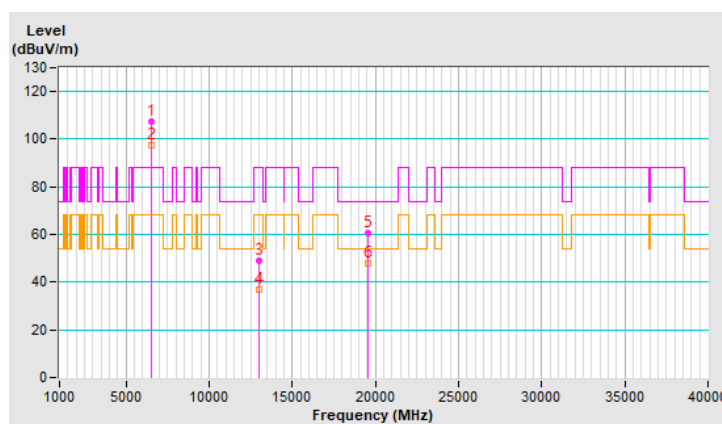


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 113 : 6515 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6515.00        | 108.8 PK                |                |             | 1.42 V             | 328                  | 105.3            | 3.5                      |
| 2                                                  | *6515.00        | 98.0 AV                 |                |             | 1.42 V             | 328                  | 94.5             | 3.5                      |
| 3                                                  | #13030.00       | 49.0 PK                 | 88.2           | -39.2       | 1.50 V             | 269                  | 38.3             | 10.7                     |
| 4                                                  | #13030.00       | 36.5 AV                 | 68.2           | -31.7       | 1.50 V             | 269                  | 25.8             | 10.7                     |
| 5                                                  | 19545.00        | 59.7 PK                 | 74.0           | -14.3       | 2.50 V             | 201                  | 65.9             | -6.2                     |
| 6                                                  | 19545.00        | 47.3 AV                 | 54.0           | -6.7        | 2.50 V             | 201                  | 53.5             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

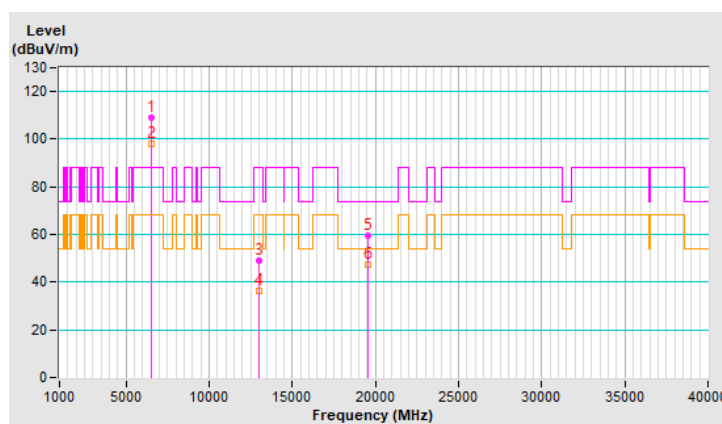


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 117 : 6535 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6535.00        | 106.6 PK                |                |             | 1.24 H             | 360                  | 103.0            | 3.6                      |
| 2                                                    | *6535.00        | 97.1 AV                 |                |             | 1.24 H             | 360                  | 93.5             | 3.6                      |
| 3                                                    | #13070.00       | 49.1 PK                 | 88.2           | -39.1       | 2.54 H             | 105                  | 38.3             | 10.8                     |
| 4                                                    | #13070.00       | 36.6 AV                 | 68.2           | -31.6       | 2.54 H             | 105                  | 25.8             | 10.8                     |
| 5                                                    | 19605.00        | 60.5 PK                 | 74.0           | -13.5       | 1.51 H             | 251                  | 66.5             | -6.0                     |
| 6                                                    | 19605.00        | 48.1 AV                 | 54.0           | -5.9        | 1.51 H             | 251                  | 54.1             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

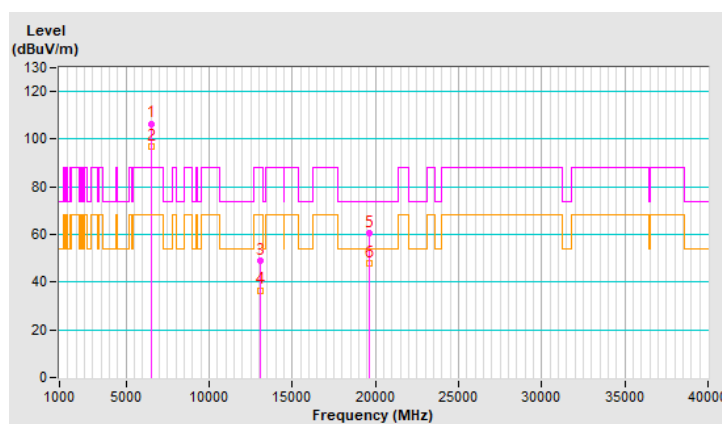


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 117 : 6535 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6535.00        | 108.4 PK                |                |             | 1.39 V             | 334                  | 104.8            | 3.6                      |
| 2                                                  | *6535.00        | 97.7 AV                 |                |             | 1.39 V             | 334                  | 94.1             | 3.6                      |
| 3                                                  | #13070.00       | 48.7 PK                 | 88.2           | -39.5       | 1.49 V             | 250                  | 37.9             | 10.8                     |
| 4                                                  | #13070.00       | 36.6 AV                 | 68.2           | -31.6       | 1.49 V             | 250                  | 25.8             | 10.8                     |
| 5                                                  | 19605.00        | 60.0 PK                 | 74.0           | -14.0       | 2.51 V             | 197                  | 66.0             | -6.0                     |
| 6                                                  | 19605.00        | 47.7 AV                 | 54.0           | -6.3        | 2.51 V             | 197                  | 53.7             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

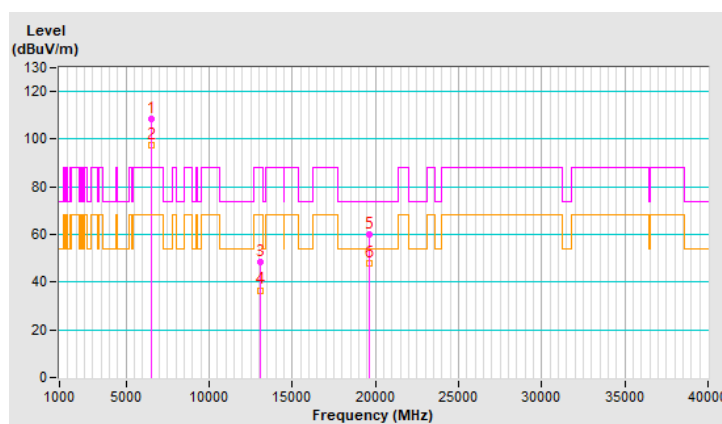


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 149 : 6695 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6695.00        | 105.3 PK                |                |             | 1.51 H             | 360                  | 101.5            | 3.8                      |
| 2                                                    | *6695.00        | 96.4 AV                 |                |             | 1.51 H             | 360                  | 92.6             | 3.8                      |
| 3                                                    | 13390.00        | 49.3 PK                 | 74.0           | -24.7       | 2.50 H             | 112                  | 37.1             | 12.2                     |
| 4                                                    | 13390.00        | 37.0 AV                 | 54.0           | -17.0       | 2.50 H             | 112                  | 24.8             | 12.2                     |
| 5                                                    | 20085.00        | 60.5 PK                 | 74.0           | -13.5       | 1.55 H             | 249                  | 65.8             | -5.3                     |
| 6                                                    | 20085.00        | 48.2 AV                 | 54.0           | -5.8        | 1.55 H             | 249                  | 53.5             | -5.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

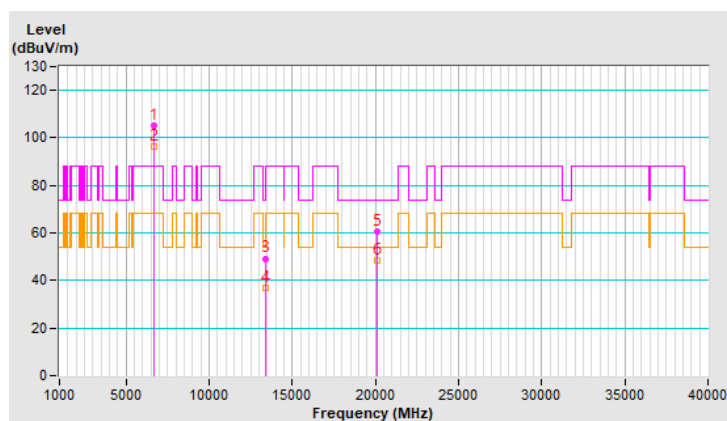


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 149 : 6695 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6695.00        | 108.7 PK                |                |             | 1.52 V             | 261                  | 104.9            | 3.8                      |
| 2                                                  | *6695.00        | 98.0 AV                 |                |             | 1.52 V             | 261                  | 94.2             | 3.8                      |
| 3                                                  | 13390.00        | 49.4 PK                 | 74.0           | -24.6       | 1.49 V             | 253                  | 37.2             | 12.2                     |
| 4                                                  | 13390.00        | 37.3 AV                 | 54.0           | -16.7       | 1.49 V             | 253                  | 25.1             | 12.2                     |
| 5                                                  | 20085.00        | 60.5 PK                 | 74.0           | -13.5       | 2.47 V             | 190                  | 65.8             | -5.3                     |
| 6                                                  | 20085.00        | 48.1 AV                 | 54.0           | -5.9        | 2.47 V             | 190                  | 53.4             | -5.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

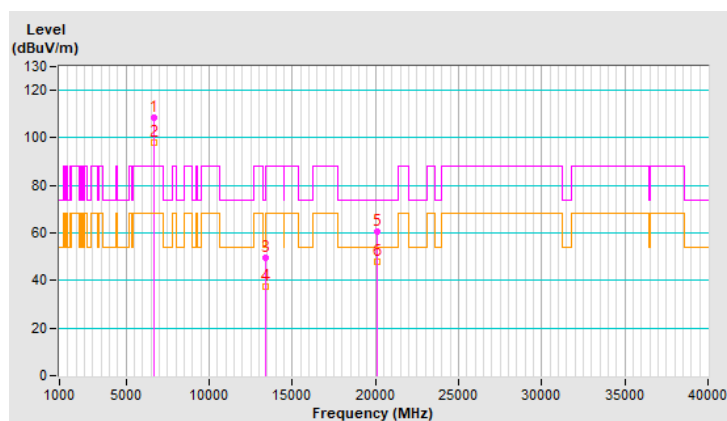


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 181 : 6855 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6855.00        | 106.7 PK                |                |             | 1.90 H             | 160                  | 102.6            | 4.1                      |
| 2                                                    | *6855.00        | 96.8 AV                 |                |             | 1.90 H             | 160                  | 92.7             | 4.1                      |
| 3                                                    | #13710.00       | 48.5 PK                 | 88.2           | -39.7       | 2.45 H             | 111                  | 35.6             | 12.9                     |
| 4                                                    | #13710.00       | 36.4 AV                 | 68.2           | -31.8       | 2.45 H             | 111                  | 23.5             | 12.9                     |
| 5                                                    | 20565.00        | 60.5 PK                 | 74.0           | -13.5       | 1.49 H             | 244                  | 65.3             | -4.8                     |
| 6                                                    | 20565.00        | 48.4 AV                 | 54.0           | -5.6        | 1.49 H             | 244                  | 53.2             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

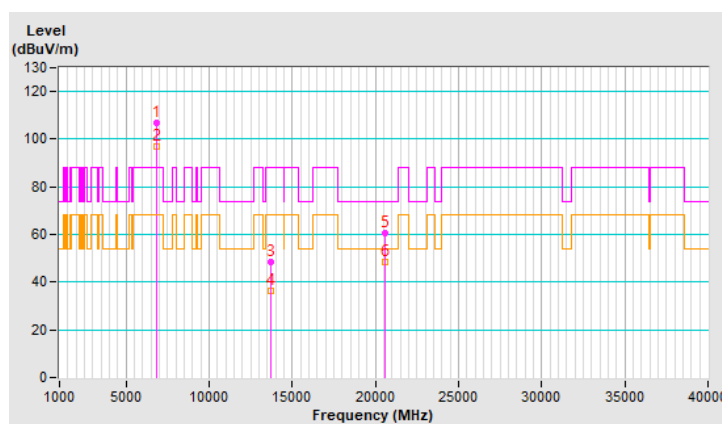


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 181 : 6855 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6855.00        | 109.4 PK                |                |             | 1.44 V             | 267                  | 105.3            | 4.1                      |
| 2                                                  | *6855.00        | 98.1 AV                 |                |             | 1.44 V             | 267                  | 94.0             | 4.1                      |
| 3                                                  | #13710.00       | 49.2 PK                 | 88.2           | -39.0       | 1.44 V             | 257                  | 36.3             | 12.9                     |
| 4                                                  | #13710.00       | 37.0 AV                 | 68.2           | -31.2       | 1.44 V             | 257                  | 24.1             | 12.9                     |
| 5                                                  | 20565.00        | 60.7 PK                 | 74.0           | -13.3       | 2.44 V             | 187                  | 65.5             | -4.8                     |
| 6                                                  | 20565.00        | 48.2 AV                 | 54.0           | -5.8        | 2.44 V             | 187                  | 53.0             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

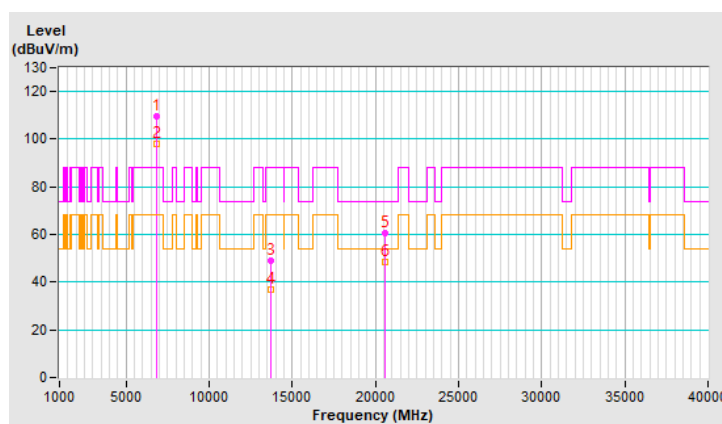


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 185 : 6875 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6875.00        | 106.2 PK                |                |             | 1.86 H             | 158                  | 102.0            | 4.2                      |
| 2                                                    | *6875.00        | 97.0 AV                 |                |             | 1.86 H             | 158                  | 92.8             | 4.2                      |
| 3                                                    | #13750.00       | 48.6 PK                 | 88.2           | -39.6       | 2.52 H             | 110                  | 35.7             | 12.9                     |
| 4                                                    | #13750.00       | 36.4 AV                 | 68.2           | -31.8       | 2.52 H             | 110                  | 23.5             | 12.9                     |
| 5                                                    | 20625.00        | 60.4 PK                 | 74.0           | -13.6       | 1.50 H             | 243                  | 65.1             | -4.7                     |
| 6                                                    | 20625.00        | 48.1 AV                 | 54.0           | -5.9        | 1.50 H             | 243                  | 52.8             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

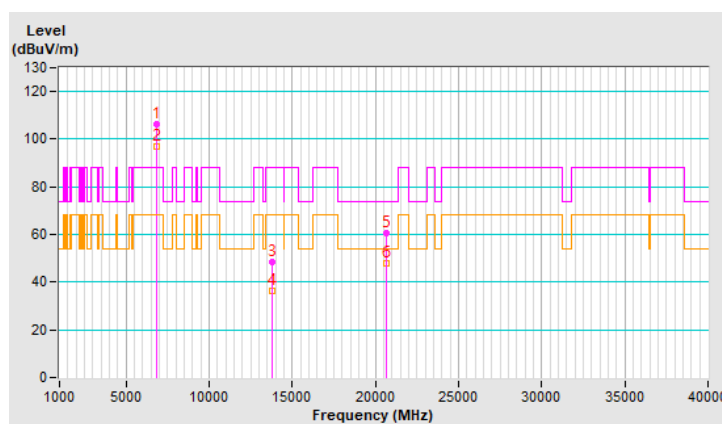


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 185 : 6875 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6875.00        | 109.4 PK                |                |             | 1.33 V             | 262                  | 105.2            | 4.2                      |
| 2                                                  | *6875.00        | 98.0 AV                 |                |             | 1.33 V             | 262                  | 93.8             | 4.2                      |
| 3                                                  | #13750.00       | 49.6 PK                 | 88.2           | -38.6       | 1.50 V             | 244                  | 36.7             | 12.9                     |
| 4                                                  | #13750.00       | 37.3 AV                 | 68.2           | -30.9       | 1.50 V             | 244                  | 24.4             | 12.9                     |
| 5                                                  | 20625.00        | 60.9 PK                 | 74.0           | -13.1       | 2.41 V             | 197                  | 65.6             | -4.7                     |
| 6                                                  | 20625.00        | 48.1 AV                 | 54.0           | -5.9        | 2.41 V             | 197                  | 52.8             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

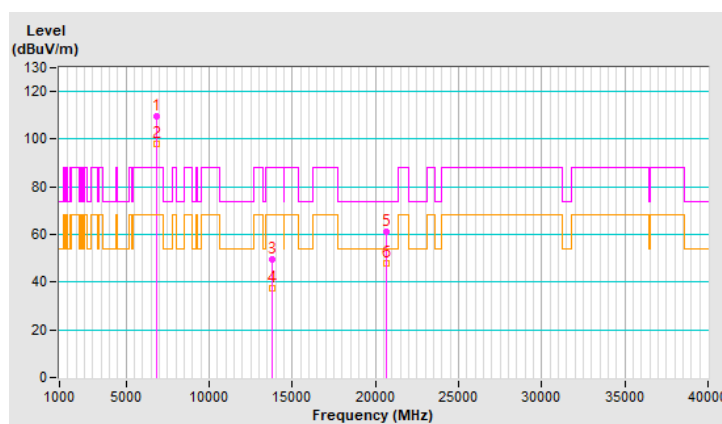


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 209 : 6995 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6995.00        | 106.2 PK                |                |             | 1.64 H             | 160                  | 100.8            | 5.4                      |
| 2                                                    | *6995.00        | 96.8 AV                 |                |             | 1.64 H             | 160                  | 91.4             | 5.4                      |
| 3                                                    | #13990.00       | 49.3 PK                 | 88.2           | -38.9       | 2.53 H             | 134                  | 36.3             | 13.0                     |
| 4                                                    | #13990.00       | 37.0 AV                 | 68.2           | -31.2       | 2.53 H             | 134                  | 24.0             | 13.0                     |
| 5                                                    | 20985.00        | 61.0 PK                 | 74.0           | -13.0       | 1.50 H             | 251                  | 65.3             | -4.3                     |
| 6                                                    | 20985.00        | 48.4 AV                 | 54.0           | -5.6        | 1.50 H             | 251                  | 52.7             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

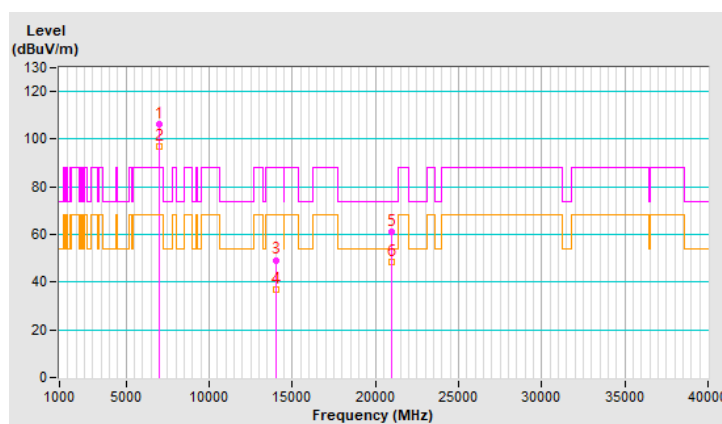


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 209 : 6995 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6995.00        | 108.4 PK                |                |             | 1.54 V             | 267                  | 103.0            | 5.4                      |
| 2                                                  | *6995.00        | 97.6 AV                 |                |             | 1.54 V             | 267                  | 92.2             | 5.4                      |
| 3                                                  | #13990.00       | 49.6 PK                 | 88.2           | -38.6       | 1.51 V             | 249                  | 36.6             | 13.0                     |
| 4                                                  | #13990.00       | 37.2 AV                 | 68.2           | -31.0       | 1.51 V             | 249                  | 24.2             | 13.0                     |
| 5                                                  | 20985.00        | 60.3 PK                 | 74.0           | -13.7       | 2.41 V             | 196                  | 64.6             | -4.3                     |
| 6                                                  | 20985.00        | 47.6 AV                 | 54.0           | -6.4        | 2.41 V             | 196                  | 51.9             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

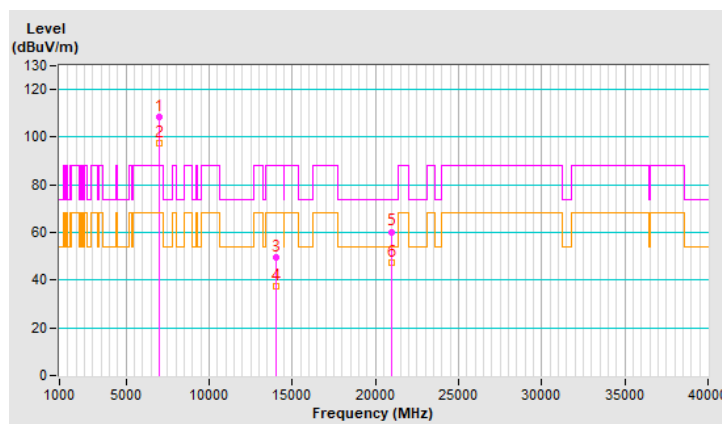


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 229 : 7095 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7095.00        | 105.5 PK                |                |             | 1.65 H             | 160                  | 100.0            | 5.5                      |
| 2                                                    | *7095.00        | 96.6 AV                 |                |             | 1.65 H             | 160                  | 91.1             | 5.5                      |
| 3                                                    | #7125.00        | 54.9 PK                 | 88.2           | -33.3       | 1.65 H             | 160                  | 49.1             | 5.8                      |
| 4                                                    | #7125.00        | 43.1 AV                 | 68.2           | -25.1       | 1.65 H             | 160                  | 37.3             | 5.8                      |
| 5                                                    | #14190.00       | 48.6 PK                 | 88.2           | -39.6       | 2.52 H             | 112                  | 35.1             | 13.5                     |
| 6                                                    | #14190.00       | 36.4 AV                 | 68.2           | -31.8       | 2.52 H             | 112                  | 22.9             | 13.5                     |
| 7                                                    | 21285.00        | 60.3 PK                 | 74.0           | -13.7       | 1.46 H             | 256                  | 64.4             | -4.1                     |
| 8                                                    | 21285.00        | 47.7 AV                 | 54.0           | -6.3        | 1.46 H             | 256                  | 51.8             | -4.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

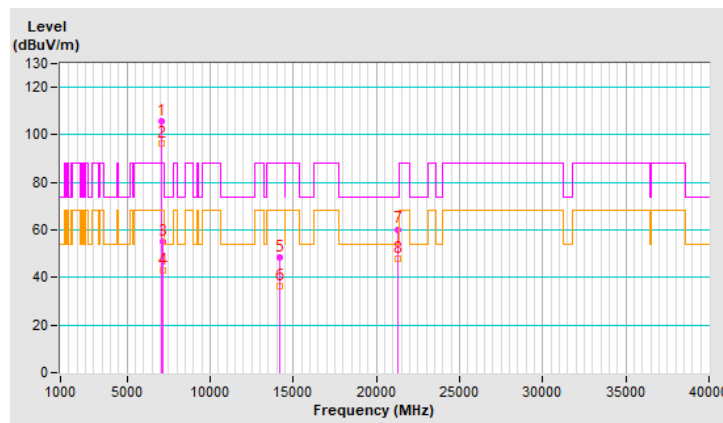


|                 |                |                               |                                                            |
|-----------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11a        | Channel                       | CH 229 : 7095 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou      |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7095.00        | 107.6 PK                |                |             | 1.67 V             | 360                  | 102.1            | 5.5                      |
| 2                                                  | *7095.00        | 97.0 AV                 |                |             | 1.67 V             | 360                  | 91.5             | 5.5                      |
| 3                                                  | #7125.00        | 54.0 PK                 | 88.2           | -34.2       | 1.67 V             | 360                  | 48.2             | 5.8                      |
| 4                                                  | #7125.00        | 42.7 AV                 | 68.2           | -25.5       | 1.67 V             | 360                  | 36.9             | 5.8                      |
| 5                                                  | #14190.00       | 48.8 PK                 | 88.2           | -39.4       | 1.47 V             | 125                  | 35.3             | 13.5                     |
| 6                                                  | #14190.00       | 35.9 AV                 | 68.2           | -32.3       | 1.47 V             | 125                  | 22.4             | 13.5                     |
| 7                                                  | 21285.00        | 61.2 PK                 | 74.0           | -12.8       | 2.51 V             | 347                  | 65.3             | -4.1                     |
| 8                                                  | 21285.00        | 49.3 AV                 | 54.0           | -4.7        | 2.51 V             | 347                  | 53.4             | -4.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

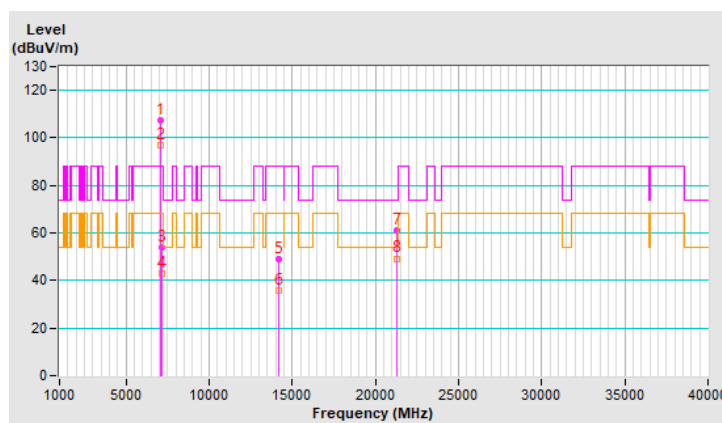


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 1 : 5955 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5000.00         | 49.0 PK                 | 74.0           | -25.0       | 2.95 H             | 251                  | 48.5             | 0.5                      |
| 2                                                    | 5000.00         | 48.2 AV                 | 54.0           | -5.8        | 2.95 H             | 251                  | 47.7             | 0.5                      |
| 3                                                    | #5925.00        | 52.8 PK                 | 88.2           | -35.4       | 1.63 H             | 168                  | 51.3             | 1.5                      |
| 4                                                    | #5925.00        | 40.9 AV                 | 68.2           | -27.3       | 1.63 H             | 168                  | 39.4             | 1.5                      |
| 5                                                    | *5955.00        | 105.3 PK                |                |             | 1.63 H             | 168                  | 103.7            | 1.6                      |
| 6                                                    | *5955.00        | 95.3 AV                 |                |             | 1.63 H             | 168                  | 93.7             | 1.6                      |
| 7                                                    | 8168.00         | 51.0 PK                 | 74.0           | -23.0       | 1.47 H             | 174                  | 43.6             | 7.4                      |
| 8                                                    | 8168.00         | 47.7 AV                 | 54.0           | -6.3        | 1.47 H             | 174                  | 40.3             | 7.4                      |
| 9                                                    | 11910.00        | 49.4 PK                 | 74.0           | -24.6       | 2.45 H             | 127                  | 38.3             | 11.1                     |
| 10                                                   | 11910.00        | 37.0 AV                 | 54.0           | -17.0       | 2.45 H             | 127                  | 25.9             | 11.1                     |
| 11                                                   | 17865.00        | 60.8 PK                 | 74.0           | -13.2       | 1.50 H             | 256                  | 38.7             | 22.1                     |
| 12                                                   | 17865.00        | 48.2 AV                 | 54.0           | -5.8        | 1.50 H             | 256                  | 26.1             | 22.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

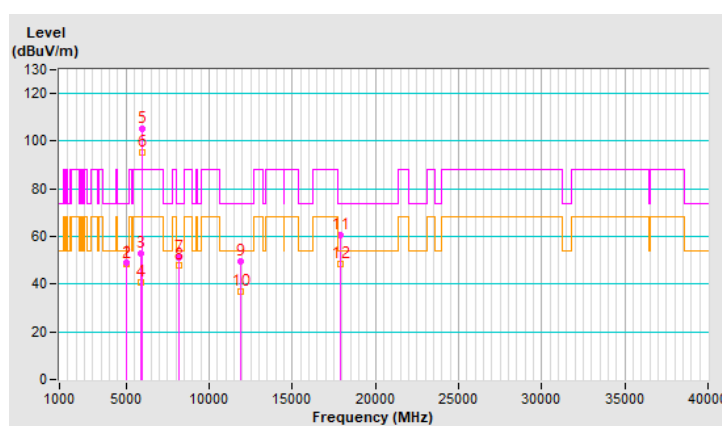


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 1 : 5955 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5000.00         | 51.5 PK                 | 74.0           | -22.5       | 1.09 V             | 323                  | 51.0             | 0.5                      |
| 2                                                  | 5000.00         | 50.5 AV                 | 54.0           | -3.5        | 1.09 V             | 323                  | 50.0             | 0.5                      |
| 3                                                  | #5925.00        | 53.4 PK                 | 88.2           | -34.8       | 2.42 V             | 42                   | 51.9             | 1.5                      |
| 4                                                  | #5925.00        | 42.1 AV                 | 68.2           | -26.1       | 2.42 V             | 42                   | 40.6             | 1.5                      |
| 5                                                  | *5955.00        | 108.6 PK                |                |             | 2.42 V             | 42                   | 107.0            | 1.6                      |
| 6                                                  | *5955.00        | 96.1 AV                 |                |             | 2.42 V             | 42                   | 94.5             | 1.6                      |
| 7                                                  | 8168.00         | 47.0 PK                 | 74.0           | -27.0       | 2.87 V             | 25                   | 39.6             | 7.4                      |
| 8                                                  | 8168.00         | 39.9 AV                 | 54.0           | -14.1       | 2.87 V             | 25                   | 32.5             | 7.4                      |
| 9                                                  | 11910.00        | 49.1 PK                 | 74.0           | -24.9       | 1.49 V             | 78                   | 38.0             | 11.1                     |
| 10                                                 | 11910.00        | 36.5 AV                 | 54.0           | -17.5       | 1.49 V             | 78                   | 25.4             | 11.1                     |
| 11                                                 | 17865.00        | 61.0 PK                 | 74.0           | -13.0       | 2.55 V             | 360                  | 38.9             | 22.1                     |
| 12                                                 | 17865.00        | 48.8 AV                 | 54.0           | -5.2        | 2.55 V             | 360                  | 26.7             | 22.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

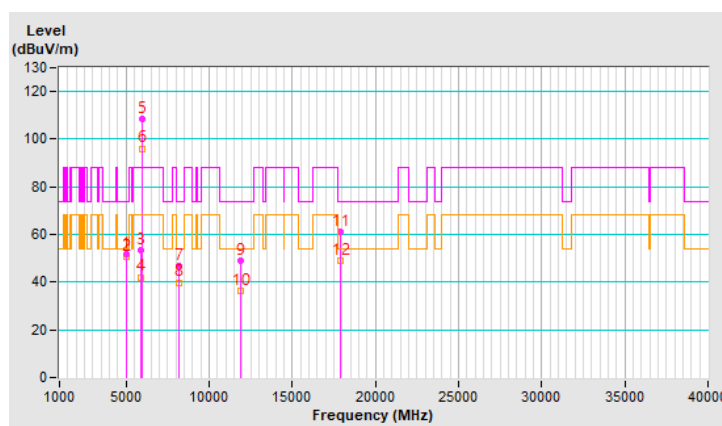


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 45 : 6175 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6175.00        | 106.7 PK                |                |             | 1.51 H             | 20                   | 104.7            | 2.0                      |
| 2                                                    | *6175.00        | 95.5 AV                 |                |             | 1.51 H             | 20                   | 93.5             | 2.0                      |
| 3                                                    | 12350.00        | 48.5 PK                 | 74.0           | -25.5       | 2.50 H             | 134                  | 38.4             | 10.1                     |
| 4                                                    | 12350.00        | 36.1 AV                 | 54.0           | -17.9       | 2.50 H             | 134                  | 26.0             | 10.1                     |
| 5                                                    | 18525.00        | 60.8 PK                 | 74.0           | -13.2       | 1.48 H             | 258                  | 67.4             | -6.6                     |
| 6                                                    | 18525.00        | 48.5 AV                 | 54.0           | -5.5        | 1.48 H             | 258                  | 55.1             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

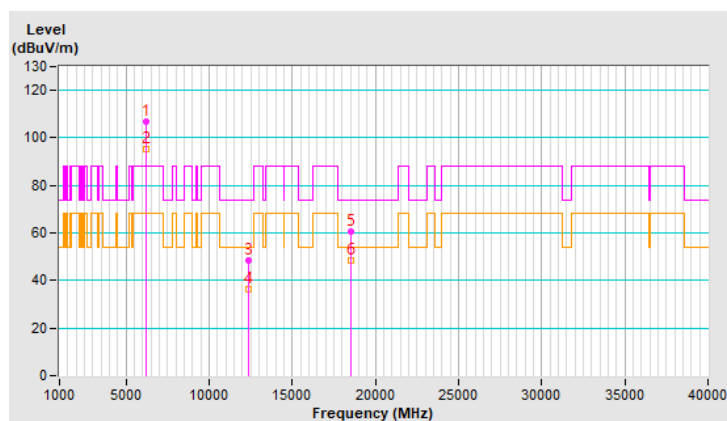


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 45 : 6175 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6175.00        | 108.1 PK                |                |             | 2.38 V             | 32                   | 106.1            | 2.0                      |
| 2                                                  | *6175.00        | 95.6 AV                 |                |             | 2.38 V             | 32                   | 93.6             | 2.0                      |
| 3                                                  | 12350.00        | 48.9 PK                 | 74.0           | -25.1       | 1.53 V             | 58                   | 38.8             | 10.1                     |
| 4                                                  | 12350.00        | 36.2 AV                 | 54.0           | -17.8       | 1.53 V             | 58                   | 26.1             | 10.1                     |
| 5                                                  | 18525.00        | 60.9 PK                 | 74.0           | -13.1       | 2.46 V             | 354                  | 67.5             | -6.6                     |
| 6                                                  | 18525.00        | 48.9 AV                 | 54.0           | -5.1        | 2.46 V             | 354                  | 55.5             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

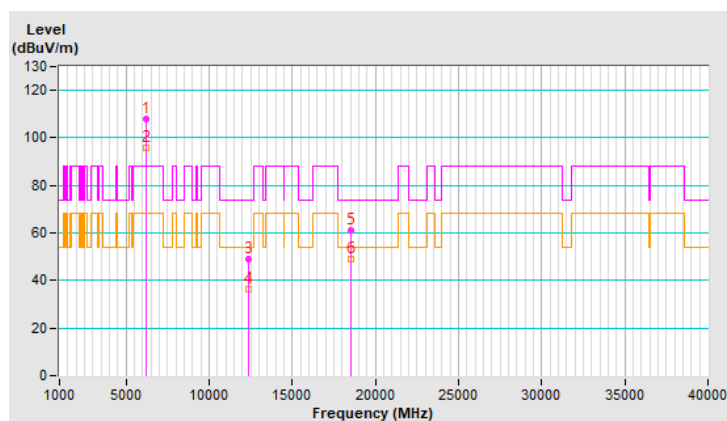


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 93 : 6415 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6415.00        | 108.3 PK                |                |             | 1.74 H             | 348                  | 105.3            | 3.0                      |
| 2                                                    | *6415.00        | 96.3 AV                 |                |             | 1.74 H             | 348                  | 93.3             | 3.0                      |
| 3                                                    | #12830.00       | 48.8 PK                 | 88.2           | -39.4       | 2.47 H             | 120                  | 38.2             | 10.6                     |
| 4                                                    | #12830.00       | 36.5 AV                 | 68.2           | -31.7       | 2.47 H             | 120                  | 25.9             | 10.6                     |
| 5                                                    | 19245.00        | 60.2 PK                 | 74.0           | -13.8       | 1.45 H             | 251                  | 66.6             | -6.4                     |
| 6                                                    | 19245.00        | 47.7 AV                 | 54.0           | -6.3        | 1.45 H             | 251                  | 54.1             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

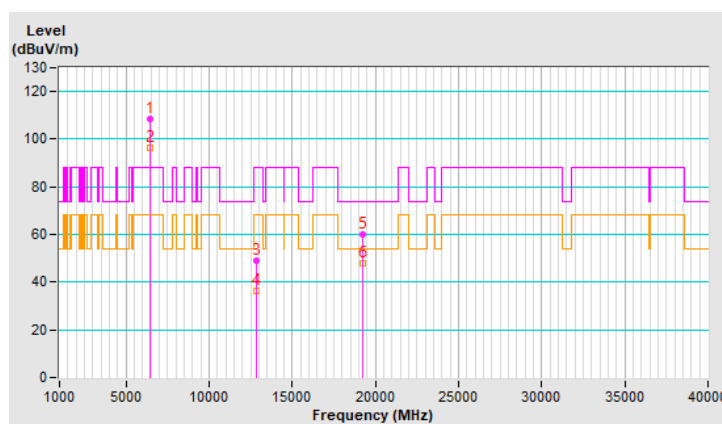


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 93 : 6415 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6415.00        | 108.5 PK                |                |             | 2.12 V             | 77                   | 105.5            | 3.0                      |
| 2                                                  | *6415.00        | 96.9 AV                 |                |             | 2.12 V             | 77                   | 93.9             | 3.0                      |
| 3                                                  | #12830.00       | 48.9 PK                 | 88.2           | -39.3       | 1.48 V             | 24                   | 38.3             | 10.6                     |
| 4                                                  | #12830.00       | 36.3 AV                 | 68.2           | -31.9       | 1.48 V             | 24                   | 25.7             | 10.6                     |
| 5                                                  | 19245.00        | 60.8 PK                 | 74.0           | -13.2       | 2.47 V             | 353                  | 67.2             | -6.4                     |
| 6                                                  | 19245.00        | 48.8 AV                 | 54.0           | -5.2        | 2.47 V             | 353                  | 55.2             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

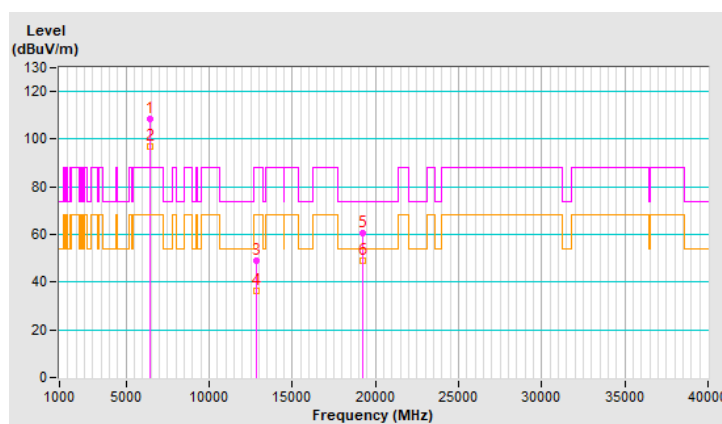


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 97 : 6435 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6435.00        | 108.4 PK                |                |             | 1.62 H             | 360                  | 105.4            | 3.0                      |
| 2                                                    | *6435.00        | 97.2 AV                 |                |             | 1.62 H             | 360                  | 94.2             | 3.0                      |
| 3                                                    | #12870.00       | 49.2 PK                 | 88.2           | -39.0       | 2.46 H             | 125                  | 38.6             | 10.6                     |
| 4                                                    | #12870.00       | 36.9 AV                 | 68.2           | -31.3       | 2.46 H             | 125                  | 26.3             | 10.6                     |
| 5                                                    | 19305.00        | 61.1 PK                 | 74.0           | -12.9       | 1.51 H             | 270                  | 67.7             | -6.6                     |
| 6                                                    | 19305.00        | 48.6 AV                 | 54.0           | -5.4        | 1.51 H             | 270                  | 55.2             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

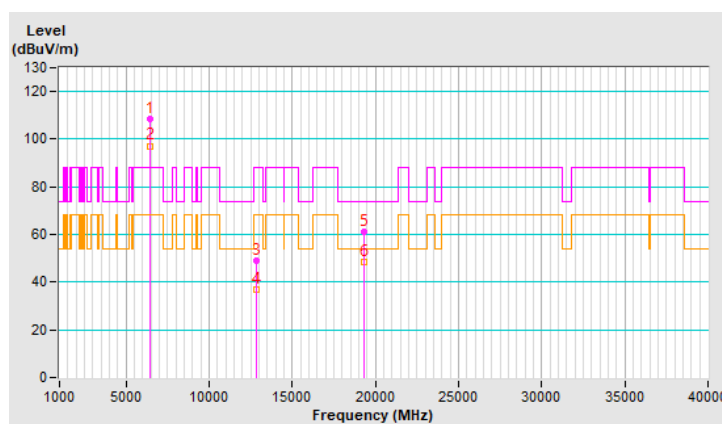


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 97 : 6435 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6435.00        | 109.0 PK                |                |             | 2.07 V             | 85                   | 106.0            | 3.0                      |
| 2                                                  | *6435.00        | 97.3 AV                 |                |             | 2.07 V             | 85                   | 94.3             | 3.0                      |
| 3                                                  | #12870.00       | 49.3 PK                 | 88.2           | -38.9       | 1.54 V             | 15                   | 38.7             | 10.6                     |
| 4                                                  | #12870.00       | 36.6 AV                 | 68.2           | -31.6       | 1.54 V             | 15                   | 26.0             | 10.6                     |
| 5                                                  | 19305.00        | 60.9 PK                 | 74.0           | -13.1       | 2.51 V             | 345                  | 67.5             | -6.6                     |
| 6                                                  | 19305.00        | 48.7 AV                 | 54.0           | -5.3        | 2.51 V             | 345                  | 55.3             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

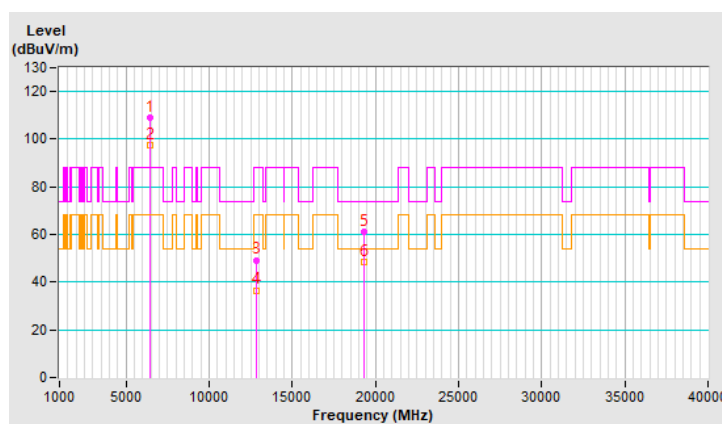


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 105 : 6475 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6475.00        | 107.3 PK                |                |             | 1.40 H             | 360                  | 104.1            | 3.2                      |
| 2                                                    | *6475.00        | 96.9 AV                 |                |             | 1.40 H             | 360                  | 93.7             | 3.2                      |
| 3                                                    | #12950.00       | 48.6 PK                 | 88.2           | -39.6       | 2.45 H             | 109                  | 38.0             | 10.6                     |
| 4                                                    | #12950.00       | 36.3 AV                 | 68.2           | -31.9       | 2.45 H             | 109                  | 25.7             | 10.6                     |
| 5                                                    | 19425.00        | 60.8 PK                 | 74.0           | -13.2       | 1.55 H             | 241                  | 67.2             | -6.4                     |
| 6                                                    | 19425.00        | 48.3 AV                 | 54.0           | -5.7        | 1.55 H             | 241                  | 54.7             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

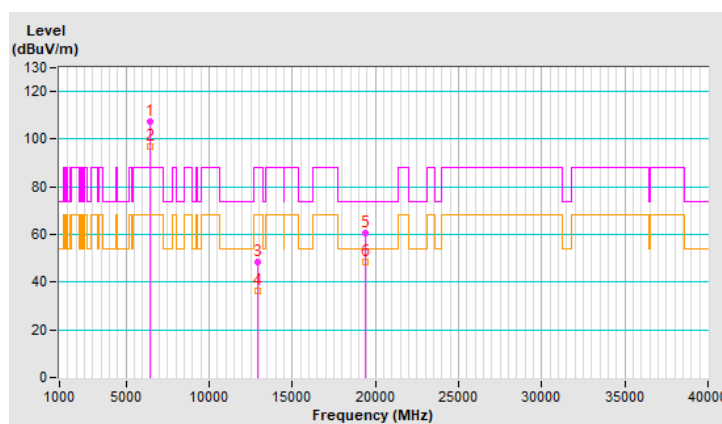


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 105 : 6475 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6475.00        | 108.7 PK                |                |             | 2.04 V             | 70                   | 105.5            | 3.2                      |
| 2                                                  | *6475.00        | 97.2 AV                 |                |             | 2.04 V             | 70                   | 94.0             | 3.2                      |
| 3                                                  | #12950.00       | 48.9 PK                 | 88.2           | -39.3       | 1.45 V             | 5                    | 38.3             | 10.6                     |
| 4                                                  | #12950.00       | 36.3 AV                 | 68.2           | -31.9       | 1.45 V             | 5                    | 25.7             | 10.6                     |
| 5                                                  | 19425.00        | 61.1 PK                 | 74.0           | -12.9       | 2.44 V             | 356                  | 67.5             | -6.4                     |
| 6                                                  | 19425.00        | 49.2 AV                 | 54.0           | -4.8        | 2.44 V             | 356                  | 55.6             | -6.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

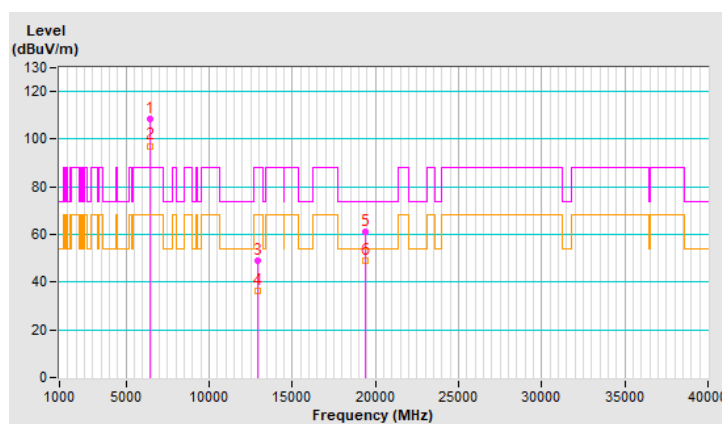


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 113 : 6515 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6515.00        | 107.9 PK                |                |             | 1.54 H             | 350                  | 104.4            | 3.5                      |
| 2                                                    | *6515.00        | 97.3 AV                 |                |             | 1.54 H             | 350                  | 93.8             | 3.5                      |
| 3                                                    | #13030.00       | 49.0 PK                 | 88.2           | -39.2       | 2.50 H             | 131                  | 38.3             | 10.7                     |
| 4                                                    | #13030.00       | 36.7 AV                 | 68.2           | -31.5       | 2.50 H             | 131                  | 26.0             | 10.7                     |
| 5                                                    | 19545.00        | 60.4 PK                 | 74.0           | -13.6       | 1.46 H             | 248                  | 66.6             | -6.2                     |
| 6                                                    | 19545.00        | 48.2 AV                 | 54.0           | -5.8        | 1.46 H             | 248                  | 54.4             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

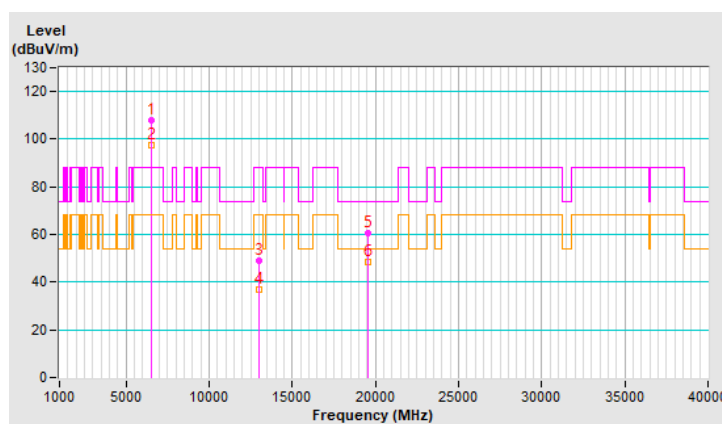


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 113 : 6515 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6515.00        | 108.4 PK                |                |             | 2.08 V             | 67                   | 104.9            | 3.5                      |
| 2                                                  | *6515.00        | 97.3 AV                 |                |             | 2.08 V             | 67                   | 93.8             | 3.5                      |
| 3                                                  | #13030.00       | 48.8 PK                 | 88.2           | -39.4       | 1.53 V             | 8                    | 38.1             | 10.7                     |
| 4                                                  | #13030.00       | 36.0 AV                 | 68.2           | -32.2       | 1.53 V             | 8                    | 25.3             | 10.7                     |
| 5                                                  | 19545.00        | 61.5 PK                 | 74.0           | -12.5       | 2.46 V             | 360                  | 67.7             | -6.2                     |
| 6                                                  | 19545.00        | 49.3 AV                 | 54.0           | -4.7        | 2.46 V             | 360                  | 55.5             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

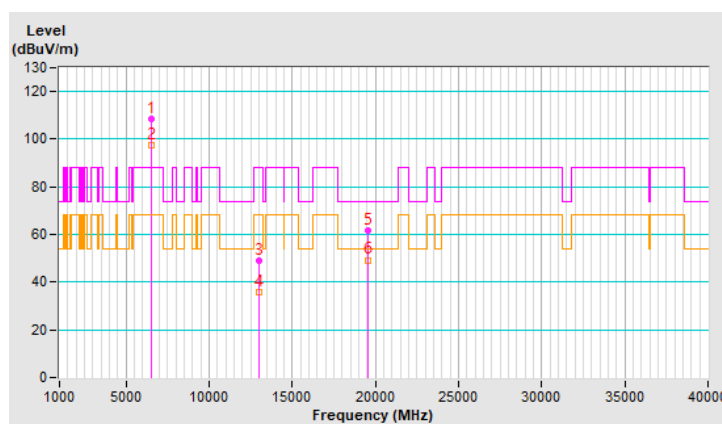


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 117 : 6535 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6535.00        | 109.3 PK                |                |             | 1.43 H             | 348                  | 105.7            | 3.6                      |
| 2                                                    | *6535.00        | 96.9 AV                 |                |             | 1.43 H             | 348                  | 93.3             | 3.6                      |
| 3                                                    | #13070.00       | 48.6 PK                 | 88.2           | -39.6       | 2.50 H             | 116                  | 37.8             | 10.8                     |
| 4                                                    | #13070.00       | 36.4 AV                 | 68.2           | -31.8       | 2.50 H             | 116                  | 25.6             | 10.8                     |
| 5                                                    | 19605.00        | 60.7 PK                 | 74.0           | -13.3       | 1.45 H             | 264                  | 66.7             | -6.0                     |
| 6                                                    | 19605.00        | 48.1 AV                 | 54.0           | -5.9        | 1.45 H             | 264                  | 54.1             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

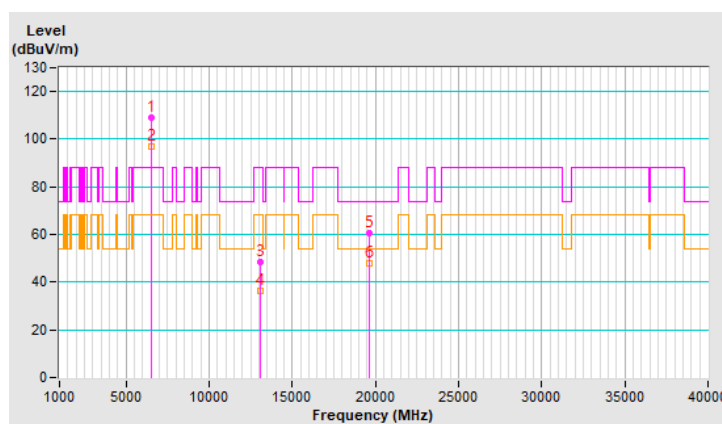


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 117 : 6535 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6535.00        | 108.6 PK                |                |             | 2.05 V             | 78                   | 105.0            | 3.6                      |
| 2                                                  | *6535.00        | 97.2 AV                 |                |             | 2.05 V             | 78                   | 93.6             | 3.6                      |
| 3                                                  | #13070.00       | 49.3 PK                 | 88.2           | -38.9       | 1.53 V             | 11                   | 38.5             | 10.8                     |
| 4                                                  | #13070.00       | 36.7 AV                 | 68.2           | -31.5       | 1.53 V             | 11                   | 25.9             | 10.8                     |
| 5                                                  | 19605.00        | 60.7 PK                 | 74.0           | -13.3       | 2.47 V             | 353                  | 66.7             | -6.0                     |
| 6                                                  | 19605.00        | 48.9 AV                 | 54.0           | -5.1        | 2.47 V             | 353                  | 54.9             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

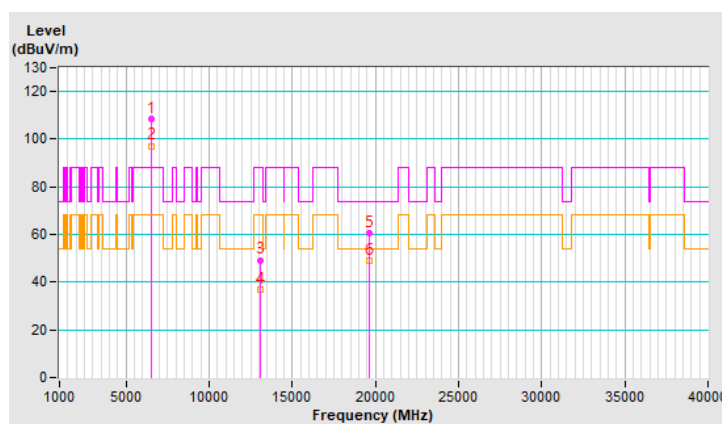


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 149 : 6695 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6695.00        | 107.9 PK                |                |             | 1.44 H             | 349                  | 104.1            | 3.8                      |
| 2                                                    | *6695.00        | 96.0 AV                 |                |             | 1.44 H             | 349                  | 92.2             | 3.8                      |
| 3                                                    | 13390.00        | 48.0 PK                 | 74.0           | -26.0       | 2.48 H             | 119                  | 35.8             | 12.2                     |
| 4                                                    | 13390.00        | 36.0 AV                 | 54.0           | -18.0       | 2.48 H             | 119                  | 23.8             | 12.2                     |
| 5                                                    | 20085.00        | 61.0 PK                 | 74.0           | -13.0       | 1.54 H             | 254                  | 66.3             | -5.3                     |
| 6                                                    | 20085.00        | 48.4 AV                 | 54.0           | -5.6        | 1.54 H             | 254                  | 53.7             | -5.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

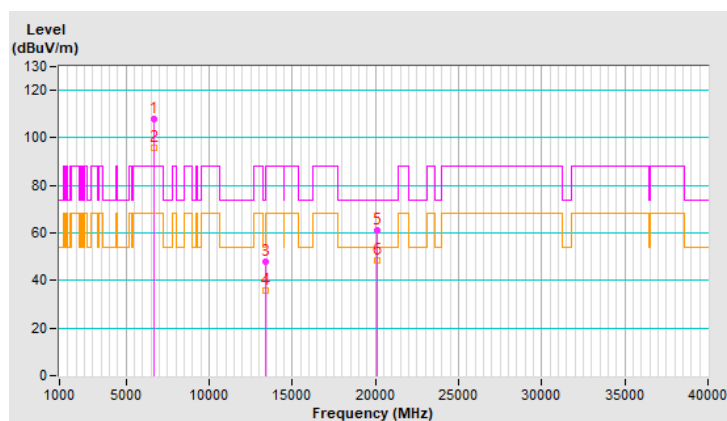


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 149 : 6695 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6695.00        | 108.8 PK                |                |             | 2.09 V             | 87                   | 105.0            | 3.8                      |
| 2                                                  | *6695.00        | 97.2 AV                 |                |             | 2.09 V             | 87                   | 93.4             | 3.8                      |
| 3                                                  | 13390.00        | 49.7 PK                 | 74.0           | -24.3       | 1.50 V             | 32                   | 37.5             | 12.2                     |
| 4                                                  | 13390.00        | 36.7 AV                 | 54.0           | -17.3       | 1.50 V             | 32                   | 24.5             | 12.2                     |
| 5                                                  | 20085.00        | 61.8 PK                 | 74.0           | -12.2       | 2.48 V             | 360                  | 67.1             | -5.3                     |
| 6                                                  | 20085.00        | 49.5 AV                 | 54.0           | -4.5        | 2.48 V             | 360                  | 54.8             | -5.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

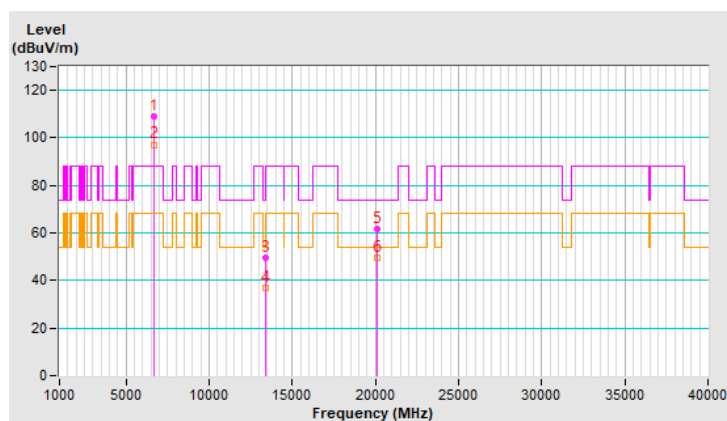


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 181 : 6855 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6855.00        | 107.8 PK                |                |             | 1.43 H             | 360                  | 103.7            | 4.1                      |
| 2                                                    | *6855.00        | 95.9 AV                 |                |             | 1.43 H             | 360                  | 91.8             | 4.1                      |
| 3                                                    | #13710.00       | 48.8 PK                 | 88.2           | -39.4       | 2.44 H             | 123                  | 35.9             | 12.9                     |
| 4                                                    | #13710.00       | 36.8 AV                 | 68.2           | -31.4       | 2.44 H             | 123                  | 23.9             | 12.9                     |
| 5                                                    | 20565.00        | 60.1 PK                 | 74.0           | -13.9       | 1.51 H             | 266                  | 64.9             | -4.8                     |
| 6                                                    | 20565.00        | 48.0 AV                 | 54.0           | -6.0        | 1.51 H             | 266                  | 52.8             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

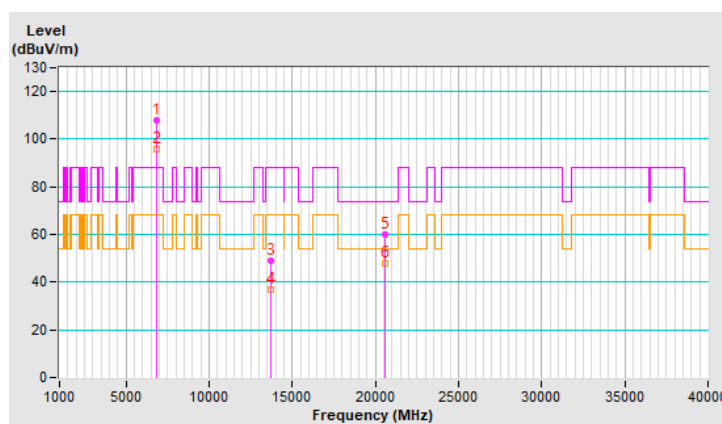


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 181 : 6855 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6855.00        | 108.5 PK                |                |             | 2.07 V             | 80                   | 104.4            | 4.1                      |
| 2                                                  | *6855.00        | 97.2 AV                 |                |             | 2.07 V             | 80                   | 93.1             | 4.1                      |
| 3                                                  | #13710.00       | 49.4 PK                 | 88.2           | -38.8       | 1.48 V             | 255                  | 36.5             | 12.9                     |
| 4                                                  | #13710.00       | 36.3 AV                 | 68.2           | -31.9       | 1.48 V             | 255                  | 23.4             | 12.9                     |
| 5                                                  | 20565.00        | 61.0 PK                 | 74.0           | -13.0       | 2.54 V             | 360                  | 65.8             | -4.8                     |
| 6                                                  | 20565.00        | 49.0 AV                 | 54.0           | -5.0        | 2.54 V             | 360                  | 53.8             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

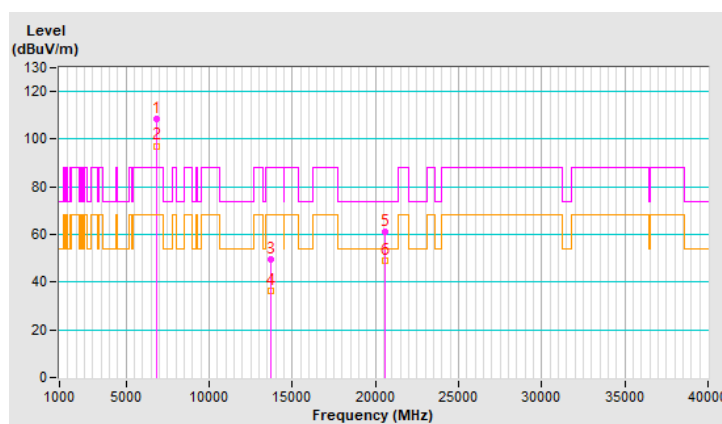


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 185 : 6875 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6875.00        | 106.1 PK                |                |             | 1.48 H             | 360                  | 101.9            | 4.2                      |
| 2                                                    | *6875.00        | 95.4 AV                 |                |             | 1.48 H             | 360                  | 91.2             | 4.2                      |
| 3                                                    | #13750.00       | 48.9 PK                 | 88.2           | -39.3       | 2.44 H             | 129                  | 36.0             | 12.9                     |
| 4                                                    | #13750.00       | 36.4 AV                 | 68.2           | -31.8       | 2.44 H             | 129                  | 23.5             | 12.9                     |
| 5                                                    | 20625.00        | 60.9 PK                 | 74.0           | -13.1       | 1.50 H             | 241                  | 65.6             | -4.7                     |
| 6                                                    | 20625.00        | 48.3 AV                 | 54.0           | -5.7        | 1.50 H             | 241                  | 53.0             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

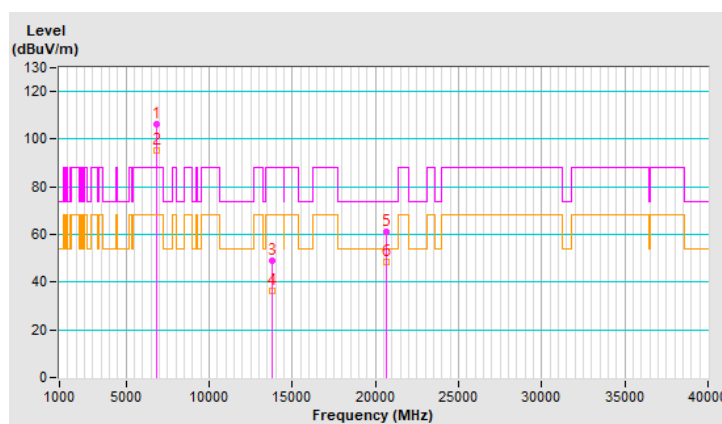


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 185 : 6875 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6875.00        | 108.8 PK                |                |             | 1.99 V             | 70                   | 104.6            | 4.2                      |
| 2                                                  | *6875.00        | 97.3 AV                 |                |             | 1.99 V             | 70                   | 93.1             | 4.2                      |
| 3                                                  | #13750.00       | 49.2 PK                 | 88.2           | -39.0       | 1.50 V             | 125                  | 36.3             | 12.9                     |
| 4                                                  | #13750.00       | 36.2 AV                 | 68.2           | -32.0       | 1.50 V             | 125                  | 23.3             | 12.9                     |
| 5                                                  | 20625.00        | 61.5 PK                 | 74.0           | -12.5       | 2.53 V             | 345                  | 66.2             | -4.7                     |
| 6                                                  | 20625.00        | 49.5 AV                 | 54.0           | -4.5        | 2.53 V             | 345                  | 54.2             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

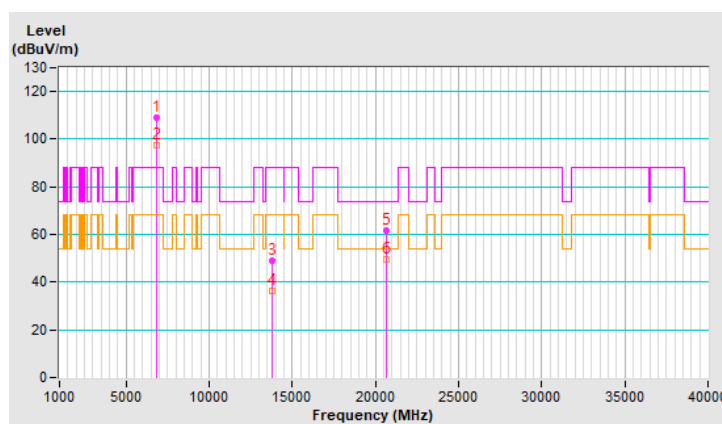


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 209 : 6995 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6995.00        | 108.2 PK                |                |             | 1.93 H             | 30                   | 102.8            | 5.4                      |
| 2                                                    | *6995.00        | 96.4 AV                 |                |             | 1.93 H             | 30                   | 91.0             | 5.4                      |
| 3                                                    | #13990.00       | 48.6 PK                 | 88.2           | -39.6       | 2.45 H             | 127                  | 35.6             | 13.0                     |
| 4                                                    | #13990.00       | 36.3 AV                 | 68.2           | -31.9       | 2.45 H             | 127                  | 23.3             | 13.0                     |
| 5                                                    | 20985.00        | 60.8 PK                 | 74.0           | -13.2       | 1.53 H             | 241                  | 65.1             | -4.3                     |
| 6                                                    | 20985.00        | 48.3 AV                 | 54.0           | -5.7        | 1.53 H             | 241                  | 52.6             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

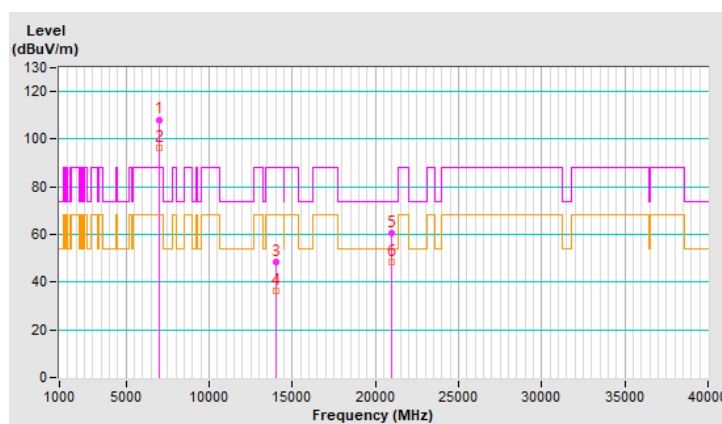


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 209 : 6995 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6995.00        | 108.3 PK                |                |             | 2.01 V             | 84                   | 102.9            | 5.4                      |
| 2                                                  | *6995.00        | 96.9 AV                 |                |             | 2.01 V             | 84                   | 91.5             | 5.4                      |
| 3                                                  | #13990.00       | 49.3 PK                 | 88.2           | -38.9       | 1.45 V             | 242                  | 36.3             | 13.0                     |
| 4                                                  | #13990.00       | 36.5 AV                 | 68.2           | -31.7       | 1.45 V             | 242                  | 23.5             | 13.0                     |
| 5                                                  | 20985.00        | 61.7 PK                 | 74.0           | -12.3       | 2.51 V             | 360                  | 66.0             | -4.3                     |
| 6                                                  | 20985.00        | 49.6 AV                 | 54.0           | -4.4        | 2.51 V             | 360                  | 53.9             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

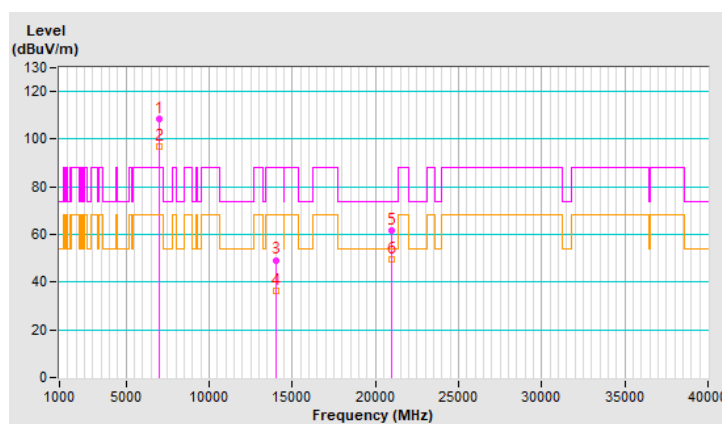


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 229 : 7095 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7095.00        | 106.8 PK                |                |             | 1.49 H             | 25                   | 101.3            | 5.5                      |
| 2                                                    | *7095.00        | 96.2 AV                 |                |             | 1.49 H             | 25                   | 90.7             | 5.5                      |
| 3                                                    | #7125.00        | 54.9 PK                 | 88.2           | -33.3       | 1.49 H             | 25                   | 49.1             | 5.8                      |
| 4                                                    | #7125.00        | 44.0 AV                 | 68.2           | -24.2       | 1.49 H             | 25                   | 38.2             | 5.8                      |
| 5                                                    | #14190.00       | 48.5 PK                 | 88.2           | -39.7       | 2.48 H             | 113                  | 35.0             | 13.5                     |
| 6                                                    | #14190.00       | 36.1 AV                 | 68.2           | -32.1       | 2.48 H             | 113                  | 22.6             | 13.5                     |
| 7                                                    | 21285.00        | 60.7 PK                 | 74.0           | -13.3       | 1.55 H             | 256                  | 64.8             | -4.1                     |
| 8                                                    | 21285.00        | 48.5 AV                 | 54.0           | -5.5        | 1.55 H             | 256                  | 52.6             | -4.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

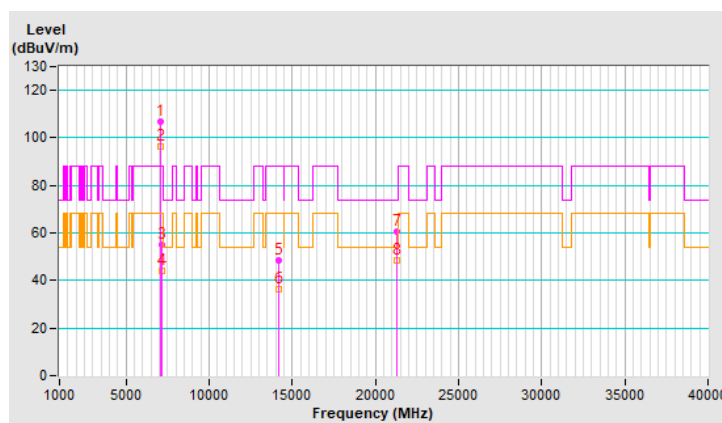


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE20) | Channel                       | CH 229 : 7095 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7095.00        | 106.4 PK                |                |             | 2.12 V             | 80                   | 100.9            | 5.5                      |
| 2                                                  | *7095.00        | 96.3 AV                 |                |             | 2.12 V             | 80                   | 90.8             | 5.5                      |
| 3                                                  | #7125.00        | 55.2 PK                 | 88.2           | -33.0       | 2.12 V             | 80                   | 49.4             | 5.8                      |
| 4                                                  | #7125.00        | 44.7 AV                 | 68.2           | -23.5       | 2.12 V             | 80                   | 38.9             | 5.8                      |
| 5                                                  | #14190.00       | 49.1 PK                 | 88.2           | -39.1       | 1.51 V             | 245                  | 35.6             | 13.5                     |
| 6                                                  | #14190.00       | 36.6 AV                 | 68.2           | -31.6       | 1.51 V             | 245                  | 23.1             | 13.5                     |
| 7                                                  | 21285.00        | 60.9 PK                 | 74.0           | -13.1       | 2.53 V             | 353                  | 65.0             | -4.1                     |
| 8                                                  | 21285.00        | 49.0 AV                 | 54.0           | -5.0        | 2.53 V             | 353                  | 53.1             | -4.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

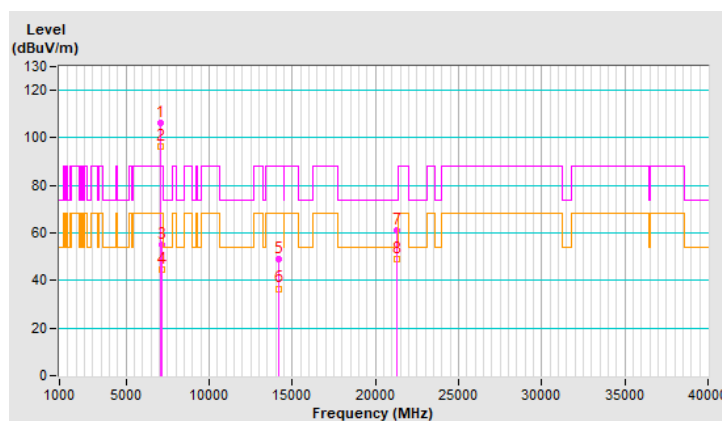


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 3 : 5965 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 54.5 PK                 | 88.2           | -33.7       | 1.55 H             | 167                  | 53.0             | 1.5                      |
| 2                                                    | #5925.00        | 44.8 AV                 | 68.2           | -23.4       | 1.55 H             | 167                  | 43.3             | 1.5                      |
| 3                                                    | *5965.00        | 106.7 PK                |                |             | 1.55 H             | 167                  | 105.1            | 1.6                      |
| 4                                                    | *5965.00        | 96.2 AV                 |                |             | 1.55 H             | 167                  | 94.6             | 1.6                      |
| 5                                                    | 11930.00        | 48.9 PK                 | 74.0           | -25.1       | 2.50 H             | 118                  | 37.8             | 11.1                     |
| 6                                                    | 11930.00        | 36.8 AV                 | 54.0           | -17.2       | 2.50 H             | 118                  | 25.7             | 11.1                     |
| 7                                                    | 17895.00        | 60.4 PK                 | 74.0           | -13.6       | 1.52 H             | 241                  | 37.6             | 22.8                     |
| 8                                                    | 17895.00        | 47.7 AV                 | 54.0           | -6.3        | 1.52 H             | 241                  | 24.9             | 22.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

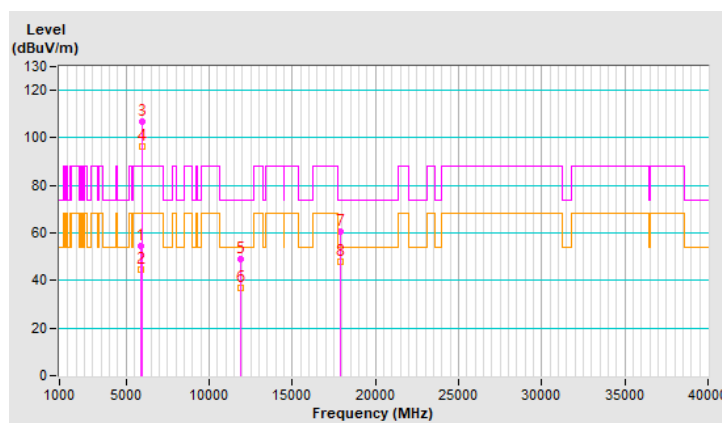


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 3 : 5965 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 54.2 PK                 | 88.2           | -34.0       | 2.61 V             | 64                   | 52.7             | 1.5                      |
| 2                                                  | #5925.00        | 42.6 AV                 | 68.2           | -25.6       | 2.61 V             | 64                   | 41.1             | 1.5                      |
| 3                                                  | *5965.00        | 105.8 PK                |                |             | 2.61 V             | 64                   | 104.2            | 1.6                      |
| 4                                                  | *5965.00        | 96.3 AV                 |                |             | 2.61 V             | 64                   | 94.7             | 1.6                      |
| 5                                                  | 11930.00        | 49.2 PK                 | 74.0           | -24.8       | 1.50 V             | 321                  | 38.1             | 11.1                     |
| 6                                                  | 11930.00        | 36.4 AV                 | 54.0           | -17.6       | 1.50 V             | 321                  | 25.3             | 11.1                     |
| 7                                                  | 17895.00        | 61.3 PK                 | 74.0           | -12.7       | 2.50 V             | 360                  | 38.5             | 22.8                     |
| 8                                                  | 17895.00        | 49.2 AV                 | 54.0           | -4.8        | 2.50 V             | 360                  | 26.4             | 22.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

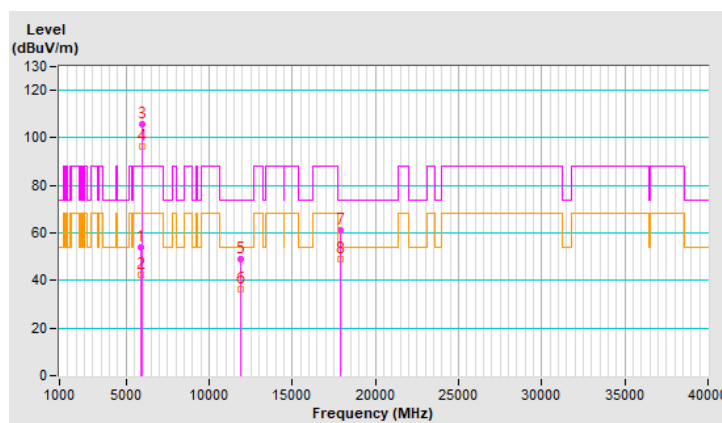


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 43 : 6165 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6165.00        | 107.2 PK                |                |             | 1.48 H             | 18                   | 105.3            | 1.9                      |
| 2                                                    | *6165.00        | 96.6 AV                 |                |             | 1.48 H             | 18                   | 94.7             | 1.9                      |
| 3                                                    | 12330.00        | 48.5 PK                 | 74.0           | -25.5       | 2.51 H             | 135                  | 38.4             | 10.1                     |
| 4                                                    | 12330.00        | 36.2 AV                 | 54.0           | -17.8       | 2.51 H             | 135                  | 26.1             | 10.1                     |
| 5                                                    | 18495.00        | 60.9 PK                 | 74.0           | -13.1       | 1.54 H             | 268                  | 67.6             | -6.7                     |
| 6                                                    | 18495.00        | 48.6 AV                 | 54.0           | -5.4        | 1.54 H             | 268                  | 55.3             | -6.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

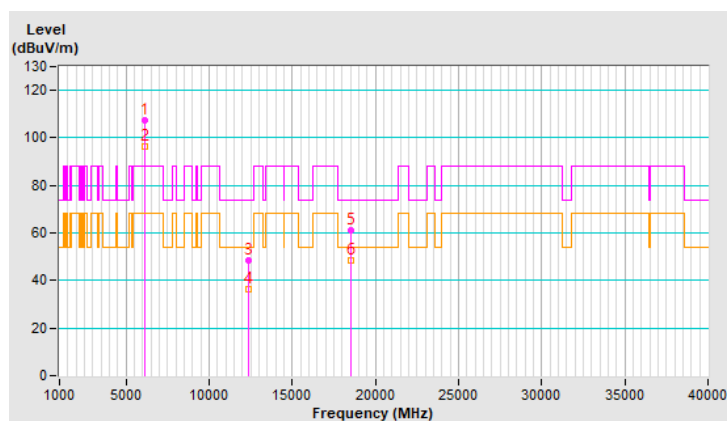


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 43 : 6165 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6165.00        | 106.1 PK                |                |             | 1.50 V             | 94                   | 104.2            | 1.9                      |
| 2                                                  | *6165.00        | 96.6 AV                 |                |             | 1.50 V             | 94                   | 94.7             | 1.9                      |
| 3                                                  | 12330.00        | 48.9 PK                 | 74.0           | -25.1       | 2.46 V             | 360                  | 38.8             | 10.1                     |
| 4                                                  | 12330.00        | 35.5 AV                 | 54.0           | -18.5       | 2.46 V             | 360                  | 25.4             | 10.1                     |
| 5                                                  | 18495.00        | 63.1 PK                 | 74.0           | -10.9       | 1.52 V             | 33                   | 69.8             | -6.7                     |
| 6                                                  | 18495.00        | 50.4 AV                 | 54.0           | -3.6        | 1.52 V             | 33                   | 57.1             | -6.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

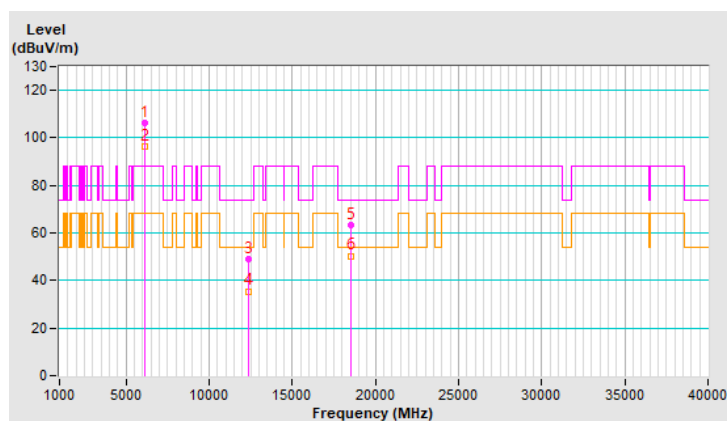


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 91 : 6405 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6405.00        | 108.4 PK                |                |             | 1.93 H             | 9                    | 105.4            | 3.0                      |
| 2                                                    | *6405.00        | 97.3 AV                 |                |             | 1.93 H             | 9                    | 94.3             | 3.0                      |
| 3                                                    | #12810.00       | 48.7 PK                 | 88.2           | -39.5       | 2.55 H             | 125                  | 38.2             | 10.5                     |
| 4                                                    | #12810.00       | 36.7 AV                 | 68.2           | -31.5       | 2.55 H             | 125                  | 26.2             | 10.5                     |
| 5                                                    | 19215.00        | 60.9 PK                 | 74.0           | -13.1       | 1.47 H             | 238                  | 67.2             | -6.3                     |
| 6                                                    | 19215.00        | 48.3 AV                 | 54.0           | -5.7        | 1.47 H             | 238                  | 54.6             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

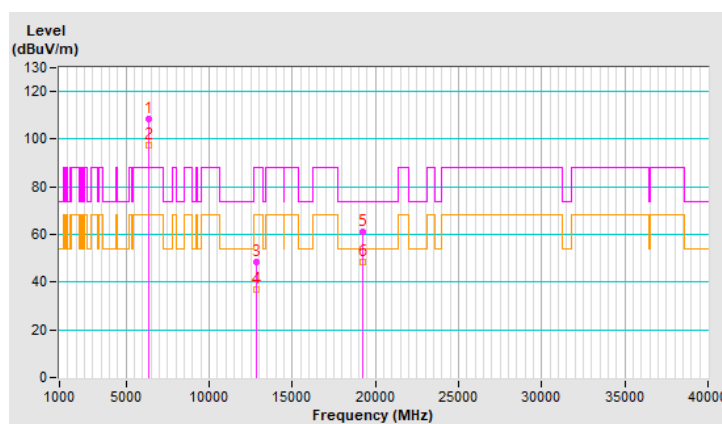


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 91 : 6405 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6405.00        | 108.1 PK                |                |             | 2.08 V             | 73                   | 105.1            | 3.0                      |
| 2                                                  | *6405.00        | 97.5 AV                 |                |             | 2.08 V             | 73                   | 94.5             | 3.0                      |
| 3                                                  | #12810.00       | 49.2 PK                 | 88.2           | -39.0       | 2.48 V             | 360                  | 38.7             | 10.5                     |
| 4                                                  | #12810.00       | 35.7 AV                 | 68.2           | -32.5       | 2.48 V             | 360                  | 25.2             | 10.5                     |
| 5                                                  | 19215.00        | 63.5 PK                 | 74.0           | -10.5       | 1.47 V             | 29                   | 69.8             | -6.3                     |
| 6                                                  | 19215.00        | 50.6 AV                 | 54.0           | -3.4        | 1.47 V             | 29                   | 56.9             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

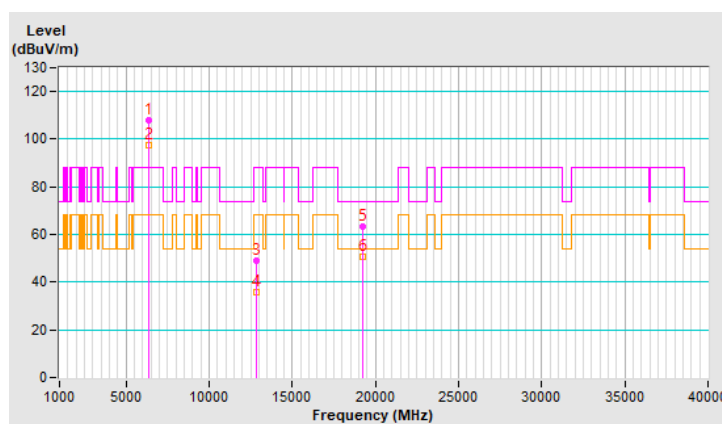


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 99 : 6445 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6445.00        | 108.8 PK                |                |             | 1.93 H             | 318                  | 105.7            | 3.1                      |
| 2                                                    | *6445.00        | 97.2 AV                 |                |             | 1.93 H             | 318                  | 94.1             | 3.1                      |
| 3                                                    | #12890.00       | 48.7 PK                 | 88.2           | -39.5       | 2.47 H             | 107                  | 38.0             | 10.7                     |
| 4                                                    | #12890.00       | 36.2 AV                 | 68.2           | -32.0       | 2.47 H             | 107                  | 25.5             | 10.7                     |
| 5                                                    | 19335.00        | 61.3 PK                 | 74.0           | -12.7       | 1.49 H             | 253                  | 67.9             | -6.6                     |
| 6                                                    | 19335.00        | 48.6 AV                 | 54.0           | -5.4        | 1.49 H             | 253                  | 55.2             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

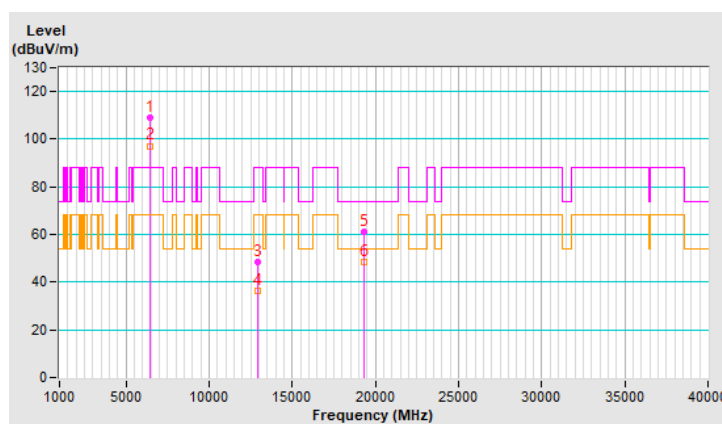


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 99 : 6445 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6445.00        | 107.8 PK                |                |             | 2.06 V             | 75                   | 104.7            | 3.1                      |
| 2                                                  | *6445.00        | 97.2 AV                 |                |             | 2.06 V             | 75                   | 94.1             | 3.1                      |
| 3                                                  | #12890.00       | 49.7 PK                 | 88.2           | -38.5       | 2.48 V             | 360                  | 39.0             | 10.7                     |
| 4                                                  | #12890.00       | 36.1 AV                 | 68.2           | -32.1       | 2.48 V             | 360                  | 25.4             | 10.7                     |
| 5                                                  | 19335.00        | 63.5 PK                 | 74.0           | -10.5       | 1.47 V             | 18                   | 70.1             | -6.6                     |
| 6                                                  | 19335.00        | 50.5 AV                 | 54.0           | -3.5        | 1.47 V             | 18                   | 57.1             | -6.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

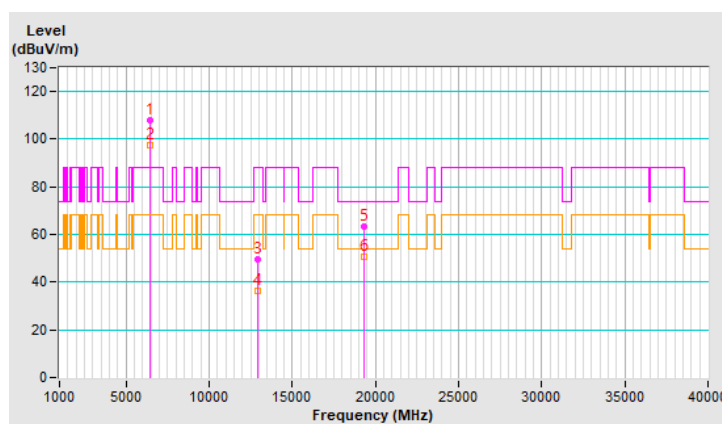


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 107 : 6485 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6485.00        | 107.9 PK                |                |             | 1.70 H             | 320                  | 104.5            | 3.4                      |
| 2                                                    | *6485.00        | 97.2 AV                 |                |             | 1.70 H             | 320                  | 93.8             | 3.4                      |
| 3                                                    | #12970.00       | 48.3 PK                 | 88.2           | -39.9       | 2.51 H             | 113                  | 37.7             | 10.6                     |
| 4                                                    | #12970.00       | 36.1 AV                 | 68.2           | -32.1       | 2.51 H             | 113                  | 25.5             | 10.6                     |
| 5                                                    | 19455.00        | 60.5 PK                 | 74.0           | -13.5       | 1.46 H             | 257                  | 66.8             | -6.3                     |
| 6                                                    | 19455.00        | 48.3 AV                 | 54.0           | -5.7        | 1.46 H             | 257                  | 54.6             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

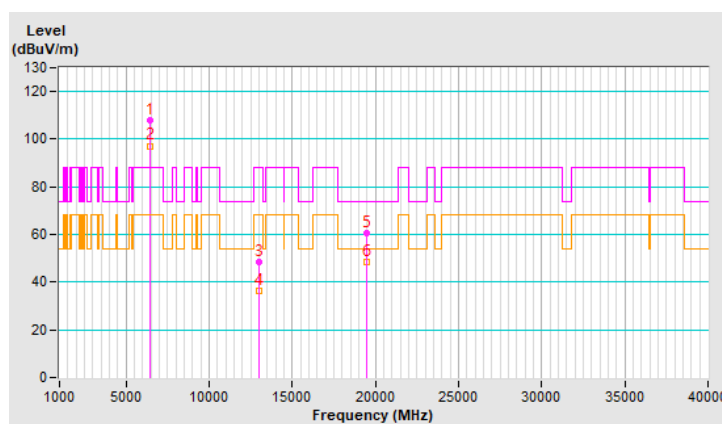


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 107 : 6485 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6485.00        | 107.9 PK                |                |             | 2.04 V             | 77                   | 104.5            | 3.4                      |
| 2                                                  | *6485.00        | 97.4 AV                 |                |             | 2.04 V             | 77                   | 94.0             | 3.4                      |
| 3                                                  | #12970.00       | 48.5 PK                 | 88.2           | -39.7       | 2.47 V             | 360                  | 37.9             | 10.6                     |
| 4                                                  | #12970.00       | 35.3 AV                 | 68.2           | -32.9       | 2.47 V             | 360                  | 24.7             | 10.6                     |
| 5                                                  | 19455.00        | 63.7 PK                 | 74.0           | -10.3       | 1.49 V             | 7                    | 70.0             | -6.3                     |
| 6                                                  | 19455.00        | 51.0 AV                 | 54.0           | -3.0        | 1.49 V             | 7                    | 57.3             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

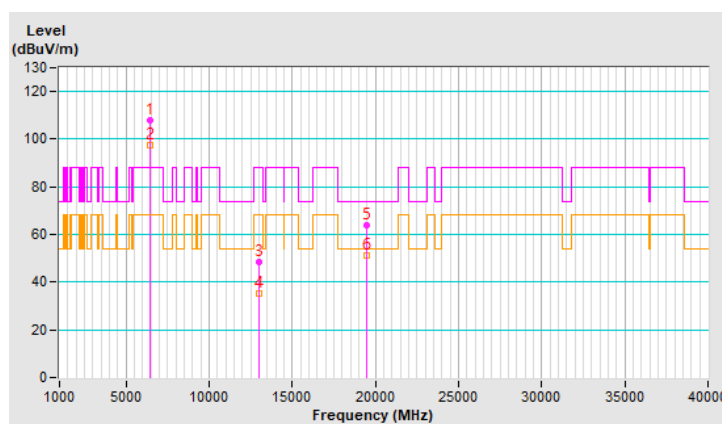


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 115 : 6525 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6525.00        | 107.9 PK                |                |             | 1.69 H             | 360                  | 104.4            | 3.5                      |
| 2                                                    | *6525.00        | 97.3 AV                 |                |             | 1.69 H             | 360                  | 93.8             | 3.5                      |
| 3                                                    | #13050.00       | 48.4 PK                 | 88.2           | -39.8       | 2.50 H             | 121                  | 37.7             | 10.7                     |
| 4                                                    | #13050.00       | 36.0 AV                 | 68.2           | -32.2       | 2.50 H             | 121                  | 25.3             | 10.7                     |
| 5                                                    | 19575.00        | 60.1 PK                 | 74.0           | -13.9       | 1.46 H             | 262                  | 66.2             | -6.1                     |
| 6                                                    | 19575.00        | 47.8 AV                 | 54.0           | -6.2        | 1.46 H             | 262                  | 53.9             | -6.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

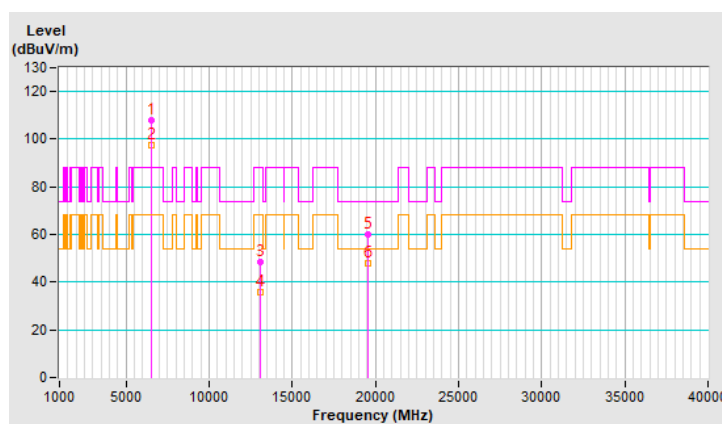


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 115 : 6525 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6525.00        | 108.1 PK                |                |             | 2.11 V             | 85                   | 104.6            | 3.5                      |
| 2                                                  | *6525.00        | 97.6 AV                 |                |             | 2.11 V             | 85                   | 94.1             | 3.5                      |
| 3                                                  | #13050.00       | 49.4 PK                 | 88.2           | -38.8       | 2.48 V             | 360                  | 38.7             | 10.7                     |
| 4                                                  | #13050.00       | 35.7 AV                 | 68.2           | -32.5       | 2.48 V             | 360                  | 25.0             | 10.7                     |
| 5                                                  | 19575.00        | 63.7 PK                 | 74.0           | -10.3       | 1.45 V             | 18                   | 69.8             | -6.1                     |
| 6                                                  | 19575.00        | 50.8 AV                 | 54.0           | -3.2        | 1.45 V             | 18                   | 56.9             | -6.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

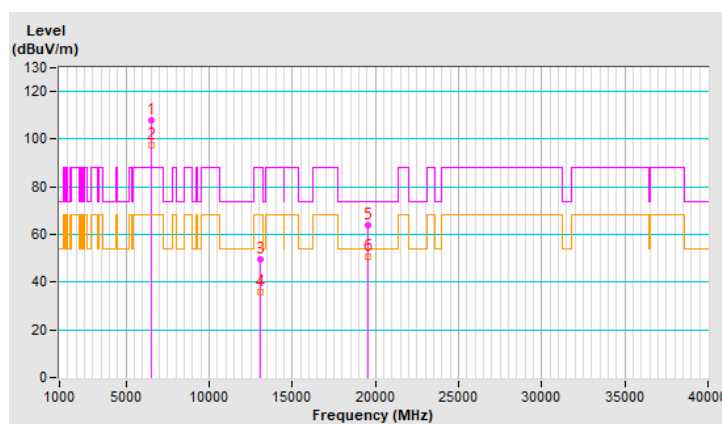


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 123 : 6565 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6565.00        | 108.8 PK                |                |             | 1.41 H             | 360                  | 105.1            | 3.7                      |
| 2                                                    | *6565.00        | 97.0 AV                 |                |             | 1.41 H             | 360                  | 93.3             | 3.7                      |
| 3                                                    | #13130.00       | 49.0 PK                 | 88.2           | -39.2       | 2.44 H             | 122                  | 37.9             | 11.1                     |
| 4                                                    | #13130.00       | 36.8 AV                 | 68.2           | -31.4       | 2.44 H             | 122                  | 25.7             | 11.1                     |
| 5                                                    | 19695.00        | 60.1 PK                 | 74.0           | -13.9       | 1.48 H             | 245                  | 66.1             | -6.0                     |
| 6                                                    | 19695.00        | 47.8 AV                 | 54.0           | -6.2        | 1.48 H             | 245                  | 53.8             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

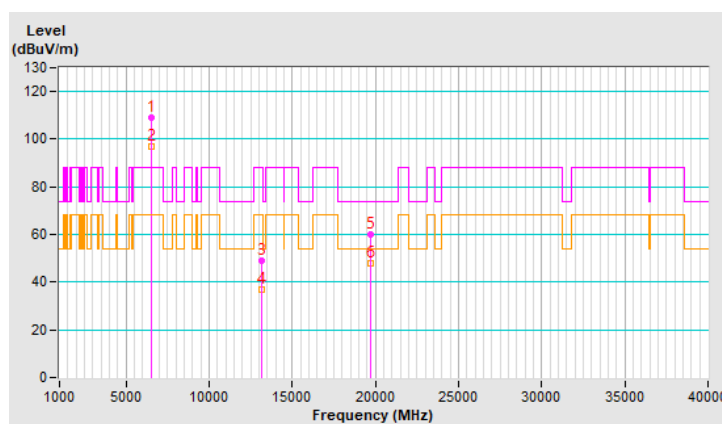


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 123 : 6565 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6565.00        | 107.6 PK                |                |             | 2.09 V             | 90                   | 103.9            | 3.7                      |
| 2                                                  | *6565.00        | 97.2 AV                 |                |             | 2.09 V             | 90                   | 93.5             | 3.7                      |
| 3                                                  | #13130.00       | 48.9 PK                 | 88.2           | -39.3       | 2.48 V             | 360                  | 37.8             | 11.1                     |
| 4                                                  | #13130.00       | 35.6 AV                 | 68.2           | -32.6       | 2.48 V             | 360                  | 24.5             | 11.1                     |
| 5                                                  | 19695.00        | 63.3 PK                 | 74.0           | -10.7       | 1.53 V             | 27                   | 69.3             | -6.0                     |
| 6                                                  | 19695.00        | 50.4 AV                 | 54.0           | -3.6        | 1.53 V             | 27                   | 56.4             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

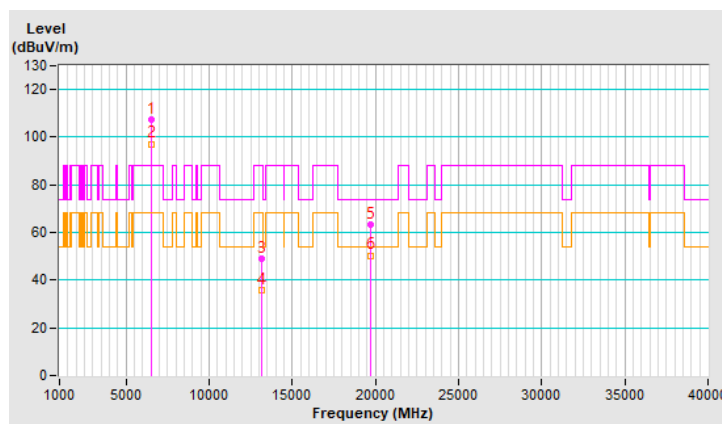


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 155 : 6725 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6725.00        | 108.1 PK                |                |             | 1.41 H             | 349                  | 104.2            | 3.9                      |
| 2                                                    | *6725.00        | 96.8 AV                 |                |             | 1.41 H             | 349                  | 92.9             | 3.9                      |
| 3                                                    | #13450.00       | 49.1 PK                 | 88.2           | -39.1       | 2.50 H             | 134                  | 36.8             | 12.3                     |
| 4                                                    | #13450.00       | 36.7 AV                 | 68.2           | -31.5       | 2.50 H             | 134                  | 24.4             | 12.3                     |
| 5                                                    | 20175.00        | 60.7 PK                 | 74.0           | -13.3       | 1.52 H             | 266                  | 66.2             | -5.5                     |
| 6                                                    | 20175.00        | 48.0 AV                 | 54.0           | -6.0        | 1.52 H             | 266                  | 53.5             | -5.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

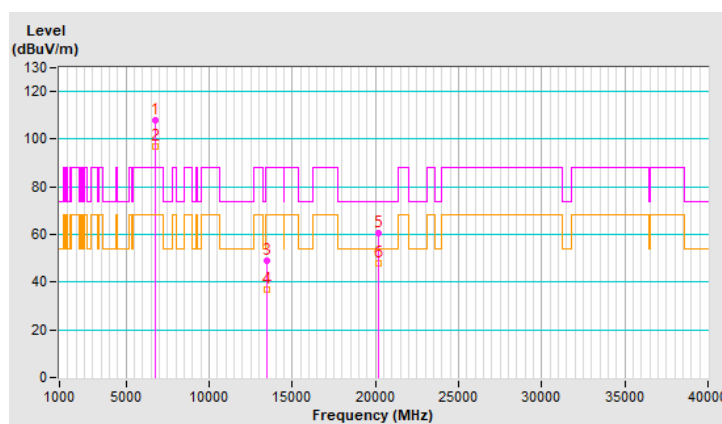


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 155 : 6725 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6725.00        | 107.5 PK                |                |             | 2.06 V             | 80                   | 103.6            | 3.9                      |
| 2                                                  | *6725.00        | 97.0 AV                 |                |             | 2.06 V             | 80                   | 93.1             | 3.9                      |
| 3                                                  | #13450.00       | 48.9 PK                 | 88.2           | -39.3       | 2.47 V             | 360                  | 36.6             | 12.3                     |
| 4                                                  | #13450.00       | 35.7 AV                 | 68.2           | -32.5       | 2.47 V             | 360                  | 23.4             | 12.3                     |
| 5                                                  | 20175.00        | 63.6 PK                 | 74.0           | -10.4       | 1.44 V             | 111                  | 69.1             | -5.5                     |
| 6                                                  | 20175.00        | 50.8 AV                 | 54.0           | -3.2        | 1.44 V             | 111                  | 56.3             | -5.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

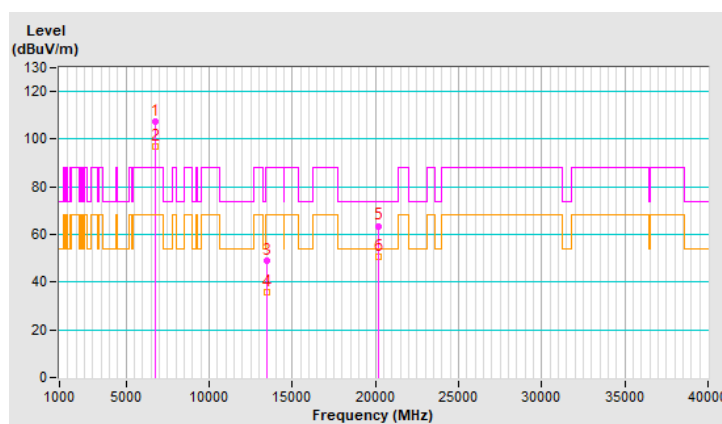


|                        |                 |                                          |                                                            |
|------------------------|-----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11ax (HE40) | <b>Channel</b>                           | CH 179 : 6845 MHz                                          |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power</b>     | 120 Vac, 60 Hz  | <b>Environmental Conditions</b>          | 25°C, 68% RH                                               |
| <b>Tested By</b>       | Nick Tsou       |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6845.00        | 106.9 PK                |                |             | 1.54 H             | 360                  | 102.8            | 4.1                      |
| 2                                                    | *6845.00        | 96.1 AV                 |                |             | 1.54 H             | 360                  | 92.0             | 4.1                      |
| 3                                                    | #13690.00       | 49.2 PK                 | 88.2           | -39.0       | 2.47 H             | 132                  | 36.3             | 12.9                     |
| 4                                                    | #13690.00       | 36.9 AV                 | 68.2           | -31.3       | 2.47 H             | 132                  | 24.0             | 12.9                     |
| 5                                                    | 20535.00        | 60.8 PK                 | 74.0           | -13.2       | 1.54 H             | 258                  | 65.6             | -4.8                     |
| 6                                                    | 20535.00        | 48.3 AV                 | 54.0           | -5.7        | 1.54 H             | 258                  | 53.1             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

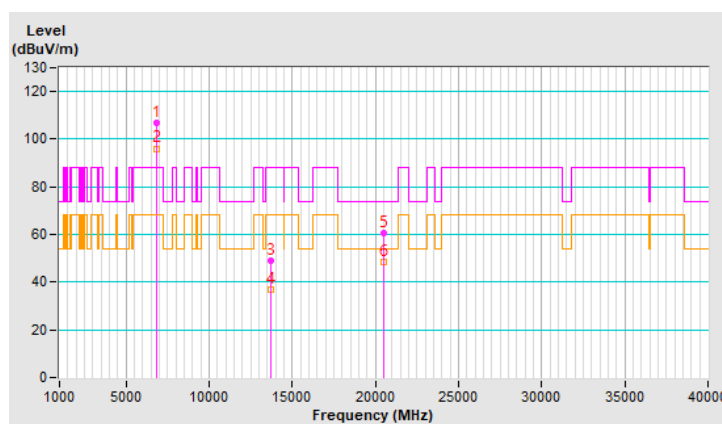


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 179 : 6845 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6845.00        | 108.0 PK                |                |             | 2.03 V             | 73                   | 103.9            | 4.1                      |
| 2                                                  | *6845.00        | 97.6 AV                 |                |             | 2.03 V             | 73                   | 93.5             | 4.1                      |
| 3                                                  | #13690.00       | 49.1 PK                 | 88.2           | -39.1       | 2.50 V             | 360                  | 36.2             | 12.9                     |
| 4                                                  | #13690.00       | 35.7 AV                 | 68.2           | -32.5       | 2.50 V             | 360                  | 22.8             | 12.9                     |
| 5                                                  | 20535.00        | 63.8 PK                 | 74.0           | -10.2       | 1.53 V             | 22                   | 68.6             | -4.8                     |
| 6                                                  | 20535.00        | 50.7 AV                 | 54.0           | -3.3        | 1.53 V             | 22                   | 55.5             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

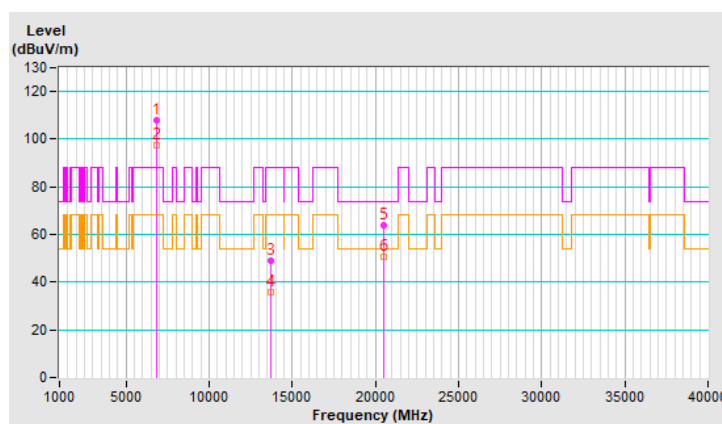


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 187 : 6885 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6885.00        | 107.2 PK                |                |             | 1.49 H             | 360                  | 102.9            | 4.3                      |
| 2                                                    | *6885.00        | 96.3 AV                 |                |             | 1.49 H             | 360                  | 92.0             | 4.3                      |
| 3                                                    | #13770.00       | 48.2 PK                 | 88.2           | -40.0       | 2.49 H             | 122                  | 35.3             | 12.9                     |
| 4                                                    | #13770.00       | 36.1 AV                 | 68.2           | -32.1       | 2.49 H             | 122                  | 23.2             | 12.9                     |
| 5                                                    | 20655.00        | 60.5 PK                 | 74.0           | -13.5       | 1.53 H             | 253                  | 65.2             | -4.7                     |
| 6                                                    | 20655.00        | 47.9 AV                 | 54.0           | -6.1        | 1.53 H             | 253                  | 52.6             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

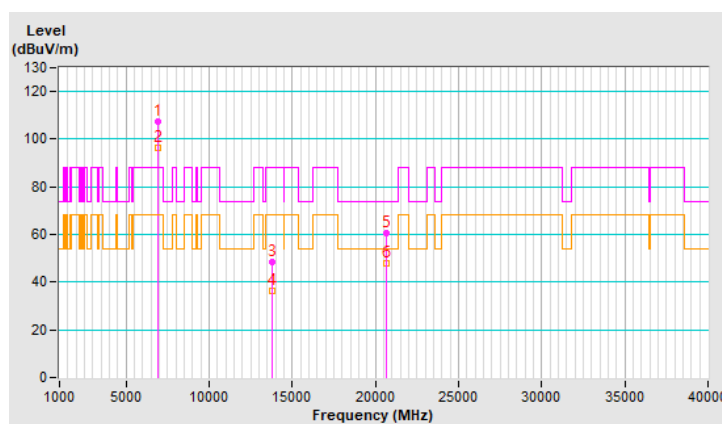


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 187 : 6885 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6885.00        | 107.9 PK                |                |             | 2.13 V             | 67                   | 103.6            | 4.3                      |
| 2                                                  | *6885.00        | 97.5 AV                 |                |             | 2.13 V             | 67                   | 93.2             | 4.3                      |
| 3                                                  | #13770.00       | 49.2 PK                 | 88.2           | -39.0       | 2.46 V             | 360                  | 36.3             | 12.9                     |
| 4                                                  | #13770.00       | 35.6 AV                 | 68.2           | -32.6       | 2.46 V             | 360                  | 22.7             | 12.9                     |
| 5                                                  | 20655.00        | 64.3 PK                 | 74.0           | -9.7        | 1.53 V             | 26                   | 69.0             | -4.7                     |
| 6                                                  | 20655.00        | 51.1 AV                 | 54.0           | -2.9        | 1.53 V             | 26                   | 55.8             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

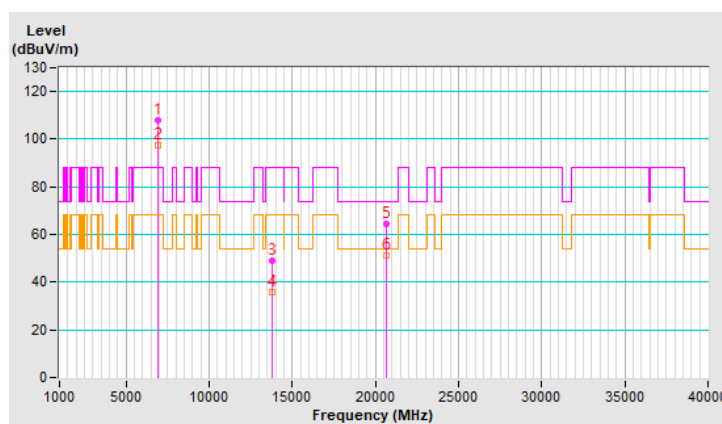


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 211 : 7005 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7005.00        | 107.9 PK                |                |             | 1.72 H             | 360                  | 102.4            | 5.5                      |
| 2                                                    | *7005.00        | 96.0 AV                 |                |             | 1.72 H             | 360                  | 90.5             | 5.5                      |
| 3                                                    | #14010.00       | 48.8 PK                 | 88.2           | -39.4       | 2.51 H             | 119                  | 35.8             | 13.0                     |
| 4                                                    | #14010.00       | 36.5 AV                 | 68.2           | -31.7       | 2.51 H             | 119                  | 23.5             | 13.0                     |
| 5                                                    | 21015.00        | 60.6 PK                 | 74.0           | -13.4       | 1.46 H             | 240                  | 64.8             | -4.2                     |
| 6                                                    | 21015.00        | 48.3 AV                 | 54.0           | -5.7        | 1.46 H             | 240                  | 52.5             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

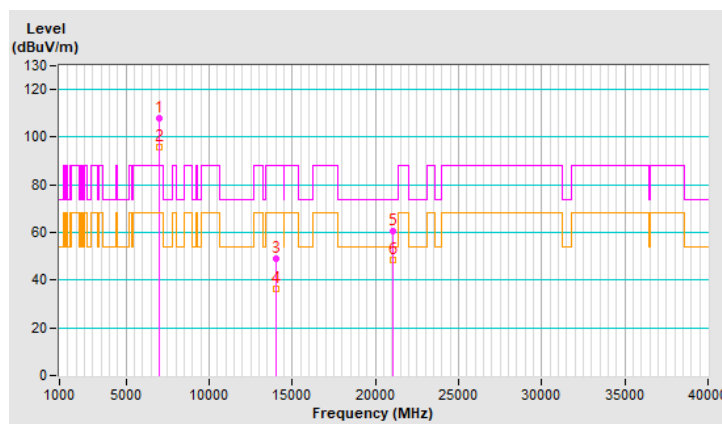


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 211 : 7005 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7005.00        | 107.7 PK                |                |             | 2.02 V             | 76                   | 102.2            | 5.5                      |
| 2                                                  | *7005.00        | 97.0 AV                 |                |             | 2.02 V             | 76                   | 91.5             | 5.5                      |
| 3                                                  | #14010.00       | 49.6 PK                 | 88.2           | -38.6       | 2.56 V             | 360                  | 36.6             | 13.0                     |
| 4                                                  | #14010.00       | 36.0 AV                 | 68.2           | -32.2       | 2.56 V             | 360                  | 23.0             | 13.0                     |
| 5                                                  | 21015.00        | 63.2 PK                 | 74.0           | -10.8       | 1.55 V             | 26                   | 67.4             | -4.2                     |
| 6                                                  | 21015.00        | 50.5 AV                 | 54.0           | -3.5        | 1.55 V             | 26                   | 54.7             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

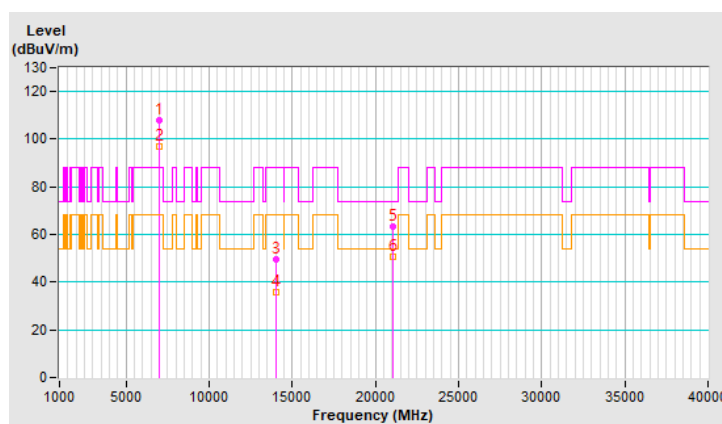


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 227 : 7085 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7085.00        | 109.6 PK                |                |             | 1.47 H             | 26                   | 104.1            | 5.5                      |
| 2                                                    | *7085.00        | 97.1 AV                 |                |             | 1.47 H             | 26                   | 91.6             | 5.5                      |
| 3                                                    | #7125.00        | 56.7 PK                 | 88.2           | -31.5       | 1.47 H             | 26                   | 50.9             | 5.8                      |
| 4                                                    | #7125.00        | 46.2 AV                 | 68.2           | -22.0       | 1.47 H             | 26                   | 40.4             | 5.8                      |
| 5                                                    | #14170.00       | 49.2 PK                 | 88.2           | -39.0       | 2.46 H             | 118                  | 35.7             | 13.5                     |
| 6                                                    | #14170.00       | 36.8 AV                 | 68.2           | -31.4       | 2.46 H             | 118                  | 23.3             | 13.5                     |
| 7                                                    | 21255.00        | 60.4 PK                 | 74.0           | -13.6       | 1.52 H             | 243                  | 64.7             | -4.3                     |
| 8                                                    | 21255.00        | 47.7 AV                 | 54.0           | -6.3        | 1.52 H             | 243                  | 52.0             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

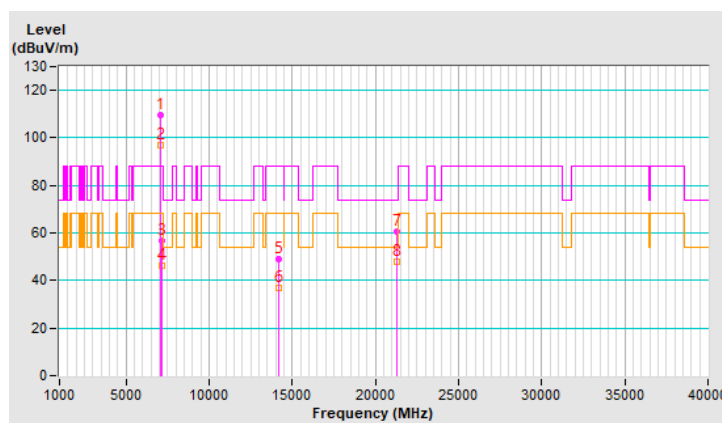


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE40) | Channel                       | CH 227 : 7085 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7085.00        | 108.0 PK                |                |             | 2.05 V             | 66                   | 102.5            | 5.5                      |
| 2                                                  | *7085.00        | 97.5 AV                 |                |             | 2.05 V             | 66                   | 92.0             | 5.5                      |
| 3                                                  | #7125.00        | 55.6 PK                 | 88.2           | -32.6       | 2.05 V             | 66                   | 49.8             | 5.8                      |
| 4                                                  | #7125.00        | 45.1 AV                 | 68.2           | -23.1       | 2.05 V             | 66                   | 39.3             | 5.8                      |
| 5                                                  | #14170.00       | 48.7 PK                 | 88.2           | -39.5       | 2.55 V             | 360                  | 35.2             | 13.5                     |
| 6                                                  | #14170.00       | 35.5 AV                 | 68.2           | -32.7       | 2.55 V             | 360                  | 22.0             | 13.5                     |
| 7                                                  | 21255.00        | 64.5 PK                 | 74.0           | -9.5        | 1.55 V             | 124                  | 68.8             | -4.3                     |
| 8                                                  | 21255.00        | 51.3 AV                 | 54.0           | -2.7        | 1.55 V             | 124                  | 55.6             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

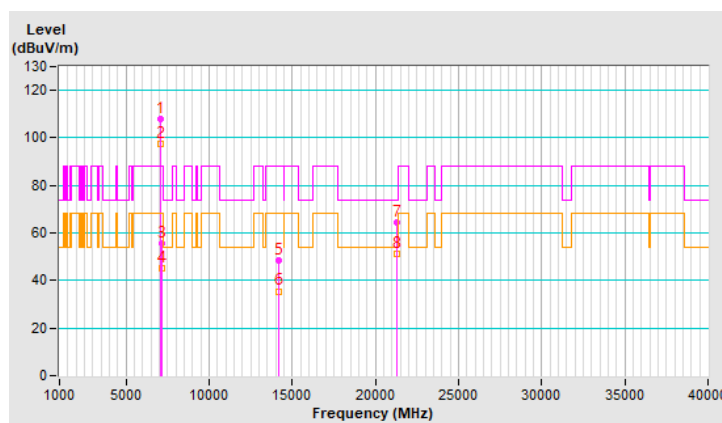


|                        |                 |                                          |                                                            |
|------------------------|-----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11ax (HE80) | <b>Channel</b>                           | CH 7 : 5985 MHz                                            |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz  | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power</b>     | 120 Vac, 60 Hz  | <b>Environmental Conditions</b>          | 25°C, 68% RH                                               |
| <b>Tested By</b>       | Nick Tsou       |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 64.2 PK                 | 88.2           | -24.0       | 1.49 H             | 168                  | 62.7             | 1.5                      |
| 2                                                    | #5925.00        | 55.2 AV                 | 68.2           | -13.0       | 1.49 H             | 168                  | 53.7             | 1.5                      |
| 3                                                    | *5985.00        | 107.3 PK                |                |             | 1.49 H             | 168                  | 105.7            | 1.6                      |
| 4                                                    | *5985.00        | 96.2 AV                 |                |             | 1.49 H             | 168                  | 94.6             | 1.6                      |
| 5                                                    | 11970.00        | 47.9 PK                 | 74.0           | -26.1       | 2.51 H             | 116                  | 36.9             | 11.0                     |
| 6                                                    | 11970.00        | 36.0 AV                 | 54.0           | -18.0       | 2.51 H             | 116                  | 25.0             | 11.0                     |
| 7                                                    | 17955.00        | 61.0 PK                 | 74.0           | -13.0       | 1.53 H             | 246                  | 37.0             | 24.0                     |
| 8                                                    | 17955.00        | 48.5 AV                 | 54.0           | -5.5        | 1.53 H             | 246                  | 24.5             | 24.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

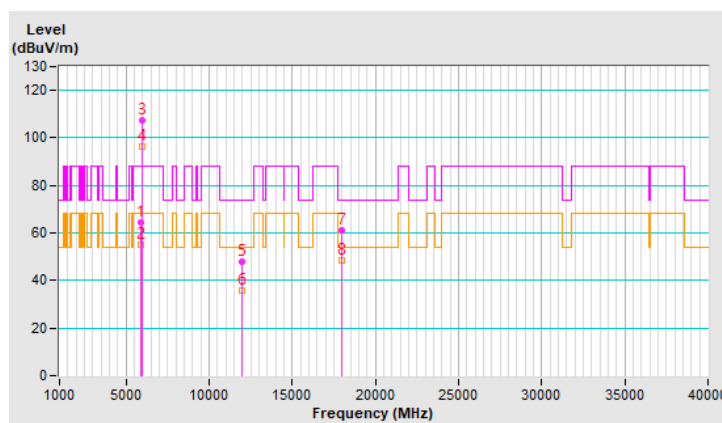


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 7 : 5985 MHz                                            |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 63.6 PK                 | 88.2           | -24.6       | 2.12 V             | 63                   | 62.1             | 1.5                      |
| 2                                                  | #5925.00        | 53.5 AV                 | 68.2           | -14.7       | 2.12 V             | 63                   | 52.0             | 1.5                      |
| 3                                                  | *5985.00        | 107.7 PK                |                |             | 2.12 V             | 63                   | 106.1            | 1.6                      |
| 4                                                  | *5985.00        | 97.1 AV                 |                |             | 2.12 V             | 63                   | 95.5             | 1.6                      |
| 5                                                  | 11970.00        | 49.3 PK                 | 74.0           | -24.7       | 2.51 V             | 360                  | 38.3             | 11.0                     |
| 6                                                  | 11970.00        | 36.0 AV                 | 54.0           | -18.0       | 2.51 V             | 360                  | 25.0             | 11.0                     |
| 7                                                  | 17955.00        | 63.6 PK                 | 74.0           | -10.4       | 1.50 V             | 5                    | 39.6             | 24.0                     |
| 8                                                  | 17955.00        | 50.4 AV                 | 54.0           | -3.6        | 1.50 V             | 5                    | 26.4             | 24.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

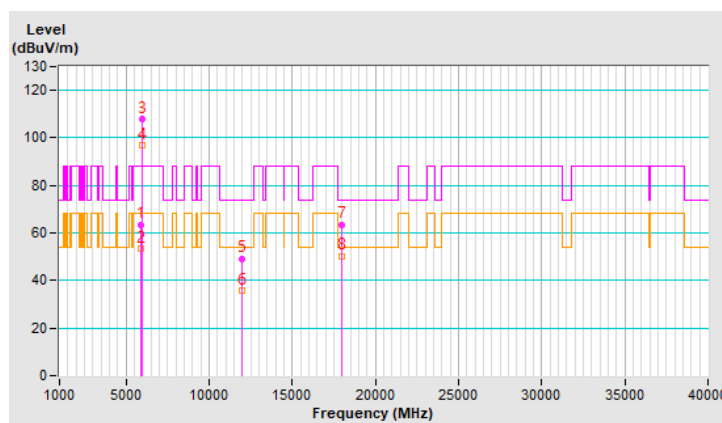


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 39 : 6145 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6145.00        | 109.3 PK                |                |             | 1.86 H             | 19                   | 107.5            | 1.8                      |
| 2                                                    | *6145.00        | 97.0 AV                 |                |             | 1.86 H             | 19                   | 95.2             | 1.8                      |
| 3                                                    | 12290.00        | 48.3 PK                 | 74.0           | -25.7       | 2.48 H             | 132                  | 38.2             | 10.1                     |
| 4                                                    | 12290.00        | 36.2 AV                 | 54.0           | -17.8       | 2.48 H             | 132                  | 26.1             | 10.1                     |
| 5                                                    | 18435.00        | 60.7 PK                 | 74.0           | -13.3       | 1.55 H             | 251                  | 67.4             | -6.7                     |
| 6                                                    | 18435.00        | 48.1 AV                 | 54.0           | -5.9        | 1.55 H             | 251                  | 54.8             | -6.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

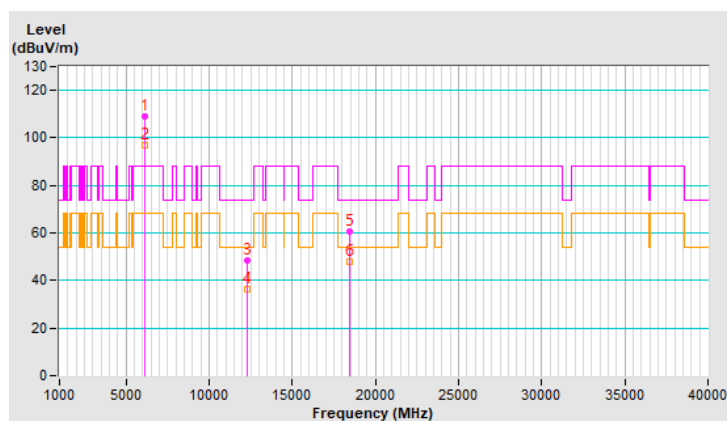


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 39 : 6145 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6145.00        | 107.6 PK                |                |             | 2.13 V             | 70                   | 105.8            | 1.8                      |
| 2                                                  | *6145.00        | 97.0 AV                 |                |             | 2.13 V             | 70                   | 95.2             | 1.8                      |
| 3                                                  | 12290.00        | 49.0 PK                 | 74.0           | -25.0       | 2.53 V             | 360                  | 38.9             | 10.1                     |
| 4                                                  | 12290.00        | 35.5 AV                 | 54.0           | -18.5       | 2.53 V             | 360                  | 25.4             | 10.1                     |
| 5                                                  | 18435.00        | 63.3 PK                 | 74.0           | -10.7       | 1.55 V             | 225                  | 70.0             | -6.7                     |
| 6                                                  | 18435.00        | 50.6 AV                 | 54.0           | -3.4        | 1.55 V             | 225                  | 57.3             | -6.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

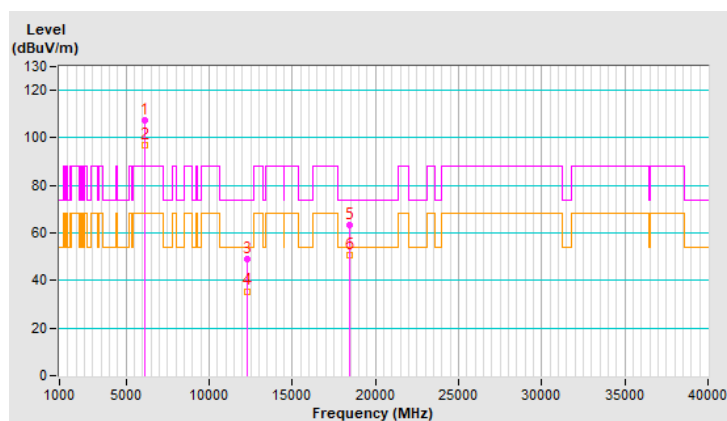


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 87 : 6385 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6385.00        | 107.3 PK                |                |             | 2.14 H             | 8                    | 104.3            | 3.0                      |
| 2                                                    | *6385.00        | 96.3 AV                 |                |             | 2.14 H             | 8                    | 93.3             | 3.0                      |
| 3                                                    | #12770.00       | 48.2 PK                 | 88.2           | -40.0       | 2.52 H             | 114                  | 37.8             | 10.4                     |
| 4                                                    | #12770.00       | 36.1 AV                 | 68.2           | -32.1       | 2.52 H             | 114                  | 25.7             | 10.4                     |
| 5                                                    | 19155.00        | 60.3 PK                 | 74.0           | -13.7       | 1.56 H             | 258                  | 66.6             | -6.3                     |
| 6                                                    | 19155.00        | 47.9 AV                 | 54.0           | -6.1        | 1.56 H             | 258                  | 54.2             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

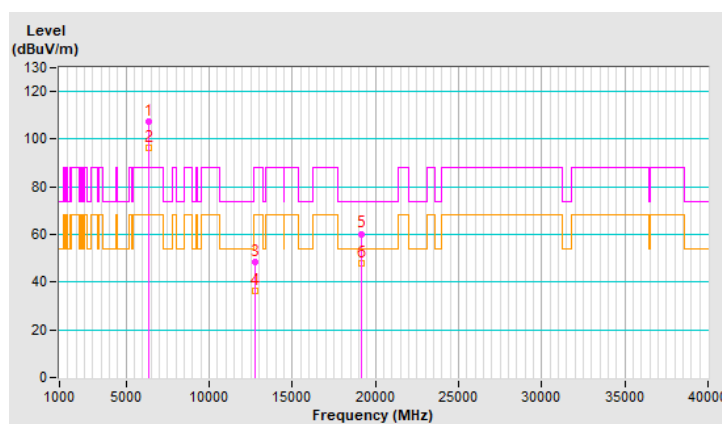


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 87 : 6385 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6385.00        | 107.5 PK                |                |             | 2.09 V             | 72                   | 104.5            | 3.0                      |
| 2                                                  | *6385.00        | 96.8 AV                 |                |             | 2.09 V             | 72                   | 93.8             | 3.0                      |
| 3                                                  | #12770.00       | 48.7 PK                 | 88.2           | -39.5       | 2.49 V             | 360                  | 38.3             | 10.4                     |
| 4                                                  | #12770.00       | 35.4 AV                 | 68.2           | -32.8       | 2.49 V             | 360                  | 25.0             | 10.4                     |
| 5                                                  | 19155.00        | 64.4 PK                 | 74.0           | -9.6        | 1.53 V             | 32                   | 70.7             | -6.3                     |
| 6                                                  | 19155.00        | 51.2 AV                 | 54.0           | -2.8        | 1.53 V             | 32                   | 57.5             | -6.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

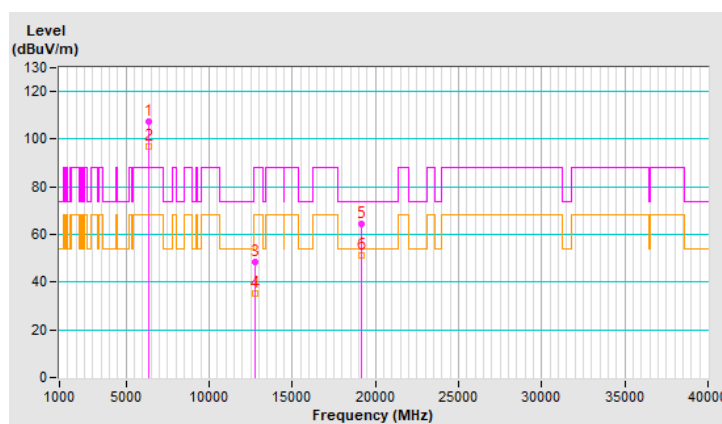


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 103 : 6465 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6465.00        | 108.2 PK                |                |             | 2.06 H             | 325                  | 105.0            | 3.2                      |
| 2                                                    | *6465.00        | 96.4 AV                 |                |             | 2.06 H             | 325                  | 93.2             | 3.2                      |
| 3                                                    | #12930.00       | 48.6 PK                 | 88.2           | -39.6       | 2.55 H             | 127                  | 38.0             | 10.6                     |
| 4                                                    | #12930.00       | 36.3 AV                 | 68.2           | -31.9       | 2.55 H             | 127                  | 25.7             | 10.6                     |
| 5                                                    | 19395.00        | 60.8 PK                 | 74.0           | -13.2       | 1.47 H             | 247                  | 67.3             | -6.5                     |
| 6                                                    | 19395.00        | 48.2 AV                 | 54.0           | -5.8        | 1.47 H             | 247                  | 54.7             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

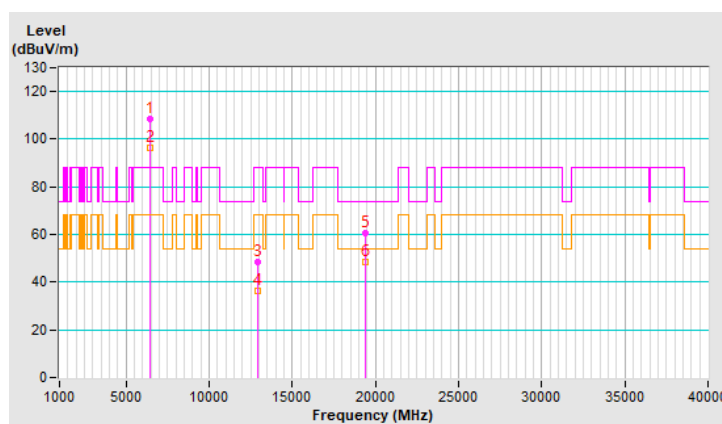


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 103 : 6465 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6465.00        | 107.7 PK                |                |             | 2.14 V             | 54                   | 104.5            | 3.2                      |
| 2                                                  | *6465.00        | 96.7 AV                 |                |             | 2.14 V             | 54                   | 93.5             | 3.2                      |
| 3                                                  | #12930.00       | 49.1 PK                 | 88.2           | -39.1       | 2.46 V             | 360                  | 38.5             | 10.6                     |
| 4                                                  | #12930.00       | 35.9 AV                 | 68.2           | -32.3       | 2.46 V             | 360                  | 25.3             | 10.6                     |
| 5                                                  | 19395.00        | 63.8 PK                 | 74.0           | -10.2       | 1.49 V             | 13                   | 70.3             | -6.5                     |
| 6                                                  | 19395.00        | 50.9 AV                 | 54.0           | -3.1        | 1.49 V             | 13                   | 57.4             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

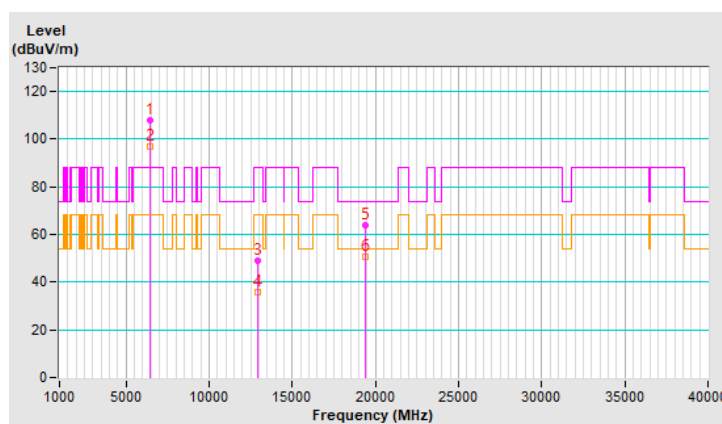


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 119 : 6545 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6545.00        | 107.9 PK                |                |             | 2.24 H             | 42                   | 104.3            | 3.6                      |
| 2                                                    | *6545.00        | 96.6 AV                 |                |             | 2.24 H             | 42                   | 93.0             | 3.6                      |
| 3                                                    | #13090.00       | 48.2 PK                 | 88.2           | -40.0       | 2.46 H             | 135                  | 37.3             | 10.9                     |
| 4                                                    | #13090.00       | 36.2 AV                 | 68.2           | -32.0       | 2.46 H             | 135                  | 25.3             | 10.9                     |
| 5                                                    | 19635.00        | 61.0 PK                 | 74.0           | -13.0       | 1.48 H             | 248                  | 67.0             | -6.0                     |
| 6                                                    | 19635.00        | 48.5 AV                 | 54.0           | -5.5        | 1.48 H             | 248                  | 54.5             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

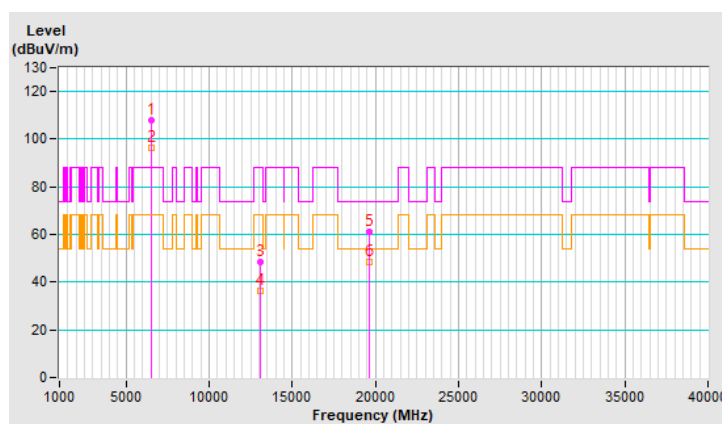


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 119 : 6545 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6545.00        | 108.3 PK                |                |             | 2.17 V             | 64                   | 104.7            | 3.6                      |
| 2                                                  | *6545.00        | 97.2 AV                 |                |             | 2.17 V             | 64                   | 93.6             | 3.6                      |
| 3                                                  | #13090.00       | 49.1 PK                 | 88.2           | -39.1       | 2.49 V             | 360                  | 38.2             | 10.9                     |
| 4                                                  | #13090.00       | 35.7 AV                 | 68.2           | -32.5       | 2.49 V             | 360                  | 24.8             | 10.9                     |
| 5                                                  | 19635.00        | 64.5 PK                 | 74.0           | -9.5        | 1.49 V             | 18                   | 70.5             | -6.0                     |
| 6                                                  | 19635.00        | 51.2 AV                 | 54.0           | -2.8        | 1.49 V             | 18                   | 57.2             | -6.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

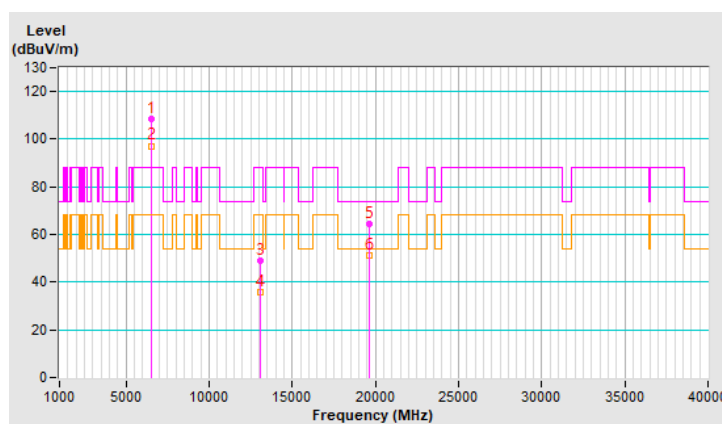


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 151 : 6705 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6705.00        | 107.0 PK                |                |             | 1.96 H             | 135                  | 103.2            | 3.8                      |
| 2                                                    | *6705.00        | 96.3 AV                 |                |             | 1.96 H             | 135                  | 92.5             | 3.8                      |
| 3                                                    | #13410.00       | 48.2 PK                 | 88.2           | -40.0       | 2.54 H             | 127                  | 36.0             | 12.2                     |
| 4                                                    | #13410.00       | 36.3 AV                 | 68.2           | -31.9       | 2.54 H             | 127                  | 24.1             | 12.2                     |
| 5                                                    | 20115.00        | 60.9 PK                 | 74.0           | -13.1       | 1.46 H             | 258                  | 66.3             | -5.4                     |
| 6                                                    | 20115.00        | 48.2 AV                 | 54.0           | -5.8        | 1.46 H             | 258                  | 53.6             | -5.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

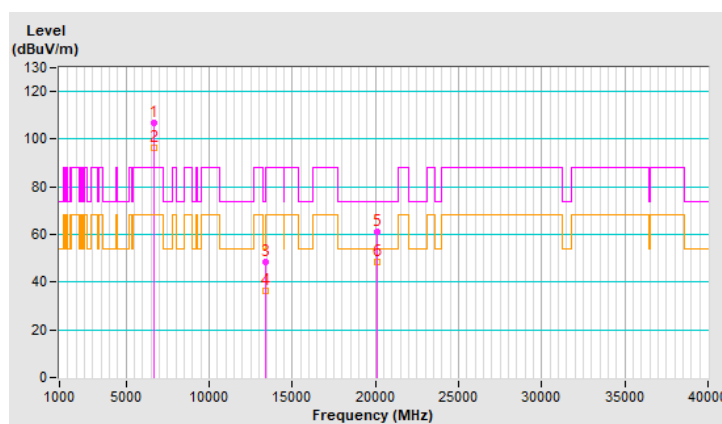


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 151 : 6705 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6705.00        | 107.6 PK                |                |             | 2.13 V             | 77                   | 103.8            | 3.8                      |
| 2                                                  | *6705.00        | 96.8 AV                 |                |             | 2.13 V             | 77                   | 93.0             | 3.8                      |
| 3                                                  | #13410.00       | 48.9 PK                 | 88.2           | -39.3       | 2.45 V             | 360                  | 36.7             | 12.2                     |
| 4                                                  | #13410.00       | 35.7 AV                 | 68.2           | -32.5       | 2.45 V             | 360                  | 23.5             | 12.2                     |
| 5                                                  | 20115.00        | 64.3 PK                 | 74.0           | -9.7        | 1.55 V             | 19                   | 69.7             | -5.4                     |
| 6                                                  | 20115.00        | 51.2 AV                 | 54.0           | -2.8        | 1.55 V             | 19                   | 56.6             | -5.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

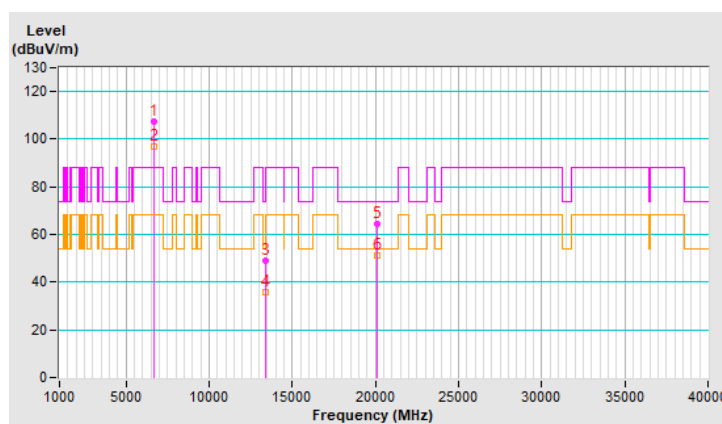


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 183 : 6865 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6865.00        | 107.7 PK                |                |             | 2.33 H             | 133                  | 103.5            | 4.2                      |
| 2                                                    | *6865.00        | 96.4 AV                 |                |             | 2.33 H             | 133                  | 92.2             | 4.2                      |
| 3                                                    | #13730.00       | 48.6 PK                 | 88.2           | -39.6       | 2.45 H             | 113                  | 35.6             | 13.0                     |
| 4                                                    | #13730.00       | 36.7 AV                 | 68.2           | -31.5       | 2.45 H             | 113                  | 23.7             | 13.0                     |
| 5                                                    | 20595.00        | 60.6 PK                 | 74.0           | -13.4       | 1.53 H             | 258                  | 65.4             | -4.8                     |
| 6                                                    | 20595.00        | 48.3 AV                 | 54.0           | -5.7        | 1.53 H             | 258                  | 53.1             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

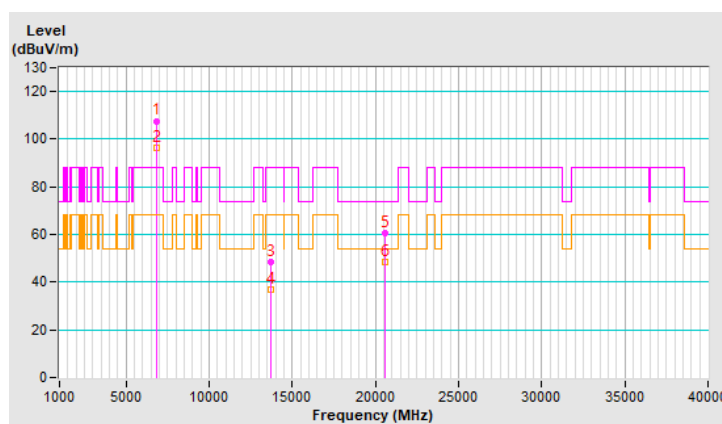


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 183 : 6865 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6865.00        | 108.6 PK                |                |             | 2.08 V             | 82                   | 104.4            | 4.2                      |
| 2                                                  | *6865.00        | 97.5 AV                 |                |             | 2.08 V             | 82                   | 93.3             | 4.2                      |
| 3                                                  | #13730.00       | 49.7 PK                 | 88.2           | -38.5       | 2.46 V             | 360                  | 36.7             | 13.0                     |
| 4                                                  | #13730.00       | 36.3 AV                 | 68.2           | -31.9       | 2.46 V             | 360                  | 23.3             | 13.0                     |
| 5                                                  | 20595.00        | 64.4 PK                 | 74.0           | -9.6        | 1.51 V             | 24                   | 69.2             | -4.8                     |
| 6                                                  | 20595.00        | 51.2 AV                 | 54.0           | -2.8        | 1.51 V             | 24                   | 56.0             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

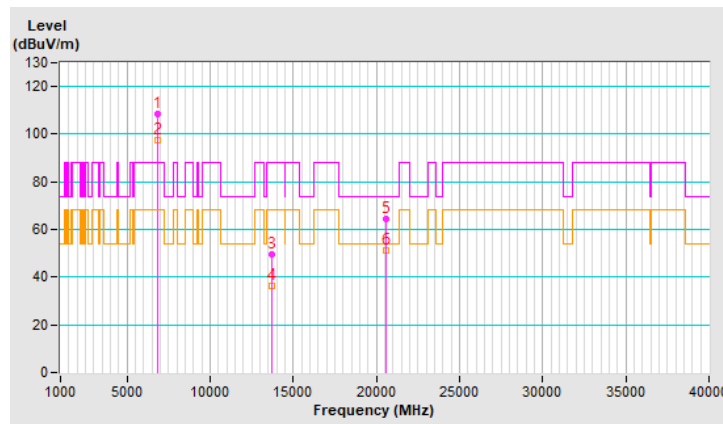


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 199 : 6945 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6945.00        | 106.7 PK                |                |             | 1.76 H             | 163                  | 101.8            | 4.9                      |
| 2                                                    | *6945.00        | 96.5 AV                 |                |             | 1.76 H             | 163                  | 91.6             | 4.9                      |
| 3                                                    | #13890.00       | 48.9 PK                 | 88.2           | -39.3       | 2.48 H             | 121                  | 35.9             | 13.0                     |
| 4                                                    | #13890.00       | 36.7 AV                 | 68.2           | -31.5       | 2.48 H             | 121                  | 23.7             | 13.0                     |
| 5                                                    | 20835.00        | 60.7 PK                 | 74.0           | -13.3       | 1.54 H             | 266                  | 65.3             | -4.6                     |
| 6                                                    | 20835.00        | 48.5 AV                 | 54.0           | -5.5        | 1.54 H             | 266                  | 53.1             | -4.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

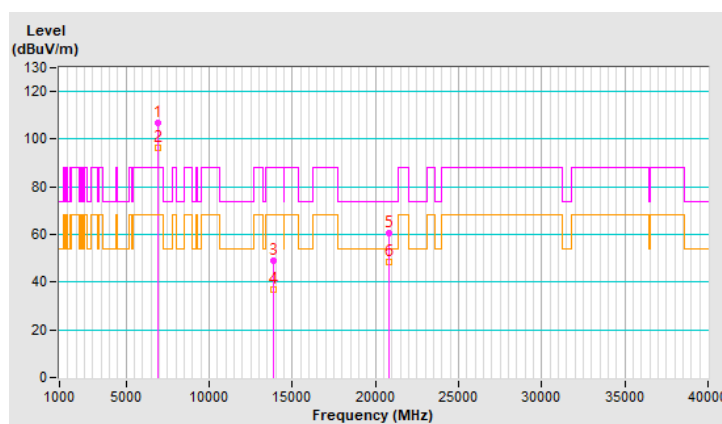


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 199 : 6945 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6945.00        | 108.5 PK                |                |             | 2.06 V             | 82                   | 103.6            | 4.9                      |
| 2                                                  | *6945.00        | 97.4 AV                 |                |             | 2.06 V             | 82                   | 92.5             | 4.9                      |
| 3                                                  | #13890.00       | 49.4 PK                 | 88.2           | -38.8       | 2.51 V             | 360                  | 36.4             | 13.0                     |
| 4                                                  | #13890.00       | 35.9 AV                 | 68.2           | -32.3       | 2.51 V             | 360                  | 22.9             | 13.0                     |
| 5                                                  | 20835.00        | 63.3 PK                 | 74.0           | -10.7       | 1.55 V             | 215                  | 67.9             | -4.6                     |
| 6                                                  | 20835.00        | 50.5 AV                 | 54.0           | -3.5        | 1.55 V             | 215                  | 55.1             | -4.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

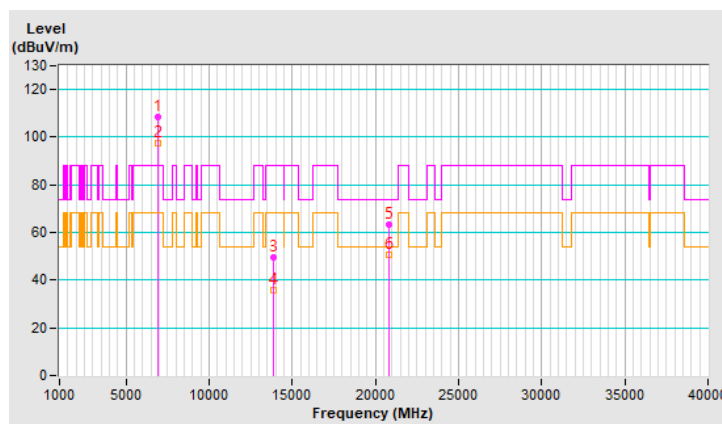


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 215 : 7025 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7025.00        | 107.7 PK                |                |             | 1.81 H             | 162                  | 102.2            | 5.5                      |
| 2                                                    | *7025.00        | 96.4 AV                 |                |             | 1.81 H             | 162                  | 90.9             | 5.5                      |
| 3                                                    | #7217.20        | 59.2 PK                 | 88.2           | -29.0       | 1.81 H             | 162                  | 53.1             | 6.1                      |
| 4                                                    | #7217.20        | 50.2 AV                 | 68.2           | -18.0       | 1.81 H             | 162                  | 44.1             | 6.1                      |
| 5                                                    | #14050.00       | 48.3 PK                 | 88.2           | -39.9       | 2.52 H             | 105                  | 35.1             | 13.2                     |
| 6                                                    | #14050.00       | 36.4 AV                 | 68.2           | -31.8       | 2.52 H             | 105                  | 23.2             | 13.2                     |
| 7                                                    | 21075.00        | 60.2 PK                 | 74.0           | -13.8       | 1.55 H             | 259                  | 64.4             | -4.2                     |
| 8                                                    | 21075.00        | 48.0 AV                 | 54.0           | -6.0        | 1.55 H             | 259                  | 52.2             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

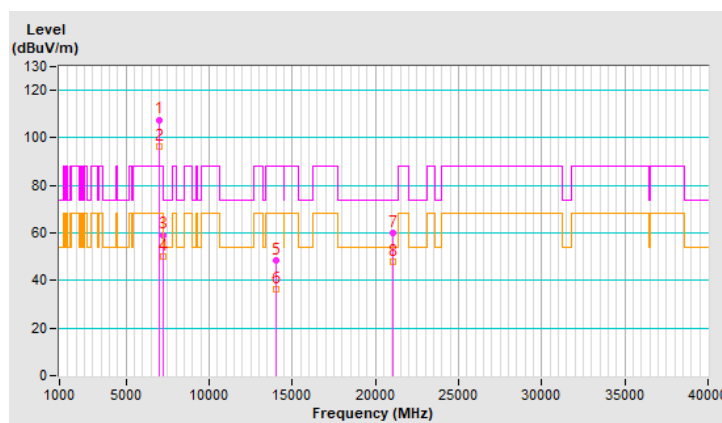


|                 |                 |                               |                                                            |
|-----------------|-----------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE80) | Channel                       | CH 215 : 7025 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz  | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz  | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou       |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7025.00        | 108.3 PK                |                |             | 2.03 V             | 69                   | 102.8            | 5.5                      |
| 2                                                  | *7025.00        | 97.1 AV                 |                |             | 2.03 V             | 69                   | 91.6             | 5.5                      |
| 3                                                  | #7217.20        | 62.7 PK                 | 88.2           | -25.5       | 2.03 V             | 69                   | 56.6             | 6.1                      |
| 4                                                  | #7217.20        | 52.2 AV                 | 68.2           | -16.0       | 2.03 V             | 69                   | 46.1             | 6.1                      |
| 5                                                  | #14050.00       | 48.8 PK                 | 88.2           | -39.4       | 2.48 V             | 360                  | 35.6             | 13.2                     |
| 6                                                  | #14050.00       | 35.6 AV                 | 68.2           | -32.6       | 2.48 V             | 360                  | 22.4             | 13.2                     |
| 7                                                  | 21075.00        | 63.5 PK                 | 74.0           | -10.5       | 1.52 V             | 32                   | 67.7             | -4.2                     |
| 8                                                  | 21075.00        | 50.6 AV                 | 54.0           | -3.4        | 1.52 V             | 32                   | 54.8             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

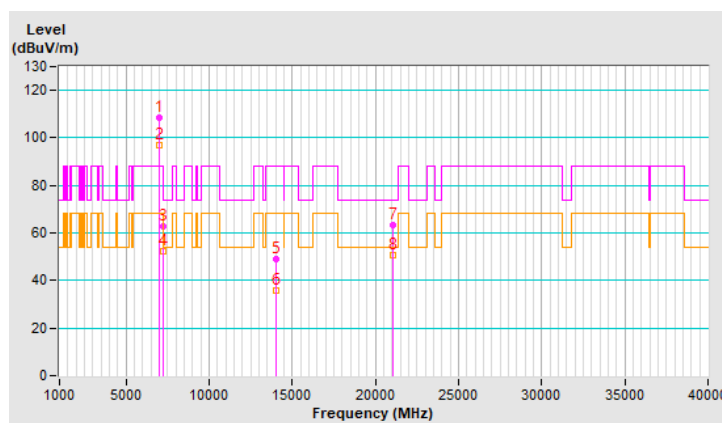


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 15 : 6025 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5924.00        | 64.1 PK                 | 88.2           | -24.1       | 2.18 H             | 190                  | 62.6             | 1.5                      |
| 2                                                    | #5924.00        | 55.5 AV                 | 68.2           | -12.7       | 2.18 H             | 190                  | 54.0             | 1.5                      |
| 3                                                    | *6025.00        | 106.5 PK                |                |             | 2.18 H             | 190                  | 104.7            | 1.8                      |
| 4                                                    | *6025.00        | 95.7 AV                 |                |             | 2.18 H             | 190                  | 93.9             | 1.8                      |
| 5                                                    | 12050.00        | 48.7 PK                 | 74.0           | -25.3       | 1.50 H             | 20                   | 37.7             | 11.0                     |
| 6                                                    | 12050.00        | 35.8 AV                 | 54.0           | -18.2       | 1.50 H             | 20                   | 24.8             | 11.0                     |
| 7                                                    | 18075.00        | 63.4 PK                 | 74.0           | -10.6       | 3.80 H             | 150                  | 57.0             | 6.4                      |
| 8                                                    | 18075.00        | 50.8 AV                 | 54.0           | -3.2        | 3.80 H             | 150                  | 44.4             | 6.4                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

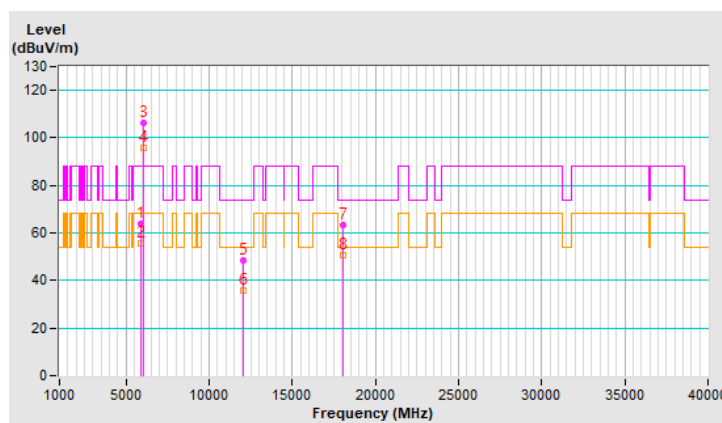


|                        |                  |                                          |                                                            |
|------------------------|------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11ax (HE160) | <b>Channel</b>                           | CH 15 : 6025 MHz                                           |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25°C, 68% RH                                               |
| <b>Tested By</b>       | Nick Tsou        |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5924.00        | 64.8 PK                 | 88.2           | -23.4       | 1.58 V             | 95                   | 63.3             | 1.5                      |
| 2                                                  | #5924.00        | 57.0 AV                 | 68.2           | -11.2       | 1.58 V             | 95                   | 55.5             | 1.5                      |
| 3                                                  | *6025.00        | 107.3 PK                |                |             | 1.58 V             | 95                   | 105.5            | 1.8                      |
| 4                                                  | *6025.00        | 96.7 AV                 |                |             | 1.58 V             | 95                   | 94.9             | 1.8                      |
| 5                                                  | 12050.00        | 49.2 PK                 | 74.0           | -24.8       | 2.50 V             | 360                  | 38.2             | 11.0                     |
| 6                                                  | 12050.00        | 35.8 AV                 | 54.0           | -18.2       | 2.50 V             | 360                  | 24.8             | 11.0                     |
| 7                                                  | 18075.00        | 63.8 PK                 | 74.0           | -10.2       | 1.50 V             | 20                   | 57.4             | 6.4                      |
| 8                                                  | 18075.00        | 50.9 AV                 | 54.0           | -3.1        | 1.50 V             | 20                   | 44.5             | 6.4                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

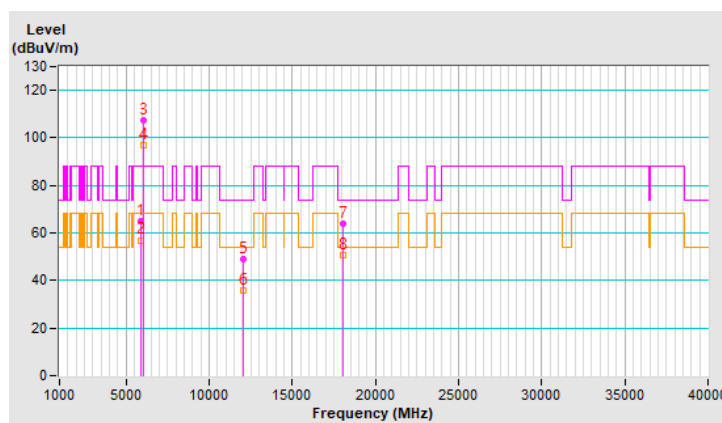


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 47 : 6185 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6185.00        | 107.9 PK                |                |             | 2.14 H             | 16                   | 105.9            | 2.0                      |
| 2                                                    | *6185.00        | 96.3 AV                 |                |             | 2.14 H             | 16                   | 94.3             | 2.0                      |
| 3                                                    | 12370.00        | 48.9 PK                 | 74.0           | -25.1       | 1.44 H             | 35                   | 38.8             | 10.1                     |
| 4                                                    | 12370.00        | 35.8 AV                 | 54.0           | -18.2       | 1.44 H             | 35                   | 25.7             | 10.1                     |
| 5                                                    | 18555.00        | 63.0 PK                 | 74.0           | -11.0       | 3.81 H             | 135                  | 69.5             | -6.5                     |
| 6                                                    | 18555.00        | 50.5 AV                 | 54.0           | -3.5        | 3.81 H             | 135                  | 57.0             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

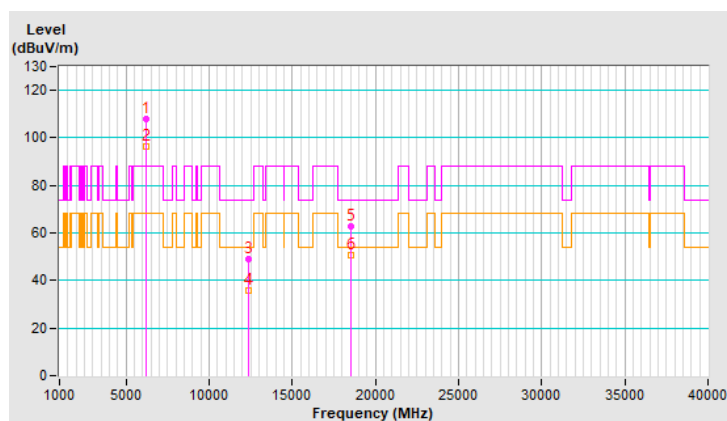


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 47 : 6185 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6185.00        | 107.4 PK                |                |             | 1.50 V             | 96                   | 105.4            | 2.0                      |
| 2                                                  | *6185.00        | 96.4 AV                 |                |             | 1.50 V             | 96                   | 94.4             | 2.0                      |
| 3                                                  | 12370.00        | 48.9 PK                 | 74.0           | -25.1       | 2.47 V             | 360                  | 38.8             | 10.1                     |
| 4                                                  | 12370.00        | 35.4 AV                 | 54.0           | -18.6       | 2.47 V             | 360                  | 25.3             | 10.1                     |
| 5                                                  | 18555.00        | 63.8 PK                 | 74.0           | -10.2       | 1.47 V             | 15                   | 70.3             | -6.5                     |
| 6                                                  | 18555.00        | 50.6 AV                 | 54.0           | -3.4        | 1.47 V             | 15                   | 57.1             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

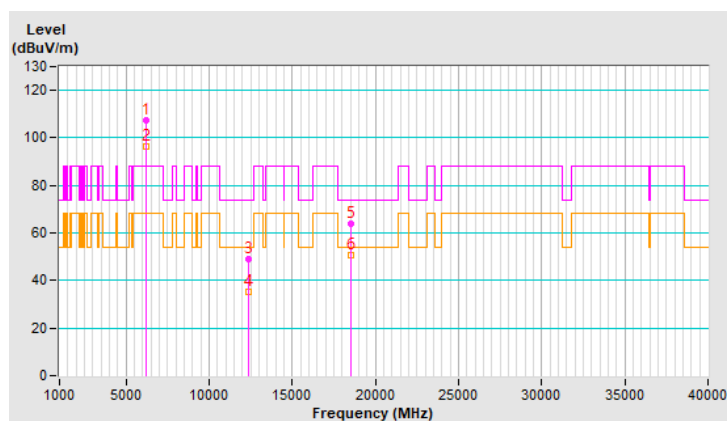


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 79 : 6345 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6345.00        | 108.2 PK                |                |             | 1.86 H             | 15                   | 105.3            | 2.9                      |
| 2                                                    | *6345.00        | 97.3 AV                 |                |             | 1.86 H             | 15                   | 94.4             | 2.9                      |
| 3                                                    | 12690.00        | 48.8 PK                 | 74.0           | -25.2       | 1.54 H             | 23                   | 38.6             | 10.2                     |
| 4                                                    | 12690.00        | 36.1 AV                 | 54.0           | -17.9       | 1.54 H             | 23                   | 25.9             | 10.2                     |
| 5                                                    | 19035.00        | 62.8 PK                 | 74.0           | -11.2       | 3.81 H             | 158                  | 69.3             | -6.5                     |
| 6                                                    | 19035.00        | 50.6 AV                 | 54.0           | -3.4        | 3.81 H             | 158                  | 57.1             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

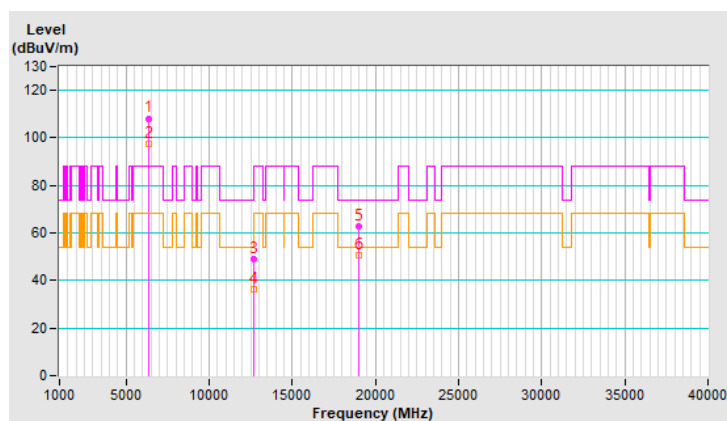


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 79 : 6345 MHz                                           |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6345.00        | 108.3 PK                |                |             | 2.10 V             | 74                   | 105.4            | 2.9                      |
| 2                                                  | *6345.00        | 97.4 AV                 |                |             | 2.10 V             | 74                   | 94.5             | 2.9                      |
| 3                                                  | 12690.00        | 48.9 PK                 | 74.0           | -25.1       | 2.52 V             | 360                  | 38.7             | 10.2                     |
| 4                                                  | 12690.00        | 35.7 AV                 | 54.0           | -18.3       | 2.52 V             | 360                  | 25.5             | 10.2                     |
| 5                                                  | 19035.00        | 63.7 PK                 | 74.0           | -10.3       | 1.50 V             | 18                   | 70.2             | -6.5                     |
| 6                                                  | 19035.00        | 50.5 AV                 | 54.0           | -3.5        | 1.50 V             | 18                   | 57.0             | -6.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

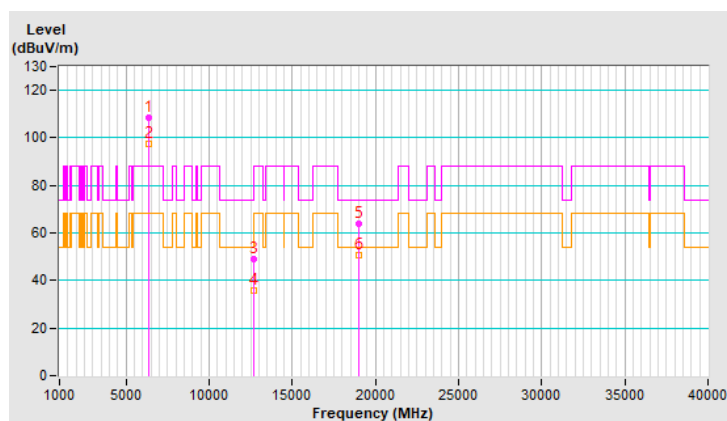


|                        |                  |                                          |                                                            |
|------------------------|------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11ax (HE160) | <b>Channel</b>                           | CH 111 : 6505 MHz                                          |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25°C, 68% RH                                               |
| <b>Tested By</b>       | Nick Tsou        |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6505.00        | 107.9 PK                |                |             | 1.91 H             | 4                    | 104.5            | 3.4                      |
| 2                                                    | *6505.00        | 97.3 AV                 |                |             | 1.91 H             | 4                    | 93.9             | 3.4                      |
| 3                                                    | #13010.00       | 48.0 PK                 | 88.2           | -40.2       | 1.54 H             | 23                   | 37.3             | 10.7                     |
| 4                                                    | #13010.00       | 35.4 AV                 | 68.2           | -32.8       | 1.54 H             | 23                   | 24.7             | 10.7                     |
| 5                                                    | 19515.00        | 63.3 PK                 | 74.0           | -10.7       | 3.81 H             | 141                  | 69.5             | -6.2                     |
| 6                                                    | 19515.00        | 50.6 AV                 | 54.0           | -3.4        | 3.81 H             | 141                  | 56.8             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

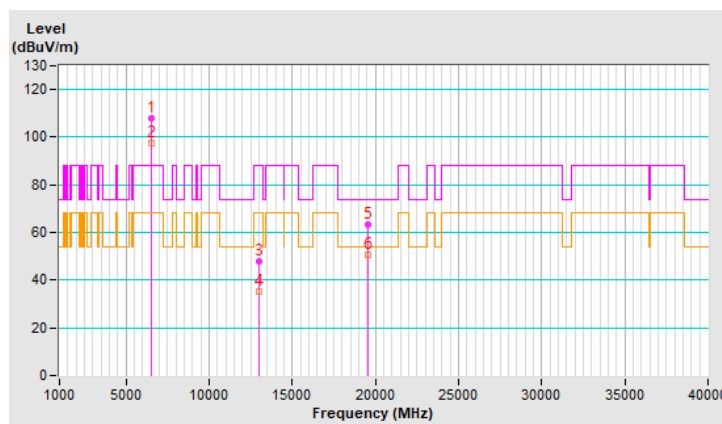


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 111 : 6505 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6505.00        | 108.5 PK                |                |             | 2.15 V             | 63                   | 105.1            | 3.4                      |
| 2                                                  | *6505.00        | 97.6 AV                 |                |             | 2.15 V             | 63                   | 94.2             | 3.4                      |
| 3                                                  | #13010.00       | 48.5 PK                 | 88.2           | -39.7       | 2.45 V             | 360                  | 37.8             | 10.7                     |
| 4                                                  | #13010.00       | 35.4 AV                 | 68.2           | -32.8       | 2.45 V             | 360                  | 24.7             | 10.7                     |
| 5                                                  | 19515.00        | 63.8 PK                 | 74.0           | -10.2       | 1.44 V             | 121                  | 70.0             | -6.2                     |
| 6                                                  | 19515.00        | 50.7 AV                 | 54.0           | -3.3        | 1.44 V             | 121                  | 56.9             | -6.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

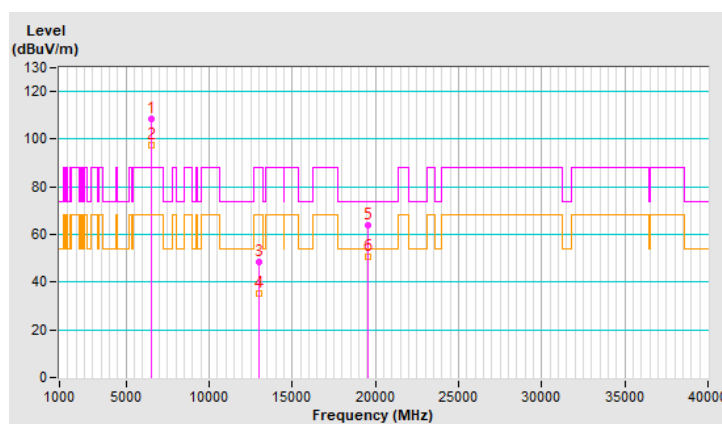


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 143 : 6665 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6665.00        | 107.5 PK                |                |             | 2.00 H             | 38                   | 103.7            | 3.8                      |
| 2                                                    | *6665.00        | 96.4 AV                 |                |             | 2.00 H             | 38                   | 92.6             | 3.8                      |
| 3                                                    | 13330.00        | 48.8 PK                 | 74.0           | -25.2       | 1.48 H             | 25                   | 37.0             | 11.8                     |
| 4                                                    | 13330.00        | 35.9 AV                 | 54.0           | -18.1       | 1.48 H             | 25                   | 24.1             | 11.8                     |
| 5                                                    | 19995.00        | 63.2 PK                 | 74.0           | -10.8       | 3.85 H             | 163                  | 68.8             | -5.6                     |
| 6                                                    | 19995.00        | 50.4 AV                 | 54.0           | -3.6        | 3.85 H             | 163                  | 56.0             | -5.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

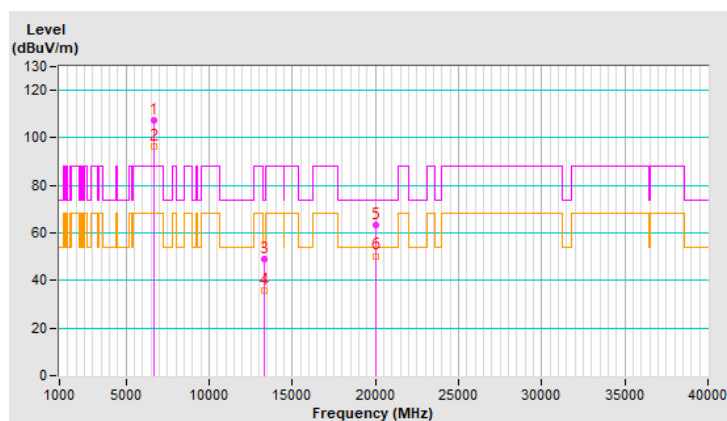


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 143 : 6665 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6665.00        | 107.9 PK                |                |             | 2.14 V             | 85                   | 104.1            | 3.8                      |
| 2                                                  | *6665.00        | 97.3 AV                 |                |             | 2.14 V             | 85                   | 93.5             | 3.8                      |
| 3                                                  | 13330.00        | 48.7 PK                 | 74.0           | -25.3       | 2.52 V             | 360                  | 36.9             | 11.8                     |
| 4                                                  | 13330.00        | 35.6 AV                 | 54.0           | -18.4       | 2.52 V             | 360                  | 23.8             | 11.8                     |
| 5                                                  | 19995.00        | 64.0 PK                 | 74.0           | -10.0       | 1.53 V             | 30                   | 69.6             | -5.6                     |
| 6                                                  | 19995.00        | 50.9 AV                 | 54.0           | -3.1        | 1.53 V             | 30                   | 56.5             | -5.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

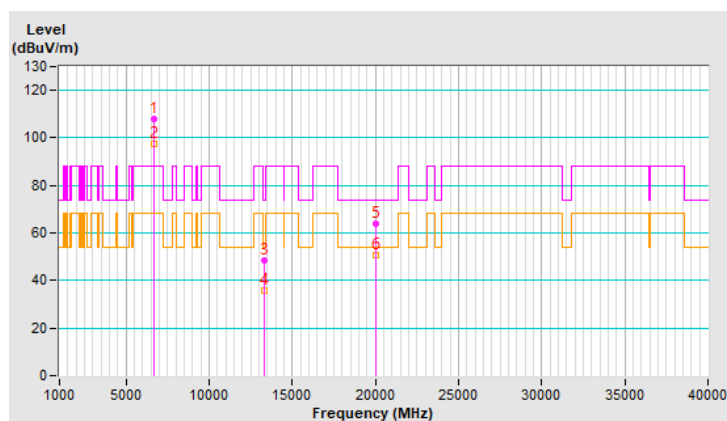


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 175 : 6825 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6825.00        | 109.3 PK                |                |             | 1.67 H             | 153                  | 105.3            | 4.0                      |
| 2                                                    | *6825.00        | 97.3 AV                 |                |             | 1.67 H             | 153                  | 93.3             | 4.0                      |
| 3                                                    | #13650.00       | 49.1 PK                 | 88.2           | -39.1       | 1.54 H             | 10                   | 36.3             | 12.8                     |
| 4                                                    | #13650.00       | 36.0 AV                 | 68.2           | -32.2       | 1.54 H             | 10                   | 23.2             | 12.8                     |
| 5                                                    | 20475.00        | 62.8 PK                 | 74.0           | -11.2       | 3.84 H             | 154                  | 67.6             | -4.8                     |
| 6                                                    | 20475.00        | 50.5 AV                 | 54.0           | -3.5        | 3.84 H             | 154                  | 55.3             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

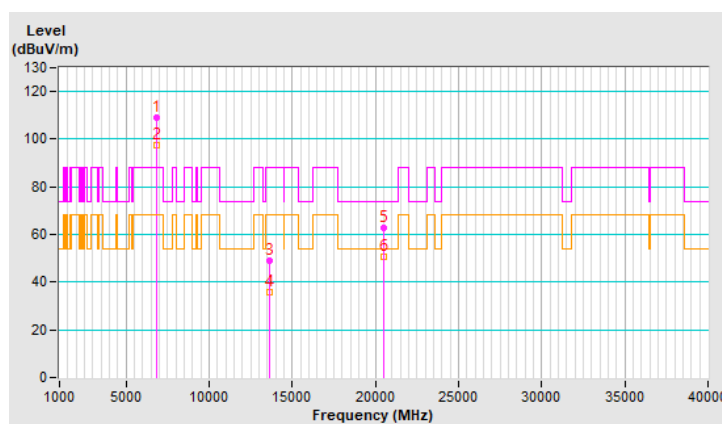


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 175 : 6825 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6825.00        | 108.4 PK                |                |             | 2.10 V             | 84                   | 104.4            | 4.0                      |
| 2                                                  | *6825.00        | 97.6 AV                 |                |             | 2.10 V             | 84                   | 93.6             | 4.0                      |
| 3                                                  | #13650.00       | 49.2 PK                 | 88.2           | -39.0       | 2.45 V             | 360                  | 36.4             | 12.8                     |
| 4                                                  | #13650.00       | 36.0 AV                 | 68.2           | -32.2       | 2.45 V             | 360                  | 23.2             | 12.8                     |
| 5                                                  | 20475.00        | 63.2 PK                 | 74.0           | -10.8       | 1.53 V             | 10                   | 68.0             | -4.8                     |
| 6                                                  | 20475.00        | 50.5 AV                 | 54.0           | -3.5        | 1.53 V             | 10                   | 55.3             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

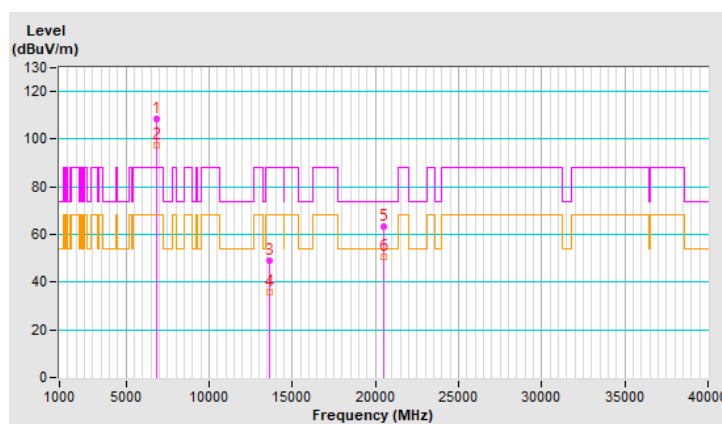


|                 |                  |                               |                                                            |
|-----------------|------------------|-------------------------------|------------------------------------------------------------|
| RF Mode         | 802.11ax (HE160) | Channel                       | CH 207 : 6985 MHz                                          |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25°C, 68% RH                                               |
| Tested By       | Nick Tsou        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6985.00        | 108.2 PK                |                |             | 1.63 H             | 157                  | 102.8            | 5.4                      |
| 2                                                    | *6985.00        | 97.2 AV                 |                |             | 1.63 H             | 157                  | 91.8             | 5.4                      |
| 3                                                    | #7125.00        | 57.6 PK                 | 88.2           | -30.6       | 1.63 H             | 157                  | 51.8             | 5.8                      |
| 4                                                    | #7125.00        | 49.7 AV                 | 68.2           | -18.5       | 1.63 H             | 157                  | 43.9             | 5.8                      |
| 5                                                    | #13970.00       | 48.6 PK                 | 88.2           | -39.6       | 1.48 H             | 27                   | 35.5             | 13.1                     |
| 6                                                    | #13970.00       | 35.6 AV                 | 68.2           | -32.6       | 1.48 H             | 27                   | 22.5             | 13.1                     |
| 7                                                    | 20955.00        | 63.9 PK                 | 74.0           | -10.1       | 3.84 H             | 146                  | 68.2             | -4.3                     |
| 8                                                    | 20955.00        | 51.2 AV                 | 54.0           | -2.8        | 3.84 H             | 146                  | 55.5             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

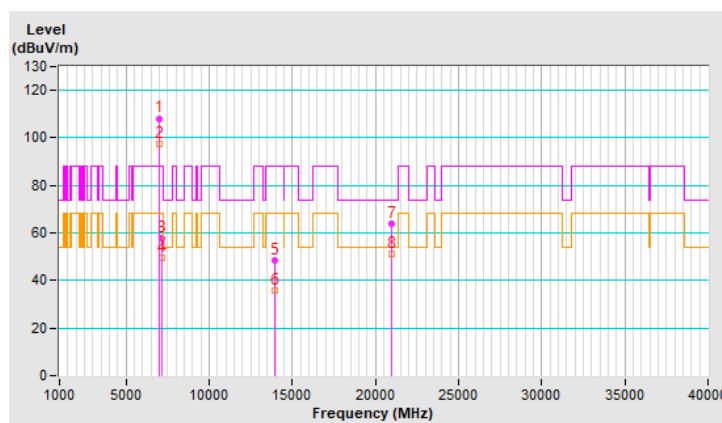


|                        |                  |                                          |                                                            |
|------------------------|------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11ax (HE160) | <b>Channel</b>                           | CH 207 : 6985 MHz                                          |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25°C, 68% RH                                               |
| <b>Tested By</b>       | Nick Tsou        |                                          |                                                            |


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6985.00        | 108.0 PK                |                |             | 1.99 V             | 70                   | 102.6            | 5.4                      |
| 2                                                  | *6985.00        | 97.4 AV                 |                |             | 1.99 V             | 70                   | 92.0             | 5.4                      |
| 3                                                  | #7125.00        | 59.4 PK                 | 88.2           | -28.8       | 1.99 V             | 70                   | 53.6             | 5.8                      |
| 4                                                  | #7125.00        | 48.8 AV                 | 68.2           | -19.4       | 1.99 V             | 70                   | 43.0             | 5.8                      |
| 5                                                  | #13970.00       | 49.7 PK                 | 88.2           | -38.5       | 2.54 V             | 360                  | 36.6             | 13.1                     |
| 6                                                  | #13970.00       | 36.3 AV                 | 68.2           | -31.9       | 2.54 V             | 360                  | 23.2             | 13.1                     |
| 7                                                  | 20955.00        | 64.0 PK                 | 74.0           | -10.0       | 1.55 V             | 12                   | 68.3             | -4.3                     |
| 8                                                  | 20955.00        | 51.0 AV                 | 54.0           | -3.0        | 1.55 V             | 12                   | 55.3             | -4.3                     |

#### Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

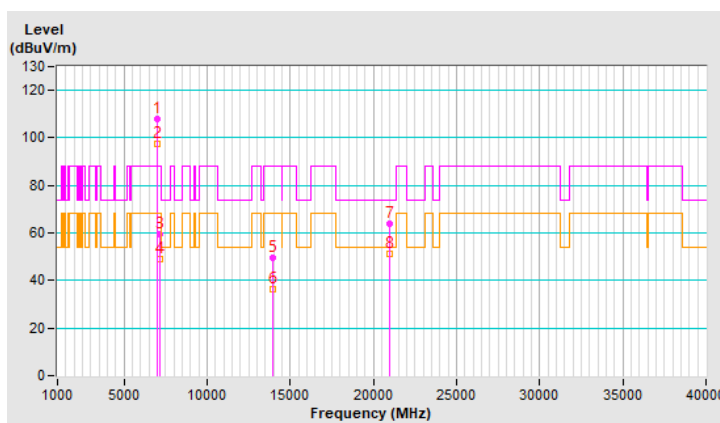


### 802.11a Channel 1

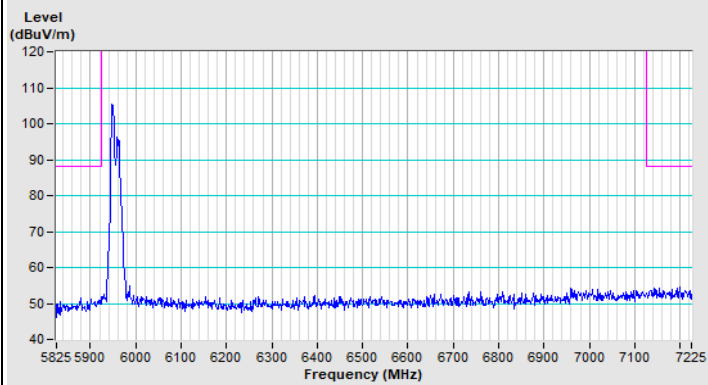


Horizontal (Peak)

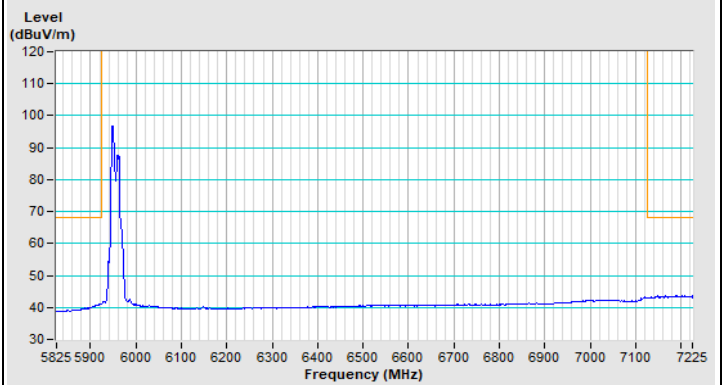

Horizontal (Average)

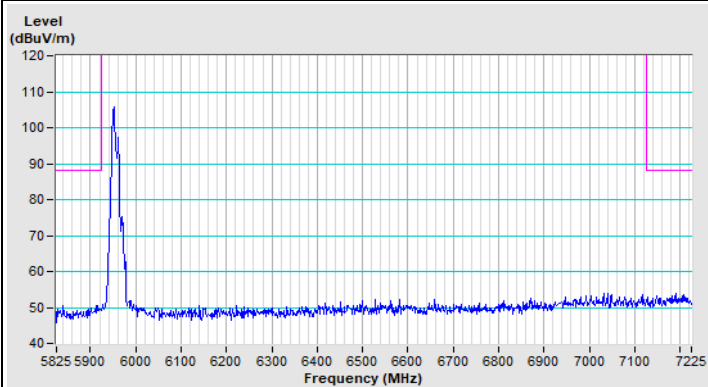


Vertical (Peak)

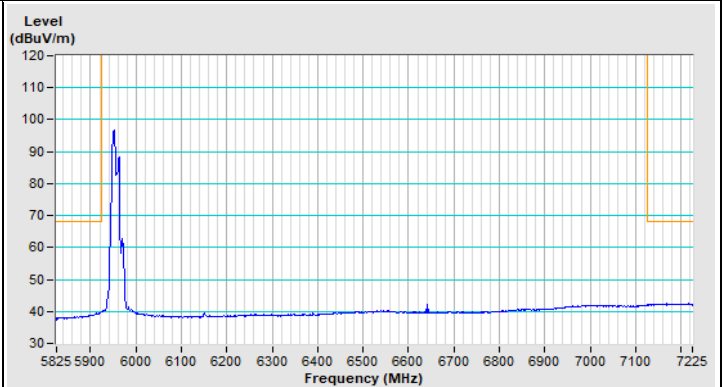


Vertical (Average)


### 802.11a Channel 45

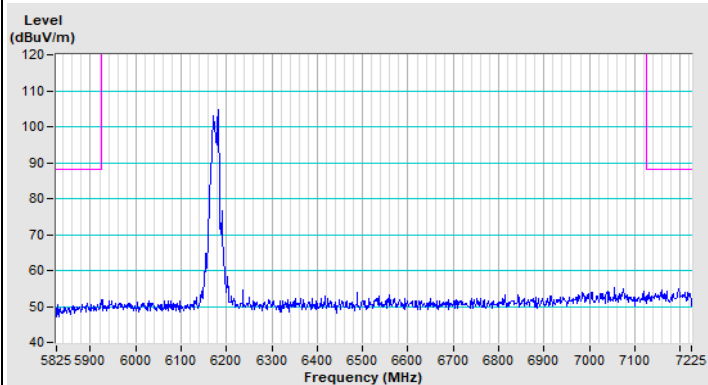


Horizontal (Peak)

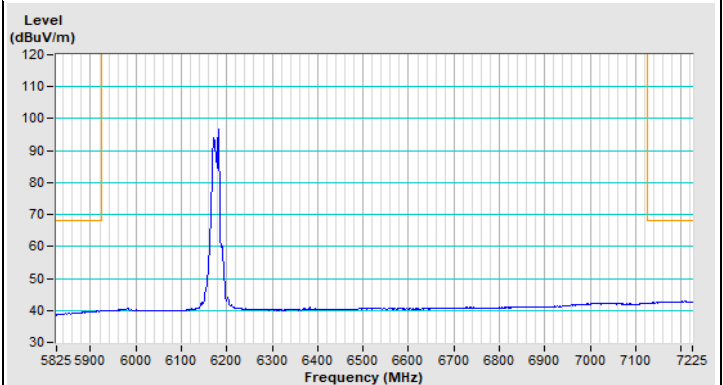

Horizontal (Average)

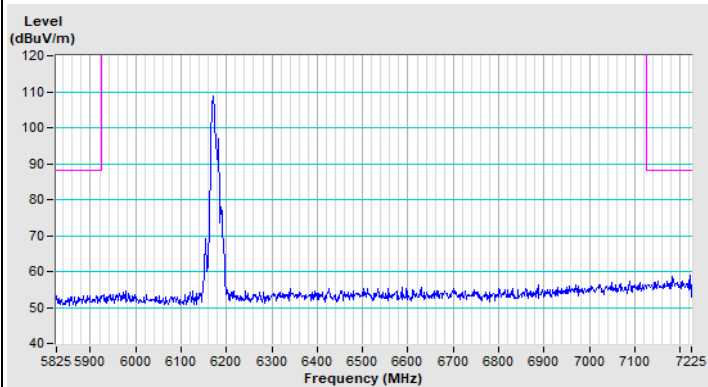


Vertical (Peak)

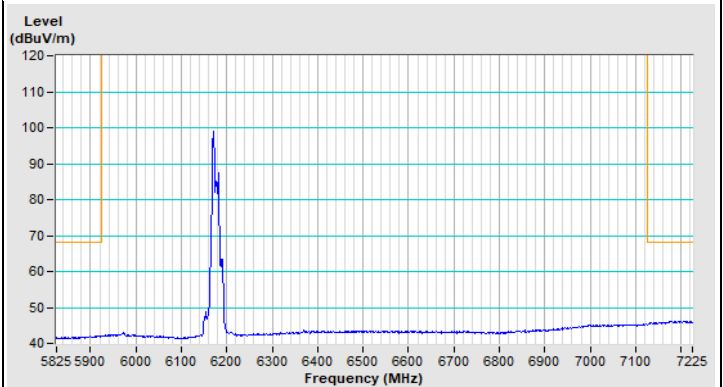


Vertical (Average)


### 802.11a Channel 93

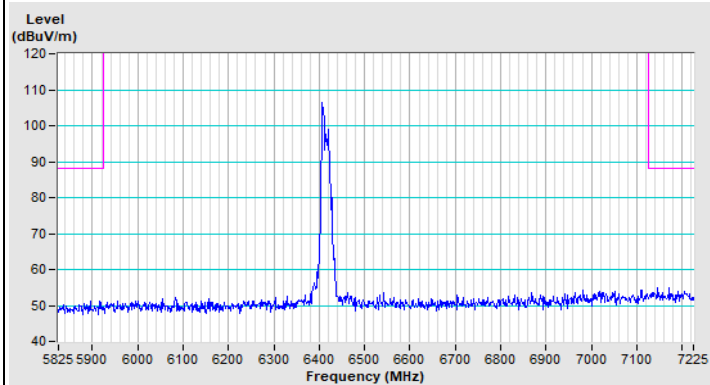


Horizontal (Peak)

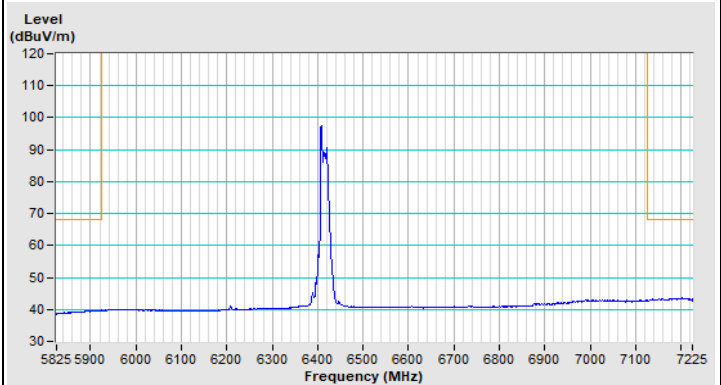

Horizontal (Average)

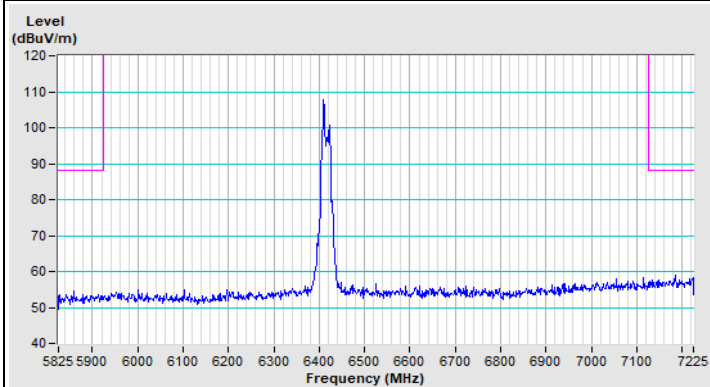


Vertical (Peak)

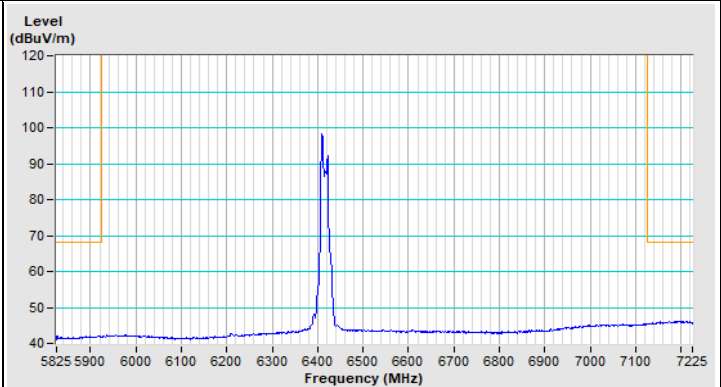


Vertical (Average)


### 802.11a Channel 97

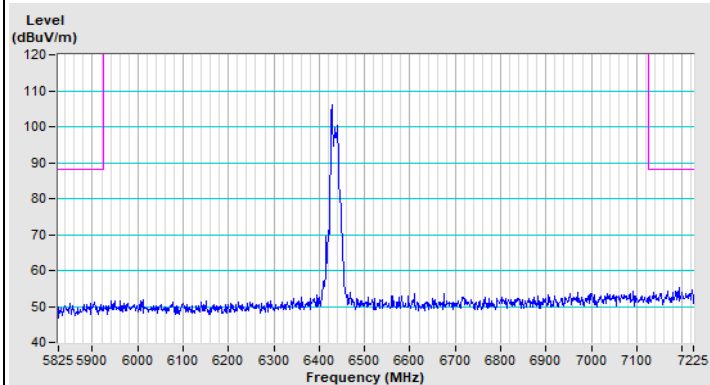


Horizontal (Peak)

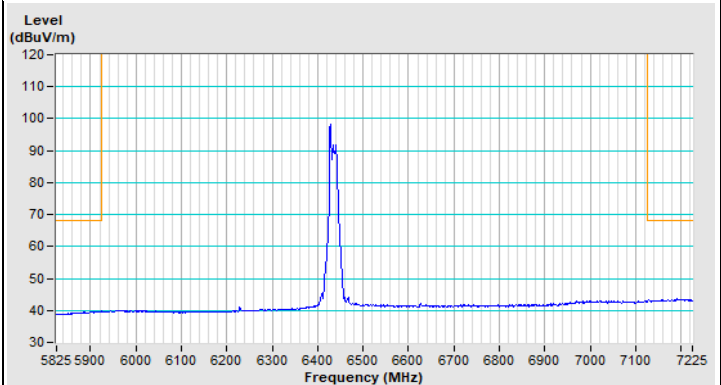


Horizontal (Average)

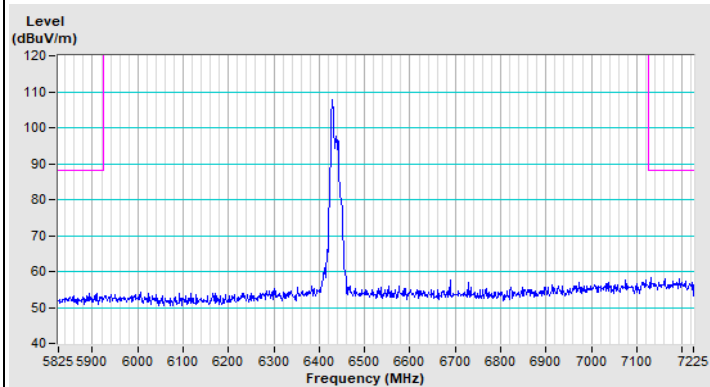


Vertical (Peak)

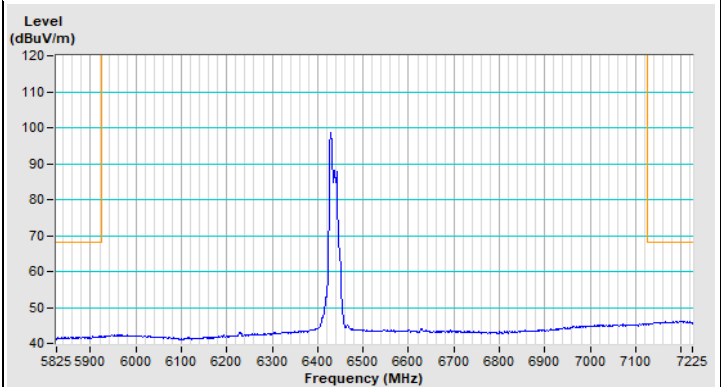


Vertical (Average)

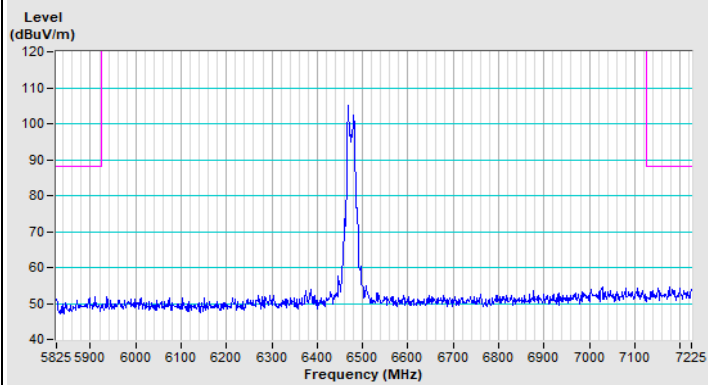**802.11a Channel 105**


Horizontal (Peak)

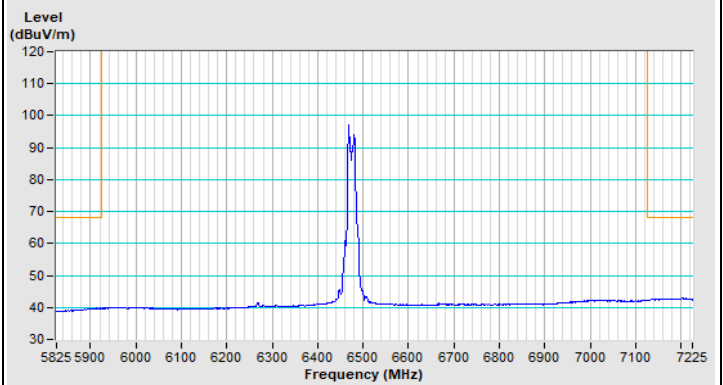


Horizontal (Average)

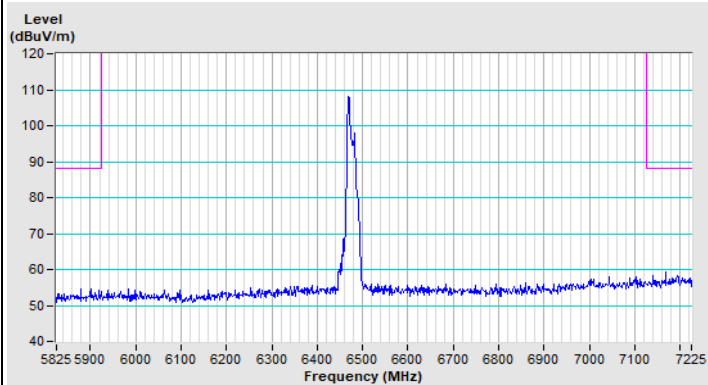


Vertical (Peak)

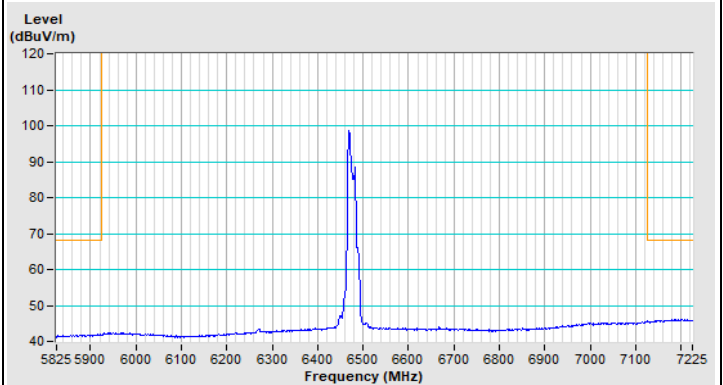


Vertical (Average)

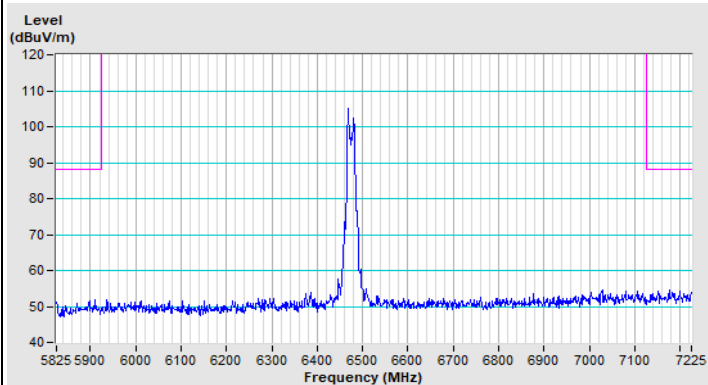**802.11a Channel 113**


Horizontal (Peak)

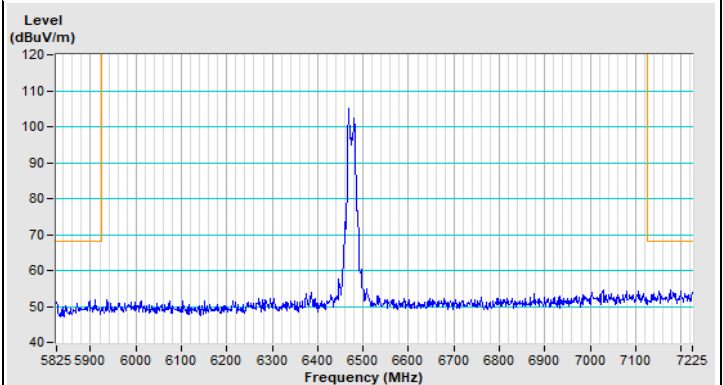

Horizontal (Average)

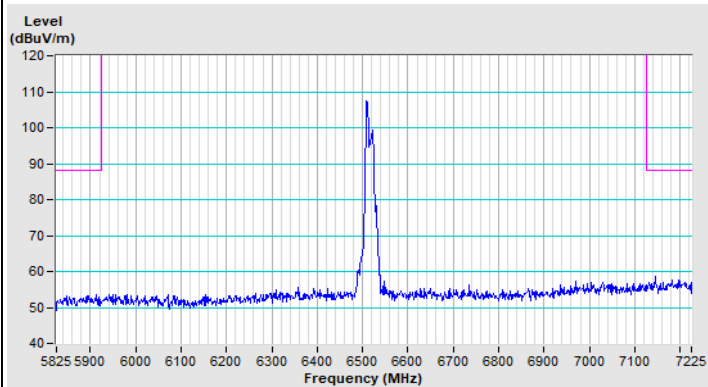


Vertical (Peak)

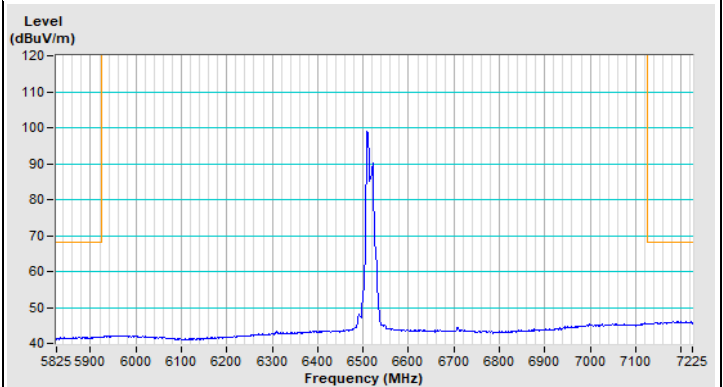


Vertical (Average)


### 802.11a Channel 117

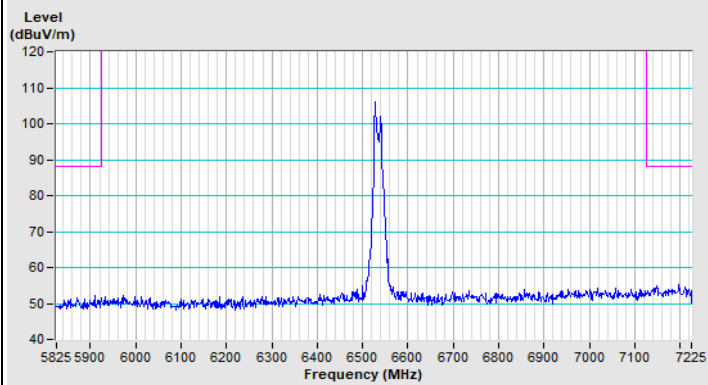


Horizontal (Peak)

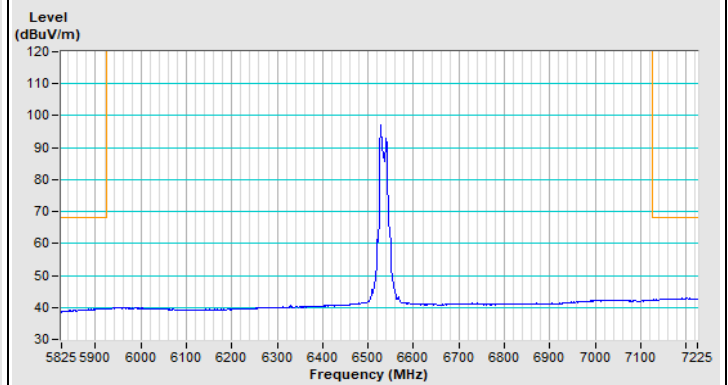

Horizontal (Average)

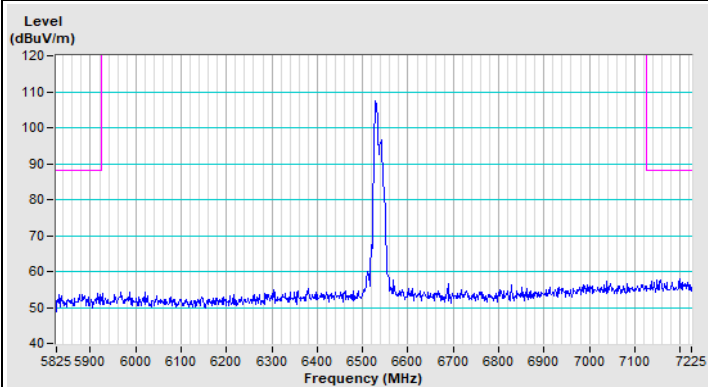


Vertical (Peak)

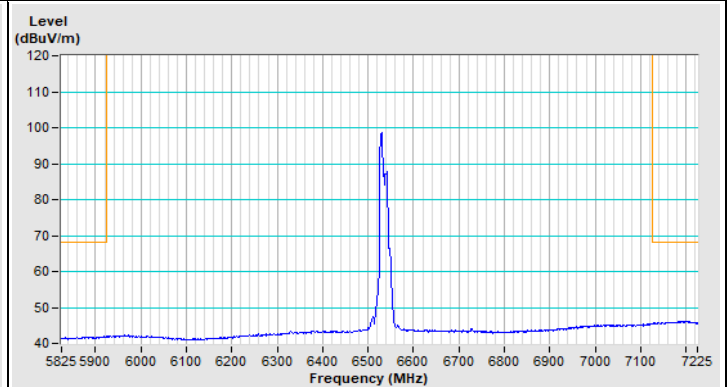


Vertical (Average)


### 802.11a Channel 149

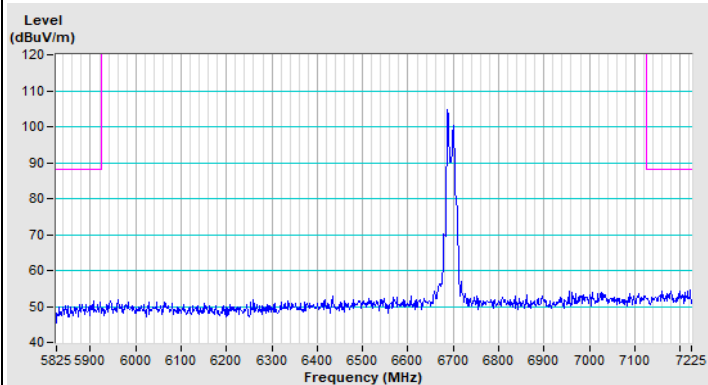


Horizontal (Peak)

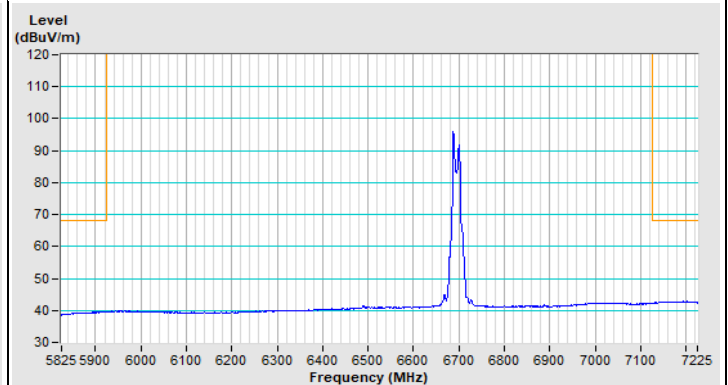


Horizontal (Average)

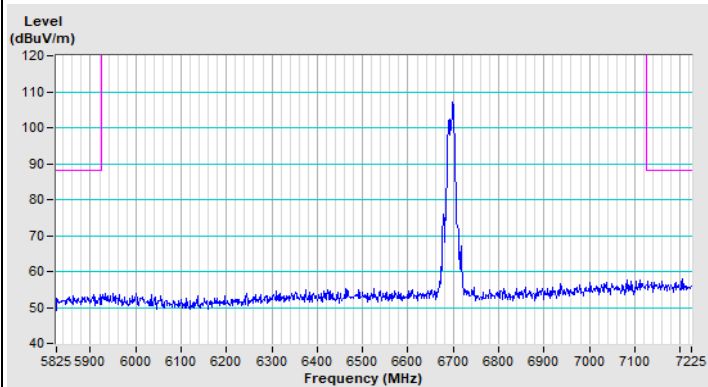


Vertical (Peak)

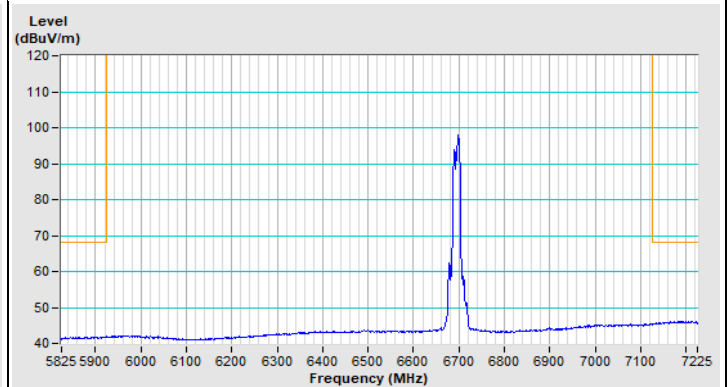


Vertical (Average)

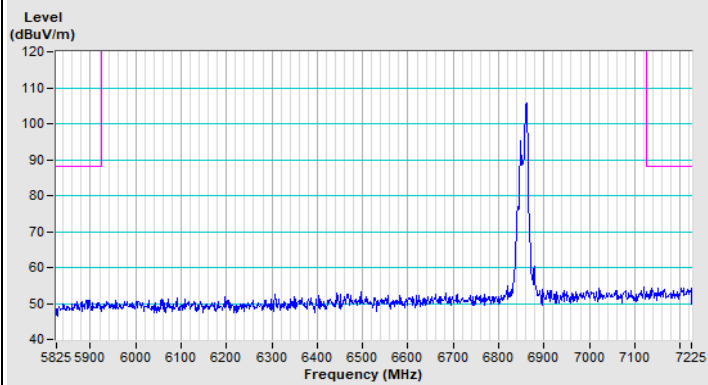**802.11a Channel 181**


Horizontal (Peak)

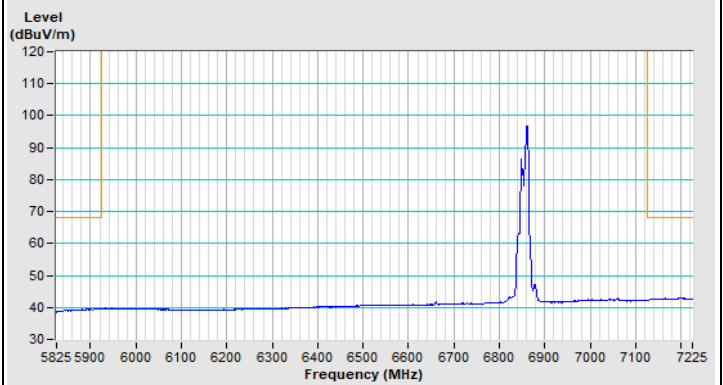


Horizontal (Average)

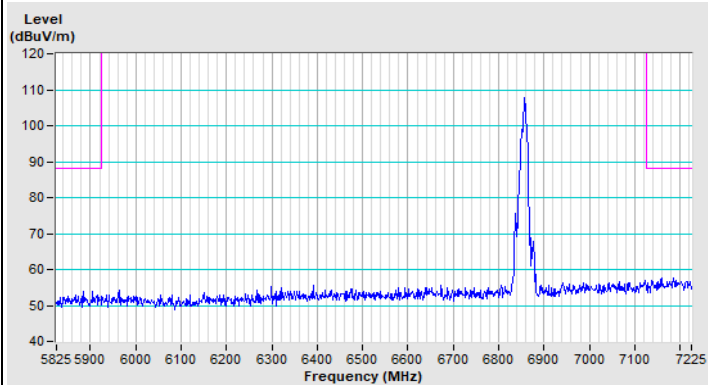


Vertical (Peak)

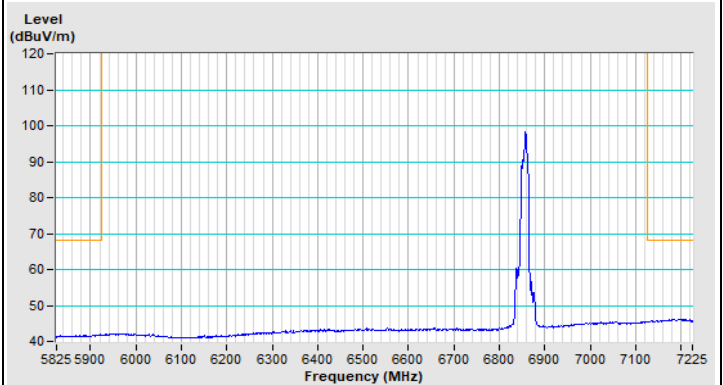


Vertical (Average)

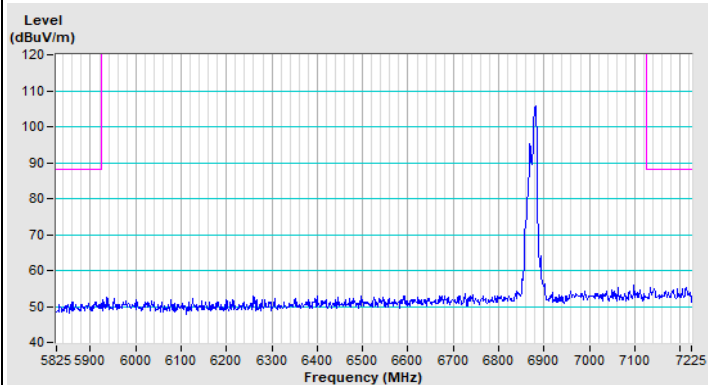**802.11a Channel 185**


Horizontal (Peak)

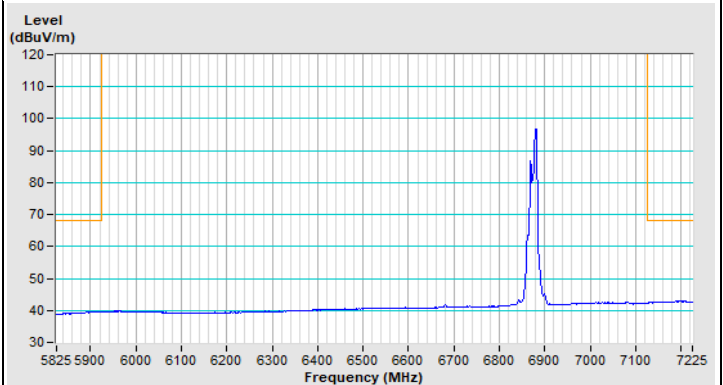

Horizontal (Average)

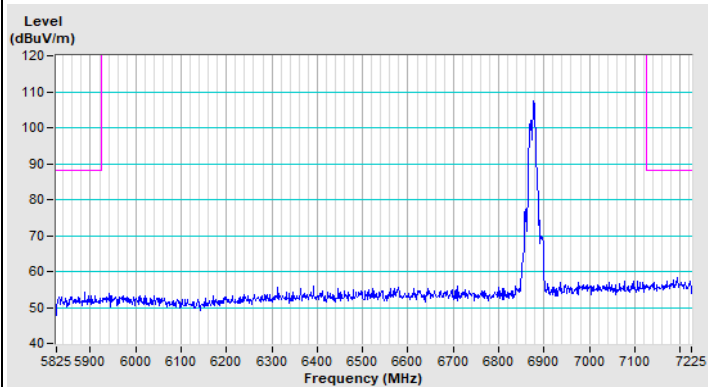


Vertical (Peak)

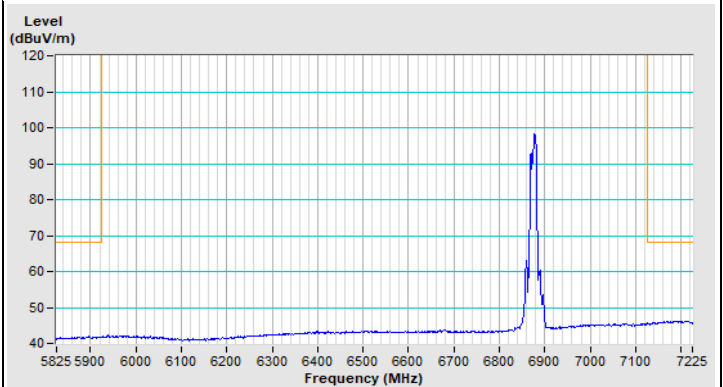


Vertical (Average)


### 802.11a Channel 209

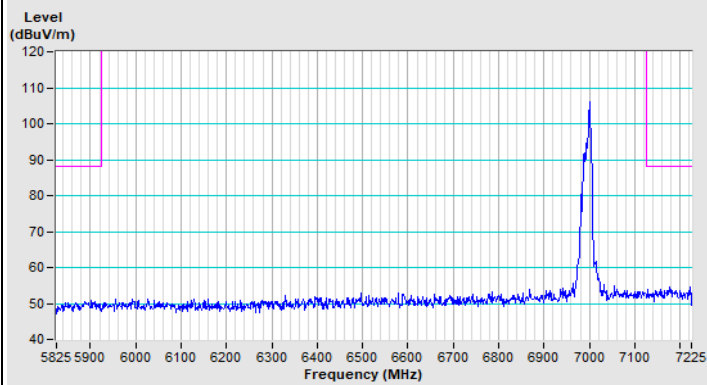


Horizontal (Peak)

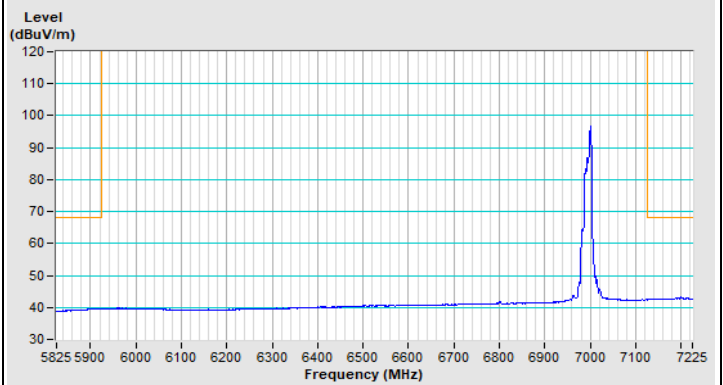

Horizontal (Average)

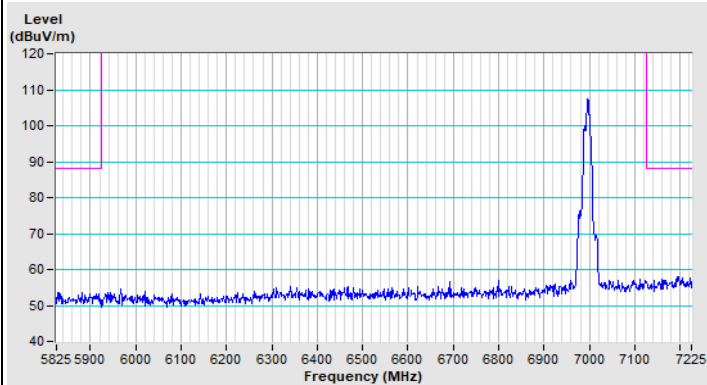


Vertical (Peak)

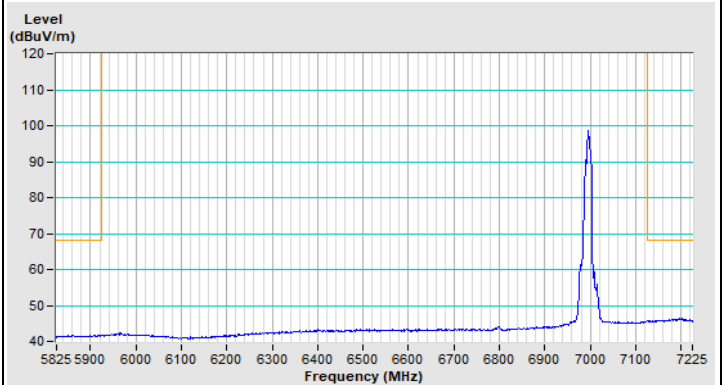


Vertical (Average)


### 802.11a Channel 229

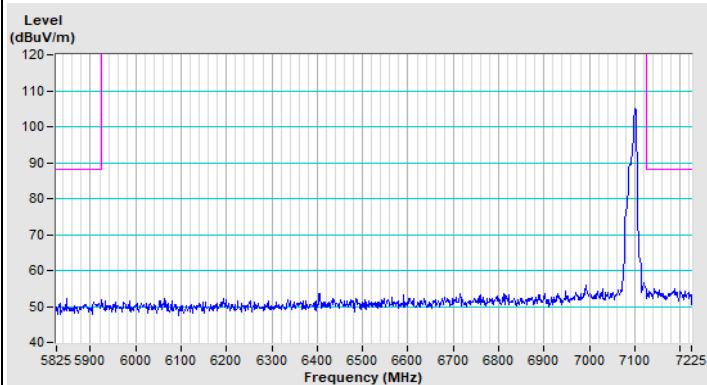


Horizontal (Peak)

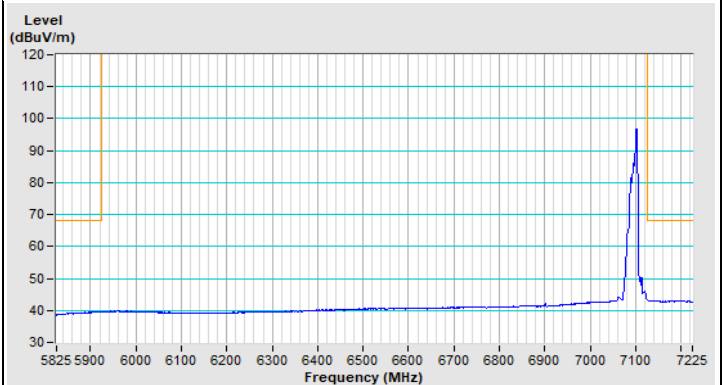

Horizontal (Average)

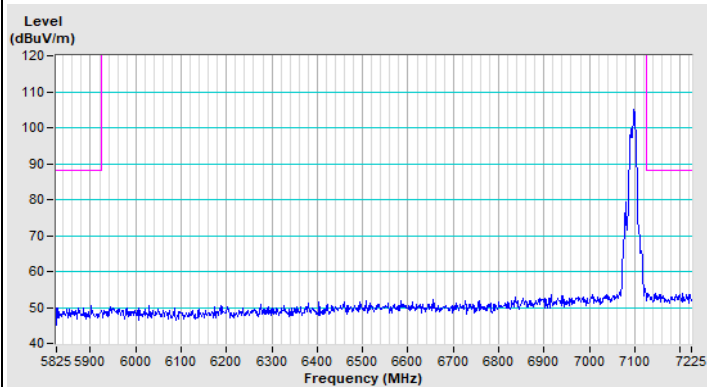


Vertical (Peak)

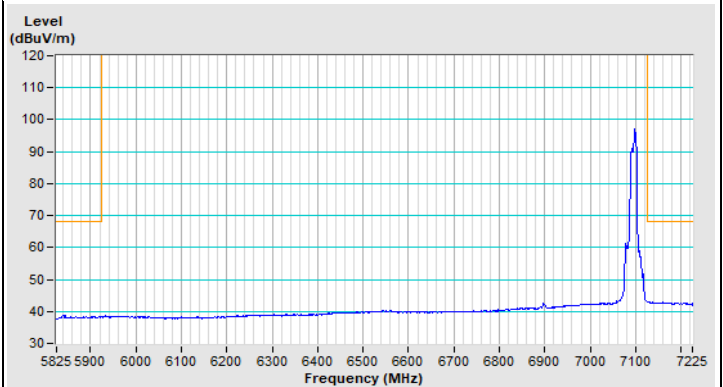


Vertical (Average)


### 802.11ax (HE20) Channel 1

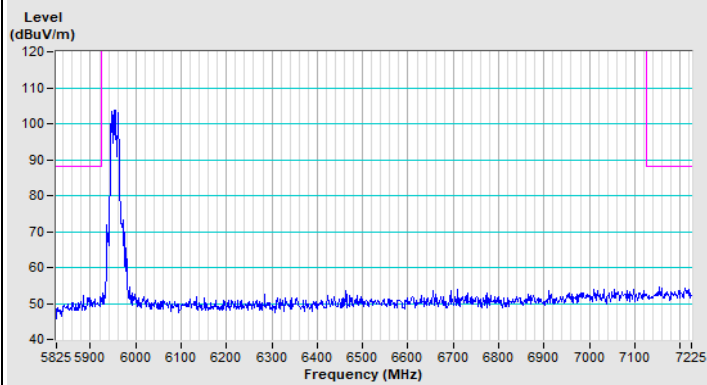


Horizontal (Peak)

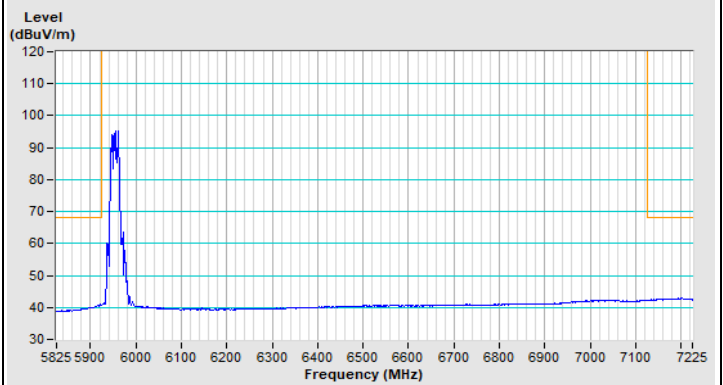

Horizontal (Average)

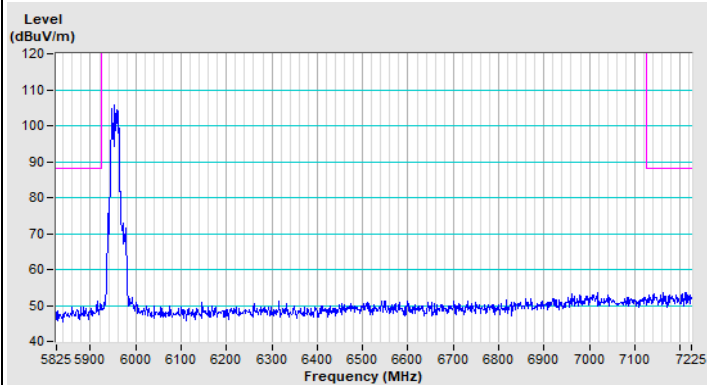


Vertical (Peak)

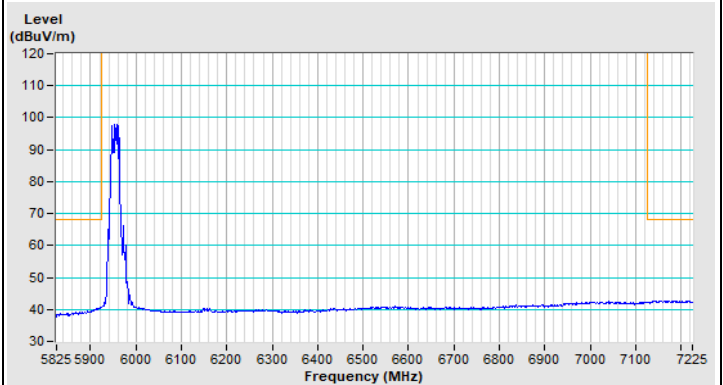


Vertical (Average)


### 802.11ax (HE20) Channel 45

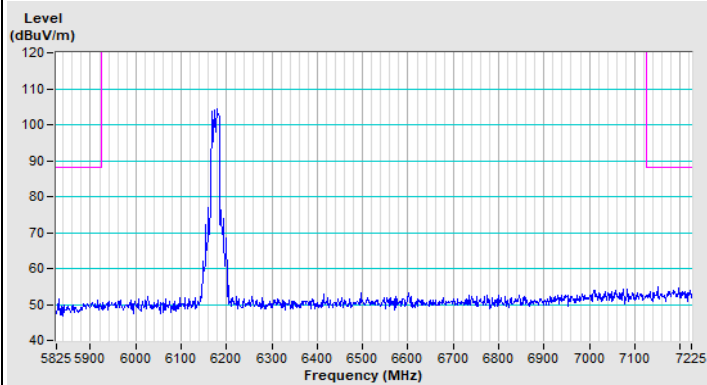


Horizontal (Peak)

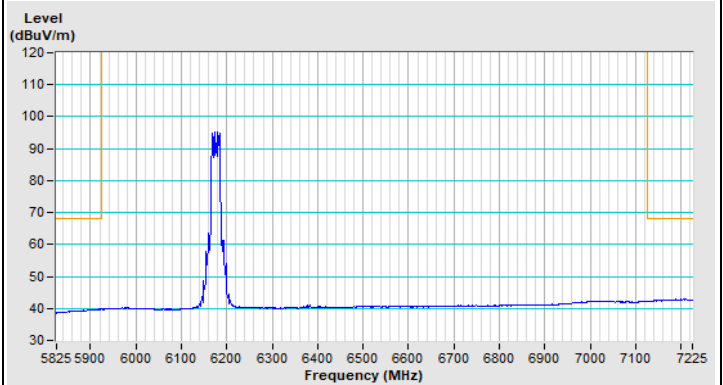

Horizontal (Average)




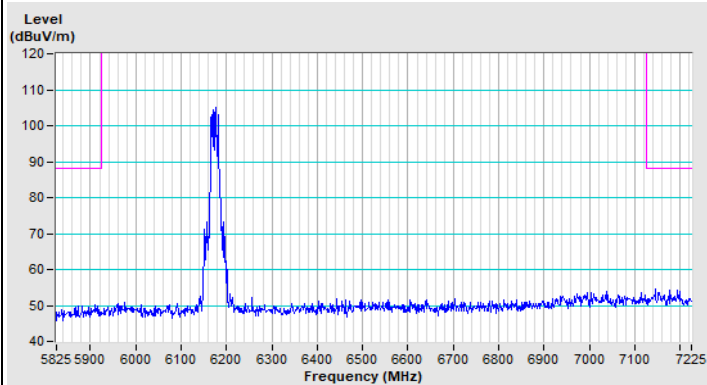


Vertical (Peak)




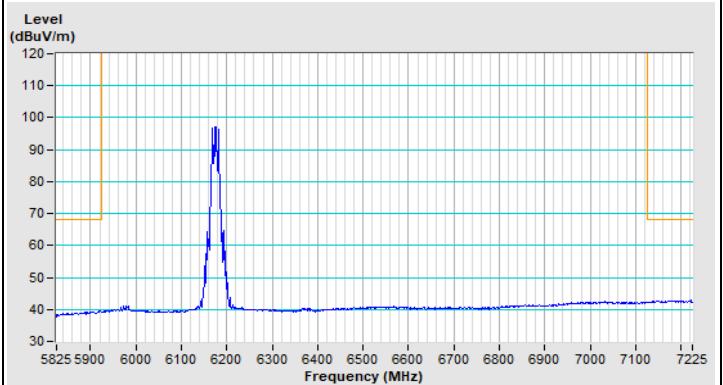


Vertical (Average)





### 802.11ax (HE20) Channel 93

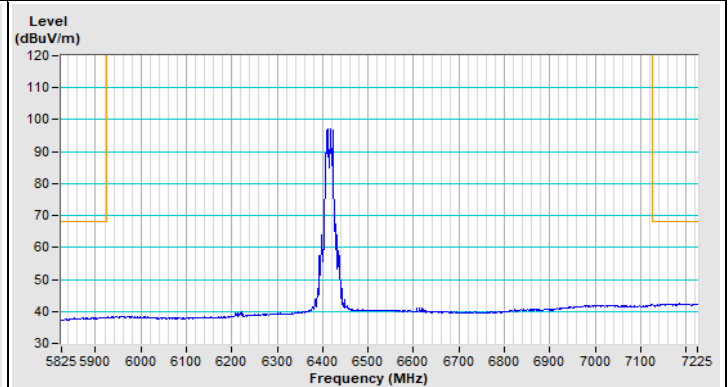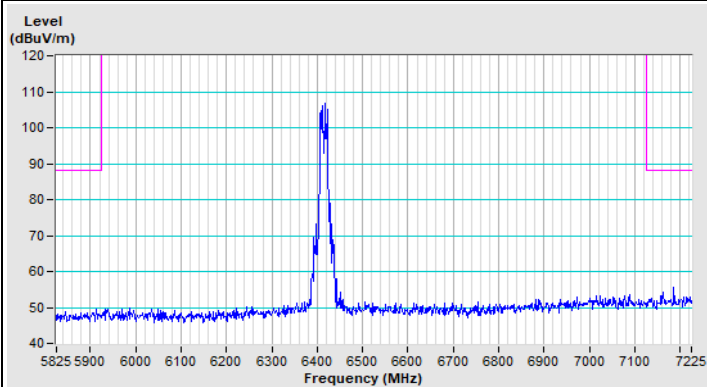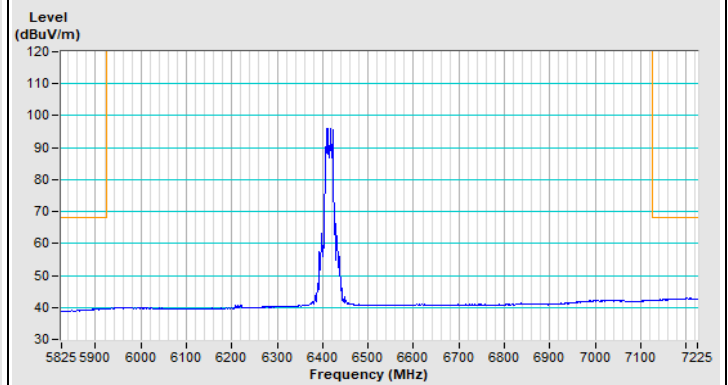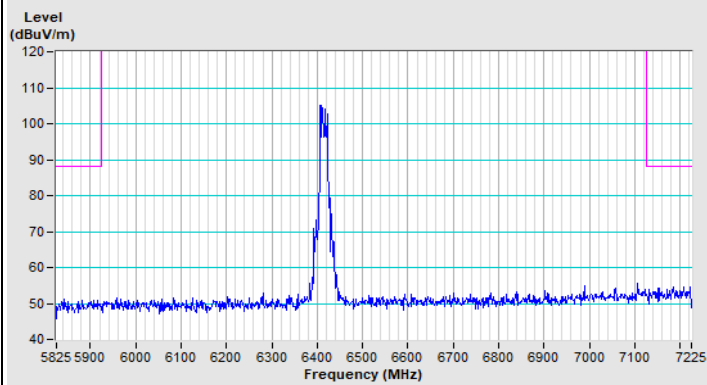





### 802.11ax (HE20) Channel 97

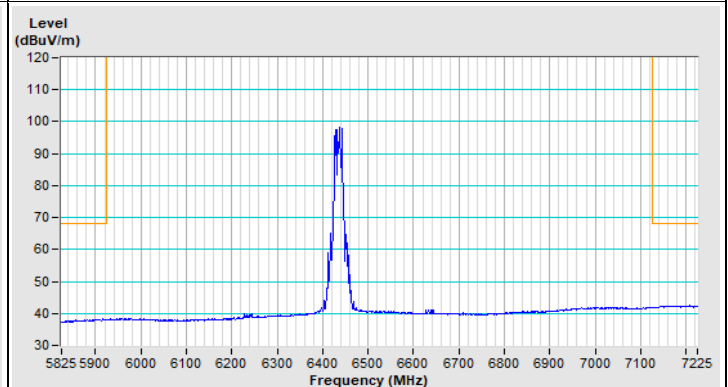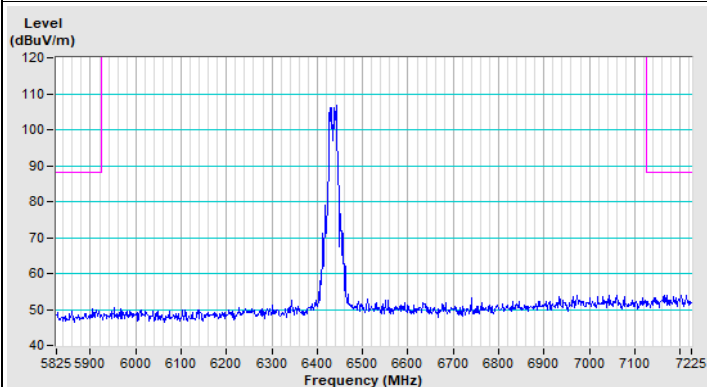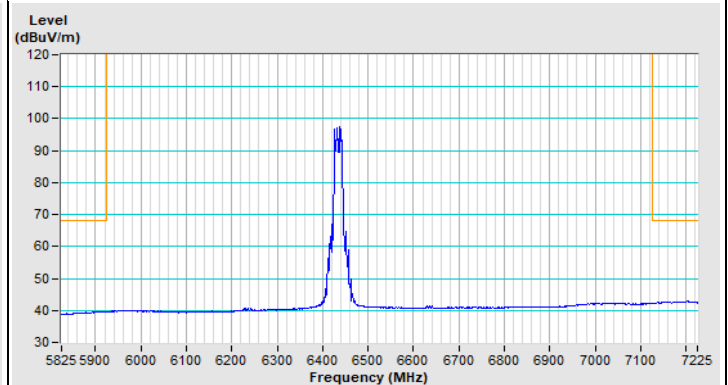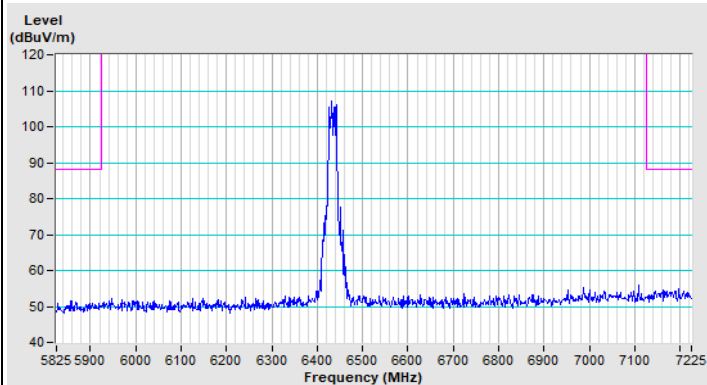


### 802.11ax (HE20) Channel 105

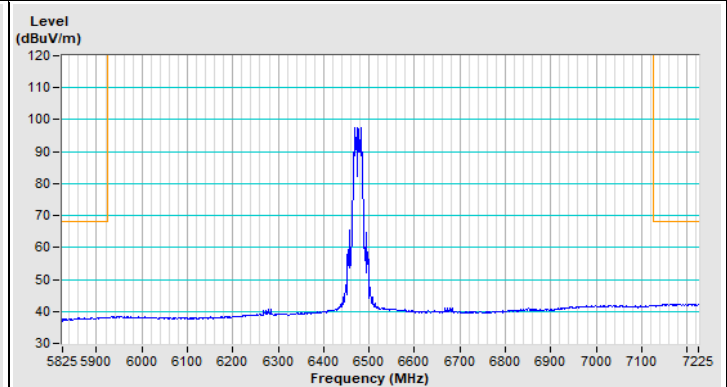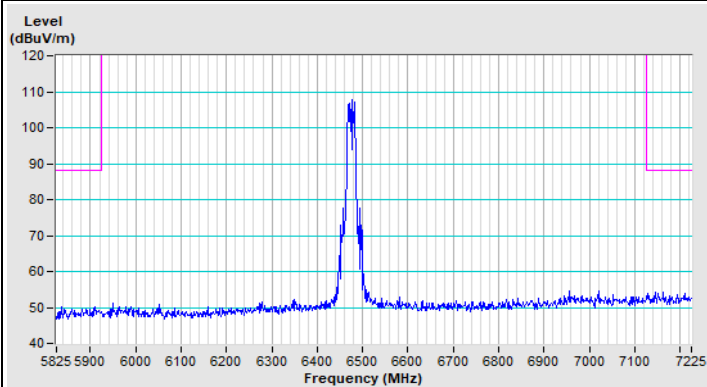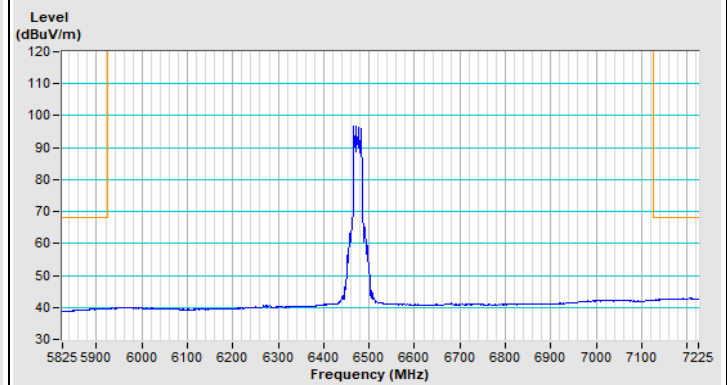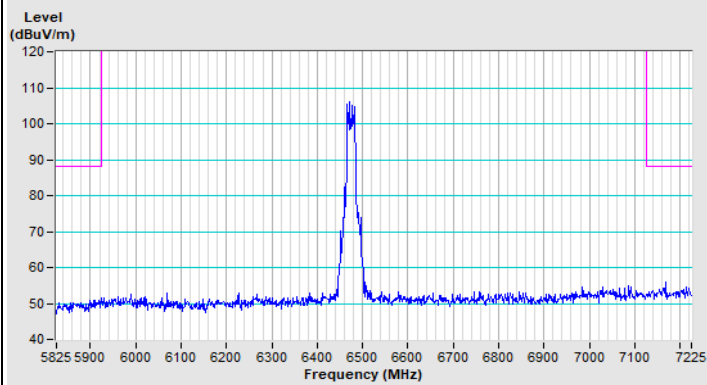


### 802.11ax (HE20) Channel 113

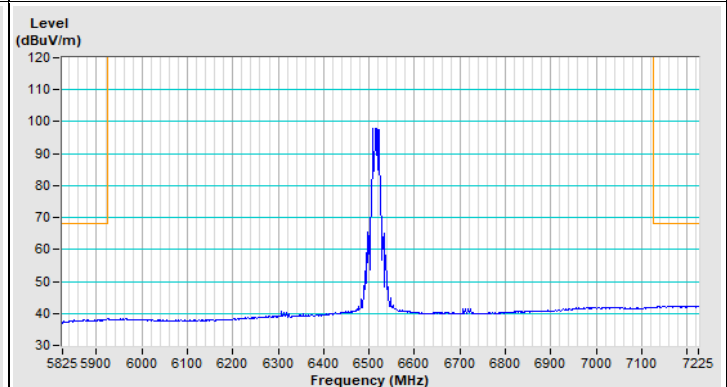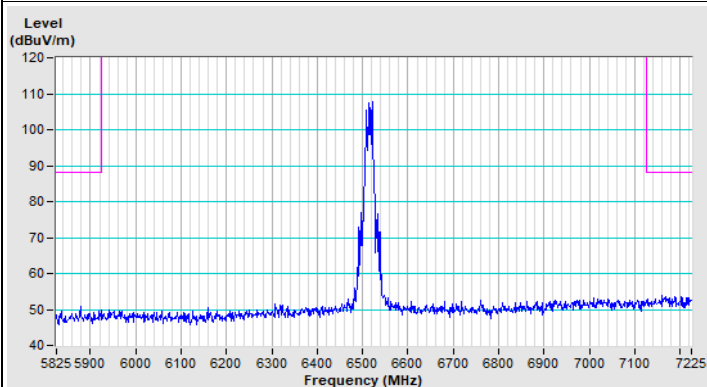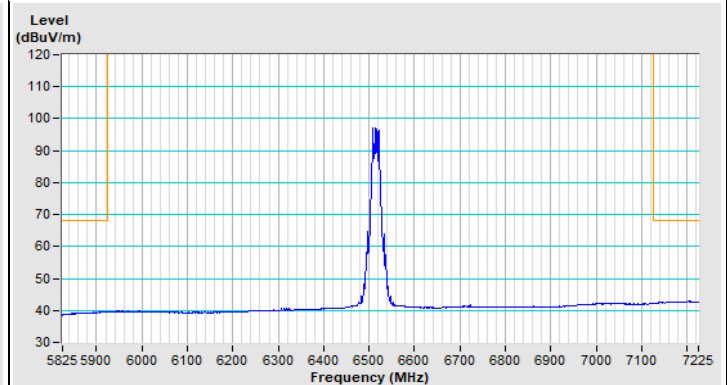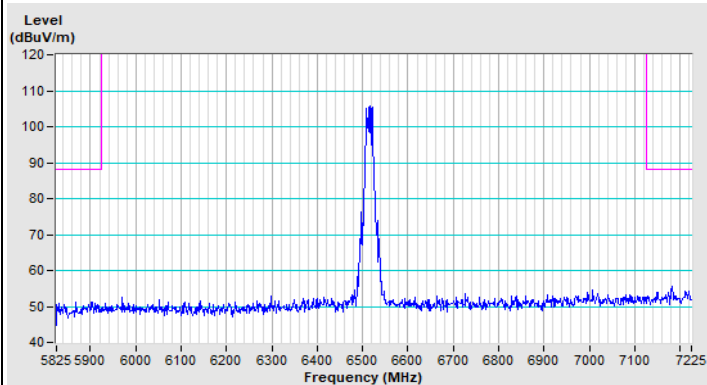


### 802.11ax (HE20) Channel 117

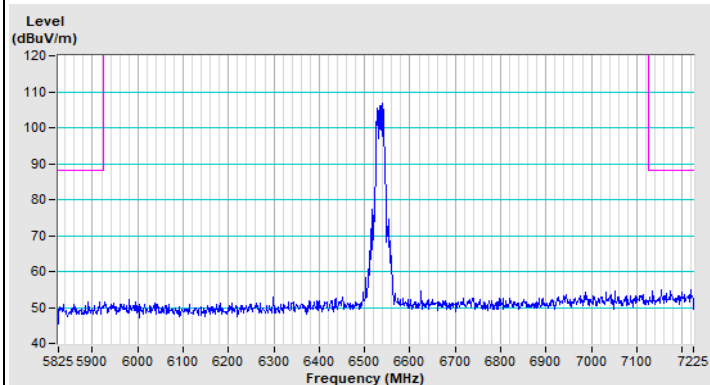


Horizontal (Peak)

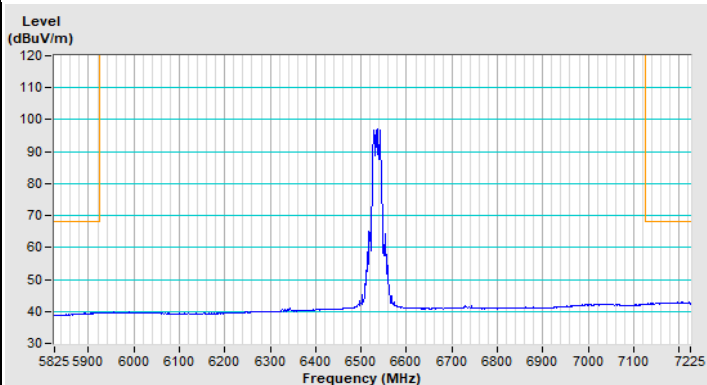

Horizontal (Average)

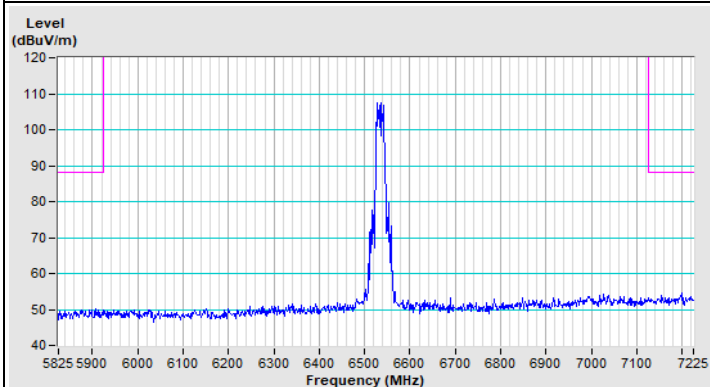


Vertical (Peak)

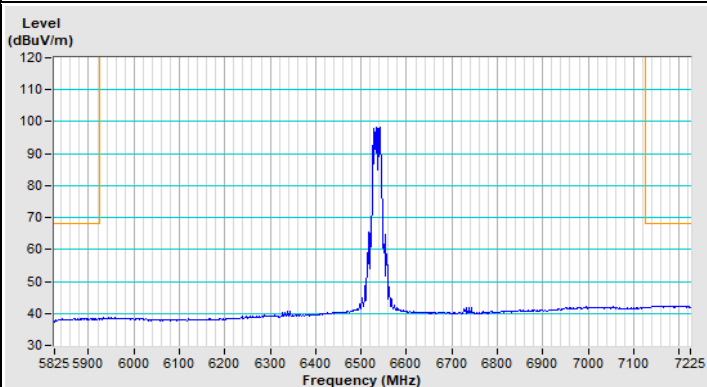


Vertical (Average)


### 802.11ax (HE20) Channel 149

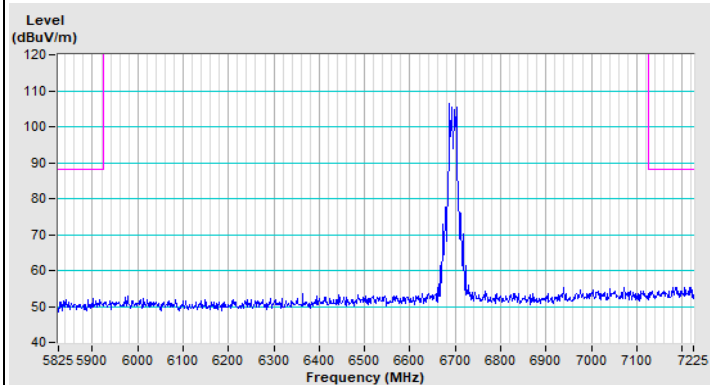


Horizontal (Peak)

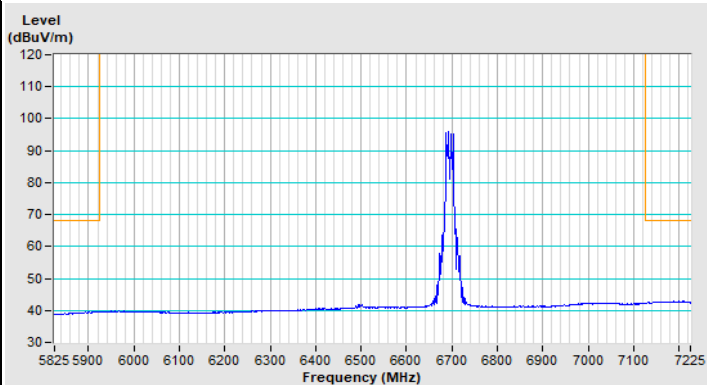

Horizontal (Average)




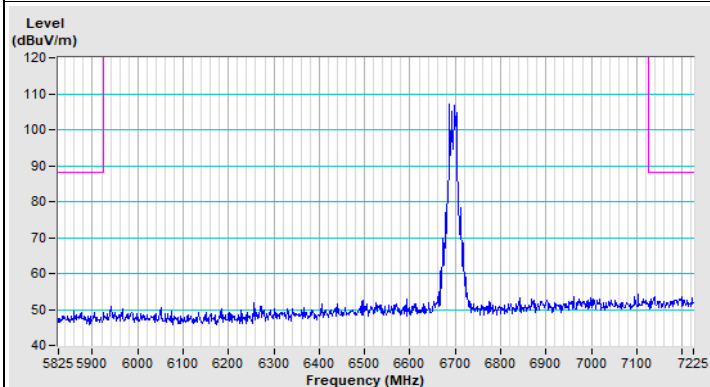


Vertical (Peak)




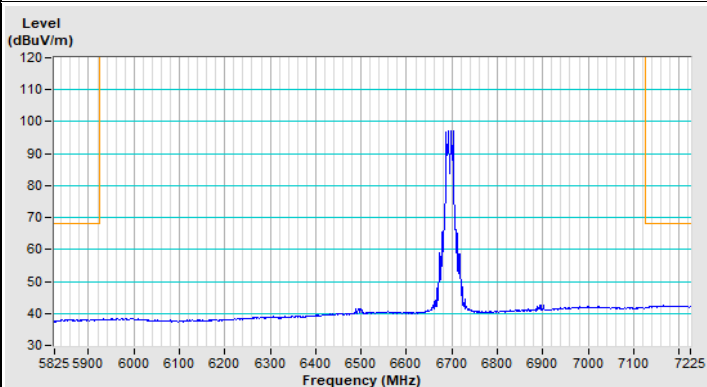



Vertical (Average)

### 802.11ax (HE20) Channel 181

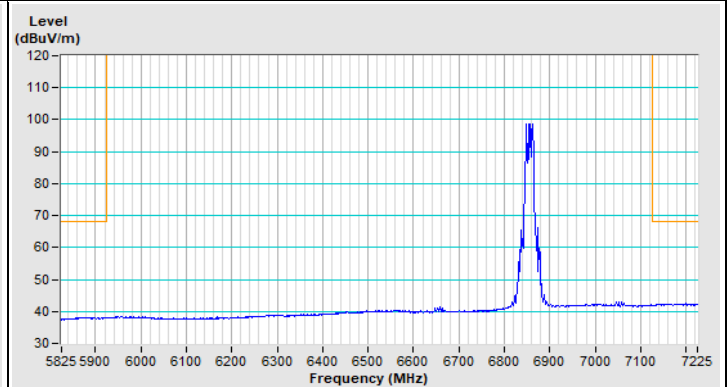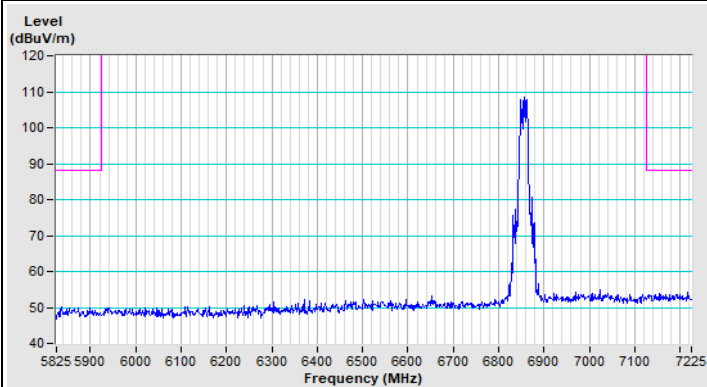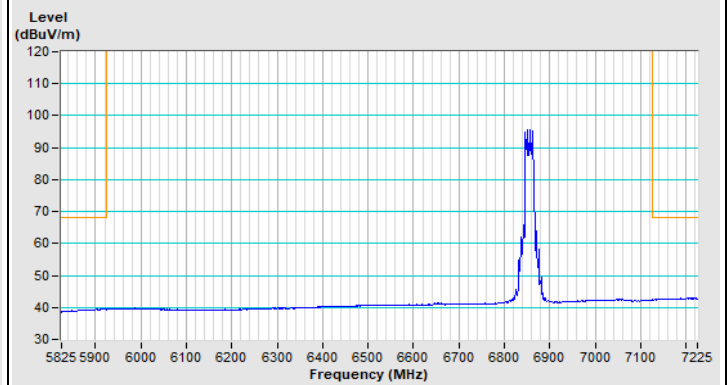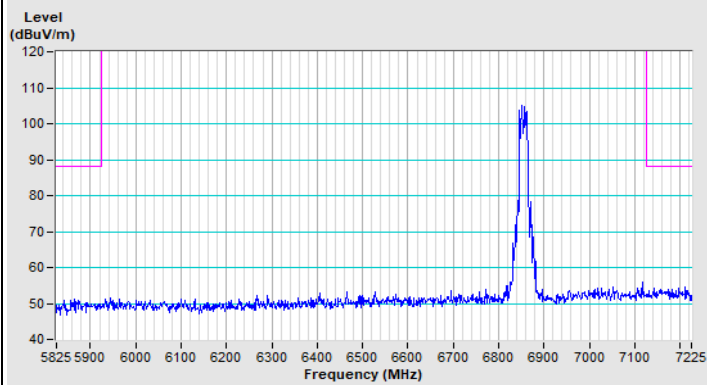


### 802.11ax (HE20) Channel 185

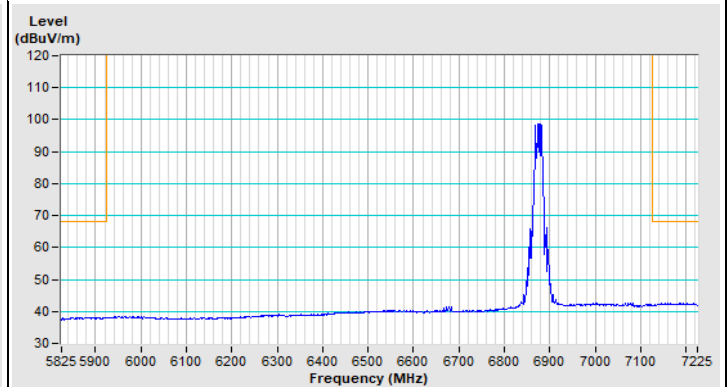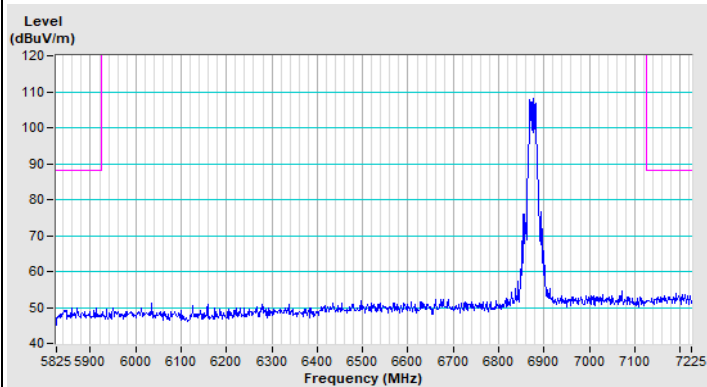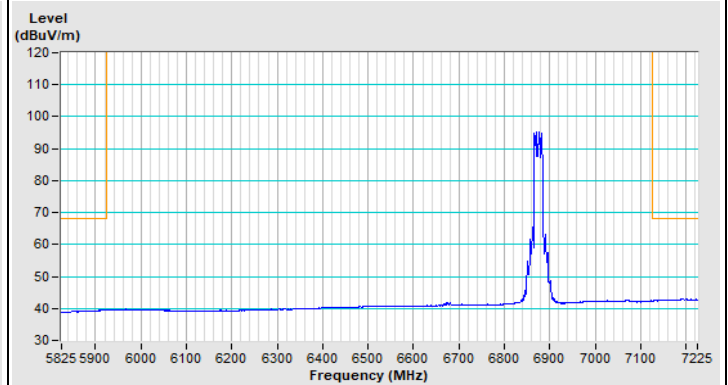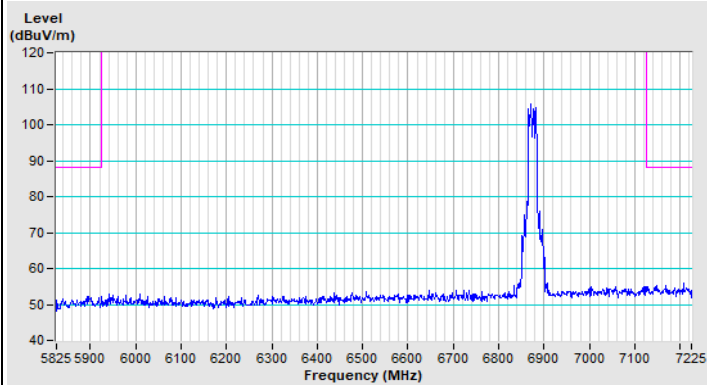


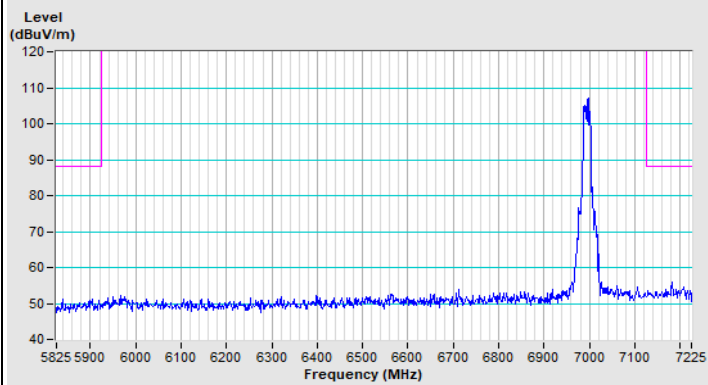**802.11ax (HE20) Channel 209**


Horizontal (Peak)

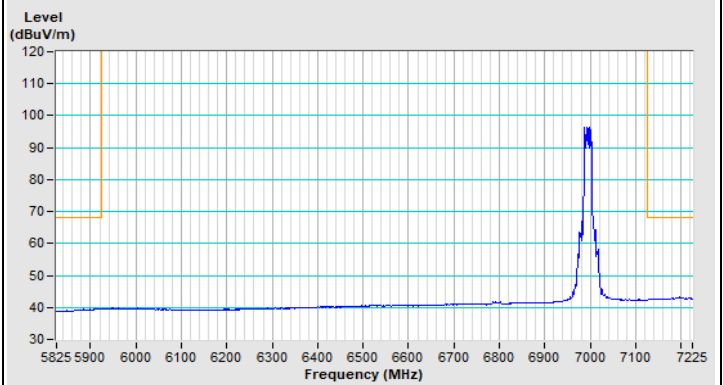


Horizontal (Average)

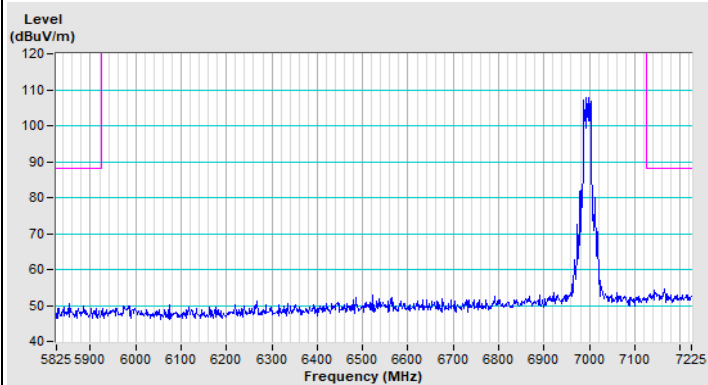


Vertical (Peak)

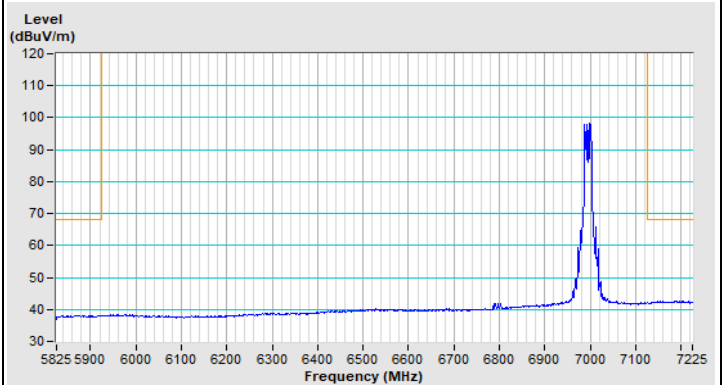


Vertical (Average)

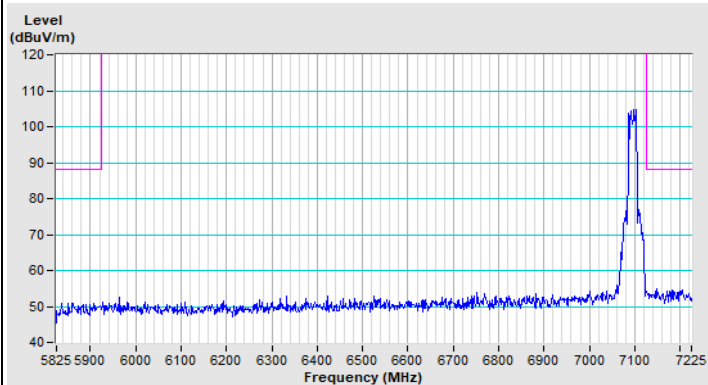**802.11ax (HE20) Channel 229**


Horizontal (Peak)

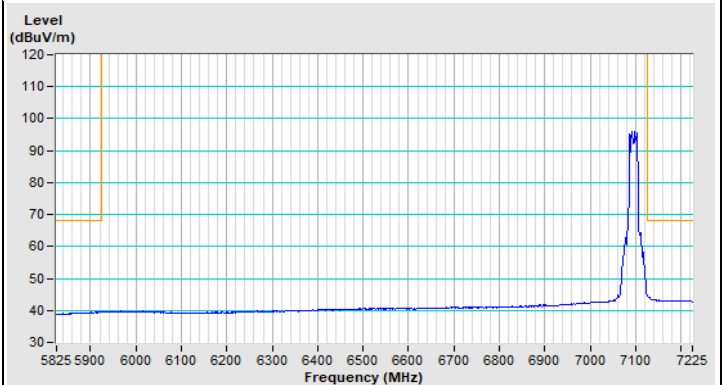

Horizontal (Average)




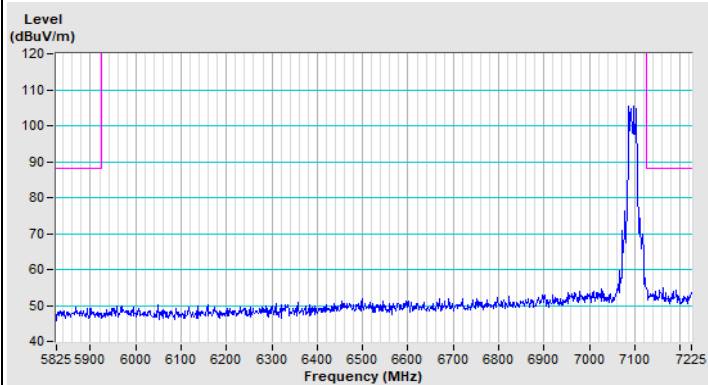


Vertical (Peak)




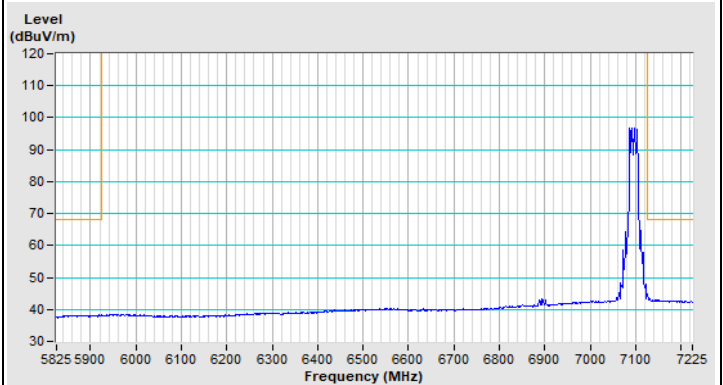


Vertical (Average)





### 802.11ax (HE40) Channel 3

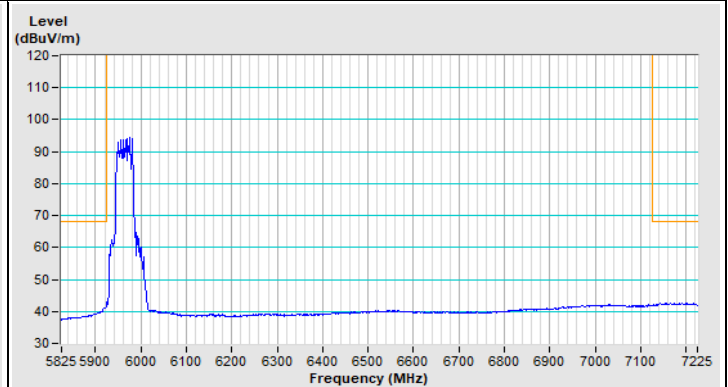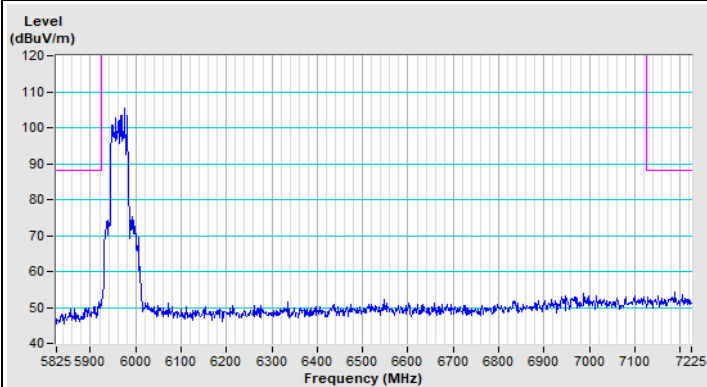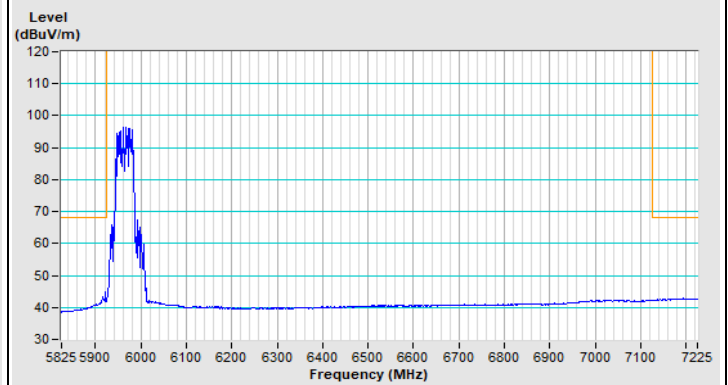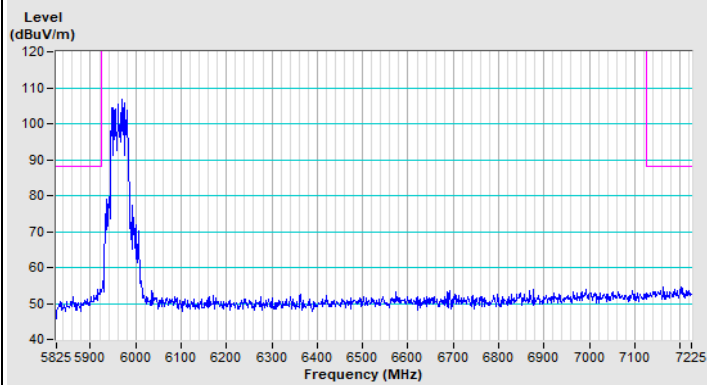





### 802.11ax (HE40) Channel 43

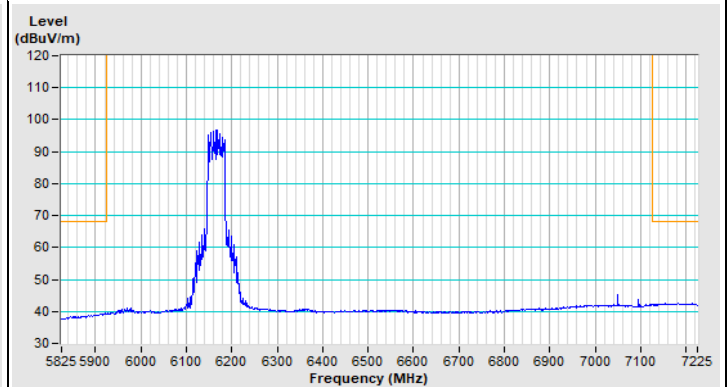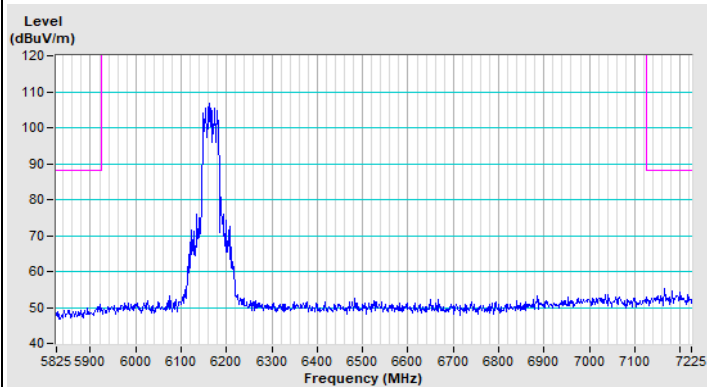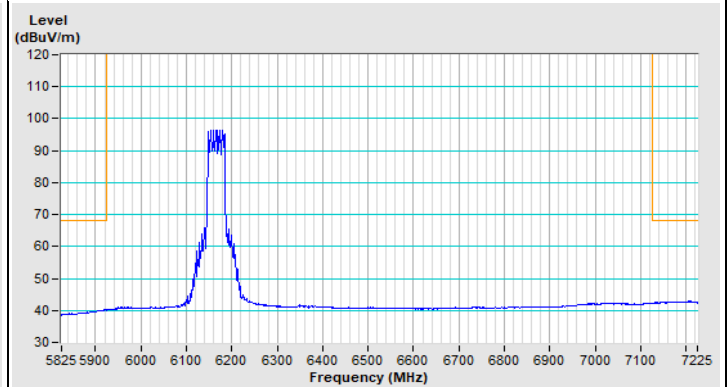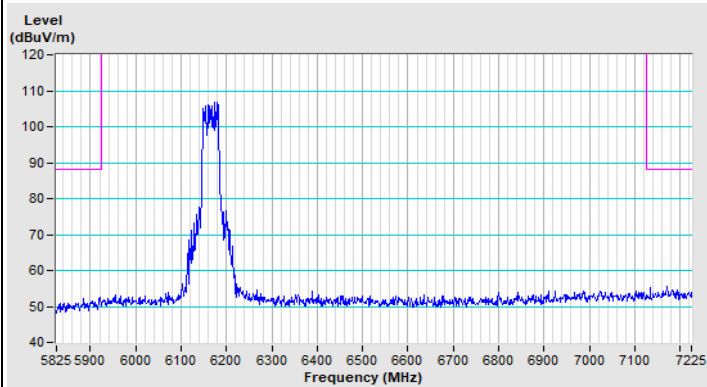


### 802.11ax (HE40) Channel 91

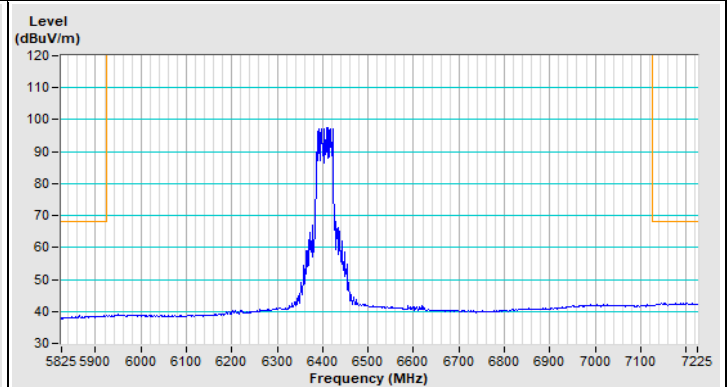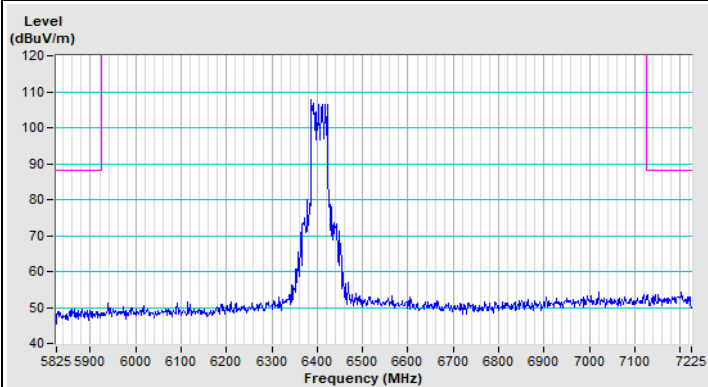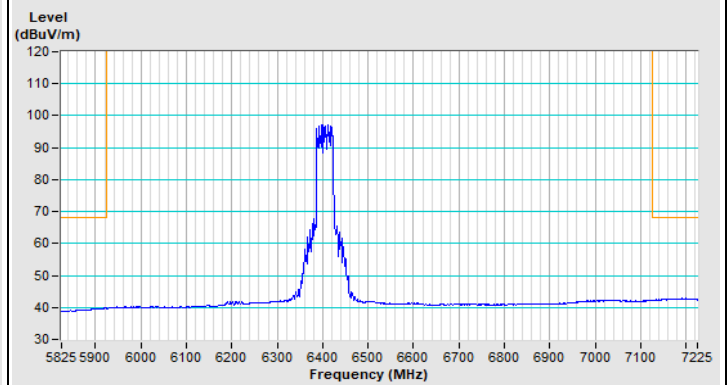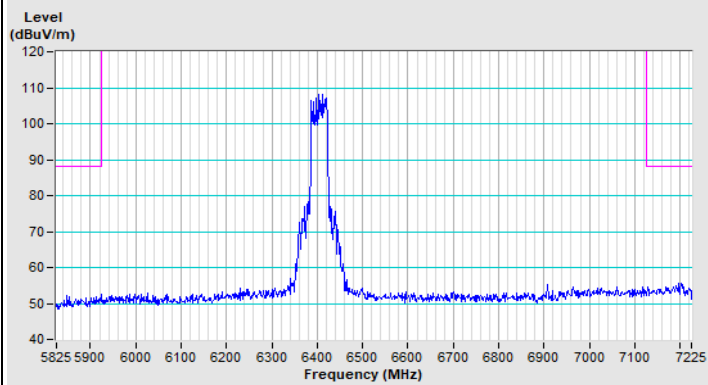


### 802.11ax (HE40) Channel 99

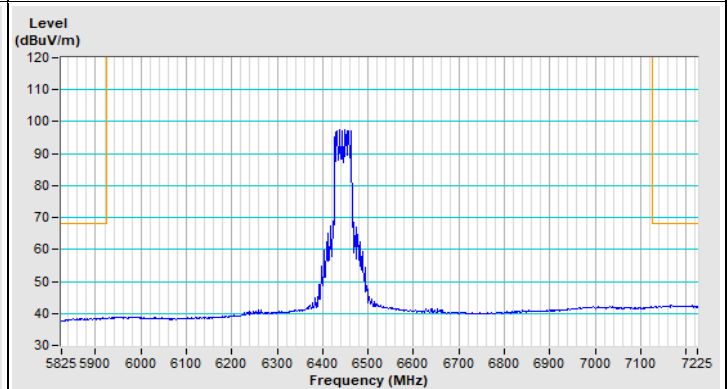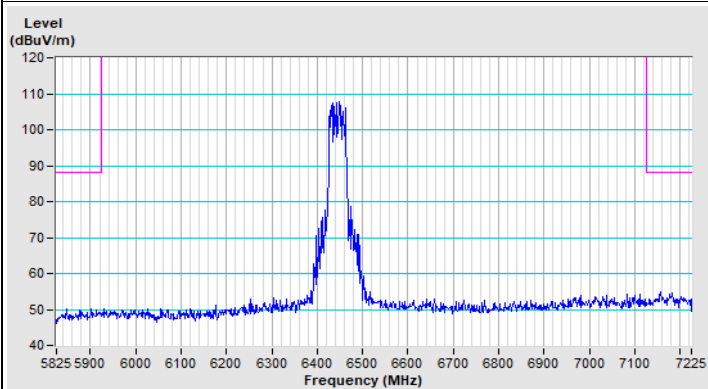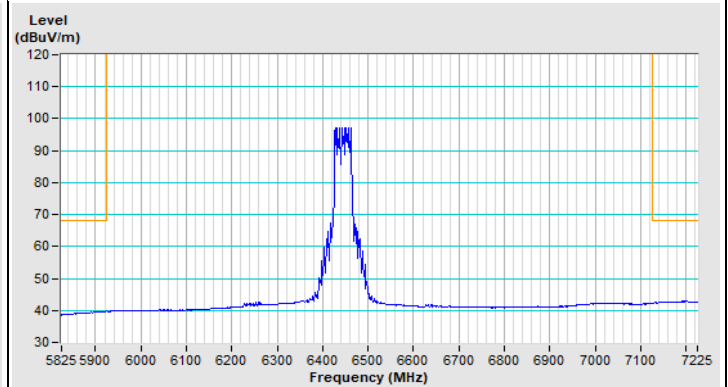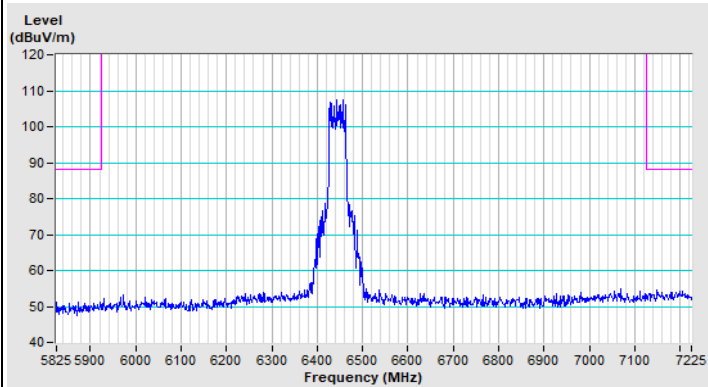


### 802.11ax (HE40) Channel 107

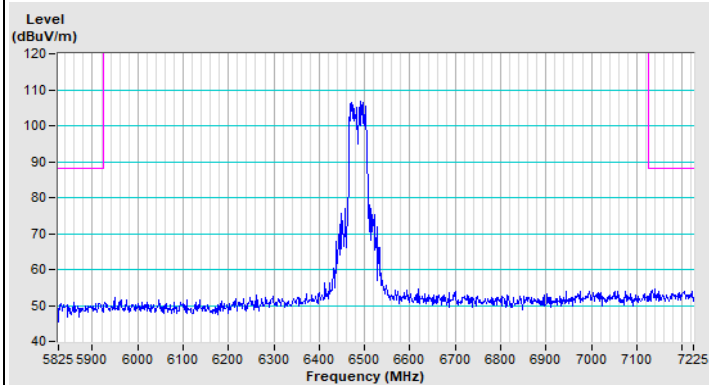


Horizontal (Peak)

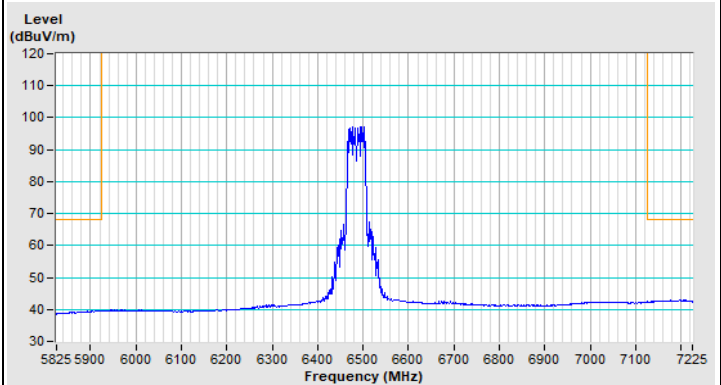

Horizontal (Average)

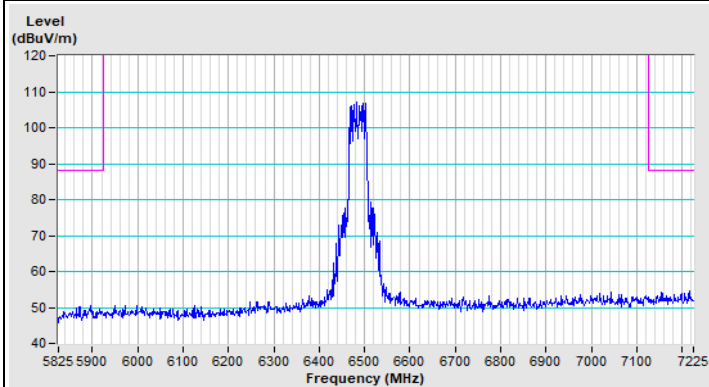


Vertical (Peak)

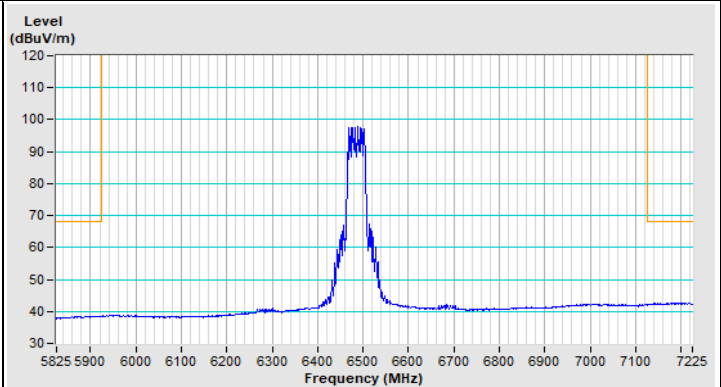


Vertical (Average)


### 802.11ax (HE40) Channel 115

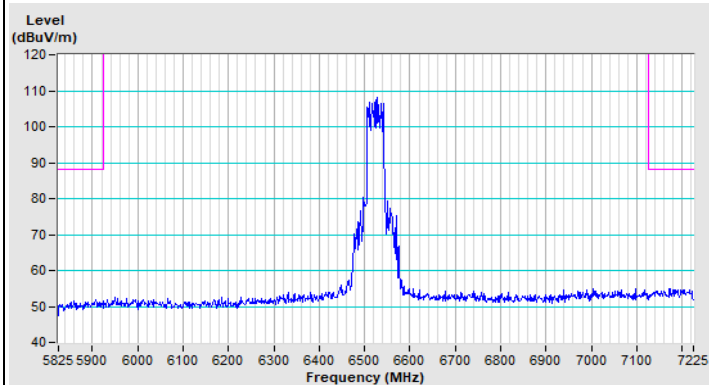


Horizontal (Peak)

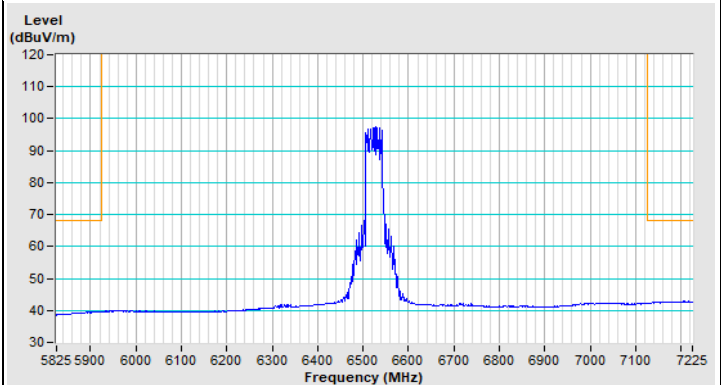

Horizontal (Average)




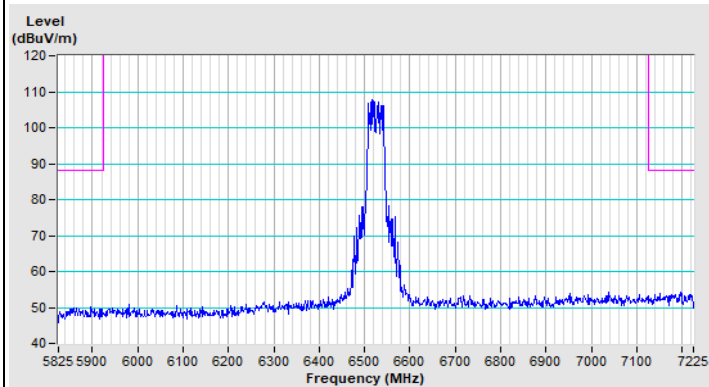


Vertical (Peak)




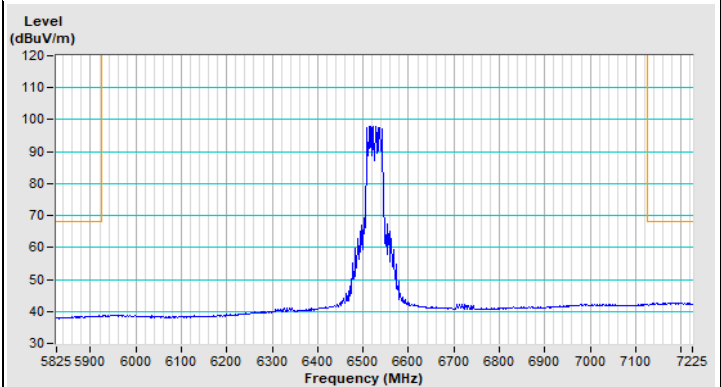


Vertical (Average)





### 802.11ax (HE40) Channel 123

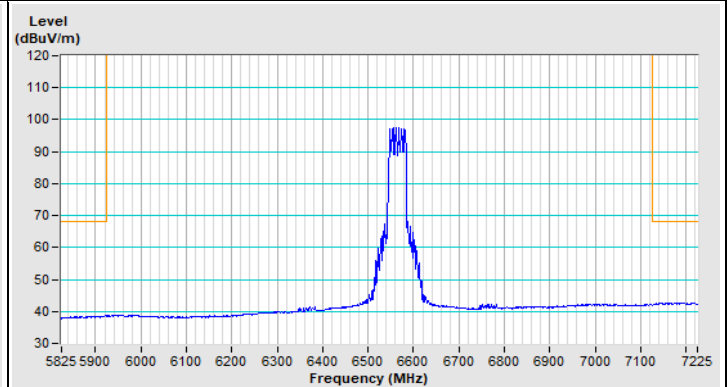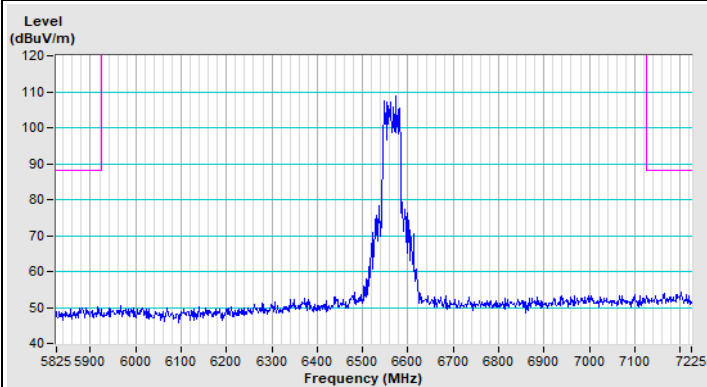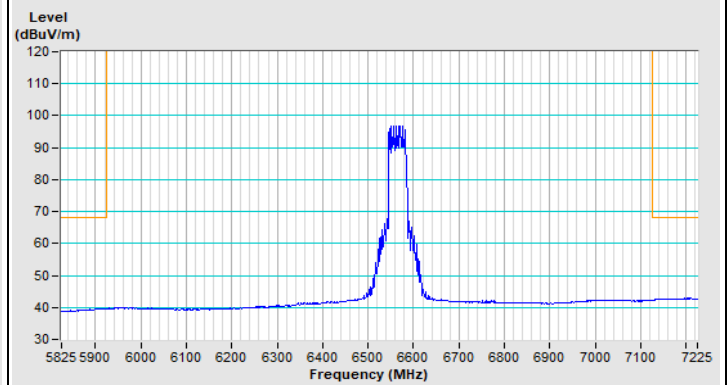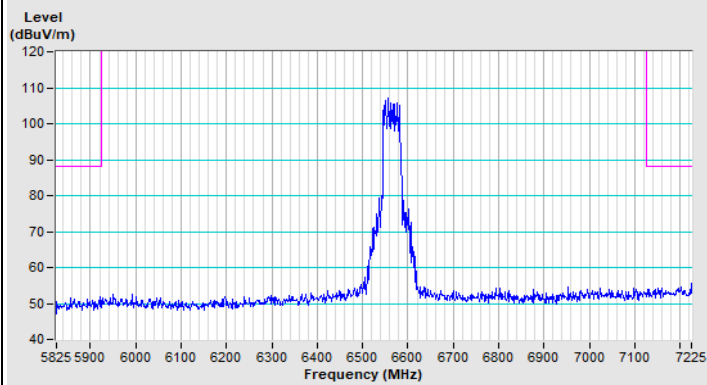





### 802.11ax (HE40) Channel 155

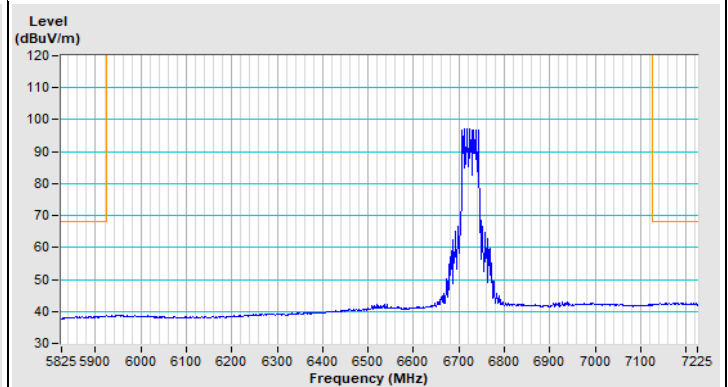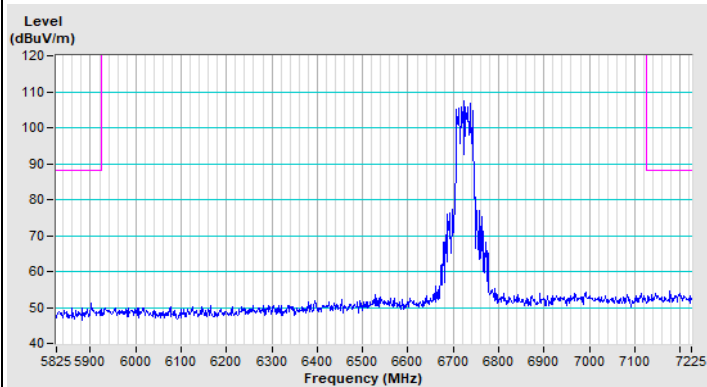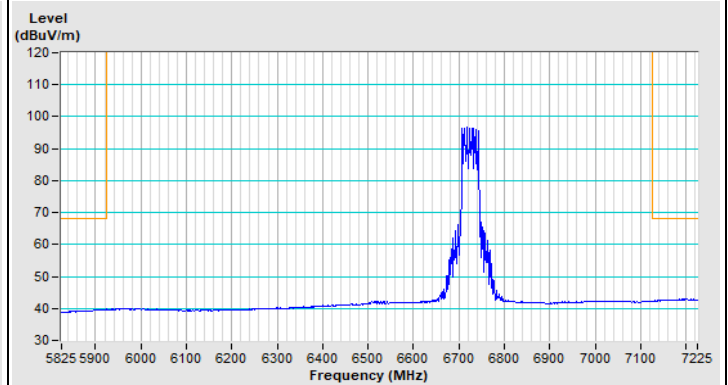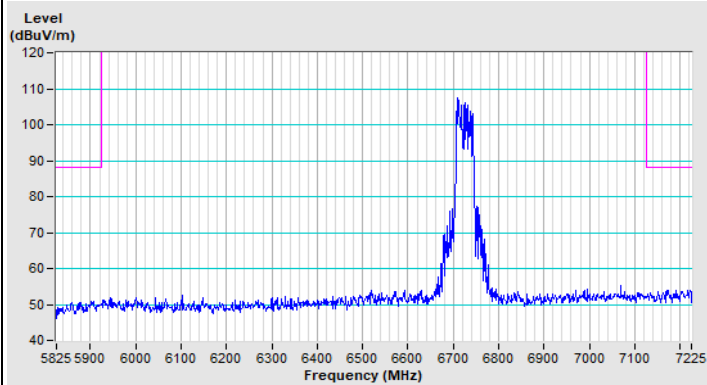


### 802.11ax (HE40) Channel 179

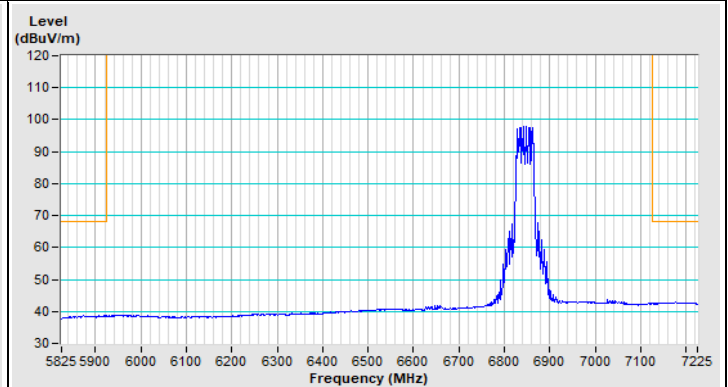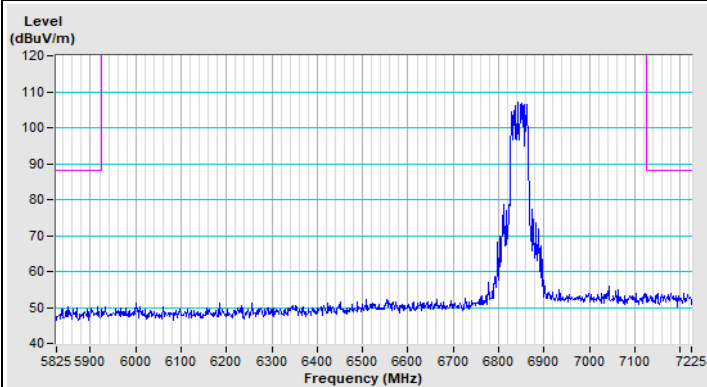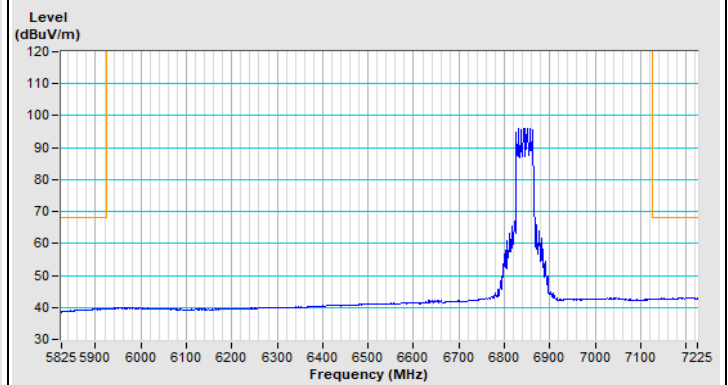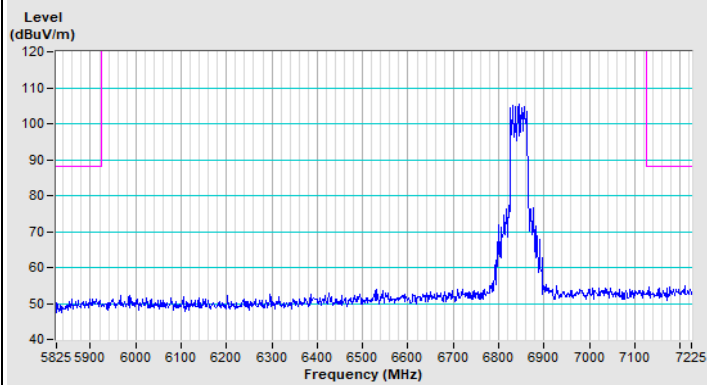


### 802.11ax (HE40) Channel 187

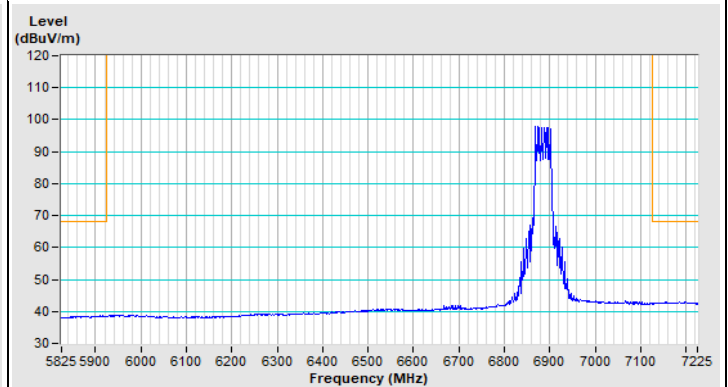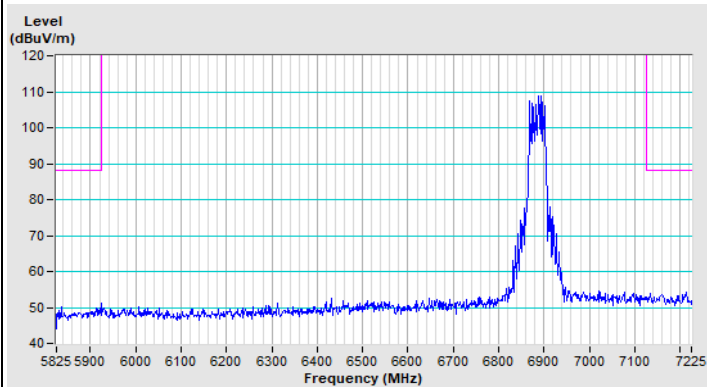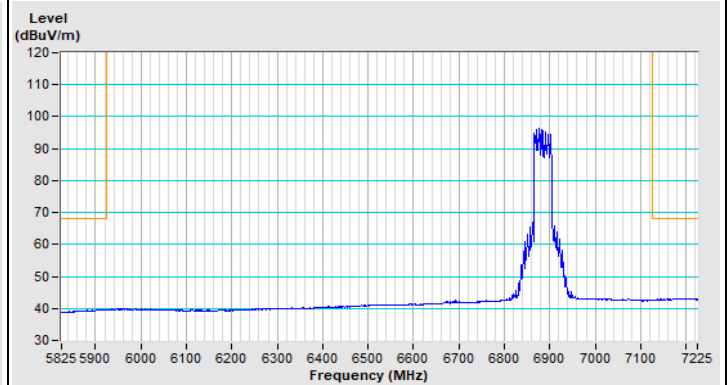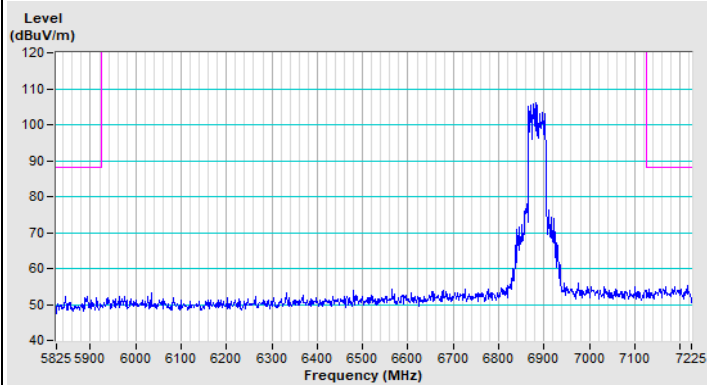


### 802.11ax (HE40) Channel 211

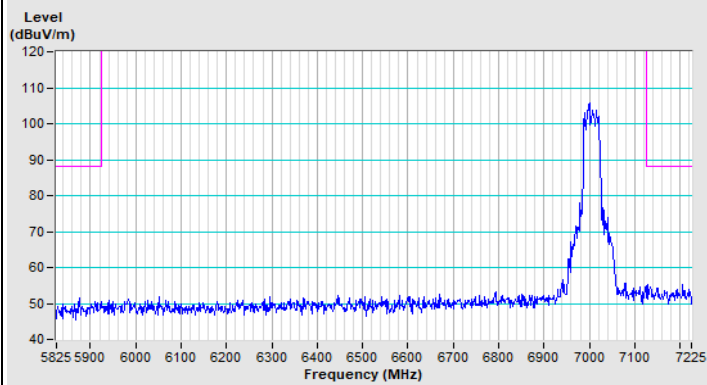


Horizontal (Peak)

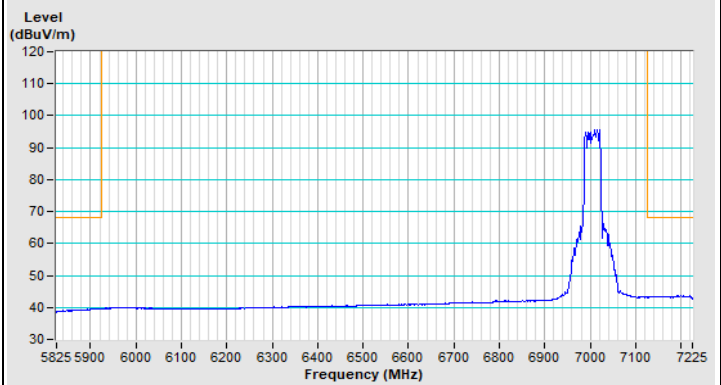

Horizontal (Average)

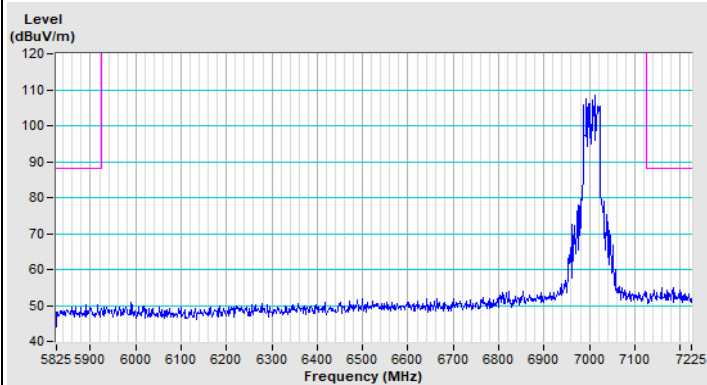


Vertical (Peak)

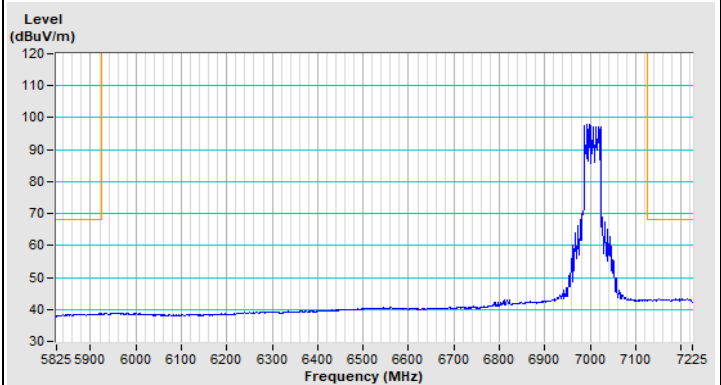


Vertical (Average)


### 802.11ax (HE40) Channel 227

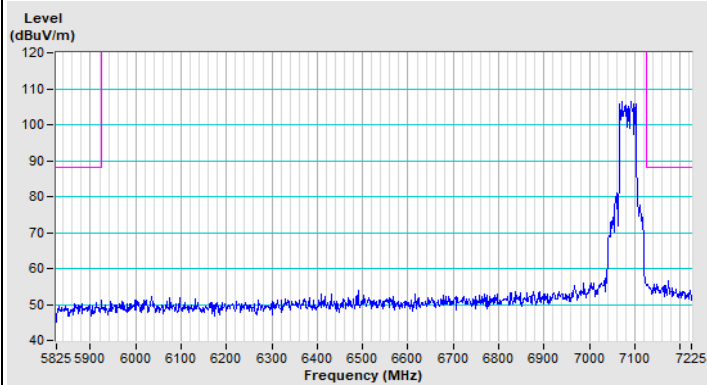


Horizontal (Peak)

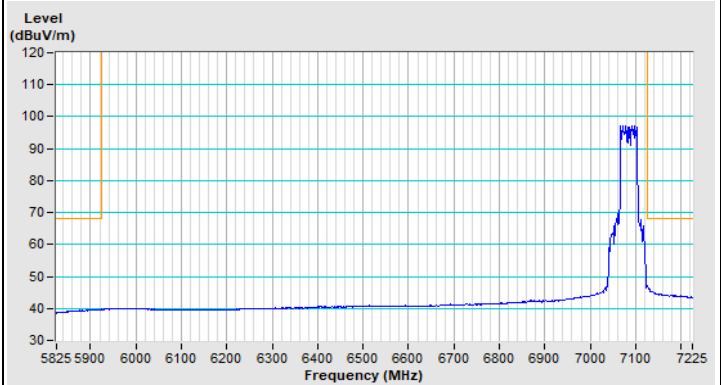

Horizontal (Average)




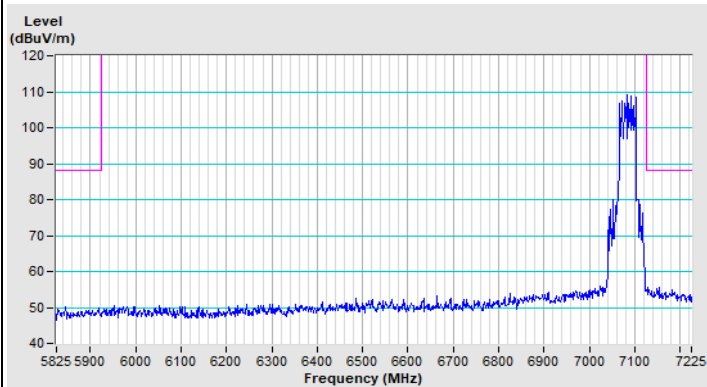


Vertical (Peak)




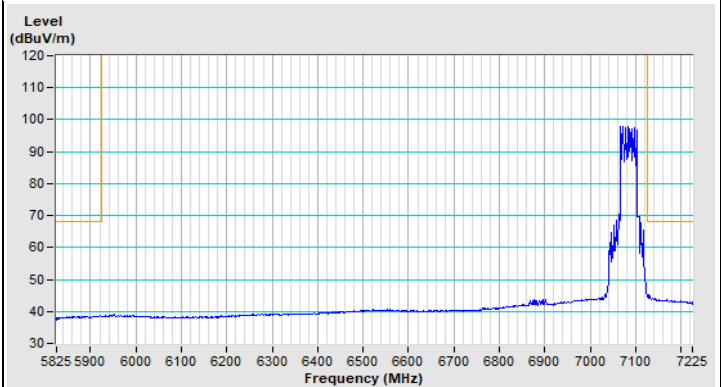


Vertical (Average)


### 802.11ax (HE80) Channel 7

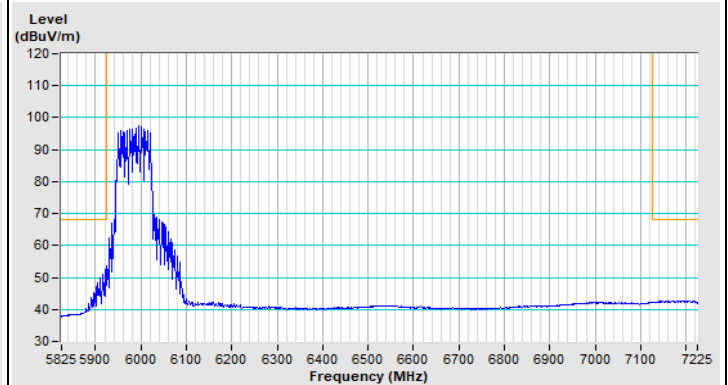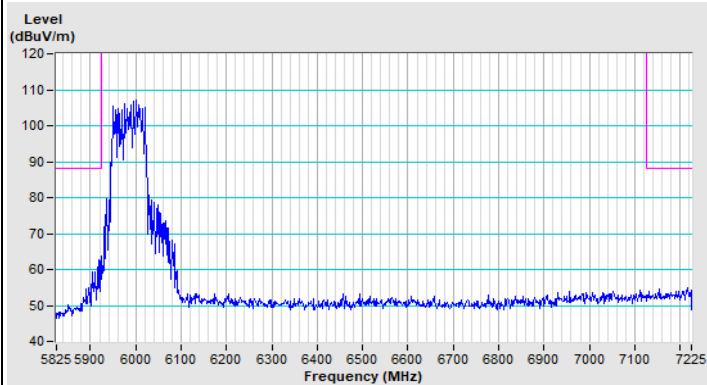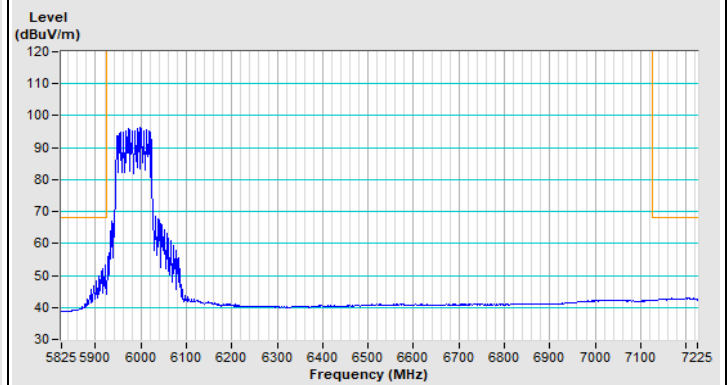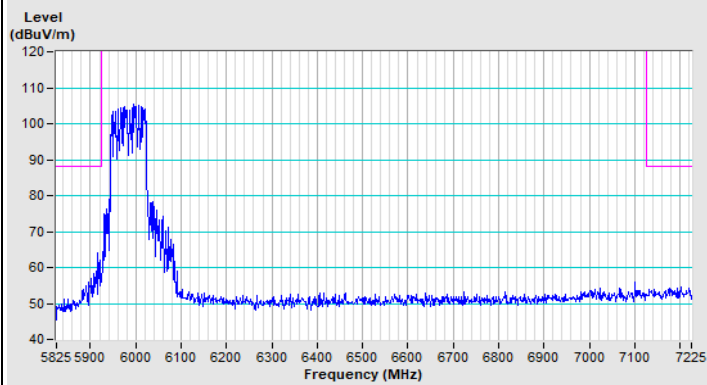


### 802.11ax (HE80) Channel 39

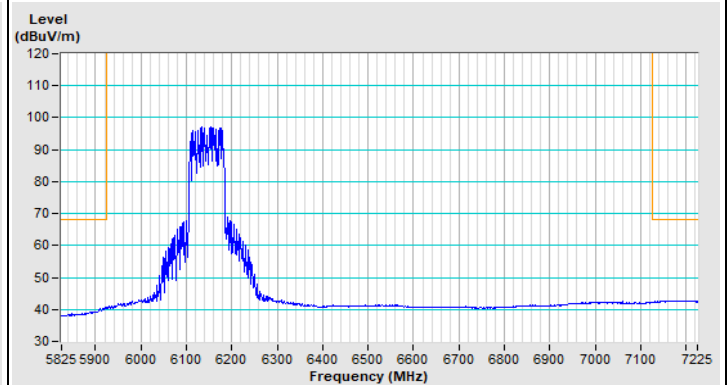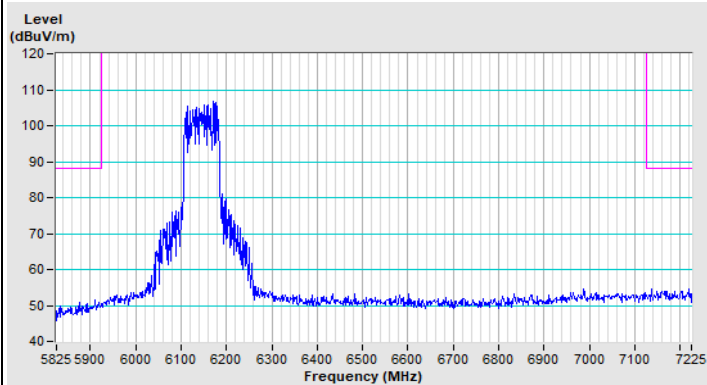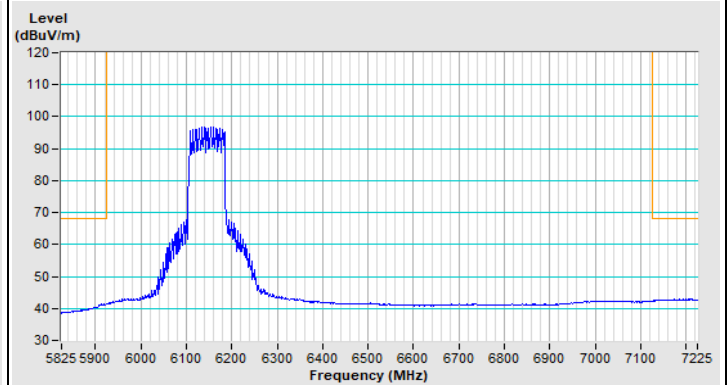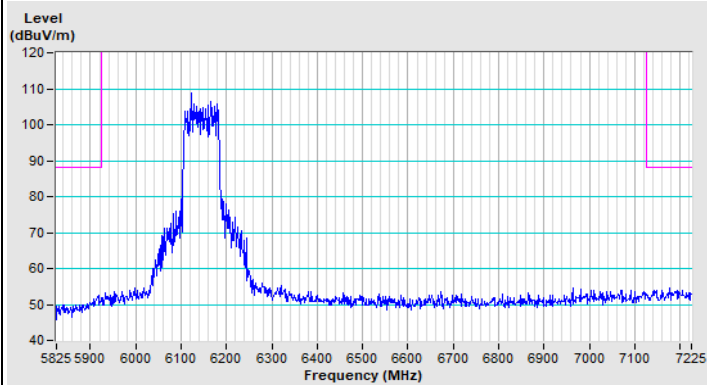


### 802.11ax (HE80) Channel 87

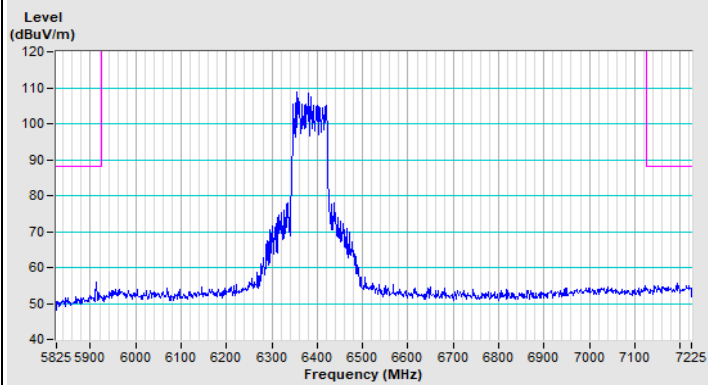


Horizontal (Peak)

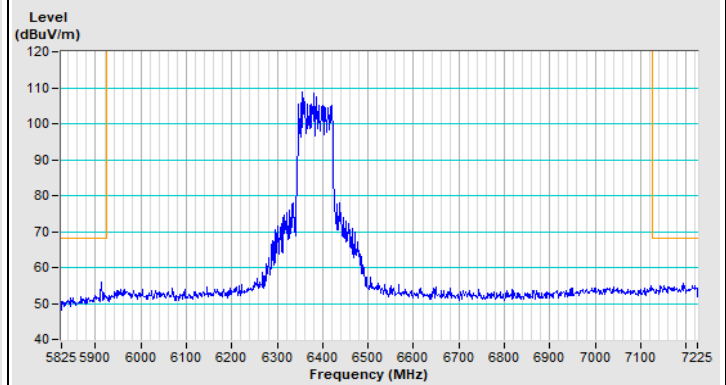

Horizontal (Average)

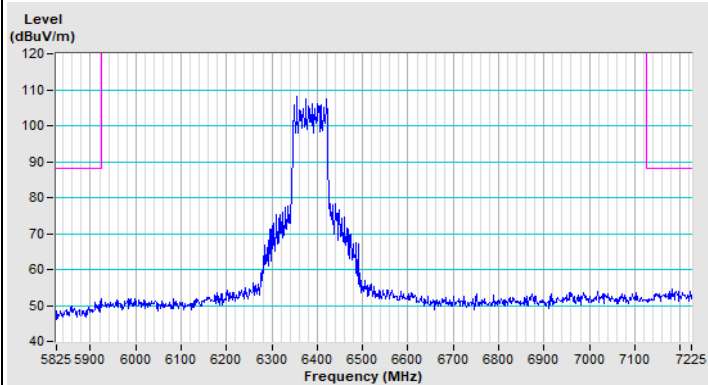


Vertical (Peak)

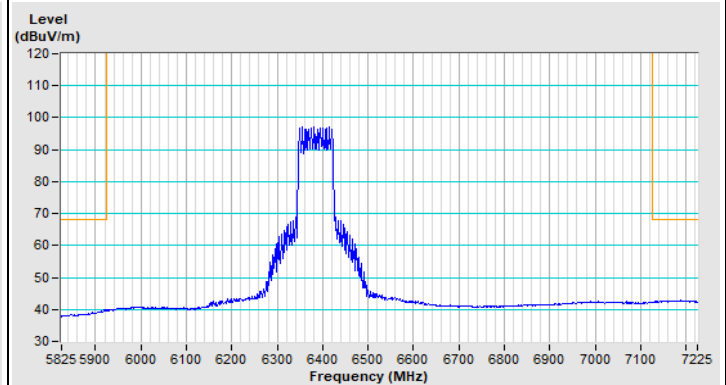


Vertical (Average)


### 802.11ax (HE80) Channel 103

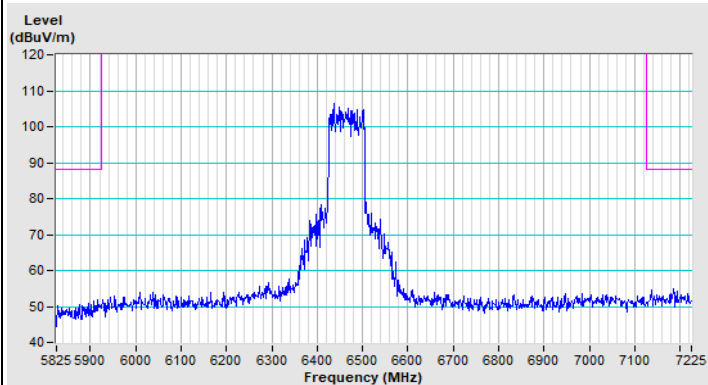


Horizontal (Peak)

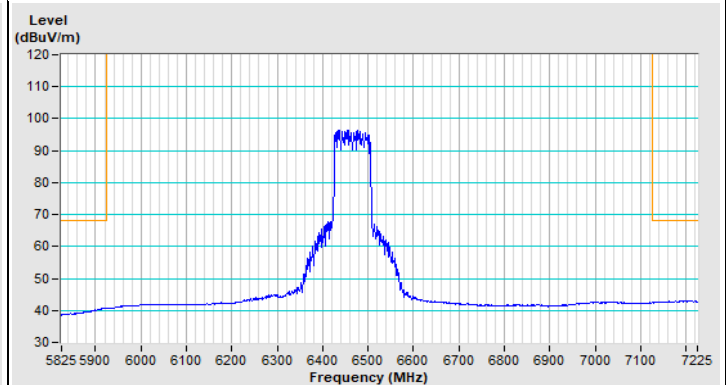

Horizontal (Average)




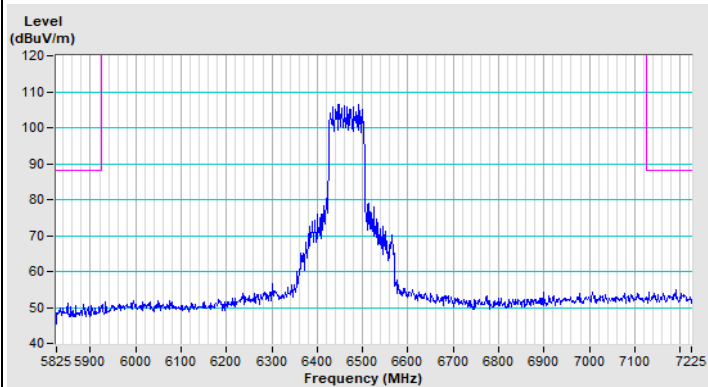


Vertical (Peak)




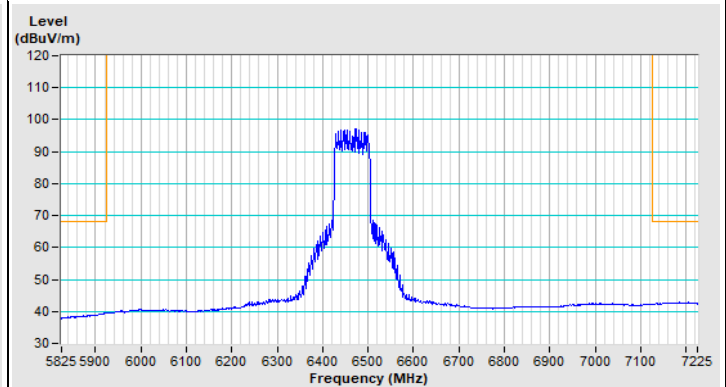


Vertical (Average)





### 802.11ax (HE80) Channel 119

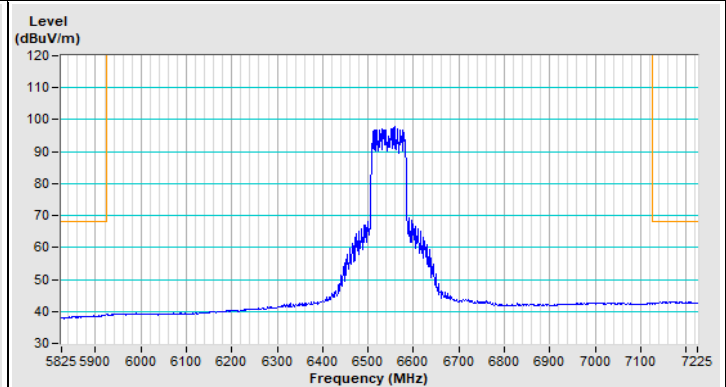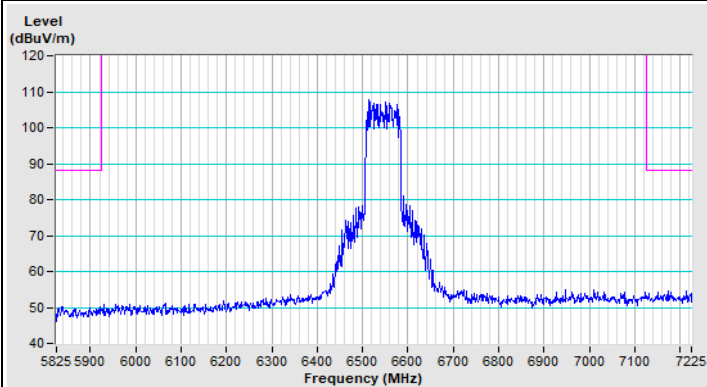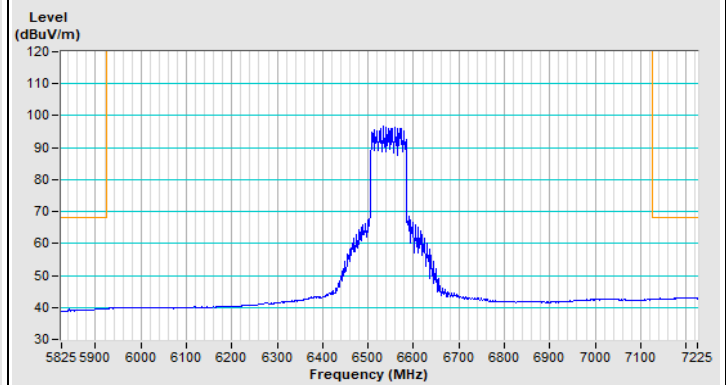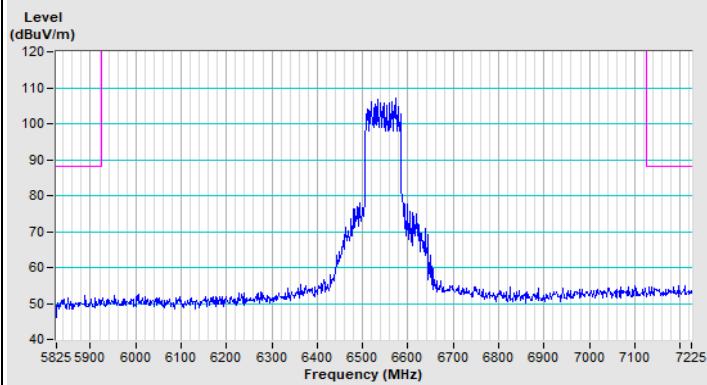





### 802.11ax (HE80) Channel 151

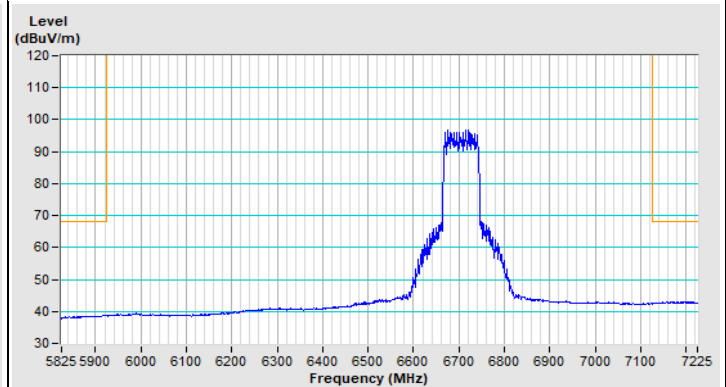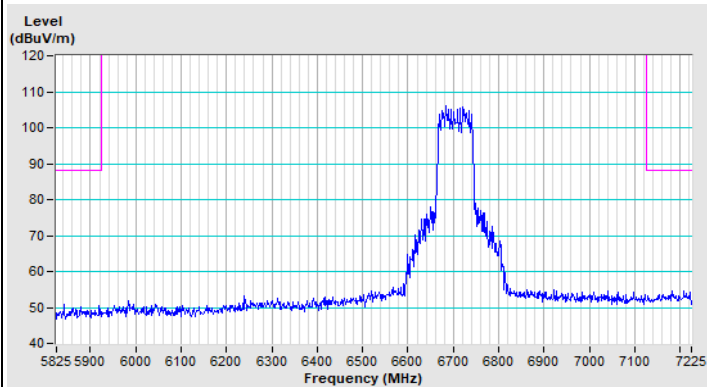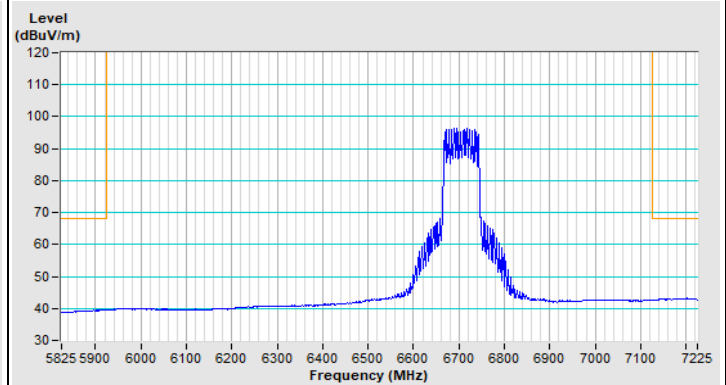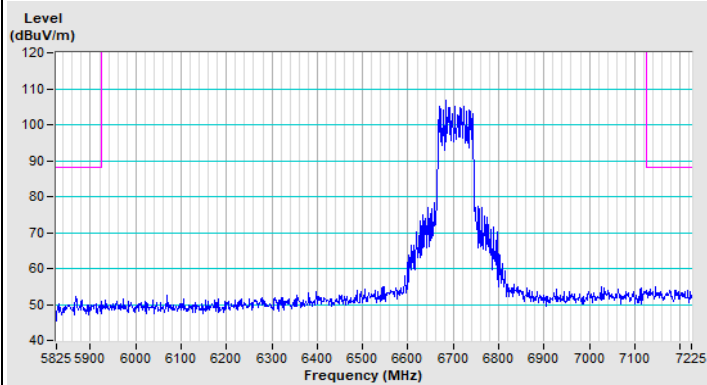


### 802.11ax (HE80) Channel 183

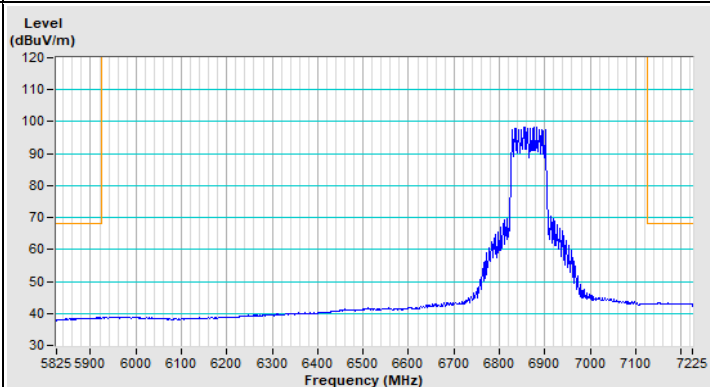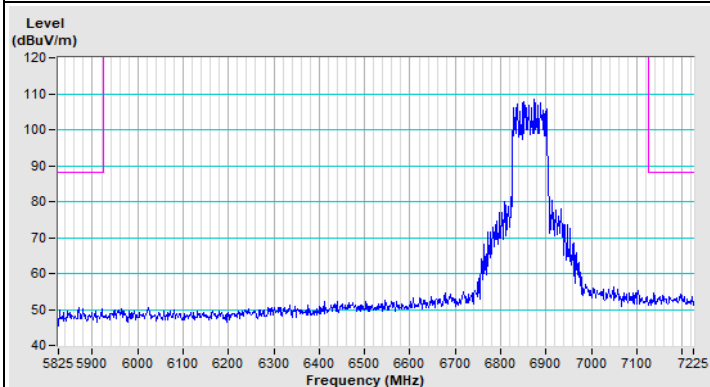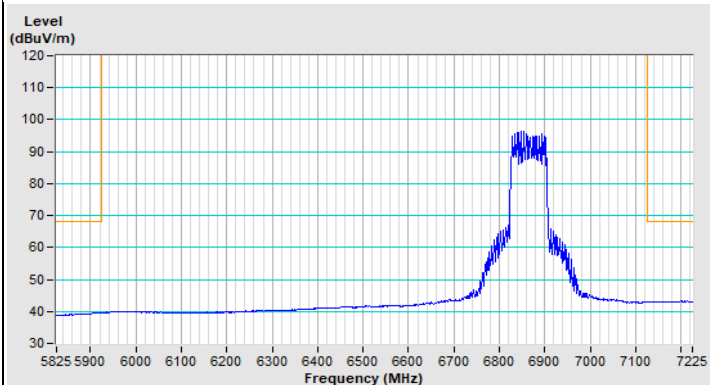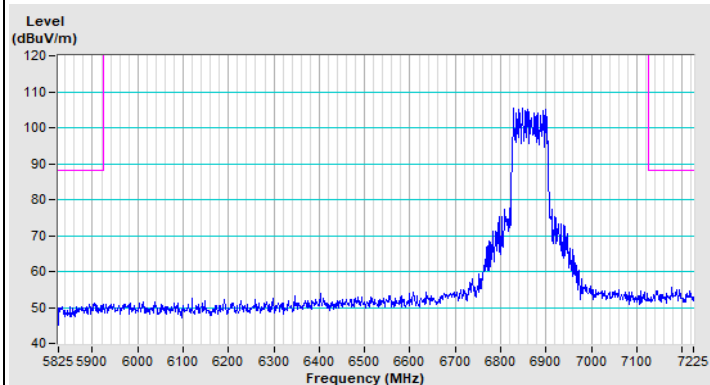


### 802.11ax (HE80) Channel 199

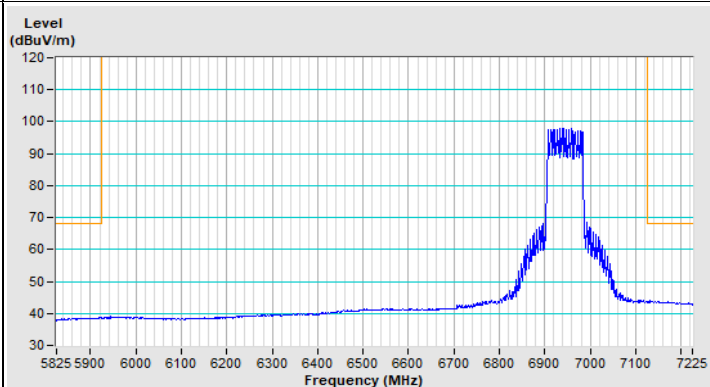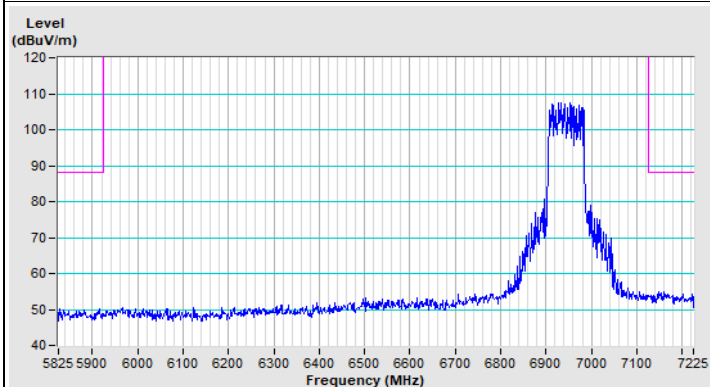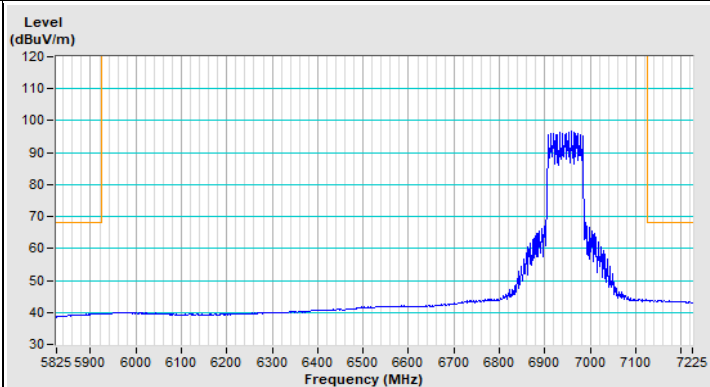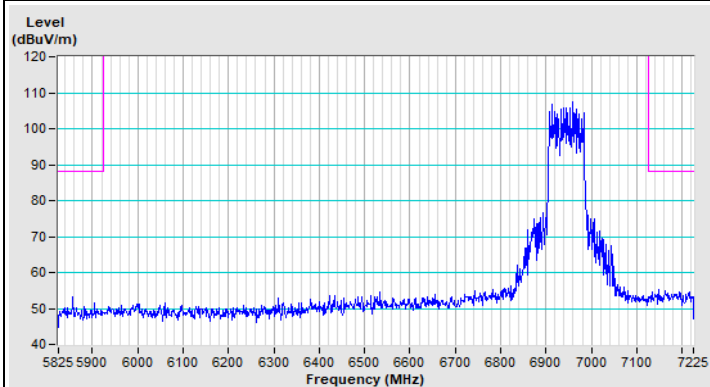


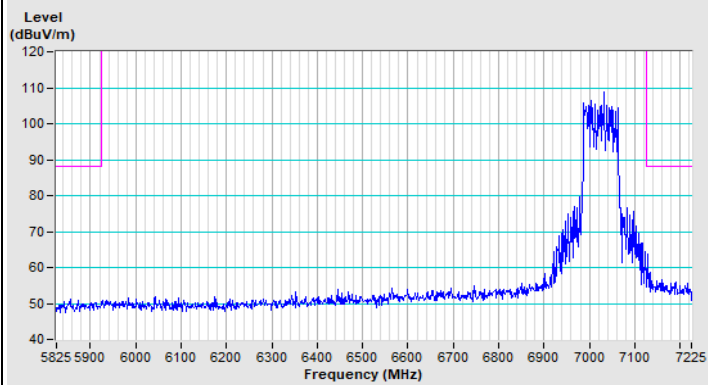**802.11ax (HE80) Channel 215**


Horizontal (Peak)

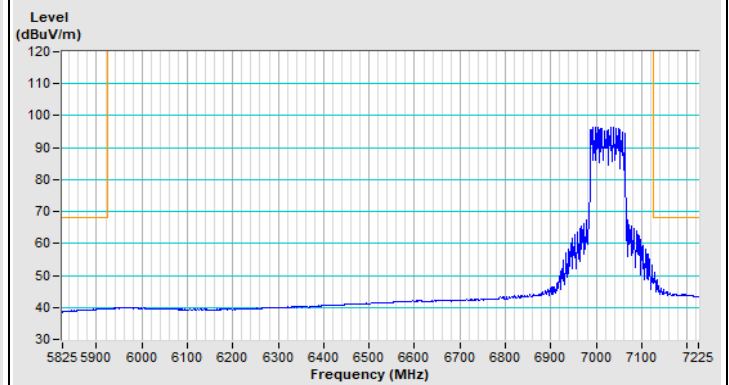

Horizontal (Average)

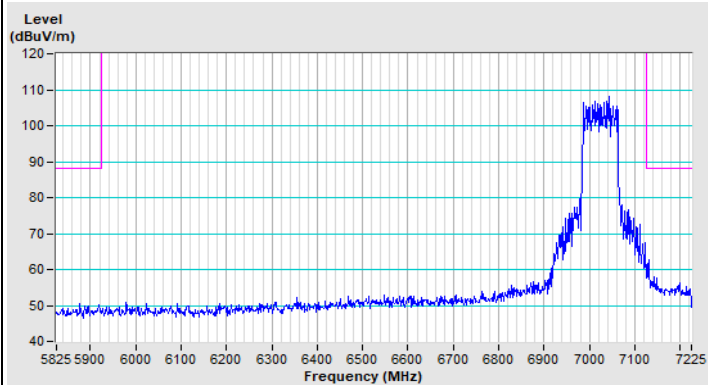


Vertical (Peak)

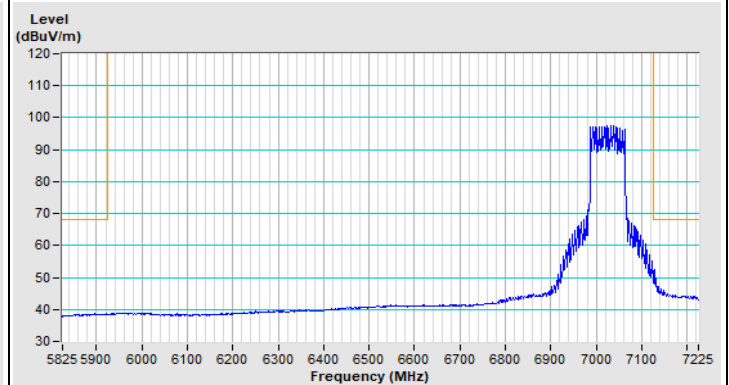


Vertical (Average)


### 802.11ax (HE160) Channel 15

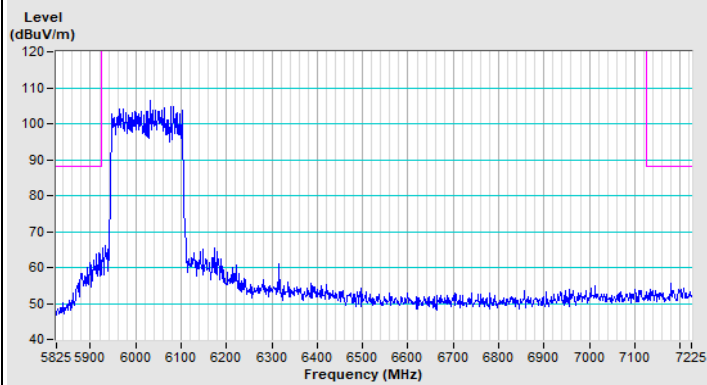


Horizontal (Peak)

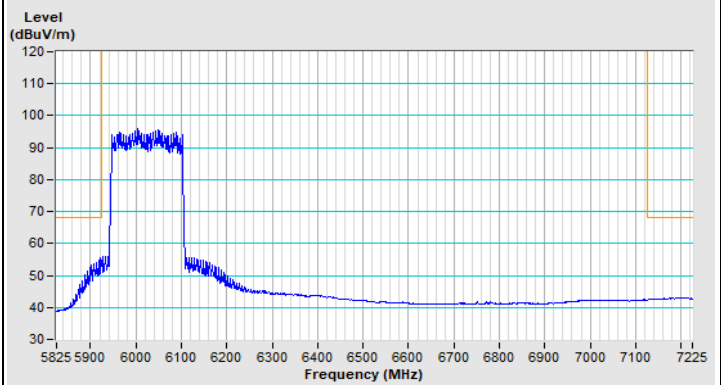

Horizontal (Average)

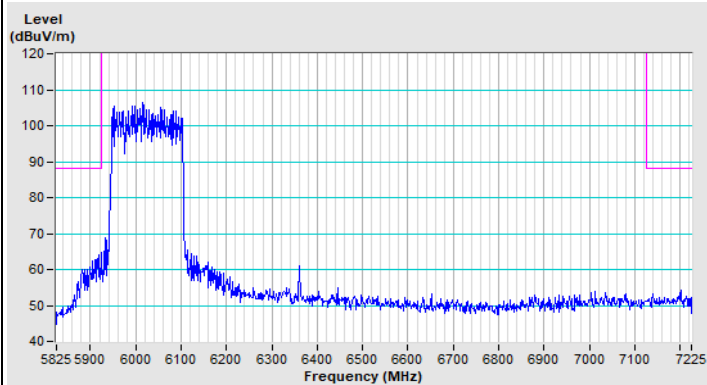


Vertical (Peak)

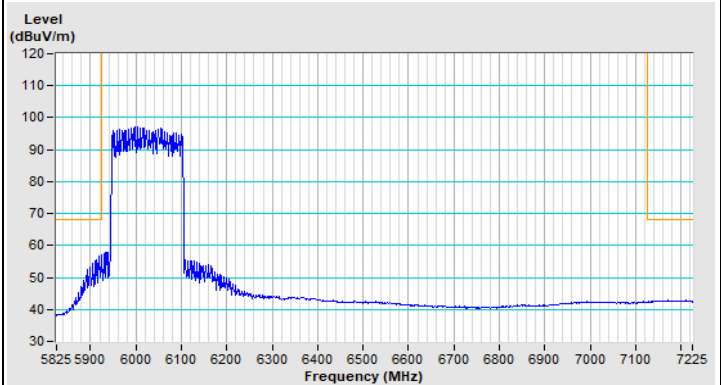


Vertical (Average)


### 802.11ax (HE160) Channel 47

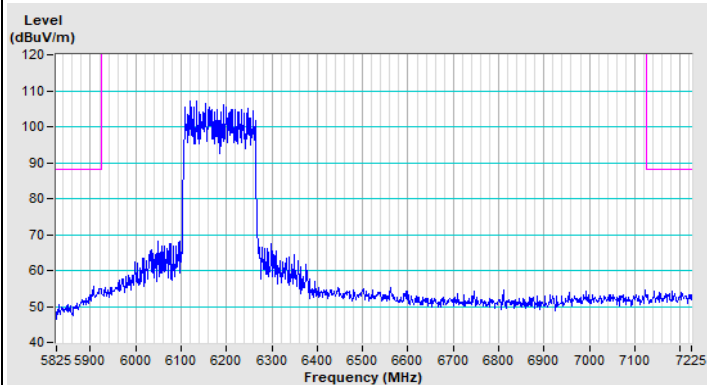


Horizontal (Peak)

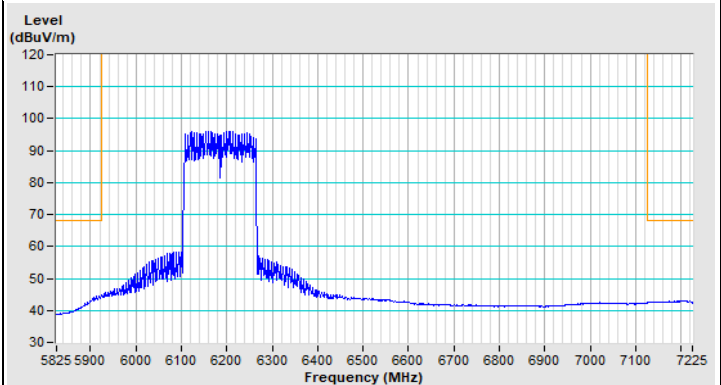

Horizontal (Average)




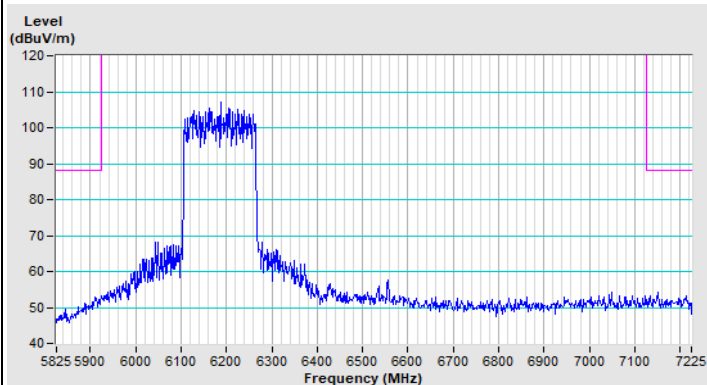


Vertical (Peak)




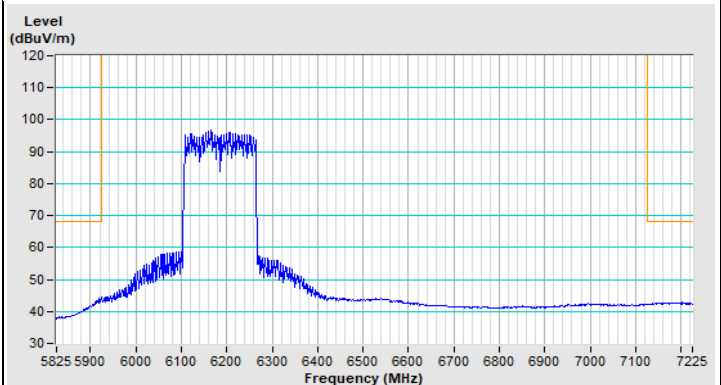


Vertical (Average)


### 802.11ax (HE160) Channel 79

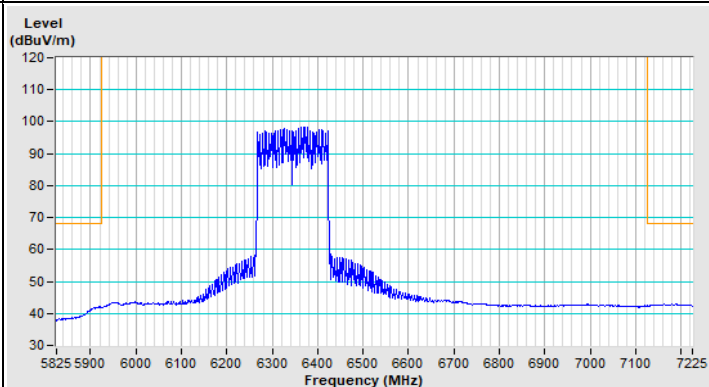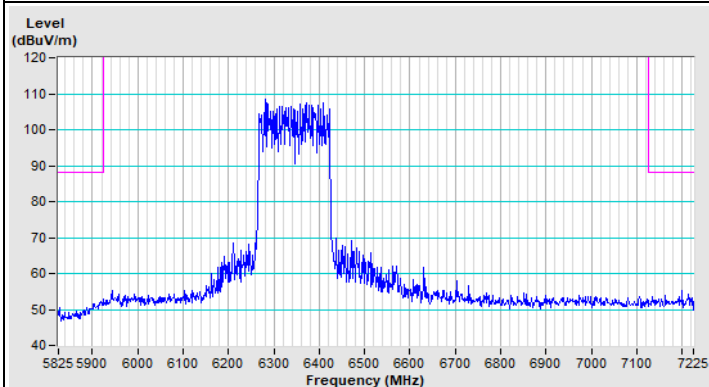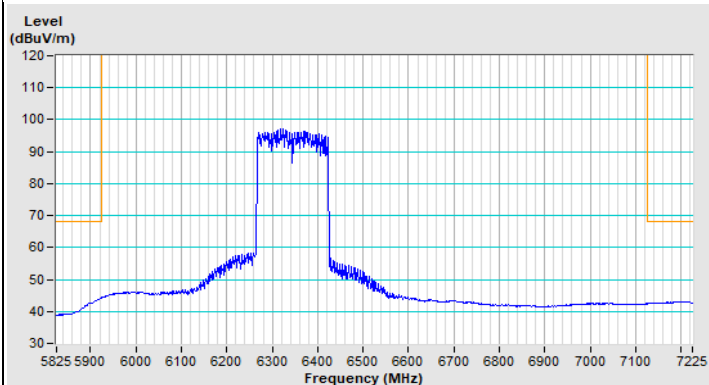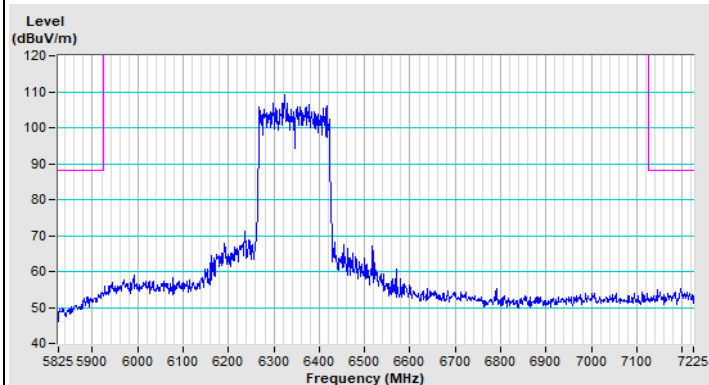


### 802.11ax (HE160) Channel 111

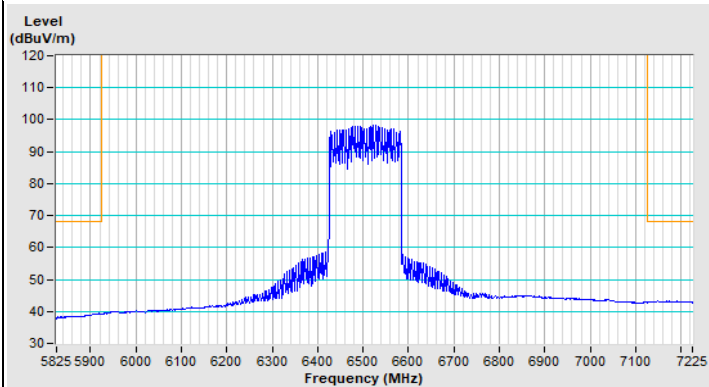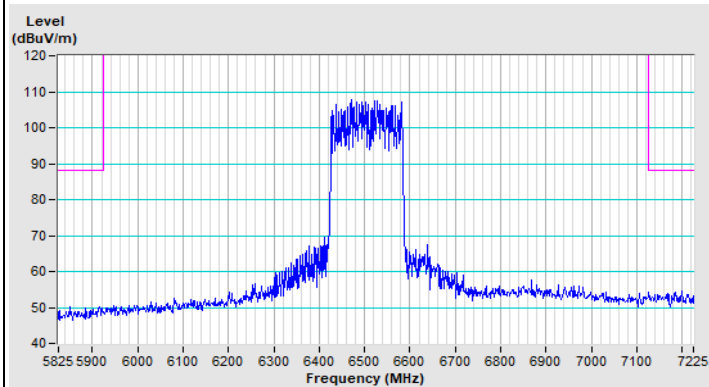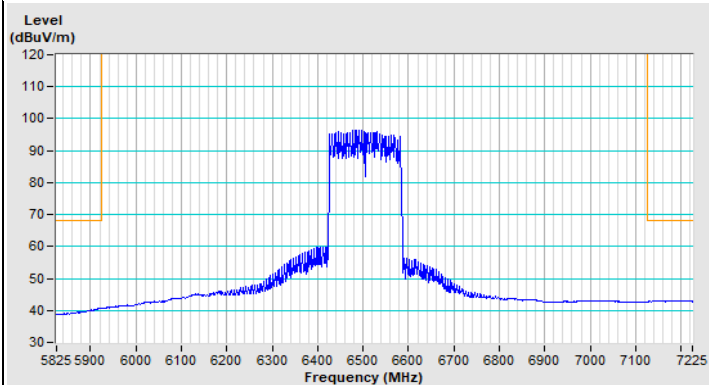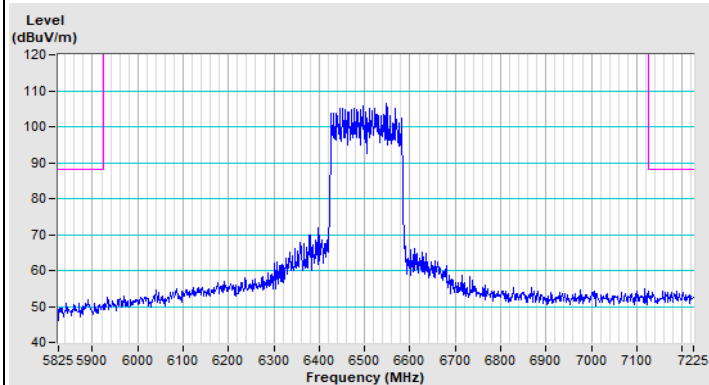


### 802.11ax (HE160) Channel 143

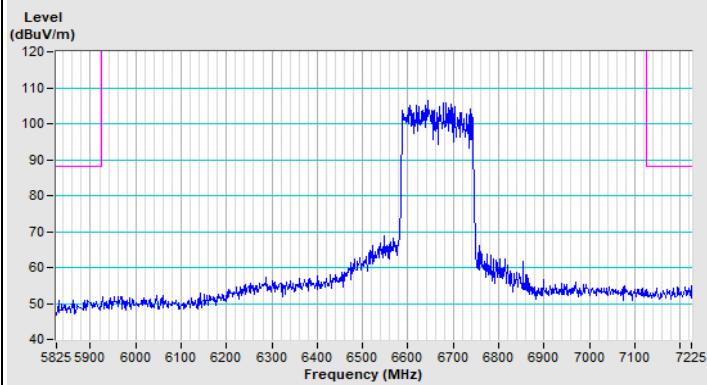


Horizontal (Peak)

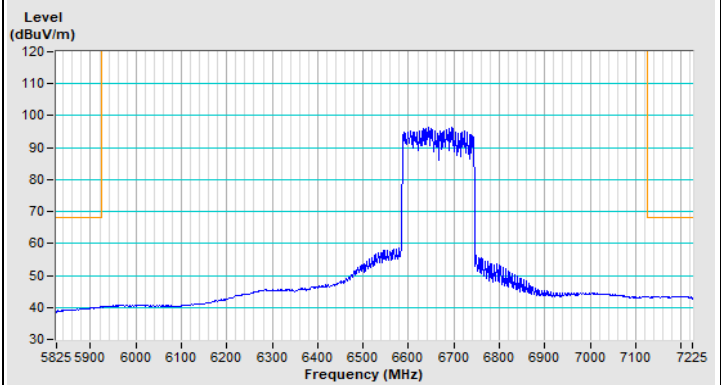

Horizontal (Average)

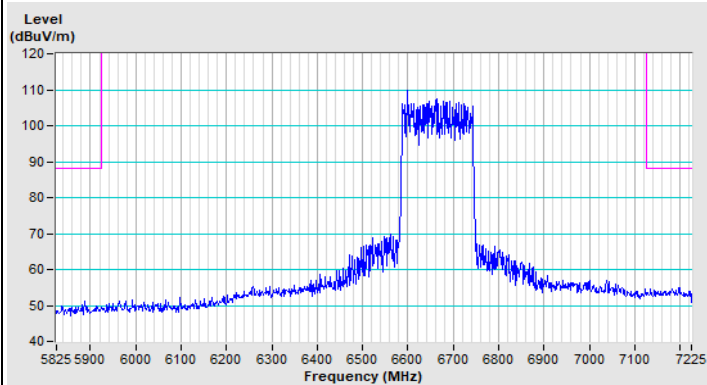


Vertical (Peak)

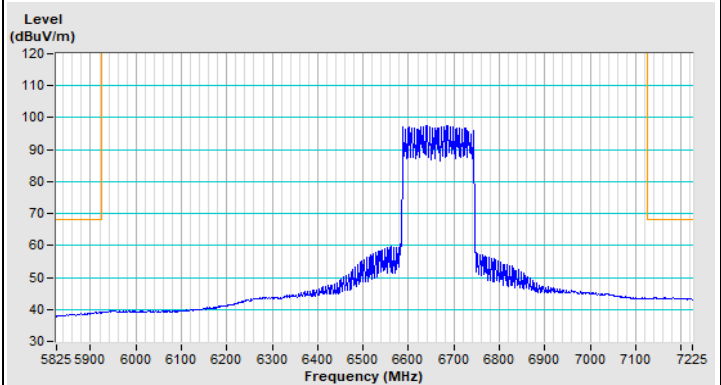


Vertical (Average)


### 802.11ax (HE160) Channel 175

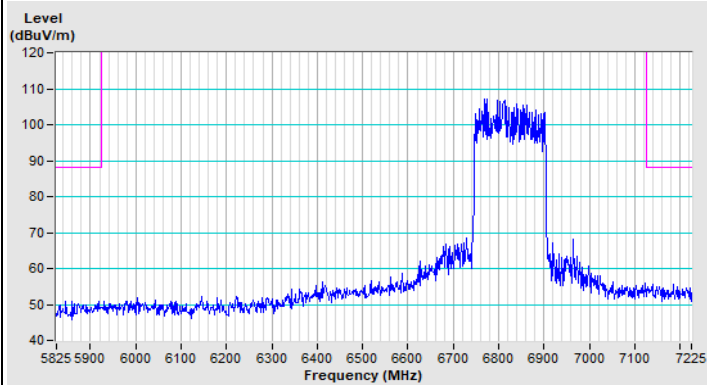


Horizontal (Peak)

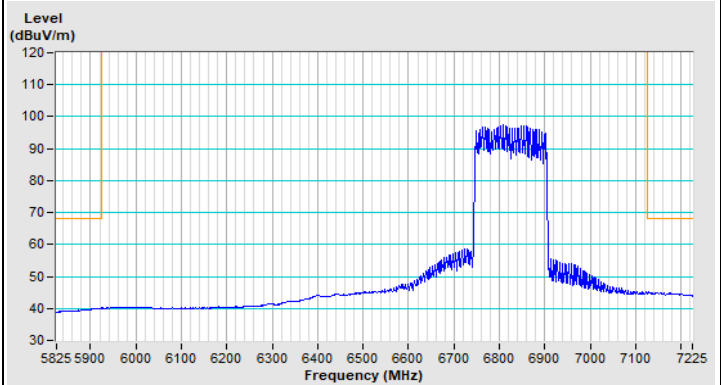


Horizontal (Average)

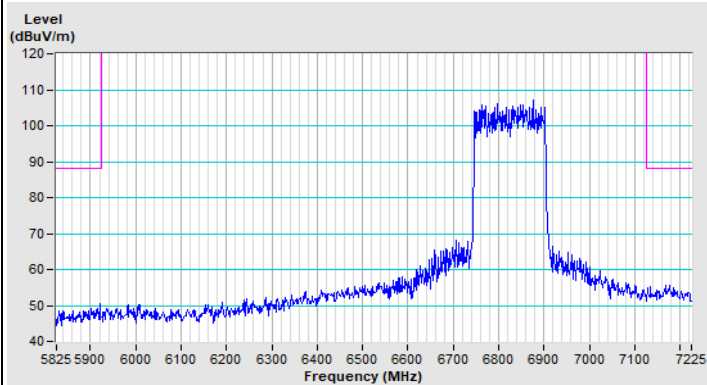


Vertical (Peak)

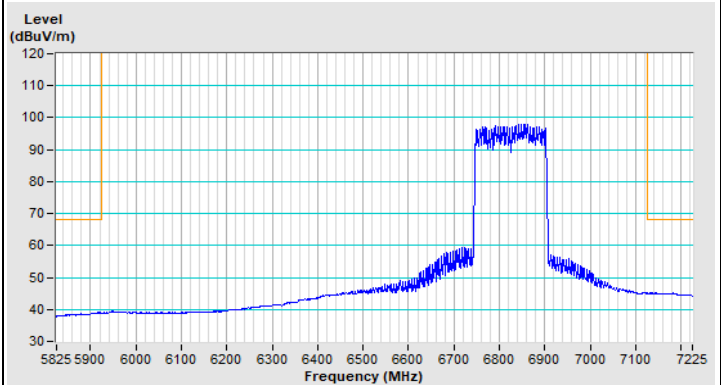


Vertical (Average)

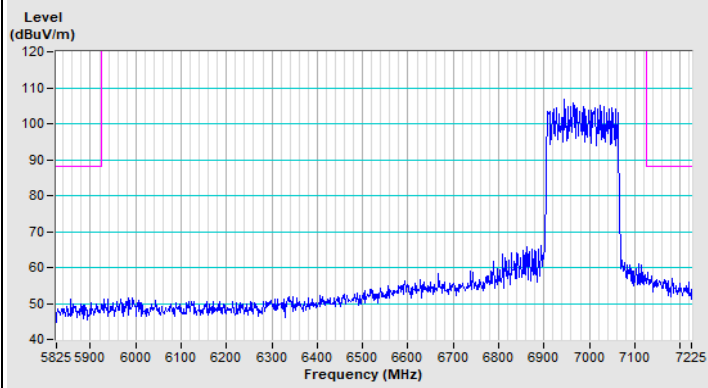**802.11ax (HE160) Channel 207**


Horizontal (Peak)

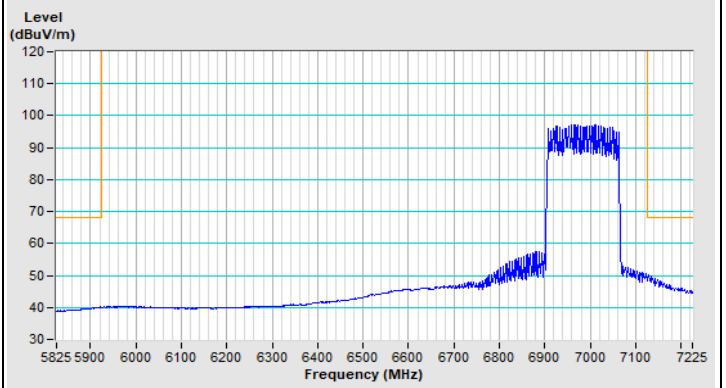

Horizontal (Average)

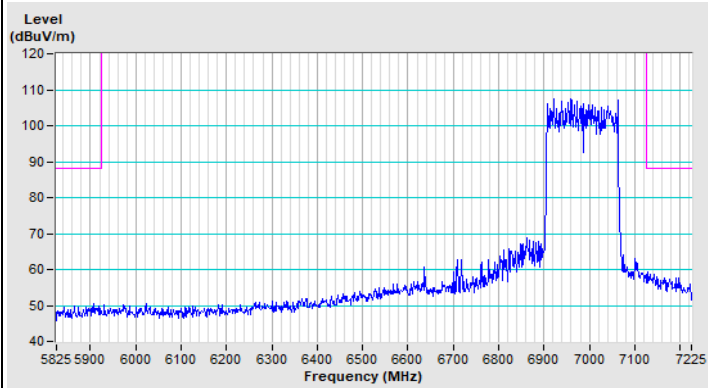

Vertical (Peak)

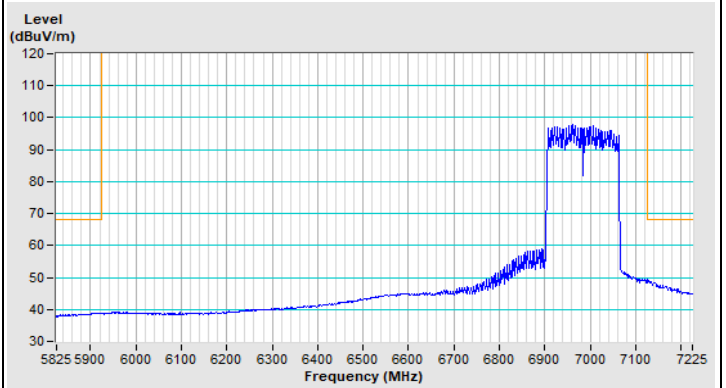

Vertical (Average)

## 8 Operational Restrictions for 6 GHz U-NII Devices

- (1) Operation of indoor access points in the 5.925-7.125 GHz band is prohibited on oil platforms, cars, trains, boats, and aircraft, except that indoor access points are permitted to operate in the 5.925-6.425 GHz bands in large aircraft while flying above 10,000 feet.
- (2) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- (3) Transmitters operating under indoor access points are limited to indoor locations.
- (4) In the 5.925-7.125 GHz band, indoor access points must bear the following statement in a conspicuous location on the device and in the user's manual: FCC regulations restrict operation of this device to indoor use only. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.
- (5) In the 5.925-7.125 GHz band, Access points may connect to other access points or subordinate devices.
- (6) Indoor access points, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Device is a Indoor AP, all restrictions are meet the §15.407 (d) requirements. Please refer to the Attestation letter exhibit supplied within this application.

## 9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---