

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	52.4 PK	74.0	-21.6	3.92 H	328	37.3	15.1
2	11570.00	40.1 AV	54.0	-13.9	3.92 H	328	25.0	15.1
3	#17355.00	57.8 PK	74.0	-16.2	3.86 H	360	37.3	20.5
4	#17355.00	45.3 AV	54.0	-8.7	3.86 H	360	24.8	20.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	53.2 PK	74.0	-20.8	1.89 V	33	38.1	15.1
2	11570.00	40.0 AV	54.0	-14.0	1.89 V	33	24.9	15.1
3	#17355.00	57.7 PK	74.0	-16.3	1.99 V	42	37.2	20.5
4	#17355.00	45.5 AV	54.0	-8.5	1.99 V	42	25.0	20.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	52.6 PK	74.0	-21.4	3.89 H	318	37.6	15.0
2	11650.00	40.2 AV	54.0	-13.8	3.89 H	318	25.2	15.0
3	#17475.00	58.1 PK	74.0	-15.9	3.89 H	360	37.0	21.1
4	#17475.00	45.6 AV	54.0	-8.4	3.89 H	360	24.5	21.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	53.5 PK	74.0	-20.5	1.94 V	41	38.5	15.0
2	11650.00	40.0 AV	54.0	-14.0	1.94 V	41	25.0	15.0
3	#17475.00	57.7 PK	74.0	-16.3	2.01 V	58	36.6	21.1
4	#17475.00	45.2 AV	54.0	-8.8	2.01 V	58	24.1	21.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	51.4 PK	74.0	-22.6	3.88 H	323	37.8	13.6
2	#10360.00	39.2 AV	54.0	-14.8	3.88 H	323	25.6	13.6
3	15540.00	55.9 PK	74.0	-18.1	3.89 H	347	40.2	15.7
4	15540.00	44.1 AV	54.0	-9.9	3.89 H	347	28.4	15.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	52.1 PK	74.0	-21.9	2.03 V	23	38.5	13.6
2	#10360.00	41.0 AV	54.0	-13.0	2.03 V	23	27.4	13.6
3	15540.00	57.3 PK	74.0	-16.7	1.94 V	14	41.6	15.7
4	15540.00	45.1 AV	54.0	-8.9	1.94 V	14	29.4	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	50.9 PK	74.0	-23.1	3.85 H	335	37.3	13.6
2	#10400.00	39.0 AV	54.0	-15.0	3.85 H	335	25.4	13.6
3	15600.00	56.0 PK	74.0	-18.0	3.83 H	360	40.3	15.7
4	15600.00	43.9 AV	54.0	-10.1	3.83 H	360	28.2	15.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	52.9 PK	74.0	-21.1	1.92 V	15	39.3	13.6
2	#10400.00	41.3 AV	54.0	-12.7	1.92 V	15	27.7	13.6
3	15600.00	58.3 PK	74.0	-15.7	1.97 V	27	42.6	15.7
4	15600.00	45.9 AV	54.0	-8.1	1.97 V	27	30.2	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	51.5 PK	74.0	-22.5	3.84 H	327	37.5	14.0
2	#10480.00	39.5 AV	54.0	-14.5	3.84 H	327	25.5	14.0
3	15720.00	56.0 PK	74.0	-18.0	3.79 H	360	40.6	15.4
4	15720.00	44.0 AV	54.0	-10.0	3.79 H	360	28.6	15.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	51.8 PK	74.0	-22.2	2.01 V	22	37.8	14.0
2	#10480.00	40.8 AV	54.0	-13.2	2.01 V	22	26.8	14.0
3	15720.00	57.5 PK	74.0	-16.5	1.95 V	5	42.1	15.4
4	15720.00	45.4 AV	54.0	-8.6	1.95 V	5	30.0	15.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	51.8 PK	74.0	-22.2	3.92 H	340	37.7	14.1
2	#10520.00	39.8 AV	54.0	-14.2	3.92 H	340	25.7	14.1
3	15780.00	55.5 PK	74.0	-18.5	3.84 H	351	40.3	15.2
4	15780.00	43.5 AV	54.0	-10.5	3.84 H	351	28.3	15.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	52.5 PK	74.0	-21.5	1.94 V	13	38.4	14.1
2	#10520.00	41.5 AV	54.0	-12.5	1.94 V	13	27.4	14.1
3	15780.00	58.2 PK	74.0	-15.8	2.00 V	6	43.0	15.2
4	15780.00	45.8 AV	54.0	-8.2	2.00 V	6	30.6	15.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	51.3 PK	74.0	-22.7	3.86 H	316	37.0	14.3
2	10600.00	39.3 AV	54.0	-14.7	3.86 H	316	25.0	14.3
3	15900.00	55.6 PK	74.0	-18.4	3.89 H	360	40.5	15.1
4	15900.00	43.4 AV	54.0	-10.6	3.89 H	360	28.3	15.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	52.7 PK	74.0	-21.3	1.95 V	21	38.4	14.3
2	10600.00	41.8 AV	54.0	-12.2	1.95 V	21	27.5	14.3
3	15900.00	58.6 PK	74.0	-15.4	1.96 V	9	43.5	15.1
4	15900.00	46.2 AV	54.0	-7.8	1.96 V	9	31.1	15.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	51.5 PK	74.0	-22.5	3.91 H	323	37.2	14.3
2	10640.00	39.7 AV	54.0	-14.3	3.91 H	323	25.4	14.3
3	15960.00	55.1 PK	74.0	-18.9	3.85 H	360	40.0	15.1
4	15960.00	43.0 AV	54.0	-11.0	3.85 H	360	27.9	15.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	52.3 PK	74.0	-21.7	2.04 V	4	38.0	14.3
2	10640.00	40.9 AV	54.0	-13.1	2.04 V	4	26.6	14.3
3	15960.00	58.1 PK	74.0	-15.9	1.95 V	1	43.0	15.1
4	15960.00	45.9 AV	54.0	-8.1	1.95 V	1	30.8	15.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	52.4 PK	74.0	-21.6	3.94 H	330	37.2	15.2
2	11000.00	40.3 AV	54.0	-13.7	3.94 H	330	25.1	15.2
3	#16500.00	57.9 PK	74.0	-16.1	3.83 H	360	40.5	17.4
4	#16500.00	45.5 AV	54.0	-8.5	3.83 H	360	28.1	17.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	53.2 PK	74.0	-20.8	1.94 V	33	38.0	15.2
2	11000.00	40.1 AV	54.0	-13.9	1.94 V	33	24.9	15.2
3	#16500.00	58.4 PK	74.0	-15.6	2.02 V	57	41.0	17.4
4	#16500.00	46.0 AV	54.0	-8.0	2.02 V	57	28.6	17.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	52.1 PK	74.0	-21.9	3.97 H	330	36.9	15.2
2	11160.00	40.0 AV	54.0	-14.0	3.97 H	330	24.8	15.2
3	#16740.00	57.6 PK	74.0	-16.4	3.84 H	360	39.3	18.3
4	#16740.00	45.3 AV	54.0	-8.7	3.84 H	360	27.0	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	53.9 PK	74.0	-20.1	1.93 V	34	38.7	15.2
2	11160.00	40.5 AV	54.0	-13.5	1.93 V	34	25.3	15.2
3	#16740.00	58.1 PK	74.0	-15.9	1.96 V	36	39.8	18.3
4	#16740.00	45.6 AV	54.0	-8.4	1.96 V	36	27.3	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	52.8 PK	74.0	-21.2	3.93 H	338	37.3	15.5
2	11400.00	40.3 AV	54.0	-13.7	3.93 H	338	24.8	15.5
3	#17100.00	57.8 PK	74.0	-16.2	3.88 H	359	37.7	20.1
4	#17100.00	45.3 AV	54.0	-8.7	3.88 H	359	25.2	20.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	52.9 PK	74.0	-21.1	1.94 V	26	37.4	15.5
2	11400.00	39.9 AV	54.0	-14.1	1.94 V	26	24.4	15.5
3	#17100.00	57.2 PK	74.0	-16.8	1.95 V	44	37.1	20.1
4	#17100.00	45.2 AV	54.0	-8.8	1.95 V	44	25.1	20.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	52.2 PK	74.0	-21.8	3.93 H	321	37.0	15.2
2	11490.00	40.0 AV	54.0	-14.0	3.93 H	321	24.8	15.2
3	#17235.00	58.0 PK	74.0	-16.0	3.81 H	360	38.0	20.0
4	#17235.00	45.4 AV	54.0	-8.6	3.81 H	360	25.4	20.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	53.4 PK	74.0	-20.6	1.86 V	43	38.2	15.2
2	11490.00	40.2 AV	54.0	-13.8	1.86 V	43	25.0	15.2
3	#17235.00	57.7 PK	74.0	-16.3	1.97 V	57	37.7	20.0
4	#17235.00	45.7 AV	54.0	-8.3	1.97 V	57	25.7	20.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	51.9 PK	74.0	-22.1	3.95 H	333	36.8	15.1
2	11570.00	39.9 AV	54.0	-14.1	3.95 H	333	24.8	15.1
3	#17355.00	57.4 PK	74.0	-16.6	3.88 H	360	36.9	20.5
4	#17355.00	44.9 AV	54.0	-9.1	3.88 H	360	24.4	20.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	52.7 PK	74.0	-21.3	1.89 V	17	37.6	15.1
2	11570.00	39.8 AV	54.0	-14.2	1.89 V	17	24.7	15.1
3	#17355.00	58.3 PK	74.0	-15.7	1.99 V	34	37.8	20.5
4	#17355.00	46.0 AV	54.0	-8.0	1.99 V	34	25.5	20.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	51.9 PK	74.0	-22.1	3.89 H	319	36.9	15.0
2	11650.00	39.7 AV	54.0	-14.3	3.89 H	319	24.7	15.0
3	#17475.00	58.3 PK	74.0	-15.7	3.84 H	360	37.2	21.1
4	#17475.00	45.5 AV	54.0	-8.5	3.84 H	360	24.4	21.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11650.00	53.5 PK	74.0	-20.5	1.93 V	35	38.5	15.0
2	11650.00	40.5 AV	54.0	-13.5	1.93 V	35	25.5	15.0
3	#17475.00	57.7 PK	74.0	-16.3	2.04 V	29	36.6	21.1
4	#17475.00	45.4 AV	54.0	-8.6	2.04 V	29	24.3	21.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	51.1 PK	74.0	-22.9	3.96 H	337	37.4	13.7
2	#10380.00	39.5 AV	54.0	-14.5	3.96 H	337	25.8	13.7
3	15570.00	55.7 PK	74.0	-18.3	3.90 H	360	40.1	15.6
4	15570.00	43.4 AV	54.0	-10.6	3.90 H	360	27.8	15.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10380.00	52.1 PK	74.0	-21.9	2.02 V	7	38.4	13.7
2	#10380.00	40.9 AV	54.0	-13.1	2.02 V	7	27.2	13.7
3	15570.00	58.3 PK	74.0	-15.7	1.85 V	13	42.7	15.6
4	15570.00	46.2 AV	54.0	-7.8	1.85 V	13	30.6	15.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	51.9 PK	74.0	-22.1	3.97 H	337	38.0	13.9
2	#10460.00	39.8 AV	54.0	-14.2	3.97 H	337	25.9	13.9
3	15690.00	54.8 PK	74.0	-19.2	3.90 H	360	39.2	15.6
4	15690.00	42.8 AV	54.0	-11.2	3.90 H	360	27.2	15.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10460.00	52.4 PK	74.0	-21.6	1.99 V	6	38.5	13.9
2	#10460.00	41.2 AV	54.0	-12.8	1.99 V	6	27.3	13.9
3	15690.00	57.8 PK	74.0	-16.2	1.90 V	13	42.2	15.6
4	15690.00	45.8 AV	54.0	-8.2	1.90 V	13	30.2	15.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	52.1 PK	74.0	-21.9	3.88 H	309	37.9	14.2
2	#10540.00	40.1 AV	54.0	-13.9	3.88 H	309	25.9	14.2
3	15810.00	55.4 PK	74.0	-18.6	3.90 H	349	40.4	15.0
4	15810.00	43.3 AV	54.0	-10.7	3.90 H	349	28.3	15.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10540.00	52.4 PK	74.0	-21.6	2.01 V	3	38.2	14.2
2	#10540.00	41.1 AV	54.0	-12.9	2.01 V	3	26.9	14.2
3	15810.00	57.8 PK	74.0	-16.2	2.01 V	11	42.8	15.0
4	15810.00	45.5 AV	54.0	-8.5	2.01 V	11	30.5	15.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	51.9 PK	74.0	-22.1	3.91 H	325	37.6	14.3
2	10620.00	39.9 AV	54.0	-14.1	3.91 H	325	25.6	14.3
3	15930.00	55.1 PK	74.0	-18.9	3.82 H	350	40.0	15.1
4	15930.00	43.0 AV	54.0	-11.0	3.82 H	350	27.9	15.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10620.00	51.9 PK	74.0	-22.1	1.94 V	20	37.6	14.3
2	10620.00	40.8 AV	54.0	-13.2	1.94 V	20	26.5	14.3
3	15930.00	57.4 PK	74.0	-16.6	1.93 V	15	42.3	15.1
4	15930.00	45.5 AV	54.0	-8.5	1.93 V	15	30.4	15.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	51.6 PK	74.0	-22.4	3.83 H	311	36.5	15.1
2	11020.00	39.5 AV	54.0	-14.5	3.83 H	311	24.4	15.1
3	#16530.00	58.2 PK	74.0	-15.8	3.84 H	360	40.7	17.5
4	#16530.00	45.3 AV	54.0	-8.7	3.84 H	360	27.8	17.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11020.00	53.1 PK	74.0	-20.9	1.84 V	22	38.0	15.1
2	11020.00	40.0 AV	54.0	-14.0	1.84 V	22	24.9	15.1
3	#16530.00	58.3 PK	74.0	-15.7	2.04 V	54	40.8	17.5
4	#16530.00	46.0 AV	54.0	-8.0	2.04 V	54	28.5	17.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11100.00	52.0 PK	74.0	-22.0	3.84 H	331	36.9	15.1
2	11100.00	40.0 AV	54.0	-14.0	3.84 H	331	24.9	15.1
3	#16650.00	58.1 PK	74.0	-15.9	3.79 H	360	40.1	18.0
4	#16650.00	45.6 AV	54.0	-8.4	3.79 H	360	27.6	18.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11100.00	53.0 PK	74.0	-21.0	1.85 V	26	37.9	15.1
2	11100.00	40.0 AV	54.0	-14.0	1.85 V	26	24.9	15.1
3	#16650.00	57.2 PK	74.0	-16.8	1.99 V	37	39.2	18.0
4	#16650.00	45.1 AV	54.0	-8.9	1.99 V	37	27.1	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	51.9 PK	74.0	-22.1	3.83 H	327	36.6	15.3
2	11340.00	40.0 AV	54.0	-14.0	3.83 H	327	24.7	15.3
3	#17010.00	58.8 PK	74.0	-15.2	3.85 H	360	38.9	19.9
4	#17010.00	45.8 AV	54.0	-8.2	3.85 H	360	25.9	19.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11340.00	53.5 PK	74.0	-20.5	1.87 V	42	38.2	15.3
2	11340.00	40.4 AV	54.0	-13.6	1.87 V	42	25.1	15.3
3	#17010.00	58.0 PK	74.0	-16.0	1.99 V	57	38.1	19.9
4	#17010.00	46.0 AV	54.0	-8.0	1.99 V	57	26.1	19.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	51.9 PK	74.0	-22.1	3.89 H	334	36.8	15.1
2	11510.00	39.7 AV	54.0	-14.3	3.89 H	334	24.6	15.1
3	#17265.00	57.6 PK	74.0	-16.4	3.83 H	355	37.7	19.9
4	#17265.00	45.0 AV	54.0	-9.0	3.83 H	355	25.1	19.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11510.00	52.8 PK	74.0	-21.2	1.92 V	44	37.7	15.1
2	11510.00	39.9 AV	54.0	-14.1	1.92 V	44	24.8	15.1
3	#17265.00	57.6 PK	74.0	-16.4	1.93 V	31	37.7	19.9
4	#17265.00	45.6 AV	54.0	-8.4	1.93 V	31	25.7	19.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	51.7 PK	74.0	-22.3	3.87 H	348	36.6	15.1
2	11590.00	39.6 AV	54.0	-14.4	3.87 H	348	24.5	15.1
3	#17385.00	57.8 PK	74.0	-16.2	3.88 H	344	37.2	20.6
4	#17385.00	45.0 AV	54.0	-9.0	3.88 H	344	24.4	20.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11590.00	54.0 PK	74.0	-20.0	1.89 V	41	38.9	15.1
2	11590.00	40.5 AV	54.0	-13.5	1.89 V	41	25.4	15.1
3	#17385.00	57.4 PK	74.0	-16.6	1.99 V	47	36.8	20.6
4	#17385.00	45.5 AV	54.0	-8.5	1.99 V	47	24.9	20.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

4.1.9 Test Results (Mode 2, Bandedge)

Above 1GHz Data:


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	1.07 H	180	69.3	3.0
2	5150.00	49.5 AV	54.0	-4.5	1.07 H	180	46.5	3.0
3	*5180.00	109.5 PK			1.07 H	180	106.4	3.1
4	*5180.00	98.4 AV			1.07 H	180	95.3	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

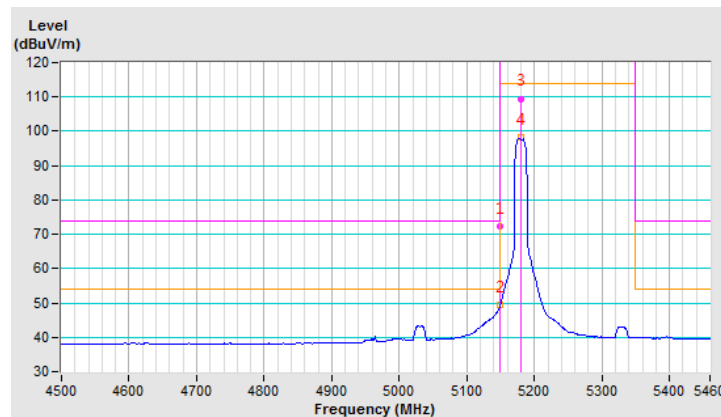


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	2.82 V	269	59.2	3.0
2	5150.00	43.7 AV	54.0	-10.3	2.82 V	269	40.7	3.0
3	*5180.00	104.9 PK			2.82 V	269	101.8	3.1
4	*5180.00	93.7 AV			2.82 V	269	90.6	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

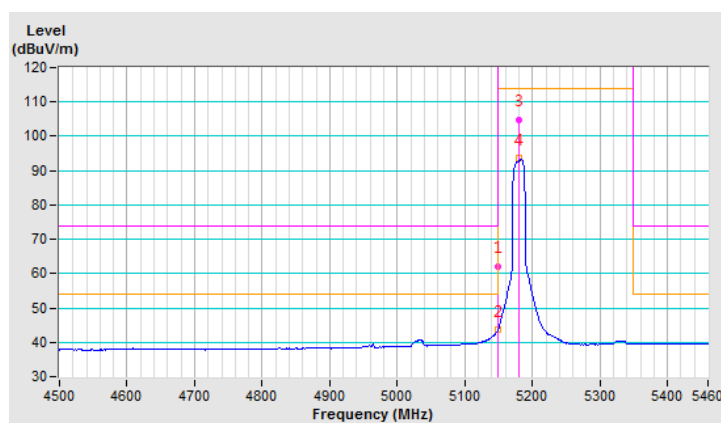


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	1.07 H	180	65.5	3.0
2	5150.00	52.6 AV	54.0	-1.4	1.07 H	180	49.6	3.0
3	*5200.00	110.9 PK			1.07 H	180	107.8	3.1
4	*5200.00	100.2 AV			1.07 H	180	97.1	3.1
5	5350.00	55.1 PK	74.0	-18.9	1.07 H	180	51.6	3.5
6	5350.00	44.0 AV	54.0	-10.0	1.07 H	180	40.5	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

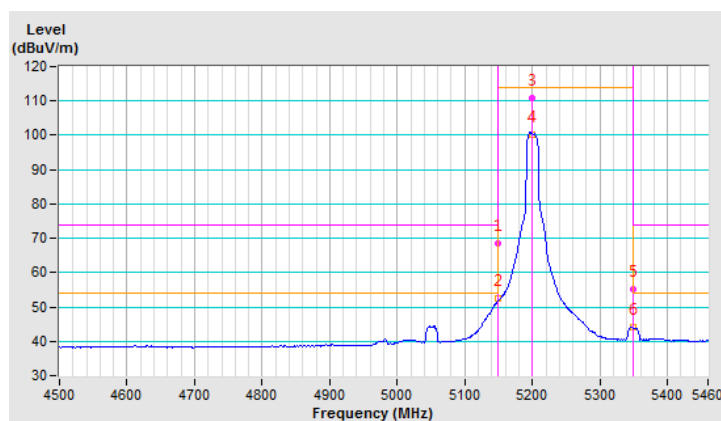


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	2.82 V	268	56.3	3.0
2	5150.00	43.7 AV	54.0	-10.3	2.82 V	268	40.7	3.0
3	*5200.00	105.7 PK			2.82 V	268	102.6	3.1
4	*5200.00	95.0 AV			2.82 V	268	91.9	3.1
5	5350.00	52.8 PK	74.0	-21.2	2.82 V	268	49.3	3.5
6	5350.00	40.5 AV	54.0	-13.5	2.82 V	268	37.0	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

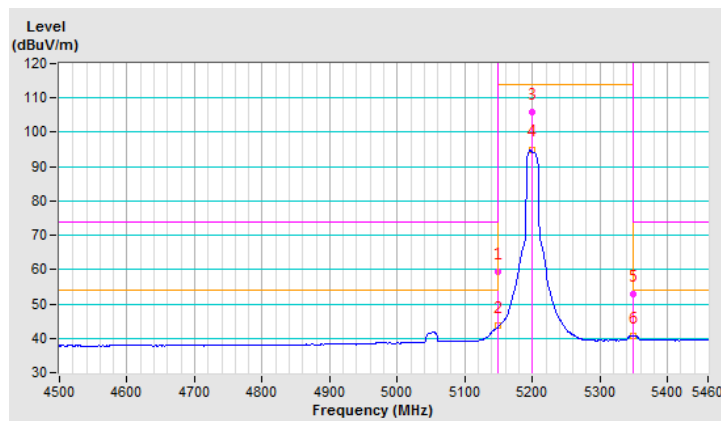


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5094.00	55.9 PK	74.0	-18.1	1.05 H	187	53.1	2.8
2	5094.00	44.2 AV	54.0	-9.8	1.05 H	187	41.4	2.8
3	*5240.00	111.6 PK			1.05 H	187	108.4	3.2
4	*5240.00	101.0 AV			1.05 H	187	97.8	3.2
5	5385.00	55.0 PK	74.0	-19.0	1.05 H	187	51.3	3.7
6	5385.00	42.8 AV	54.0	-11.2	1.05 H	187	39.1	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

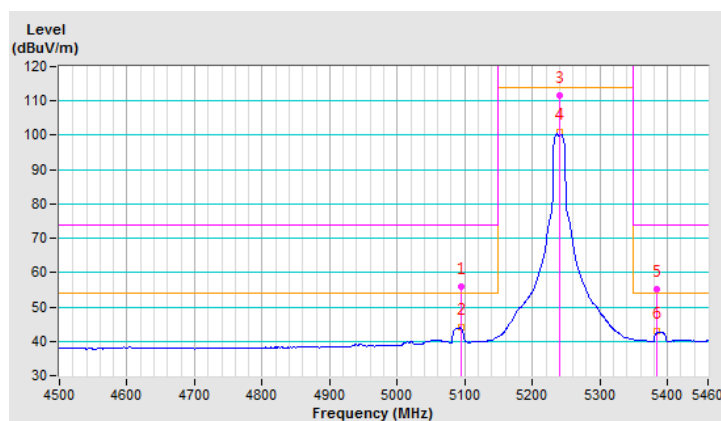


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5094.00	53.3 PK	74.0	-20.7	2.94 V	268	50.5	2.8
2	5094.00	41.8 AV	54.0	-12.2	2.94 V	268	39.0	2.8
3	*5240.00	107.2 PK			2.94 V	268	104.0	3.2
4	*5240.00	96.4 AV			2.94 V	268	93.2	3.2
5	5385.00	53.1 PK	74.0	-20.9	2.94 V	268	49.4	3.7
6	5385.00	40.1 AV	54.0	-13.9	2.94 V	268	36.4	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

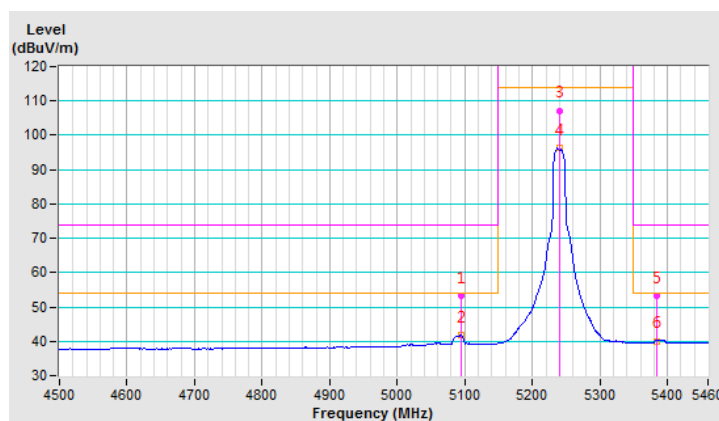


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5107.00	55.5 PK	74.0	-18.5	1.00 H	183	52.7	2.8
2	5107.00	43.8 AV	54.0	-10.2	1.00 H	183	41.0	2.8
3	*5260.00	111.0 PK			1.00 H	183	107.7	3.3
4	*5260.00	100.5 AV			1.00 H	183	97.2	3.3
5	5410.00	55.6 PK	74.0	-18.4	1.00 H	183	51.9	3.7
6	5410.00	42.4 AV	54.0	-11.6	1.00 H	183	38.7	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

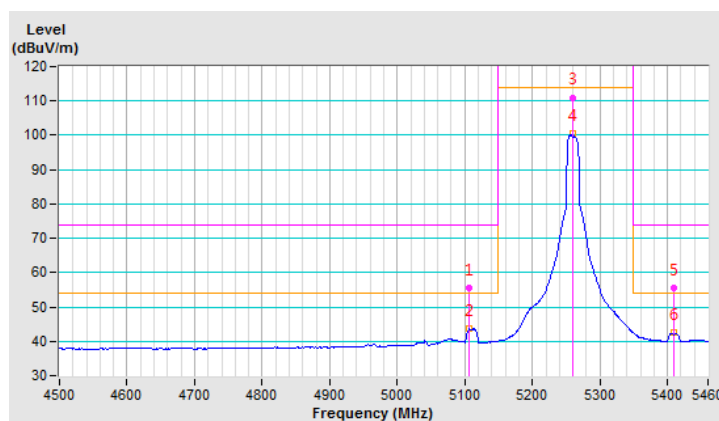


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5107.00	53.6 PK	74.0	-20.4	2.92 V	267	50.8	2.8
2	5107.00	41.7 AV	54.0	-12.3	2.92 V	267	38.9	2.8
3	*5260.00	107.0 PK			2.92 V	267	103.7	3.3
4	*5260.00	96.0 AV			2.92 V	267	92.7	3.3
5	5410.00	53.3 PK	74.0	-20.7	2.92 V	267	49.6	3.7
6	5410.00	41.8 AV	54.0	-12.2	2.92 V	267	38.1	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

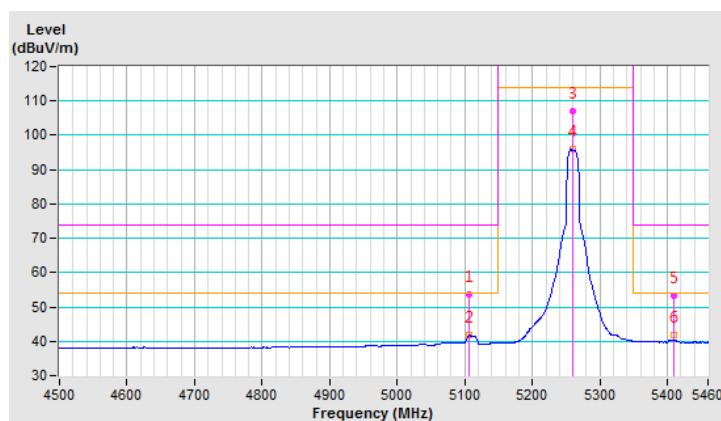


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	110.8 PK			1.00 H	186	107.5	3.3
2	*5300.00	100.2 AV			1.00 H	186	96.9	3.3
3	5350.00	68.9 PK	74.0	-5.1	1.00 H	186	65.4	3.5
4	5350.00	52.5 AV	54.0	-1.5	1.00 H	186	49.0	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

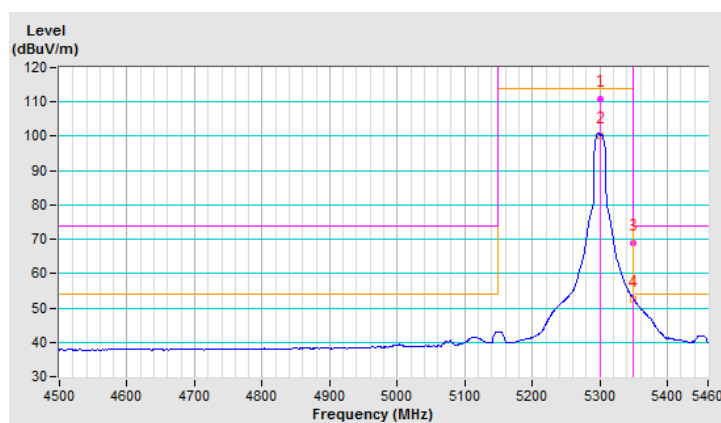


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	105.2 PK			2.75 V	268	101.9	3.3
2	*5300.00	94.2 AV			2.75 V	268	90.9	3.3
3	5350.00	56.8 PK	74.0	-17.2	2.75 V	268	53.3	3.5
4	5350.00	41.3 AV	54.0	-12.7	2.75 V	268	37.8	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

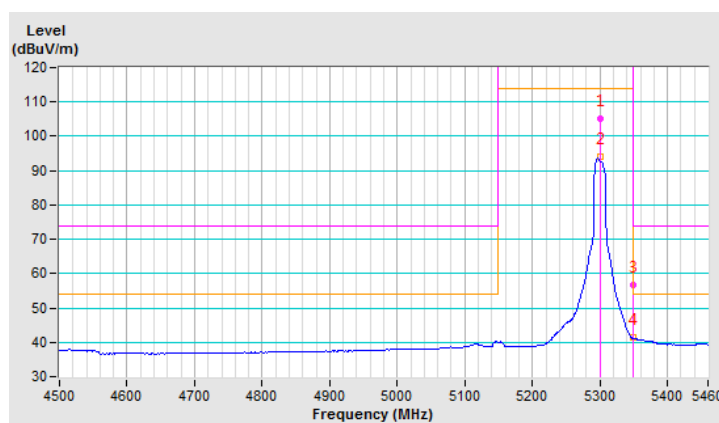


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	108.6 PK			1.00 H	179	105.1	3.5
2	*5320.00	97.8 AV			1.00 H	179	94.3	3.5
3	5350.00	72.0 PK	74.0	-2.0	1.00 H	179	68.5	3.5
4	5350.00	52.6 AV	54.0	-1.4	1.00 H	179	49.1	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

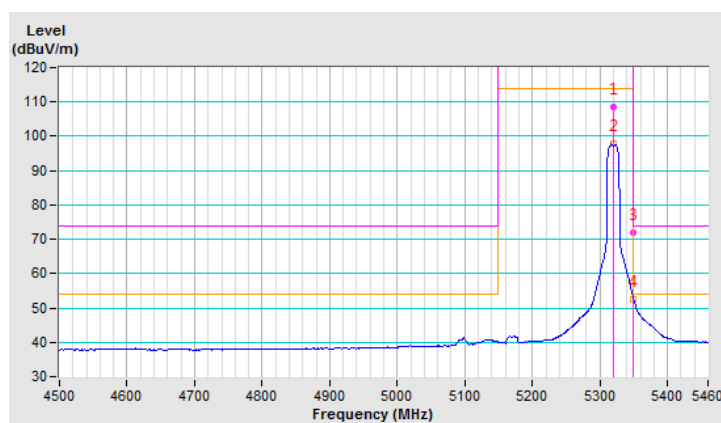


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	99.8 PK			2.75 V	0	96.3	3.5
2	*5320.00	89.6 AV			2.75 V	0	86.1	3.5
3	5350.00	58.8 PK	74.0	-15.2	2.75 V	275	55.3	3.5
4	5350.00	41.5 AV	54.0	-12.5	2.75 V	275	38.0	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

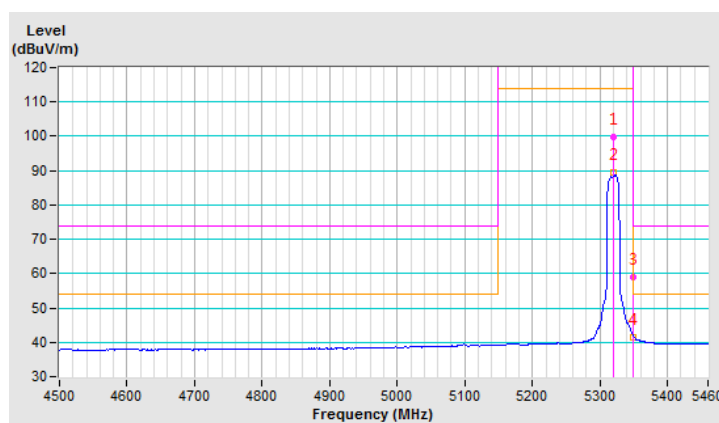


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	63.8 PK	74.0	-10.2	2.75 V	278	60.1	3.7
2	#5470.00	45.9 AV	54.0	-8.1	2.75 V	278	42.2	3.7
3	*5500.00	99.4 PK			2.75 V	278	95.6	3.8
4	*5500.00	88.9 AV			2.75 V	278	85.1	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

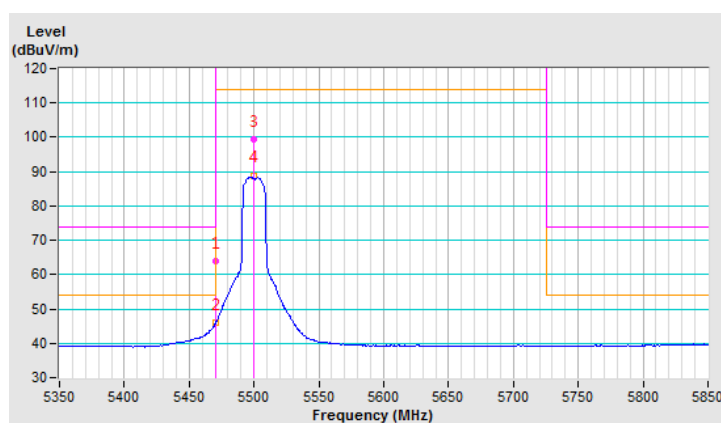


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5352.00	53.8 PK	74.0	-20.2	1.00 H	184	50.3	3.5
2	5352.00	42.9 AV	54.0	-11.1	1.00 H	184	39.4	3.5
3	*5580.00	108.8 PK			1.00 H	184	104.9	3.9
4	*5580.00	98.5 AV			1.00 H	184	94.6	3.9
5	#5725.00	52.0 PK	74.0	-22.0	1.00 H	184	47.8	4.2
6	#5725.00	40.3 AV	54.0	-13.7	1.00 H	184	36.1	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

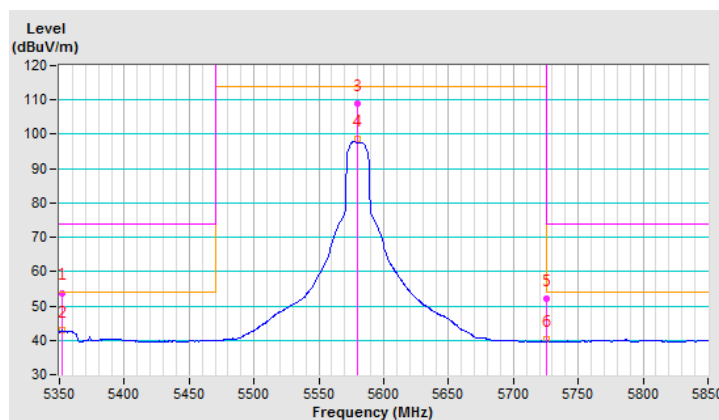


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5352.00	52.3 PK	74.0	-21.7	2.74 V	269	48.8	3.5
2	5352.00	39.5 AV	54.0	-14.5	2.74 V	269	36.0	3.5
3	*5580.00	102.7 PK			2.74 V	269	98.8	3.9
4	*5580.00	91.6 AV			2.74 V	269	87.7	3.9
5	#5725.00	52.6 PK	74.0	-21.4	2.74 V	269	48.4	4.2
6	#5725.00	39.4 AV	54.0	-14.6	2.74 V	269	35.2	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

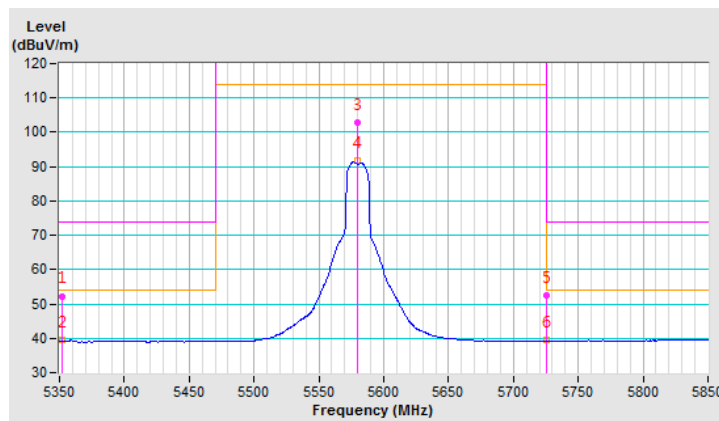


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	105.0 PK			1.00 H	162	100.8	4.2
2	*5700.00	94.0 AV			1.00 H	162	89.8	4.2
3	#5725.00	71.4 PK	74.0	-2.6	1.00 H	162	67.2	4.2
4	#5725.00	52.7 AV	54.0	-1.3	1.00 H	162	48.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

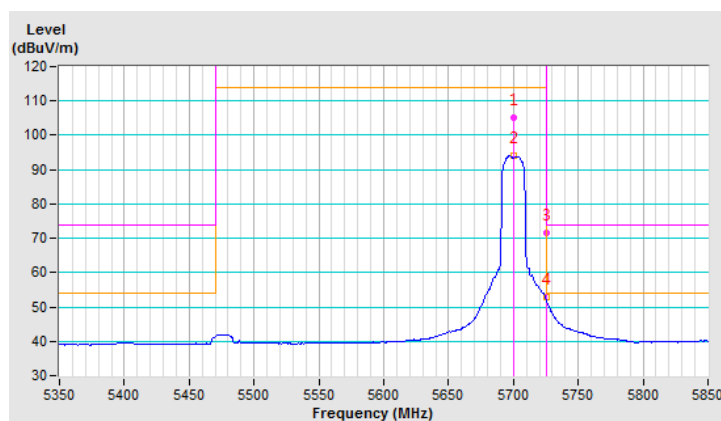


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	97.3 PK			2.58 V	269	93.1	4.2
2	*5700.00	86.0 AV			2.58 V	269	81.8	4.2
3	#5725.00	61.9 PK	74.0	-12.1	2.58 V	269	57.7	4.2
4	#5725.00	43.6 AV	54.0	-10.4	2.58 V	269	39.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

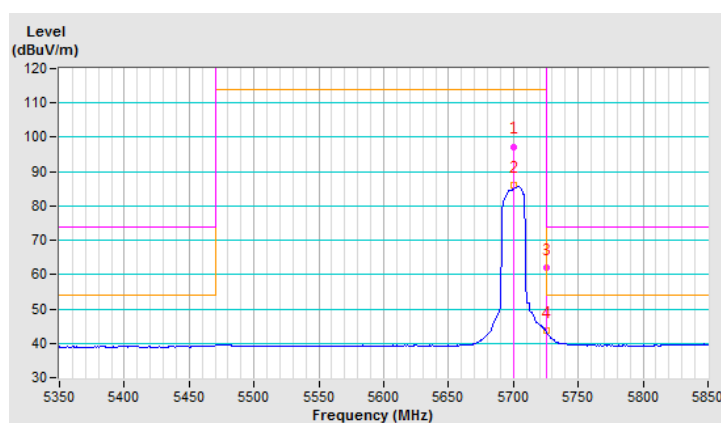


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	71.0 PK	74.0	-3.0	1.00 H	161	66.8	4.2
2	#5715.00	45.8 AV	54.0	-8.2	1.00 H	161	41.6	4.2
3	#5725.00	77.1 PK	78.2	-1.1	1.00 H	161	72.9	4.2
4	*5745.00	104.8 PK			1.00 H	161	100.6	4.2
5	*5745.00	94.0 AV			1.00 H	161	89.8	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

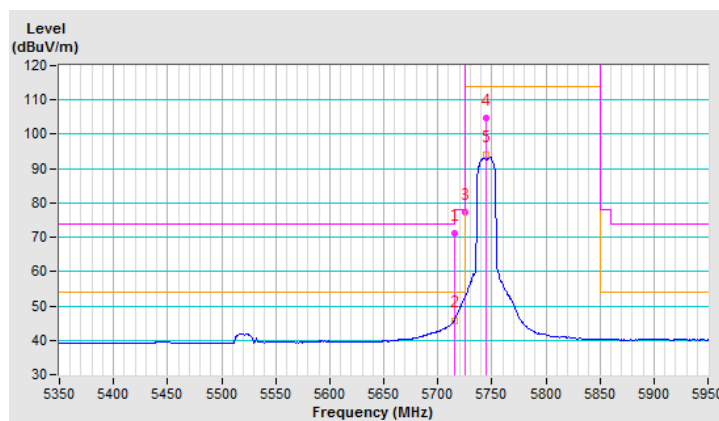


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.3 PK	74.0	-11.7	2.61 V	274	58.1	4.2
2	#5715.00	42.4 AV	54.0	-11.6	2.61 V	274	38.2	4.2
3	#5725.00	70.3 PK	78.2	-7.9	2.61 V	274	66.1	4.2
4	*5745.00	100.2 PK			2.61 V	274	96.0	4.2
5	*5745.00	88.7 AV			2.61 V	274	84.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

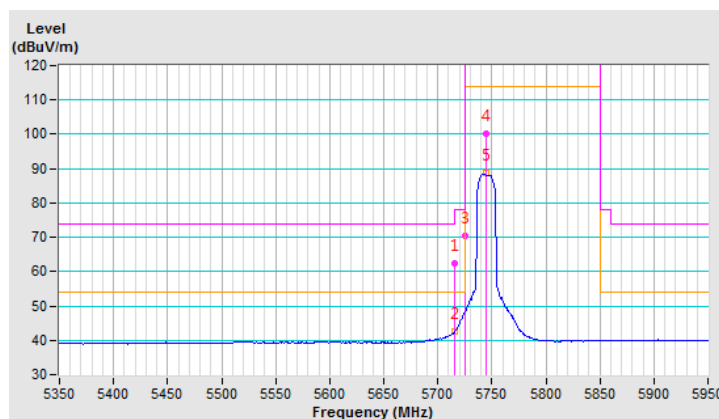


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.0 PK	74.0	-15.0	1.00 H	185	54.8	4.2
2	#5715.00	42.8 AV	54.0	-11.2	1.00 H	185	38.6	4.2
3	#5725.00	64.1 PK	78.2	-14.1	1.00 H	185	59.9	4.2
4	*5785.00	107.0 PK			1.00 H	185	102.9	4.1
5	*5785.00	96.4 AV			1.00 H	185	92.3	4.1
6	#5850.00	62.3 PK	78.2	-15.9	1.00 H	185	58.1	4.2
7	#5860.00	61.0 PK	74.0	-13.0	1.00 H	185	56.8	4.2
8	#5860.00	42.9 AV	54.0	-11.1	1.00 H	185	38.7	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

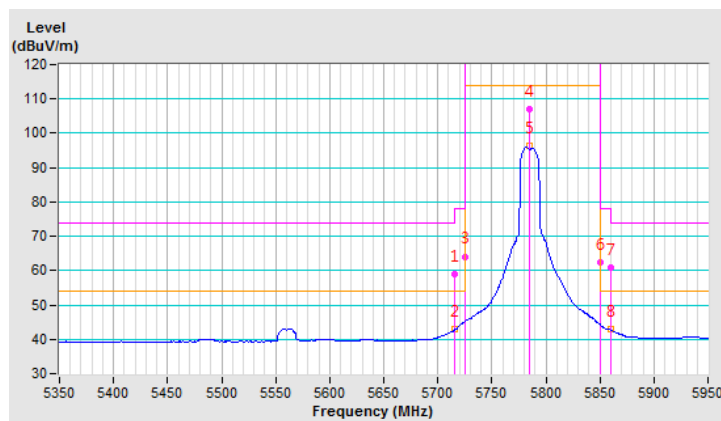


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	53.3 PK	74.0	-20.7	2.61 V	228	49.1	4.2
2	#5715.00	40.0 AV	54.0	-14.0	2.61 V	228	35.8	4.2
3	#5725.00	55.3 PK	78.2	-22.9	2.61 V	228	51.1	4.2
4	*5785.00	101.0 PK			2.61 V	228	96.9	4.1
5	*5785.00	90.0 AV			2.61 V	228	85.9	4.1
6	#5850.00	55.8 PK	78.2	-22.4	2.61 V	228	51.6	4.2
7	#5860.00	53.6 PK	74.0	-20.4	2.61 V	228	49.4	4.2
8	#5860.00	40.4 AV	54.0	-13.6	2.61 V	228	36.2	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

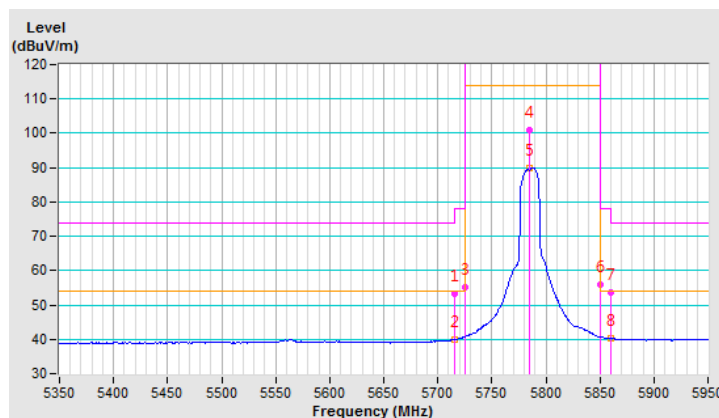


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.3 PK			1.00 H	166	102.1	4.2
2	*5825.00	95.5 AV			1.00 H	166	91.3	4.2
3	#5850.00	73.6 PK	78.2	-4.6	1.00 H	166	69.4	4.2
4	#5860.00	70.0 PK	74.0	-4.0	1.00 H	166	65.8	4.2
5	#5860.00	52.6 AV	54.0	-1.4	1.00 H	166	48.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

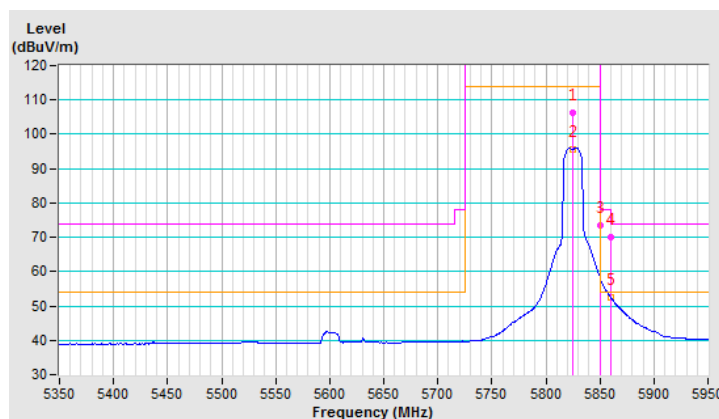


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	100.0 PK			2.61 V	228	95.8	4.2
2	*5825.00	87.7 AV			2.61 V	228	83.5	4.2
3	#5850.00	65.4 PK	78.2	-12.8	2.61 V	228	61.2	4.2
4	#5860.00	60.3 PK	74.0	-13.7	2.61 V	228	56.1	4.2
5	#5860.00	43.2 AV	54.0	-10.8	2.61 V	228	39.0	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

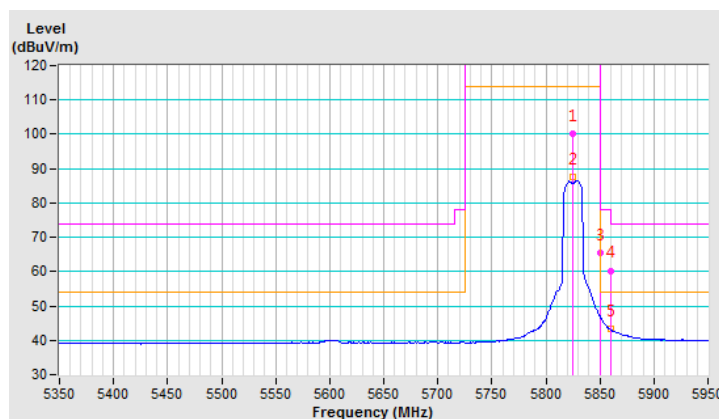


802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.00 H	194	66.0	3.0
2	5150.00	52.6 AV	54.0	-1.4	1.00 H	194	49.6	3.0
3	*5180.00	110.0 PK			1.00 H	194	106.9	3.1
4	*5180.00	97.9 AV			1.00 H	194	94.8	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

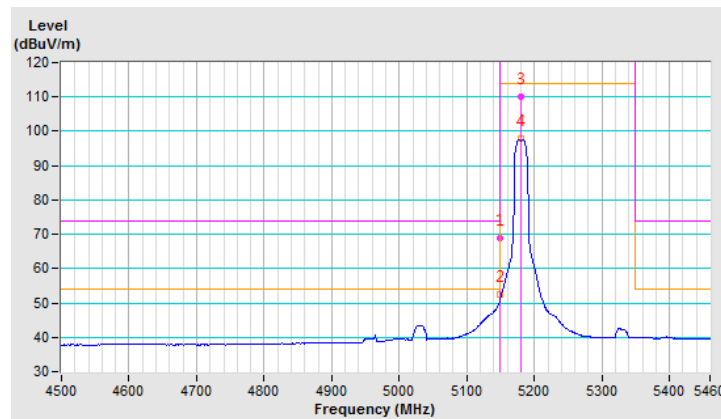


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	2.61 V	262	56.3	3.0
2	5150.00	42.0 AV	54.0	-12.0	2.61 V	262	39.0	3.0
3	*5180.00	102.2 PK			2.61 V	262	99.1	3.1
4	*5180.00	91.5 AV			2.61 V	262	88.4	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

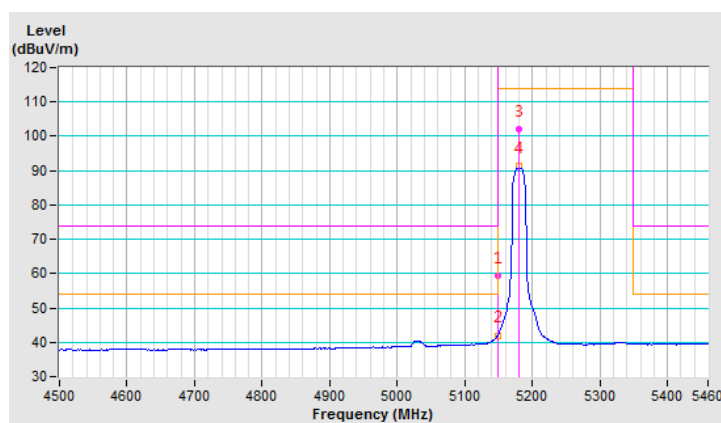


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	1.00 H	189	59.2	3.0
2	5150.00	46.0 AV	54.0	-8.0	1.00 H	189	43.0	3.0
3	*5200.00	110.7 PK			1.00 H	189	107.6	3.1
4	*5200.00	98.5 AV			1.00 H	189	95.4	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

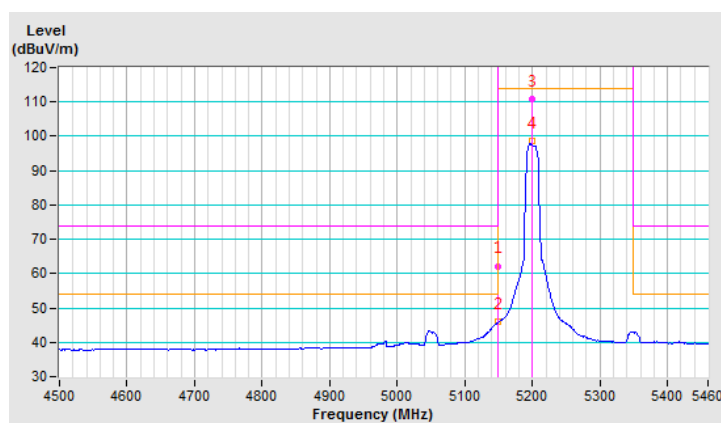


CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.61 V	262	52.5	3.0
2	5150.00	41.6 AV	54.0	-12.4	2.61 V	262	38.6	3.0
3	*5200.00	102.8 PK			2.61 V	262	99.7	3.1
4	*5200.00	92.2 AV			2.61 V	262	89.1	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

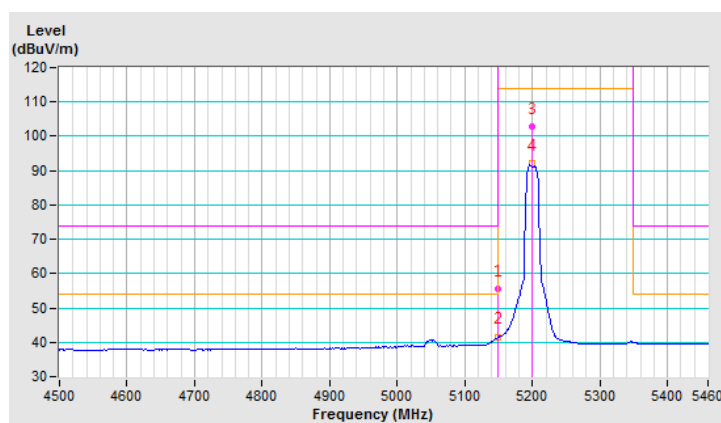


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5090.00	55.4 PK	74.0	-18.6	1.00 H	179	52.6	2.8
2	5090.00	43.2 AV	54.0	-10.8	1.00 H	179	40.4	2.8
3	*5240.00	110.6 PK			1.00 H	179	107.4	3.2
4	*5240.00	98.6 AV			1.00 H	179	95.4	3.2
5	5386.00	54.2 PK	74.0	-19.8	1.00 H	179	50.5	3.7
6	5386.00	41.9 AV	54.0	-12.1	1.00 H	179	38.2	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

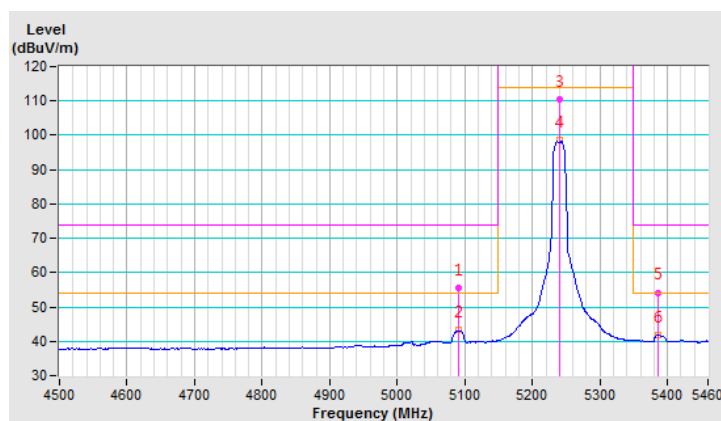


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5090.00	53.6 PK	74.0	-20.4	2.77 V	269	50.8	2.8
2	5090.00	40.9 AV	54.0	-13.1	2.77 V	269	38.1	2.8
3	*5240.00	104.3 PK			2.77 V	269	101.1	3.2
4	*5240.00	93.6 AV			2.77 V	269	90.4	3.2
5	5386.00	53.1 PK	74.0	-20.9	2.77 V	269	49.4	3.7
6	5386.00	40.0 AV	54.0	-14.0	2.77 V	269	36.3	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

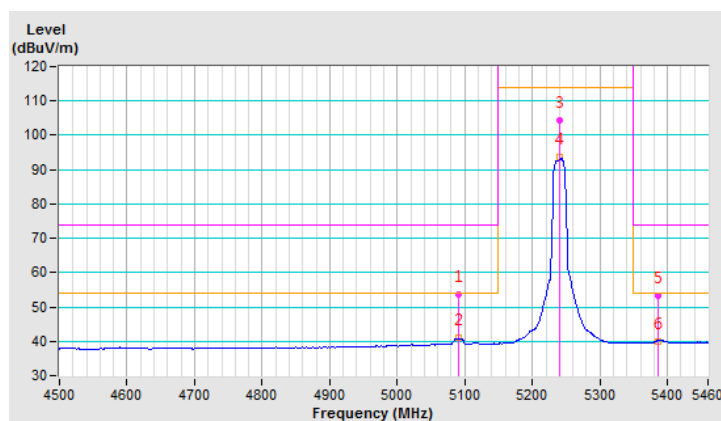


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5110.00	55.2 PK	74.0	-18.8	1.00 H	181	52.3	2.9
2	5110.00	43.0 AV	54.0	-11.0	1.00 H	181	40.1	2.9
3	*5260.00	110.8 PK			1.00 H	181	107.5	3.3
4	*5260.00	98.9 AV			1.00 H	181	95.6	3.3
5	5410.00	54.0 PK	74.0	-20.0	1.00 H	181	50.3	3.7
6	5410.00	41.6 AV	54.0	-12.4	1.00 H	181	37.9	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

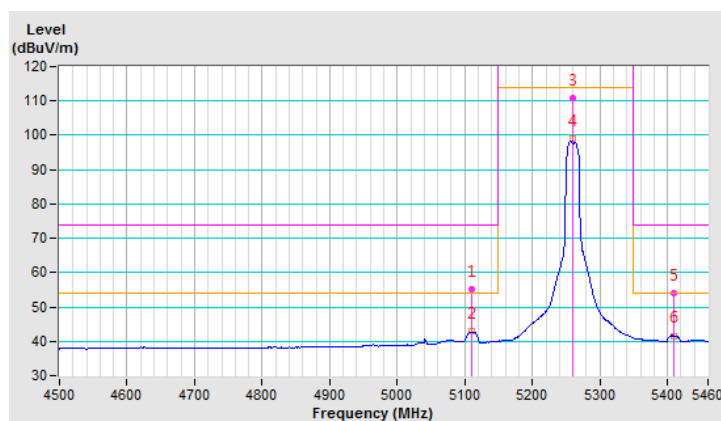


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5110.00	53.4 PK	74.0	-20.6	2.91 V	268	50.5	2.9
2	5110.00	41.0 AV	54.0	-13.0	2.91 V	268	38.1	2.9
3	*5260.00	104.2 PK			2.91 V	268	100.9	3.3
4	*5260.00	93.6 AV			2.91 V	268	90.3	3.3
5	5410.00	52.8 PK	74.0	-21.2	2.91 V	268	49.1	3.7
6	5410.00	39.8 AV	54.0	-14.2	2.91 V	268	36.1	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

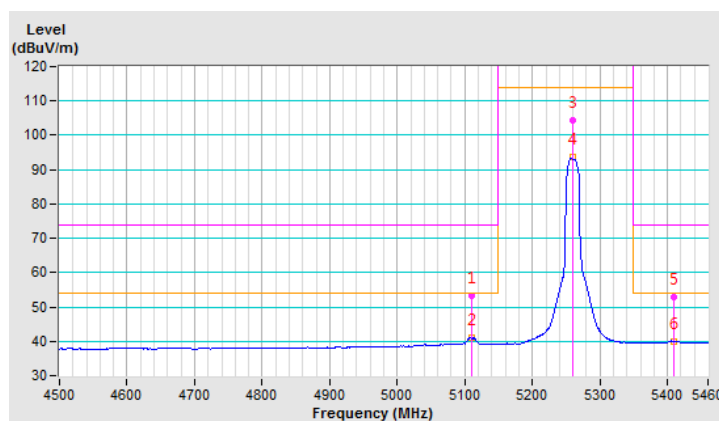


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.00	54.1 PK	74.0	-19.9	1.00 H	185	51.1	3.0
2	5147.00	42.2 AV	54.0	-11.8	1.00 H	185	39.2	3.0
3	*5300.00	110.9 PK			1.00 H	185	107.6	3.3
4	*5300.00	99.2 AV			1.00 H	185	95.9	3.3
5	5350.00	64.3 PK	74.0	-9.7	1.00 H	185	60.8	3.5
6	5350.00	46.9 AV	54.0	-7.1	1.00 H	185	43.4	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

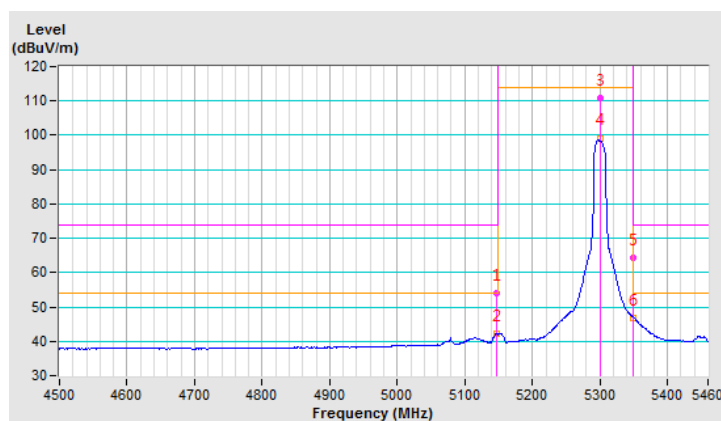


CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.00	53.3 PK	74.0	-20.7	2.88 V	267	50.3	3.0
2	5147.00	40.8 AV	54.0	-13.2	2.88 V	267	37.8	3.0
3	*5300.00	104.0 PK			2.88 V	267	100.7	3.3
4	*5300.00	93.5 AV			2.88 V	267	90.2	3.3
5	5350.00	58.0 PK	74.0	-16.0	2.88 V	267	54.5	3.5
6	5350.00	41.3 AV	54.0	-12.7	2.88 V	267	37.8	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

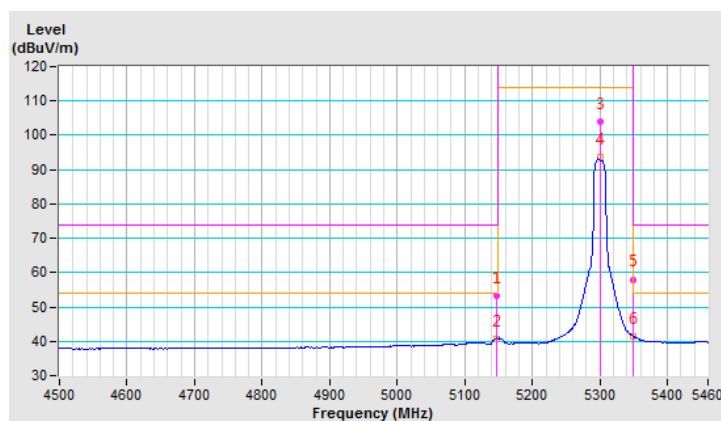


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	108.5 PK			1.00 H	154	105.0	3.5
2	*5320.00	97.2 AV			1.00 H	154	93.7	3.5
3	5350.00	71.1 PK	74.0	-2.9	1.00 H	154	67.6	3.5
4	5350.00	52.7 AV	54.0	-1.3	1.00 H	154	49.2	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

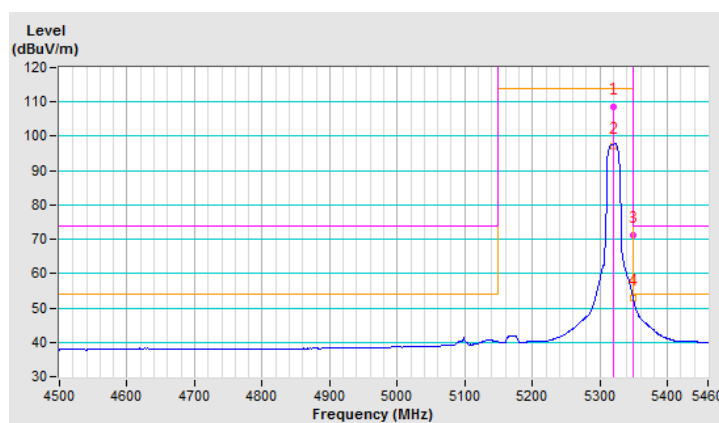


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	100.2 PK			2.88 V	266	96.7	3.5
2	*5320.00	90.0 AV			2.88 V	266	86.5	3.5
3	5350.00	58.6 PK	74.0	-15.4	2.88 V	266	55.1	3.5
4	5350.00	41.6 AV	54.0	-12.4	2.88 V	266	38.1	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

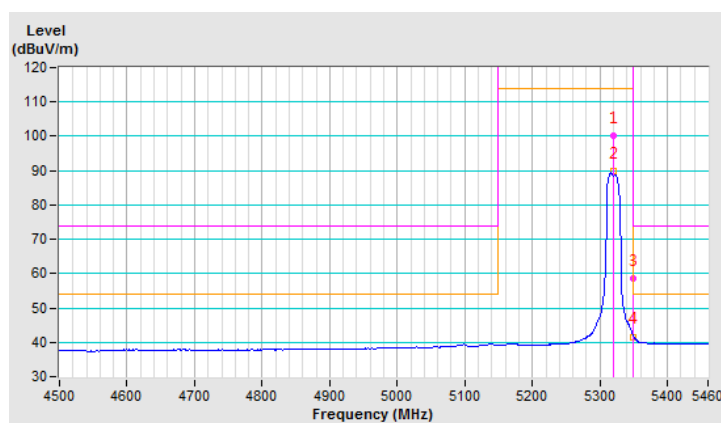


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	71.0 PK	74.0	-3.0	1.00 H	188	67.3	3.7
2	#5470.00	52.7 AV	54.0	-1.3	1.00 H	188	49.0	3.7
3	*5500.00	107.6 PK			1.00 H	188	103.8	3.8
4	*5500.00	96.6 AV			1.00 H	188	92.8	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

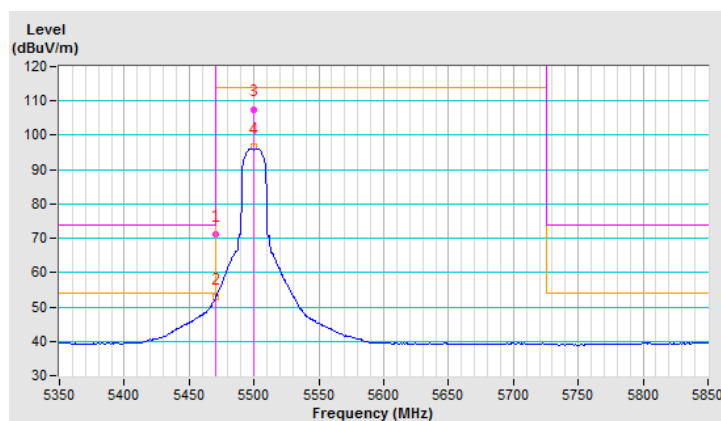


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	63.4 PK	74.0	-10.6	2.87 V	275	59.7	3.7
2	#5470.00	46.0 AV	54.0	-8.0	2.87 V	275	42.3	3.7
3	*5500.00	100.2 PK			2.87 V	275	96.4	3.8
4	*5500.00	89.4 AV			2.87 V	275	85.6	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

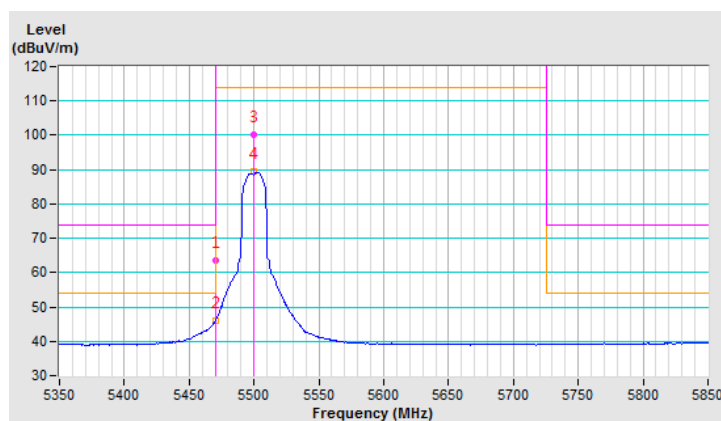


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5352.00	54.0 PK	74.0	-20.0	1.00 H	184	50.5	3.5
2	5352.00	42.5 AV	54.0	-11.5	1.00 H	184	39.0	3.5
3	*5580.00	107.3 PK			1.00 H	184	103.4	3.9
4	*5580.00	96.3 AV			1.00 H	184	92.4	3.9
5	#5725.00	53.9 PK	74.0	-20.1	1.00 H	184	49.7	4.2
6	#5725.00	40.0 AV	54.0	-14.0	1.00 H	184	35.8	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

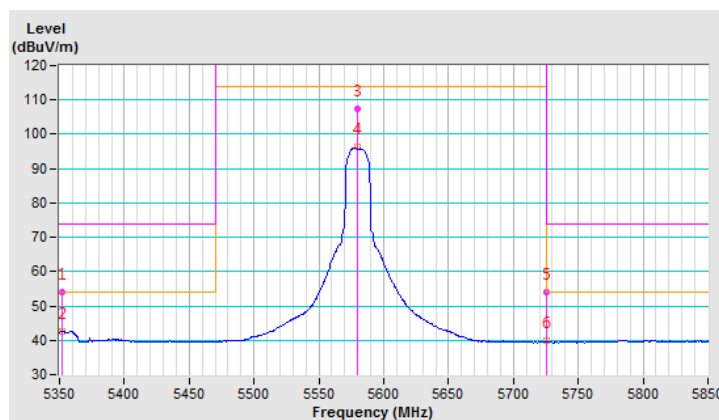


CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5352.00	52.6 PK	74.0	-21.4	2.87 V	268	49.1	3.5
2	5352.00	39.9 AV	54.0	-14.1	2.87 V	268	36.4	3.5
3	*5580.00	100.1 PK			2.87 V	268	96.2	3.9
4	*5580.00	89.1 AV			2.87 V	268	85.2	3.9
5	#5725.00	53.5 PK	74.0	-20.5	2.87 V	268	49.3	4.2
6	#5725.00	39.6 AV	54.0	-14.4	2.87 V	268	35.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

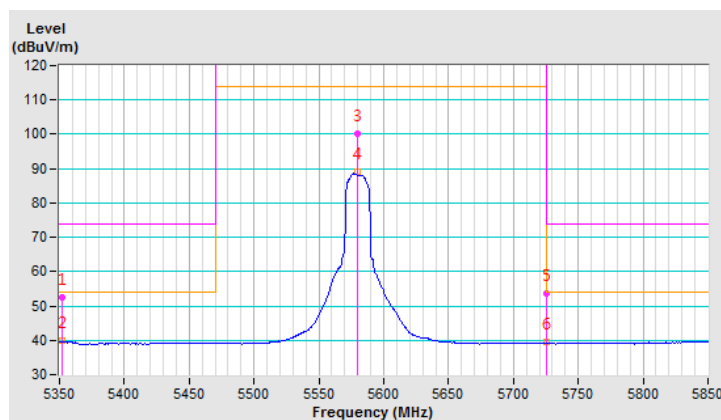


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	105.0 PK			1.00 H	162	100.8	4.2
2	*5700.00	94.3 AV			1.00 H	162	90.1	4.2
3	#5725.00	72.6 PK	74.0	-1.4	1.00 H	162	68.4	4.2
4	#5725.00	52.7 AV	54.0	-1.3	1.00 H	162	48.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

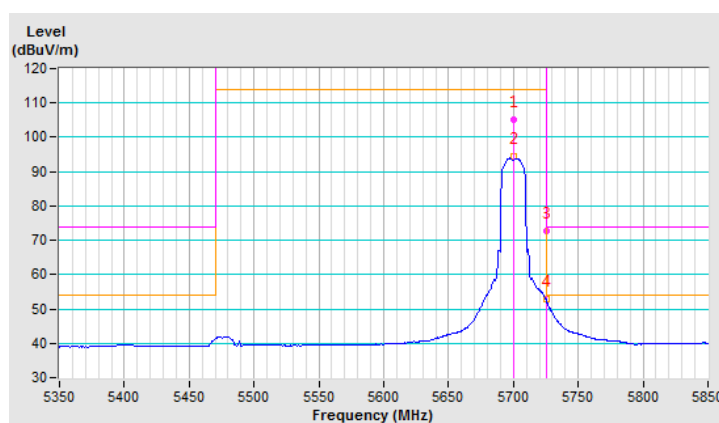


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	100.3 PK			3.19 V	236	96.1	4.2
2	*5700.00	88.6 AV			3.19 V	236	84.4	4.2
3	#5725.00	66.0 PK	74.0	-8.0	3.19 V	236	61.8	4.2
4	#5725.00	46.2 AV	54.0	-7.8	3.19 V	236	42.0	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

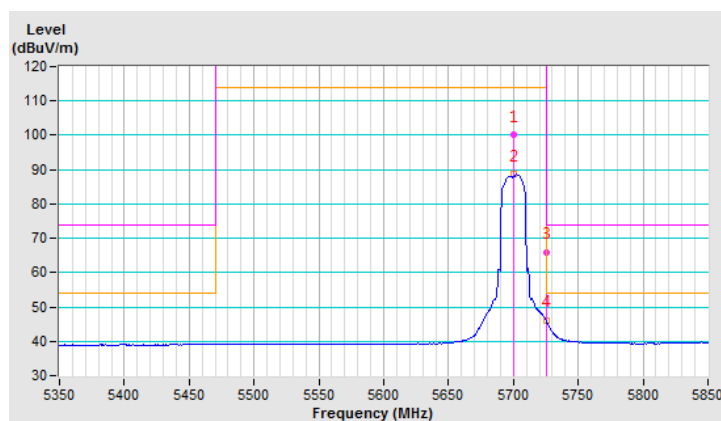


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	63.2 PK	74.0	-10.8	1.08 H	159	59.0	4.2
2	#5715.00	45.6 AV	54.0	-8.4	1.08 H	159	41.4	4.2
3	#5725.00	76.5 PK	78.2	-1.7	1.08 H	159	72.3	4.2
4	*5745.00	104.0 PK			1.08 H	159	99.8	4.2
5	*5745.00	92.7 AV			1.08 H	159	88.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

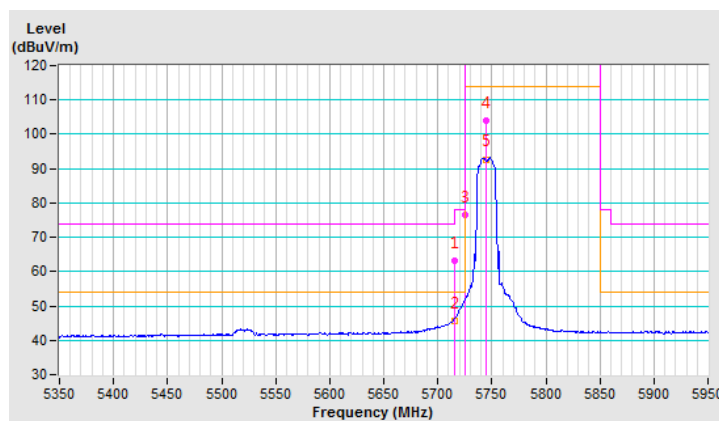


CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.8 PK	74.0	-14.2	2.55 V	225	55.6	4.2
2	#5715.00	40.7 AV	54.0	-13.3	2.55 V	225	36.5	4.2
3	#5725.00	67.0 PK	78.2	-11.2	2.55 V	225	62.8	4.2
4	*5745.00	97.1 PK			2.55 V	225	92.9	4.2
5	*5745.00	85.6 AV			2.55 V	225	81.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

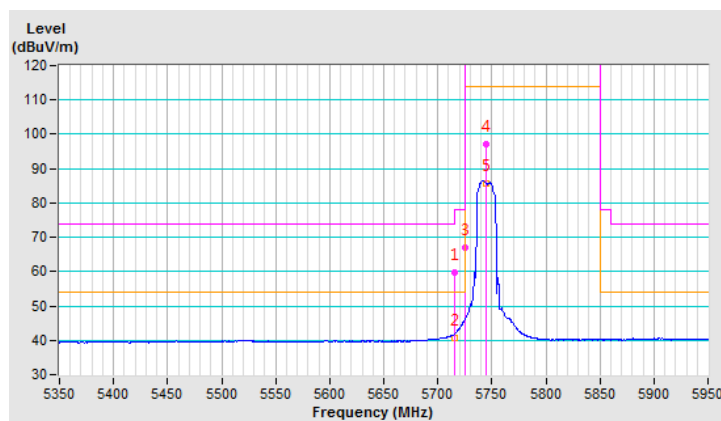


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5561.00	52.9 PK	74.0	-21.1	1.05 H	160	49.0	3.9
2	#5561.00	41.6 AV	54.0	-12.4	1.05 H	160	37.7	3.9
3	#5725.00	59.9 PK	78.2	-18.3	1.05 H	160	55.7	4.2
4	*5785.00	104.4 PK			1.05 H	160	100.3	4.1
5	*5785.00	93.2 AV			1.05 H	160	89.1	4.1
6	#5850.00	58.8 PK	78.2	-19.4	1.05 H	160	54.6	4.2
7	#5860.00	52.6 PK	74.0	-21.4	1.05 H	160	48.4	4.2
8	#5860.00	40.9 AV	54.0	-13.1	1.05 H	160	36.7	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

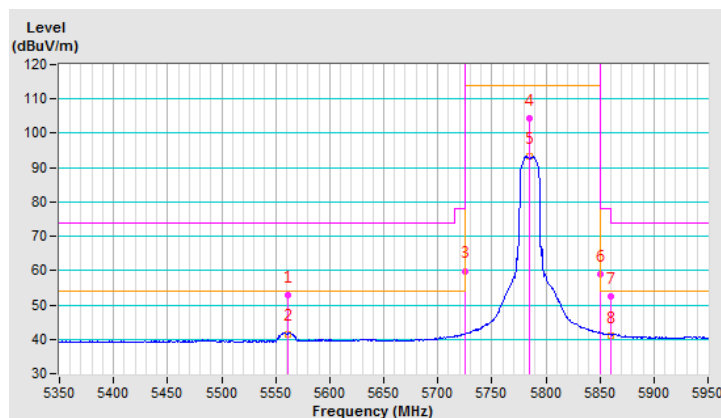


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5561.00	50.8 PK	74.0	-23.2	2.50 V	230	46.9	3.9
2	#5561.00	38.6 AV	54.0	-15.4	2.50 V	230	34.7	3.9
3	#5725.00	51.3 PK	78.2	-26.9	2.50 V	230	47.1	4.2
4	*5785.00	97.2 PK			2.50 V	230	93.1	4.1
5	*5785.00	86.7 AV			2.50 V	230	82.6	4.1
6	#5850.00	51.5 PK	78.2	-26.7	2.50 V	230	47.3	4.2
7	#5860.00	51.9 PK	74.0	-22.1	2.50 V	230	47.7	4.2
8	#5860.00	39.6 AV	54.0	-14.4	2.50 V	230	35.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

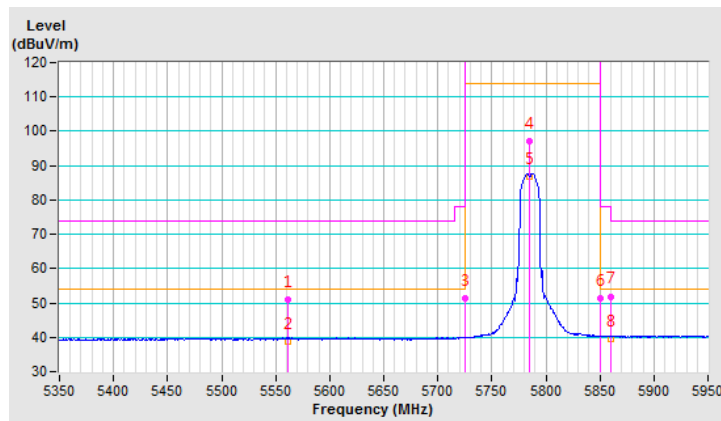


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	104.5 PK			1.00 H	161	100.3	4.2
2	*5825.00	93.6 AV			1.00 H	161	89.4	4.2
3	#5850.00	70.6 PK	78.2	-7.6	1.00 H	161	66.4	4.2
4	#5860.00	63.4 PK	74.0	-10.6	1.00 H	161	59.2	4.2
5	#5860.00	46.9 AV	54.0	-7.1	1.00 H	161	42.7	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

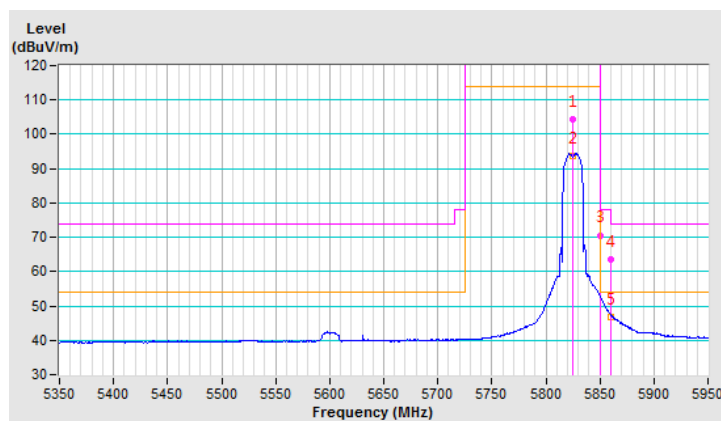


CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	97.3 PK			2.69 V	226	93.1	4.2
2	*5825.00	86.7 AV			2.69 V	226	82.5	4.2
3	#5850.00	65.2 PK	78.2	-13.0	2.69 V	226	61.0	4.2
4	#5860.00	56.6 PK	74.0	-17.4	2.69 V	226	52.4	4.2
5	#5860.00	42.1 AV	54.0	-11.9	2.69 V	226	37.9	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

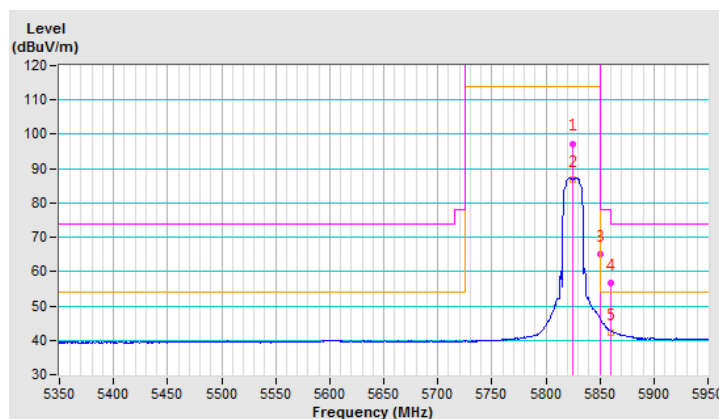


802.11 (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	1.00 H	155	65.5	3.0
2	5150.00	52.5 AV	54.0	-1.5	1.00 H	155	49.5	3.0
3	*5190.00	101.2 PK			1.00 H	155	98.1	3.1
4	*5190.00	90.7 AV			1.00 H	155	87.6	3.1
5	5350.00	52.6 PK	74.0	-21.4	1.00 H	155	49.1	3.5
6	5350.00	41.4 AV	54.0	-12.6	1.00 H	155	37.9	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

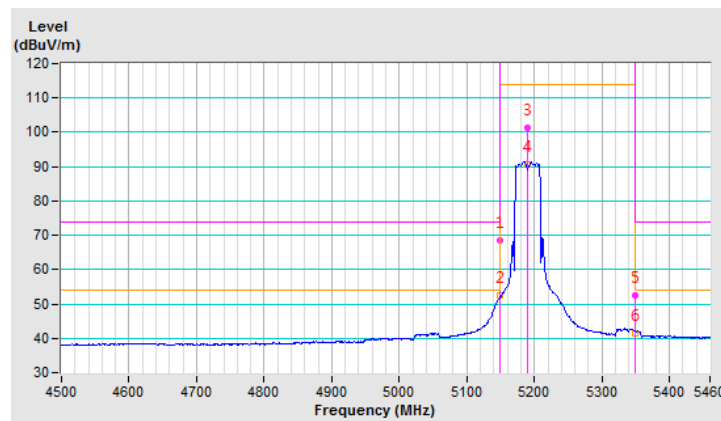


CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.60 V	298	57.2	3.0
2	5150.00	43.9 AV	54.0	-10.1	2.60 V	298	40.9	3.0
3	*5190.00	94.9 PK			2.60 V	298	91.8	3.1
4	*5190.00	83.4 AV			2.60 V	298	80.3	3.1
5	5350.00	51.2 PK	74.0	-22.8	2.60 V	298	47.7	3.5
6	5350.00	38.8 AV	54.0	-15.2	2.60 V	298	35.3	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

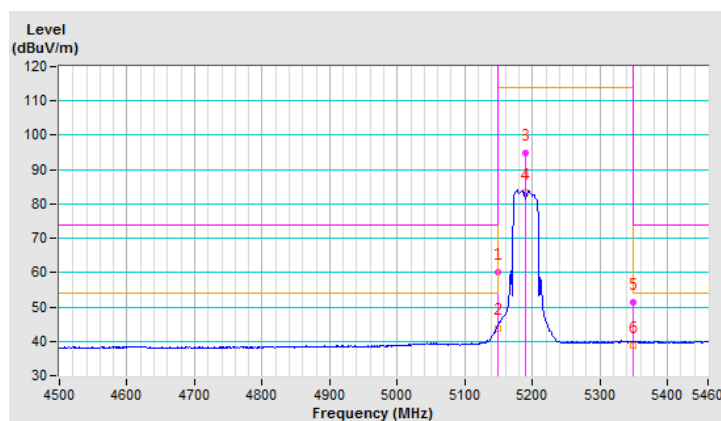


CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.7 PK	74.0	-21.3	2.98 H	290	49.7	3.0
2	5150.00	40.3 AV	54.0	-13.7	2.98 H	290	37.3	3.0
3	*5230.00	98.3 PK			2.98 H	290	95.1	3.2
4	*5230.00	86.6 AV			2.98 H	290	83.4	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

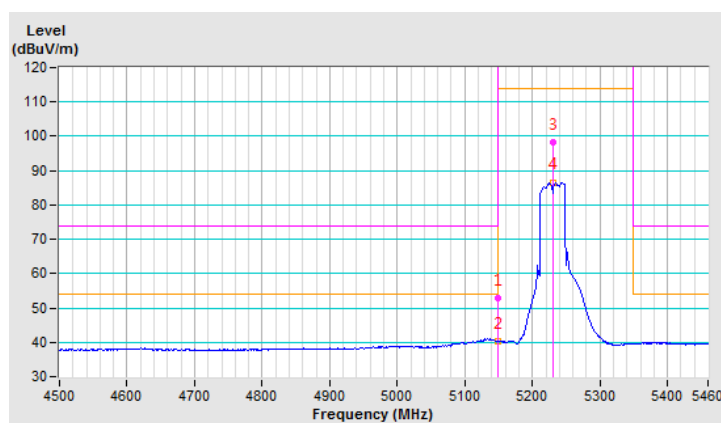


CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.00 V	178	56.2	3.0
2	5150.00	46.0 AV	54.0	-8.0	1.00 V	178	43.0	3.0
3	*5230.00	105.2 PK			1.00 V	178	102.0	3.2
4	*5230.00	94.2 AV			1.00 V	178	91.0	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

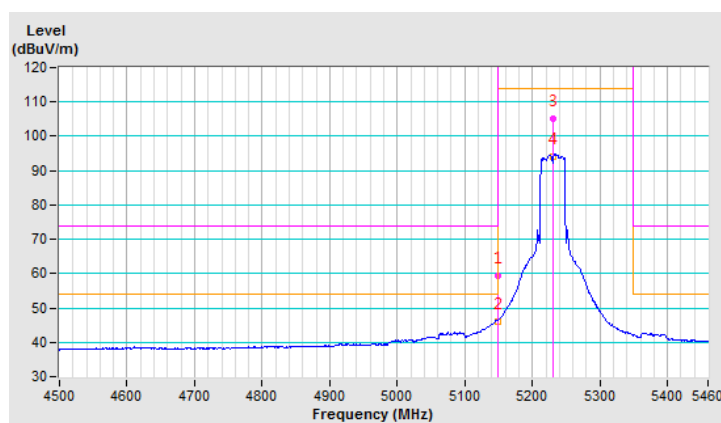


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	1.00 H	175	52.2	3.0
2	5150.00	46.2 AV	54.0	-7.8	1.00 H	175	43.2	3.0
3	*5270.00	104.7 PK			1.00 H	175	101.4	3.3
4	*5270.00	93.2 AV			1.00 H	175	89.9	3.3
5	5350.00	61.2 PK	74.0	-12.8	1.00 H	175	57.7	3.5
6	5350.00	52.0 AV	54.0	-2.0	1.00 H	175	48.5	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

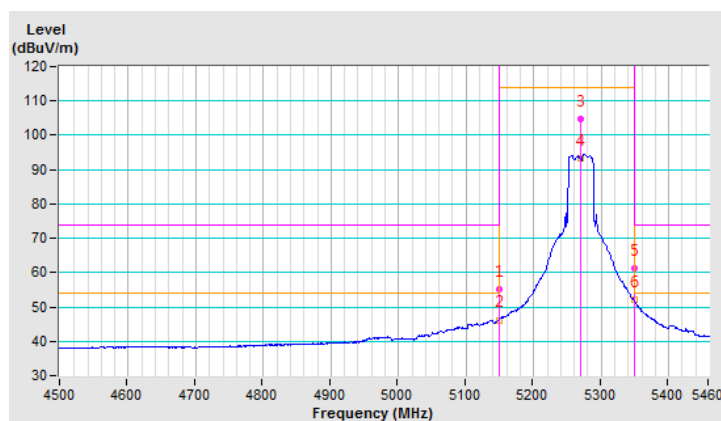


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	2.82 V	288	47.9	3.0
2	5150.00	39.2 AV	54.0	-14.8	2.82 V	288	36.2	3.0
3	*5270.00	96.2 PK			2.82 V	288	92.9	3.3
4	*5270.00	85.5 AV			2.82 V	288	82.2	3.3
5	5350.00	51.1 PK	74.0	-22.9	2.82 V	288	47.6	3.5
6	5350.00	38.9 AV	54.0	-15.1	2.82 V	288	35.4	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

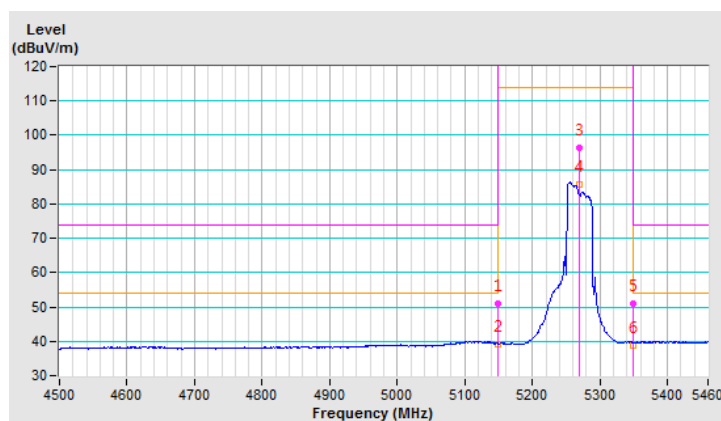


CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	102.4 PK			1.00 H	180	99.0	3.4
2	*5310.00	91.6 AV			1.00 H	180	88.2	3.4
3	5350.00	68.9 PK	74.0	-5.1	1.00 H	180	65.4	3.5
4	5350.00	52.5 AV	54.0	-1.5	1.00 H	180	49.0	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

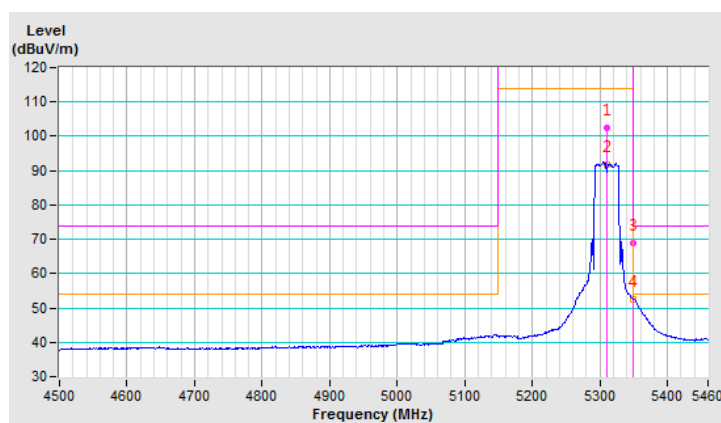


CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	94.8 PK			2.91 V	288	91.4	3.4
2	*5310.00	83.9 AV			2.91 V	288	80.5	3.4
3	5350.00	56.4 PK	74.0	-17.6	2.91 V	288	52.9	3.5
4	5350.00	41.2 AV	54.0	-12.8	2.91 V	288	37.7	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

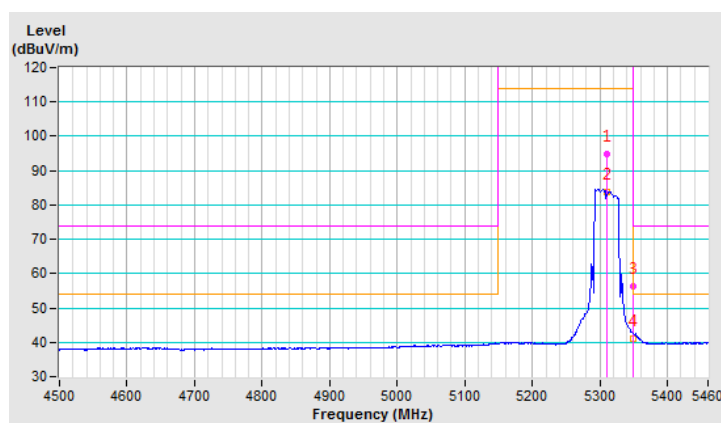


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	72.8 PK	74.0	-1.2	1.02 H	158	69.1	3.7
2	#5470.00	52.8 AV	54.0	-1.2	1.02 H	158	49.1	3.7
3	*5510.00	101.2 PK			1.02 H	158	97.4	3.8
4	*5510.00	89.1 AV			1.02 H	158	85.3	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

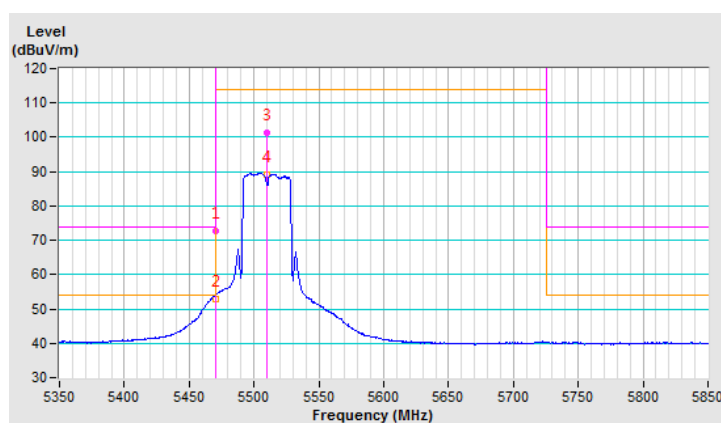


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	63.2 PK	74.0	-10.8	2.87 V	223	59.5	3.7
2	#5470.00	43.2 AV	54.0	-10.8	2.87 V	223	39.5	3.7
3	*5510.00	89.5 PK			2.87 V	223	85.7	3.8
4	*5510.00	79.5 AV			2.87 V	223	75.7	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

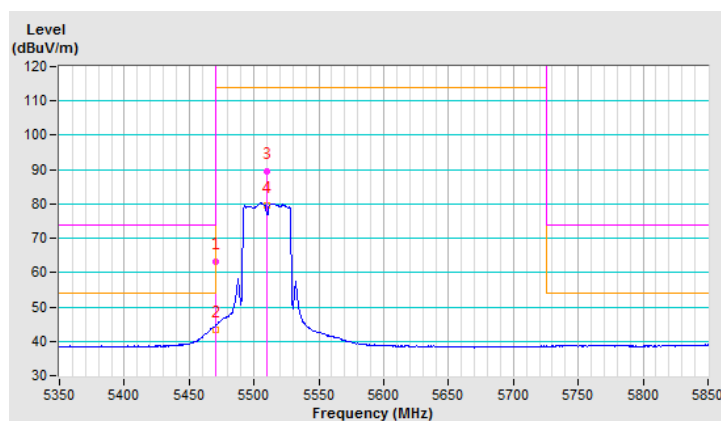


CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	66.8 PK	74.0	-7.2	1.02 H	162	63.1	3.7
2	#5470.00	50.0 AV	54.0	-4.0	1.02 H	162	46.3	3.7
3	*5550.00	102.4 PK			1.02 H	162	98.5	3.9
4	*5550.00	91.4 AV			1.02 H	162	87.5	3.9
5	#5725.00	52.6 PK	74.0	-21.4	1.02 H	162	48.4	4.2
6	#5725.00	40.2 AV	54.0	-13.8	1.02 H	162	36.0	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

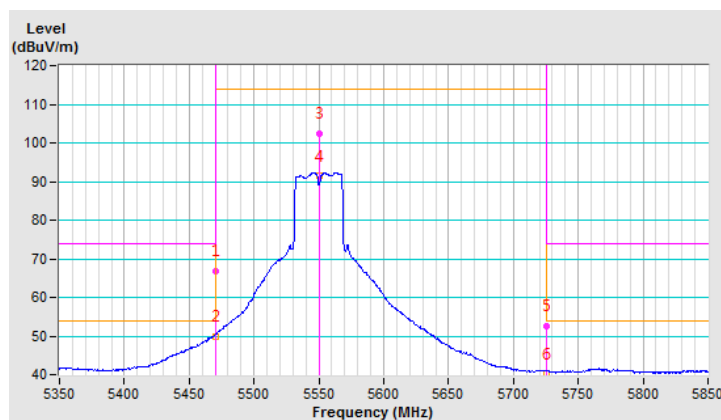


CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	57.2 PK	74.0	-16.8	3.02 V	230	53.5	3.7
2	#5470.00	42.1 AV	54.0	-11.9	3.02 V	230	38.4	3.7
3	*5550.00	93.5 PK			3.02 V	230	89.6	3.9
4	*5550.00	82.9 AV			3.02 V	230	79.0	3.9
5	#5725.00	51.6 PK	74.0	-22.4	3.02 V	230	47.4	4.2
6	#5725.00	39.4 AV	54.0	-14.6	3.02 V	230	35.2	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

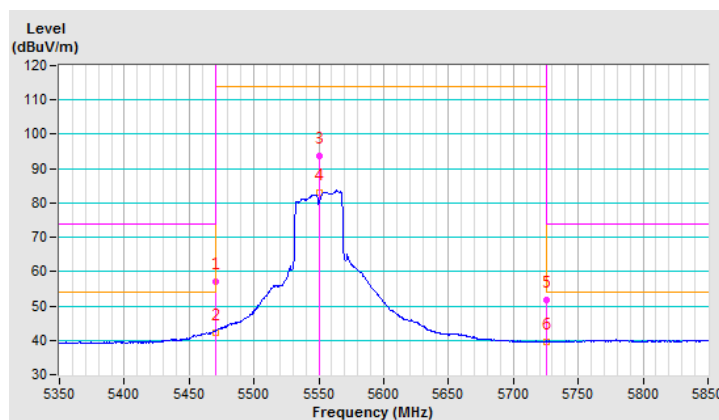


CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	101.5 PK			1.00 H	159	97.5	4.0
2	*5670.00	90.8 AV			1.00 H	159	86.8	4.0
3	#5725.00	66.1 PK	74.0	-7.9	1.00 H	159	61.9	4.2
4	#5725.00	52.2 AV	54.0	-1.8	1.00 H	159	48.0	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

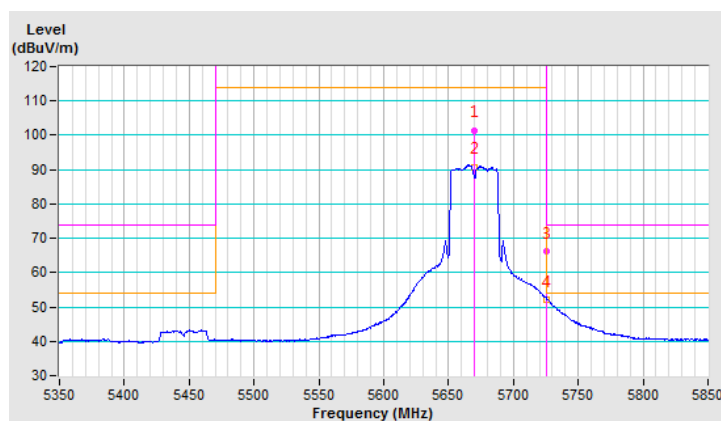


CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	92.6 PK			2.60 V	225	88.6	4.0
2	*5670.00	82.8 AV			2.60 V	225	78.8	4.0
3	#5725.00	58.1 PK	74.0	-15.9	2.60 V	225	53.9	4.2
4	#5725.00	44.0 AV	54.0	-10.0	2.60 V	225	39.8	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

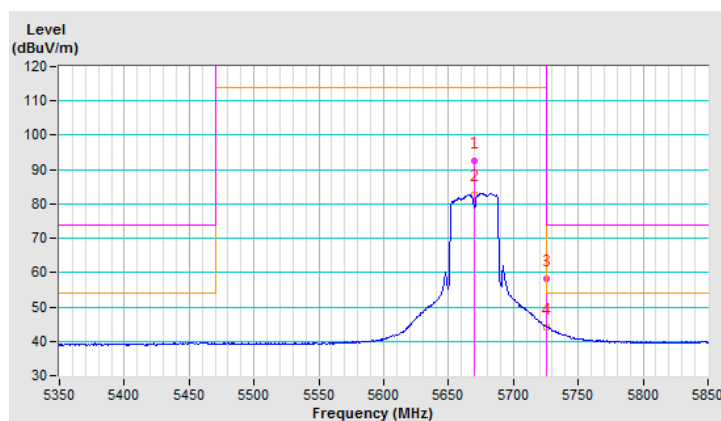


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	70.2 PK	74.0	-3.8	1.00 H	160	66.0	4.2
2	#5715.00	51.1 AV	54.0	-2.9	1.00 H	160	46.9	4.2
3	#5725.00	76.5 PK	78.2	-1.7	1.00 H	160	72.3	4.2
4	*5755.00	98.7 PK			1.00 H	160	94.5	4.2
5	*5755.00	88.5 AV			1.00 H	160	84.3	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

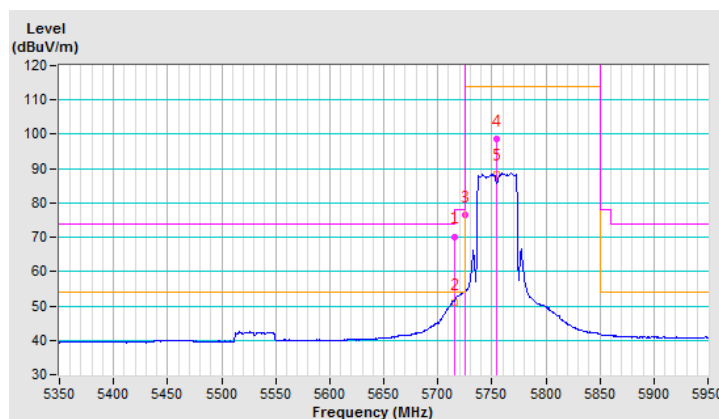


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.3 PK	74.0	-11.7	2.52 V	224	58.1	4.2
2	#5715.00	43.5 AV	54.0	-10.5	2.52 V	224	39.3	4.2
3	#5725.00	66.7 PK	78.2	-11.5	2.52 V	224	62.5	4.2
4	*5755.00	91.2 PK			2.52 V	224	87.0	4.2
5	*5755.00	80.7 AV			2.52 V	224	76.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

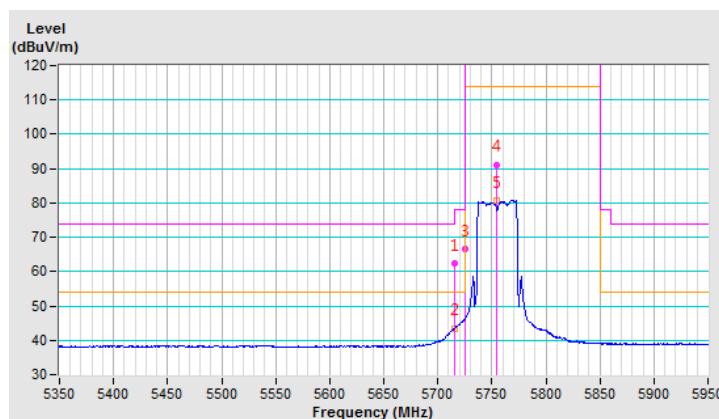


CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	101.1 PK			1.00 H	160	97.0	4.1
2	*5795.00	90.1 AV			1.00 H	160	86.0	4.1
3	#5850.00	69.2 PK	78.2	-9.0	1.00 H	160	65.0	4.2
4	#5860.00	64.8 PK	74.0	-9.2	1.00 H	160	60.6	4.2
5	#5860.00	47.5 AV	54.0	-6.5	1.00 H	160	43.3	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

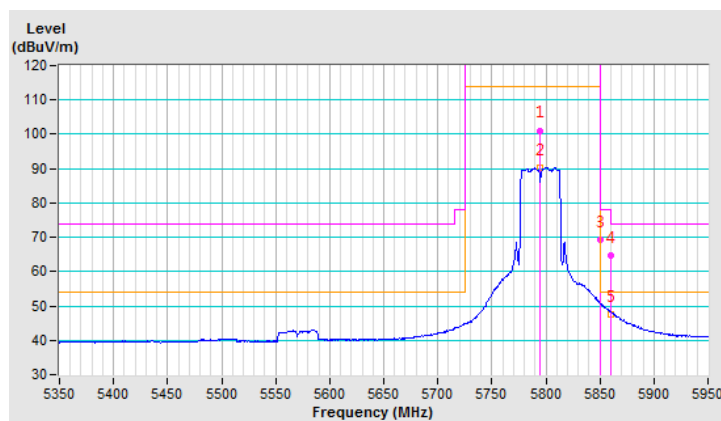


CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	93.2 PK			2.38 V	226	89.1	4.1
2	*5795.00	84.2 AV			2.38 V	226	80.1	4.1
3	#5850.00	59.9 PK	78.2	-18.3	2.38 V	226	55.7	4.2
4	#5860.00	55.9 PK	74.0	-18.1	2.38 V	226	51.7	4.2
5	#5860.00	43.9 AV	54.0	-10.1	2.38 V	226	39.7	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

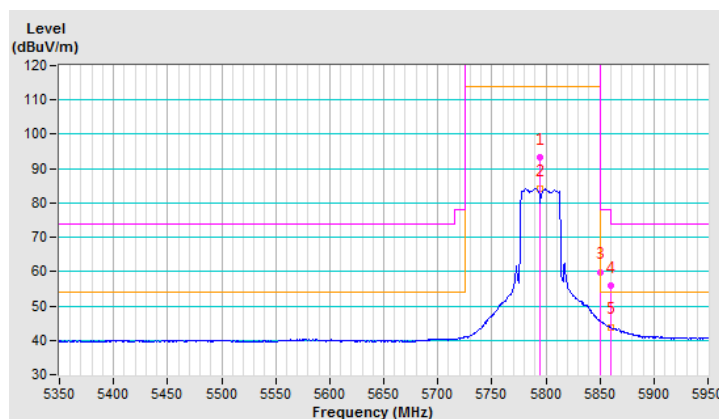

4.1.10 Test Results (Mode 2, Spurious emission)

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	51.1 PK	74.0	-22.9	3.00 H	288	37.5	13.6
2	#10360.00	38.7 AV	54.0	-15.3	3.00 H	288	25.1	13.6
3	15540.00	56.9 PK	74.0	-17.1	2.75 H	293	41.2	15.7
4	15540.00	44.5 AV	54.0	-9.5	2.75 H	293	28.8	15.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10360.00	52.2 PK	74.0	-21.8	1.88 V	78	38.6	13.6
2	#10360.00	41.1 AV	54.0	-12.9	1.88 V	78	27.5	13.6
3	15540.00	58.3 PK	74.0	-15.7	1.62 V	117	42.6	15.7
4	15540.00	45.7 AV	54.0	-8.3	1.62 V	117	30.0	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	51.0 PK	74.0	-23.0	3.01 H	294	37.4	13.6
2	#10400.00	38.7 AV	54.0	-15.3	3.01 H	294	25.1	13.6
3	15600.00	56.6 PK	74.0	-17.4	2.75 H	284	40.9	15.7
4	15600.00	44.3 AV	54.0	-9.7	2.75 H	284	28.6	15.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10400.00	52.2 PK	74.0	-21.8	1.87 V	67	38.6	13.6
2	#10400.00	41.1 AV	54.0	-12.9	1.87 V	67	27.5	13.6
3	15600.00	58.5 PK	74.0	-15.5	1.62 V	110	42.8	15.7
4	15600.00	46.0 AV	54.0	-8.0	1.62 V	110	30.3	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	51.1 PK	74.0	-22.9	3.03 H	275	37.1	14.0
2	#10480.00	38.7 AV	54.0	-15.3	3.03 H	275	24.7	14.0
3	15720.00	57.6 PK	74.0	-16.4	2.70 H	281	42.2	15.4
4	15720.00	44.9 AV	54.0	-9.1	2.70 H	281	29.5	15.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10480.00	51.9 PK	74.0	-22.1	1.92 V	65	37.9	14.0
2	#10480.00	40.6 AV	54.0	-13.4	1.92 V	65	26.6	14.0
3	15720.00	58.9 PK	74.0	-15.1	1.68 V	120	43.5	15.4
4	15720.00	46.4 AV	54.0	-7.6	1.68 V	120	31.0	15.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	50.9 PK	74.0	-23.1	3.04 H	304	36.8	14.1
2	#10520.00	38.3 AV	54.0	-15.7	3.04 H	304	24.2	14.1
3	15780.00	57.4 PK	74.0	-16.6	2.75 H	290	42.2	15.2
4	15780.00	45.0 AV	54.0	-9.0	2.75 H	290	29.8	15.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#10520.00	52.5 PK	74.0	-21.5	1.81 V	71	38.4	14.1
2	#10520.00	41.2 AV	54.0	-12.8	1.81 V	71	27.1	14.1
3	15780.00	58.4 PK	74.0	-15.6	1.67 V	102	43.2	15.2
4	15780.00	45.6 AV	54.0	-8.4	1.67 V	102	30.4	15.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	50.8 PK	74.0	-23.2	3.03 H	280	36.5	14.3
2	10600.00	38.4 AV	54.0	-15.6	3.03 H	280	24.1	14.3
3	15900.00	57.0 PK	74.0	-17.0	2.69 H	288	41.9	15.1
4	15900.00	44.7 AV	54.0	-9.3	2.69 H	288	29.6	15.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10600.00	52.3 PK	74.0	-21.7	1.82 V	62	38.0	14.3
2	10600.00	41.0 AV	54.0	-13.0	1.82 V	62	26.7	14.3
3	15900.00	58.4 PK	74.0	-15.6	1.64 V	104	43.3	15.1
4	15900.00	46.2 AV	54.0	-7.8	1.64 V	104	31.1	15.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	51.3 PK	74.0	-22.7	2.96 H	280	37.0	14.3
2	10640.00	38.8 AV	54.0	-15.2	2.96 H	280	24.5	14.3
3	15960.00	57.3 PK	74.0	-16.7	2.77 H	291	42.2	15.1
4	15960.00	44.7 AV	54.0	-9.3	2.77 H	291	29.6	15.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	10640.00	52.2 PK	74.0	-21.8	1.81 V	53	37.9	14.3
2	10640.00	40.8 AV	54.0	-13.2	1.81 V	53	26.5	14.3
3	15960.00	58.5 PK	74.0	-15.5	1.65 V	102	43.4	15.1
4	15960.00	46.1 AV	54.0	-7.9	1.65 V	102	31.0	15.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	52.8 PK	74.0	-21.2	2.94 H	291	37.6	15.2
2	11000.00	40.6 AV	54.0	-13.4	2.94 H	291	25.4	15.2
3	#16500.00	57.8 PK	74.0	-16.2	2.81 H	277	40.4	17.4
4	#16500.00	45.2 AV	54.0	-8.8	2.81 H	277	27.8	17.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11000.00	51.7 PK	74.0	-22.3	1.85 V	69	36.5	15.2
2	11000.00	40.7 AV	54.0	-13.3	1.85 V	69	25.5	15.2
3	#16500.00	58.5 PK	74.0	-15.5	1.58 V	99	41.1	17.4
4	#16500.00	45.8 AV	54.0	-8.2	1.58 V	99	28.4	17.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	52.8 PK	74.0	-21.2	2.96 H	277	37.6	15.2
2	11160.00	40.2 AV	54.0	-13.8	2.96 H	277	25.0	15.2
3	#16740.00	57.1 PK	74.0	-16.9	2.81 H	278	38.8	18.3
4	#16740.00	44.6 AV	54.0	-9.4	2.81 H	278	26.3	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11160.00	53.4 PK	74.0	-20.6	1.87 V	65	38.2	15.2
2	11160.00	39.7 AV	54.0	-14.3	1.87 V	65	24.5	15.2
3	#16740.00	57.8 PK	74.0	-16.2	1.64 V	98	39.5	18.3
4	#16740.00	45.8 AV	54.0	-8.2	1.64 V	98	27.5	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	53.4 PK	74.0	-20.6	3.00 H	301	37.9	15.5
2	11400.00	40.9 AV	54.0	-13.1	3.00 H	301	25.4	15.5
3	#17100.00	57.4 PK	74.0	-16.6	2.77 H	302	37.3	20.1
4	#17100.00	44.9 AV	54.0	-9.1	2.77 H	302	24.8	20.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11400.00	53.3 PK	74.0	-20.7	1.82 V	66	37.8	15.5
2	11400.00	39.8 AV	54.0	-14.2	1.82 V	66	24.3	15.5
3	#17100.00	58.2 PK	74.0	-15.8	1.56 V	100	38.1	20.1
4	#17100.00	46.1 AV	54.0	-7.9	1.56 V	100	26.0	20.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	53.0 PK	74.0	-21.0	3.00 H	287	37.8	15.2
2	11490.00	40.6 AV	54.0	-13.4	3.00 H	287	25.4	15.2
3	#17235.00	57.5 PK	74.0	-16.5	2.78 H	292	37.5	20.0
4	#17235.00	44.9 AV	54.0	-9.1	2.78 H	292	24.9	20.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	53.5 PK	74.0	-20.5	1.85 V	78	38.3	15.2
2	11490.00	40.1 AV	54.0	-13.9	1.85 V	78	24.9	15.2
3	#17235.00	57.7 PK	74.0	-16.3	1.62 V	89	37.7	20.0
4	#17235.00	45.8 AV	54.0	-8.2	1.62 V	89	25.8	20.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	53.2 PK	74.0	-20.8	3.02 H	293	38.1	15.1
2	11570.00	40.8 AV	54.0	-13.2	3.02 H	293	25.7	15.1
3	#17355.00	58.1 PK	74.0	-15.9	2.80 H	301	37.6	20.5
4	#17355.00	45.3 AV	54.0	-8.7	2.80 H	301	24.8	20.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11570.00	53.7 PK	74.0	-20.3	1.84 V	70	38.6	15.1
2	11570.00	40.1 AV	54.0	-13.9	1.84 V	70	25.0	15.1
3	#17355.00	57.5 PK	74.0	-16.5	1.68 V	92	37.0	20.5
4	#17355.00	45.4 AV	54.0	-8.6	1.68 V	92	24.9	20.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.