

Marstech Limited

11 Kelfield Street, Etobicoke, Ontario, Canada, M9W 5A1

Telephone (416) 246-1116, Fax (416) 246-1020

TEST REPORT

REPORT DATE: April 11, 2000 REPORT NO: 20118D

CONTENTS: See Table of Contents

SUBMITTOR: ATLINKS USA Inc.
101 W 103rd St.
Indianapolis, IN
46290-1102 USA

SUBJECT: Model No: 27700XXX-A
FCC ID: G9H2-7700


TEST SPECIFICATION: FCC CFR 47 15.233 AND 2.989
Sections: 15.35, 15.107, 15.109, 15.207 and 15.209
NOTE: Tests Conducted Are "Type" Tests.

DATE SAMPLE RECEIVED: N/A DATE TESTED: April 3, 2000

RESULTS: Equipment tested complies with referenced specification.

ALTERATIONS: NONE

Tested by: Timco Engineering, Inc.
Site Registration #95517

Approved and
Certified by: 
B. G. MARSHALL, P. Eng.
Date: April 12/00

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF MARSTECH LIMITED. This report was prepared by Marstech Limited for the account of the "Submittor". The material in it reflects Marstech's judgement in light of the information available to it at the time of preparation. Any use which a Third Party makes of this report, or any reliance on decisions to be made based on it, are the responsibility of such Third Parties. Marstech accepts no responsibility for damages, if any, suffered by any Third Party as a result of decisions made or actions based on this report.

TECHNICAL REPORT - FCC 2.1033(b)

Applicant

ATLINKS USA Inc.
101 W 103rd. St.
Indianapolis, IN
46290-1102 USA

FCC Identifier

G9H2-7700

Manufacturer

Southern Telecommunication Development Co., Ltd.
Block 7, 21, Yunshan East Road, Jiangbei
Huizhou, Guangdong, The PRC

TABLE OF CONTENTS

<u>APPENDIX</u>	<u>Description</u>	<u>FCC Ref.</u>	<u>Page</u>
A	Installation and Operating Instructions Furnished to the User.	2.1033(b)(3)	APPENDIX A APPENDIX A(1)
B	Description of Circuit Functions	2.1033(b)(4)	APPENDIX B APPENDIX B(1)-1 to -7
C	Block Diagram Schematic Diagram	2.1033(b)(5)	APPENDIX C APPENDIX C(1)-1 to -2 APPENDIX C(2)-1 to -4
D	Report of Measurements Test Facility	2.1033(b)(6)	APPENDIX D(1)-1 to -35 APPENDIX D(2)
E	Photographs Label Equipment	2.1033(b)(7)	APPENDIX E APPENDIX E(1)-1 to -3 APPENDIX E(2)-1 to -8

APPENDIX D

(FCC Ref. 2.1033(b)(6))

"Report of Measurements"

Appendix D(1)-1 to -35 - Timco Engineering, Inc. Test Report
Appendix D(2) - Test Site Registration Letter

APPLICANT: MARSTECH LIMITED

FCC ID: 27700XXX-A

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....	LETTER of EXPLANATION
PAGE 2.....	TEST PROCEDURE & EQUIPMENT LIST
PAGE 3.....	STATEMENT ABOUT ANTENNA
PAGE 4.....	POWER LINE CONDUCTED EMISSIONS
PAGE 5.....	6dB BANDWIDTH
PAGE 5.....	POWER OUTPUT
PAGE 6-8.....	RF CONDUCTED EMISSIONS
PAGE 9.....	RADIATION INTERFERENCE TEST DATA
PAGE 10.....	POWER SPECTRAL DENSITY
PAGE 11.....	ANTENNA GAIN

EXHIBIT ATTACHMENTS:

EXHIBIT 12 a & b....	POWER LINE CONDUCTED EMISSIONS
EXHIBIT 13 a - f....	6dB BANDWIDTH PLOTS
EXHIBIT 14 a - f....	BANDEDGE ATTENUATION
EXHIBIT 15 a - f....	SPECTRAL DENSITY PLOTS
EXHIBIT 16 a - d....	PROCESSING GAIN

APPLICANT: MARSTECH LIMITED
FCC ID: 27700XXX-A
REPORT NO.: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT

APPLICANT: MARSTECH LIMITED

FCCID : 27700XXX-A

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
3. Signal Generator: HP 8614A, S/N 2015A07428 Cal. 5/29/99
4. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/23/97
5. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057
6. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
7. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
8. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319 Cal. 4/27/99
9. Horn 40-60GHz: ATM Part #19-443-6R
10. X Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
11. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
12. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
13. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
14. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
15. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99
16. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 76oF with a humidity of 55%.

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=1.0MHz and the video bandwidth(VBW)=3.0MHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.

APPLICANT: MARSTECH LIMITED

FCCID: 27700XXX-A

REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT

PAGE #: 2

ANTENNA CONDUCTED EMISSIONS: The RBW=100KHz, VBW=300KHz and the span set to 10.0MHz and the spectrum was scanned from 30MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1.0MHz and the VBW = 3.0MHz and the span to 50MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100kHz up to 1GHz and 1.0MHz above 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 3.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 71oF with a humidity of 56%.

PRODUCT DESCRIPTION:

The 27700XXX-A is a direct sequency spread spectrum cordless telephone radio that operates in the 2400-2483.5MHz band. The antenna used for the base and the handset is permanantly attached to the UUT. Its actual frequency range is;

Channel #1	2404.0MHz Lowest
Channel #40	2474.72MHz Highest

APPLICANT: MARSTECH LIMITED
FCC ID: 27700XXX-A
PAGE #: 3

APPLICANT: MARSTECH LIMITED
FCC ID: 27700XXX-A - ASSEMBLY #1 AND #3
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NUMBER: 15.107(a)
REQUIREMENTS: .45 - 30 MHz 250 uV OR 47.96 dBuV
TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum
was scanned from .45 to 30 MHz.
TEST DATA:

THE HIGHEST EMISSION READ FOR LINE 1 WAS 12.0uV @ 9.55MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 2.69uV @ 27.64MHz.

THE GRAPHS IN EXHIBITS 12 a & b REPRESENT THE EMISSIONS TAKEN FOR THIS
DEVICE.

TEST RESULTS: Both lines were observed. The measurements in-
dicate that the unit DOES appear to meet the FCC requirements for this
class of equipment.

APPLICANT: MARSTECH LIMITED
FCCID: 27700XXX-A
REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT
PAGE #: 4

NAME OF TEST: 6.0dB BANDWIDTH

RULES PART NUMBER: 15.247(a)(2)

REQUIREMENTS: The 6.0dB bandwidth must be greater than 500KHz.

MEASUREMENT: The 6.0dB bandwidth measured @ 2440.60MHz was
1.47MHz for the base.
The 6.0dB bandwidth measured @ 2440.60MHz was
1.60MHz for the handset.

MEASUREMENT DATA: The 6dB bandwidth was measured at the Low end of
band, middle of band, and the high end of the band for both the handset
& the base unit. See Plots in Exhibits #13 a-f,

NAME OF TEST: POWER OUTPUT


RULES PART NUMBER: 15.247(b) 1.0Watt or +30dBm

MEASUREMENT:

Channel No.	Power Output milliwatts	Unit
1	5.60	Base
20	7.00	Base
40	10.0	Base
1	8.20	Handset
20	9.50	Handset
40	10.0	Handset

15.247(c) Method of Measuring RF Power output:

The antenna was disconnected and a Peak power Sensor was
connected in place of the antenna. The Power output was measured at
the Low end of band, middle of band, and the high end of the band
for both the handset & the base unit.

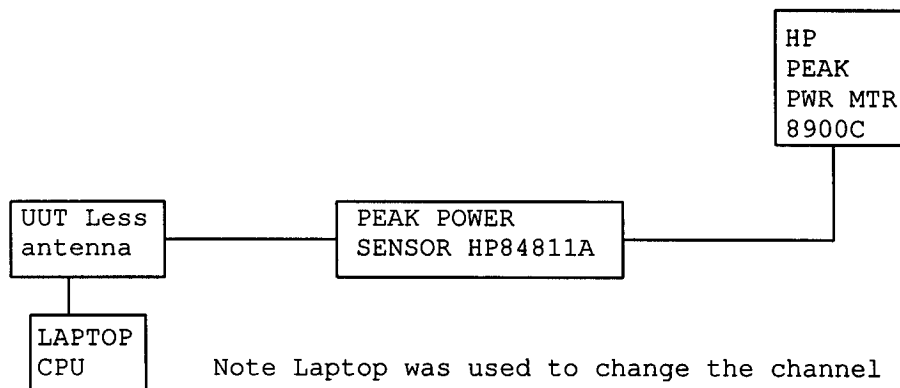


APPLICANT: MARSTECH LIMITED

FCCID: 27700XXX-A

REPORT #: T:\CUS\M\MARSTECH\MAR114U0\1104U0.RPT

PAGE #: 5

15.247(c) Method of Measuring RF Conducted Spurious Emissions

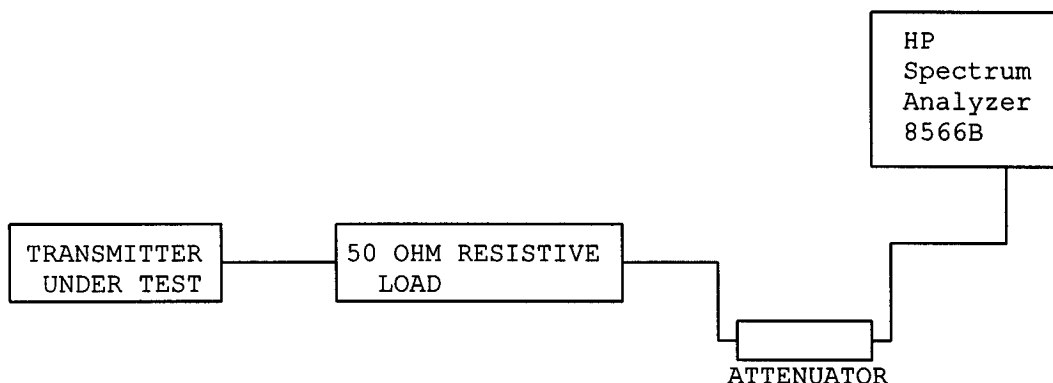

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100KHz

	EMISSION FREQUENCY MHz	dB BELOW CARRIER
Channel 1	2404.0	00.0
base	4809.66	-52.2
	7214.0	-72.5
Channel 20	2438.6	0.00
	4878.04	-43.2
Channel 40	2474.72	0.0
	4949.96	-42.9
HANDSET		
Channel 1	2404.0	0.0
	4809.6	-42.8
	7215.18	-59.8
Channel 21	2438.80	0.0
	4878.08	-43.9
	7317.34	-60.2
Channel 40	2475.0	0.0
	4950.00	-44.7
	7425.00	-60.1

NOTE: THE SPECTRUM WAS SCANNED TO THE TENTH HARMONIC.

APPLICANT: MARSTECH LIMITED

FCCID: 27700XXX-A

REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT

PAGE #: 6

15.247(c),15.205 &15.209(b) Field strength of spurious emissions:

REQUIREMENTS:

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental:	of Harmonics	30 - 88 MHz 40 dBuV/m @3M
902-928MHz		88 -216 MHz 43.5
2.4-2.4835GHz		216 -960 MHz 46
127.38dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REQUIREMENTS: Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	FCC. LIMIT dB	MARGIN dB	ANT.
------------------------------	-------------------------------	--------------------	-----------	-----------------------------	---------------------	--------------	------

BASE

2404.65	62.70	1.09	29.01	92.80	127.38	34.58	V
2483.5	92.80dBuV/m	- 56.00		36.80	54.00	17.20	
4809.80R	1.60	1.45	33.91	36.96	54.00	17.04	V
7214.95	3.90	1.81	36.62	42.33	54.00	11.67	H
9619.44	1.80	2.11	38.58	42.48	54.00	11.52	H
2438.82	63.10	1.10	29.10	93.29	127.38	34.09	V
2483.5	93.29dBuV/m	- 53.80		39.49	54.00	14.51	
4878.22R	3.10	1.46	33.99	38.55	54.00	15.45	V
7316.74R	12.10	1.83	36.73	50.66	54.00	3.34	V
9756.20	0.70	2.12	38.67	41.49	54.00	12.51	V
2474.71	62.90	1.10	29.19	93.19	127.38	34.19	V
2483.5	93.19dBuV/m	- 52.60		40.59	54.00	13.41	
4949.74R	-0.10	1.47	34.07	35.44	54.00	18.56	V
7424.92R	7.70	1.84	36.85	46.40	54.00	7.60	V
9900.48	-1.00	2.14	38.76	39.90	54.00	14.10	V

APPLICANT: MARSTECH LIMITED

FCCID: 27700XXX-A

REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT

PAGE #: 7

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	FCC. LIMIT dB	MARGIN dB	ANT.
------------------------------	-------------------------------	--------------------	-----------	-----------------------------	---------------------	--------------	------

HANDSET

2405.40	44.30	1.09	29.01	74.40	127.38	52.98	H
2483.5	74.40dBuV/m	- 53.40		21.00	54.00	33.00	
4809.80R	8.40	1.45	33.91	43.76	54.00	10.24	H
7214.70	0.30	1.81	36.62	38.73	54.00	15.27	H
9619.60	7.60	2.11	38.58	48.28	54.00	5.72	H
2438.71	49.50	1.10	29.10	79.69	127.38	47.69	H
2483.5	79.69dBuV/m	- 55.50		24.19	54.00	29.81	
4878.25R	12.70	1.46	33.99	48.15	54.00	5.85	H
7317.30R	2.60	1.83	36.73	41.16	54.00	12.84	H
9756.43	8.80	2.12	38.67	49.59	54.00	4.41	H
2474.71	49.50	1.10	29.19	79.79	127.38	47.59	V
2483.5	79.79dBuV/m	- 50.60		29.19	54.00	24.81	
4949.74R	10.20	1.47	34.07	45.74	54.00	8.26	H
7425.31R	5.90	1.84	36.85	44.60	54.00	9.40	V
9900.44	8.20	2.14	38.76	49.10	54.00	4.90	H

The plots of the Delta attenuation from the channel to the edge of the restricted band of 2483.5MHz are attached as exhibits 14 a-f.


APPLICANT: MARSTECH LIMITED
 FCCID: 27700XXX-A
 REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT
 PAGE #: 8

2.993(a)(b)

2.993(a)(b) Continued Field strength of spurious emissions:

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 & the Guidance on Measurements for Direct Sequence Spread Spectrum Systems. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, NEWBERRY, FL 32669.

Method of Measuring Radiated Spurious Emissions

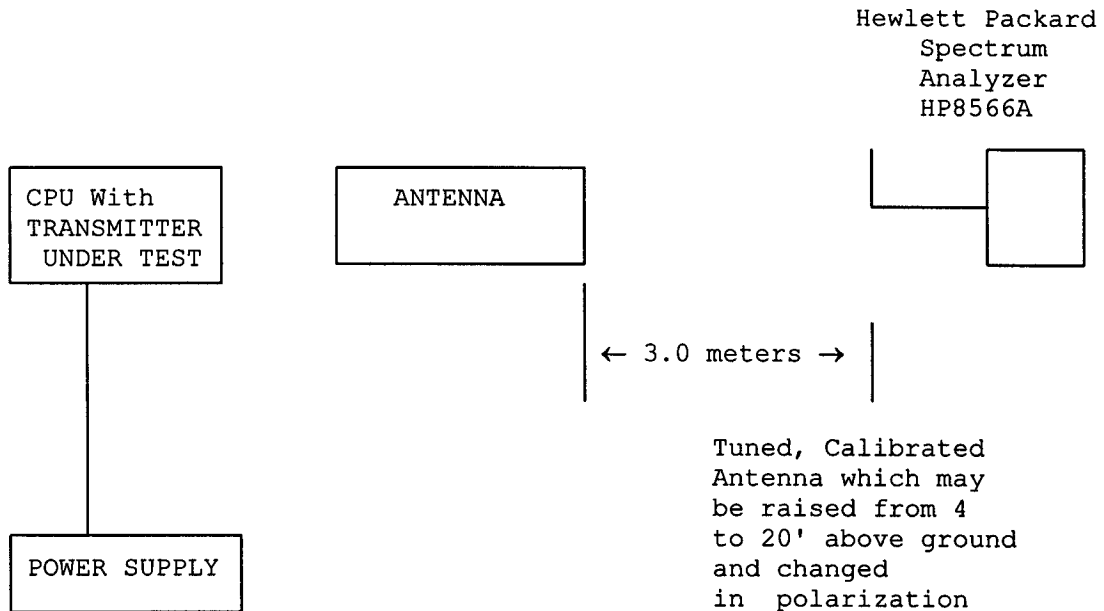

Equipment placed 4' above ground on a rotatable platform.

APPLICANT: MARSTECH LIMITED

FCCID: 27700XXX-A

REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT

PAGE #: 9

APPLICANT: MARSTECH LIMITED
FCC ID: 27700XXX-A
NAME OF TEST: POWER SPECTRAL DENSITY
RULES PART NUMBER: 15.247(d)
REQUIREMENTS: The peak level measured must be no greater than
+8.0dBm.
DATA: THE PLOTS ARE SHOWN IN EXHIBIT 15.

BASE UNIT The HIGHEST level was at 24789.41MHz +5.0dBm.
The antenna was disconnected and the output was
connected to a coaxial attenuator and to the Spectrum analyzer and
the power spectral density was measured at the Low end of band,
middle of band, and the high end of the band for both the handset
& the base unit. The plots of the power spectral power density
for the low end of the band, middle of the band, and the high end
of the band for both the handset & the base are attached as exhibit
15 a-f.

RULES PART NUMBER: 15.247(e)

REQUIREMENTS:

DATA: The processing gain information supplied by the
manufacturer is 12.0dB.

APPLICANT: MARSTECH LIMITED
FCCID: 27700XXX-A
REPORT #: T:\CUS\M\MARSTECH\MAR114U0\114U0.RPT
PAGE #: 10

NAME OF TEST: ANTENNA GAIN

RULES PART NUMBER: 15.247 (b) (3)

REQUIREMENTS: Antenna gain may not exceed 6 dBi without reducing peak power.

DATA: HANDSET: 0 dBi
BASE: 0 dBi

APPLICANT: THOMSON CONSUMER ELECTRONICS

FCC ID: 27701XXX-M

REPORT NO: T:\CUS\M\MARSTECH\MAR114UO\114UO.RPT

PAGE NO: 11