



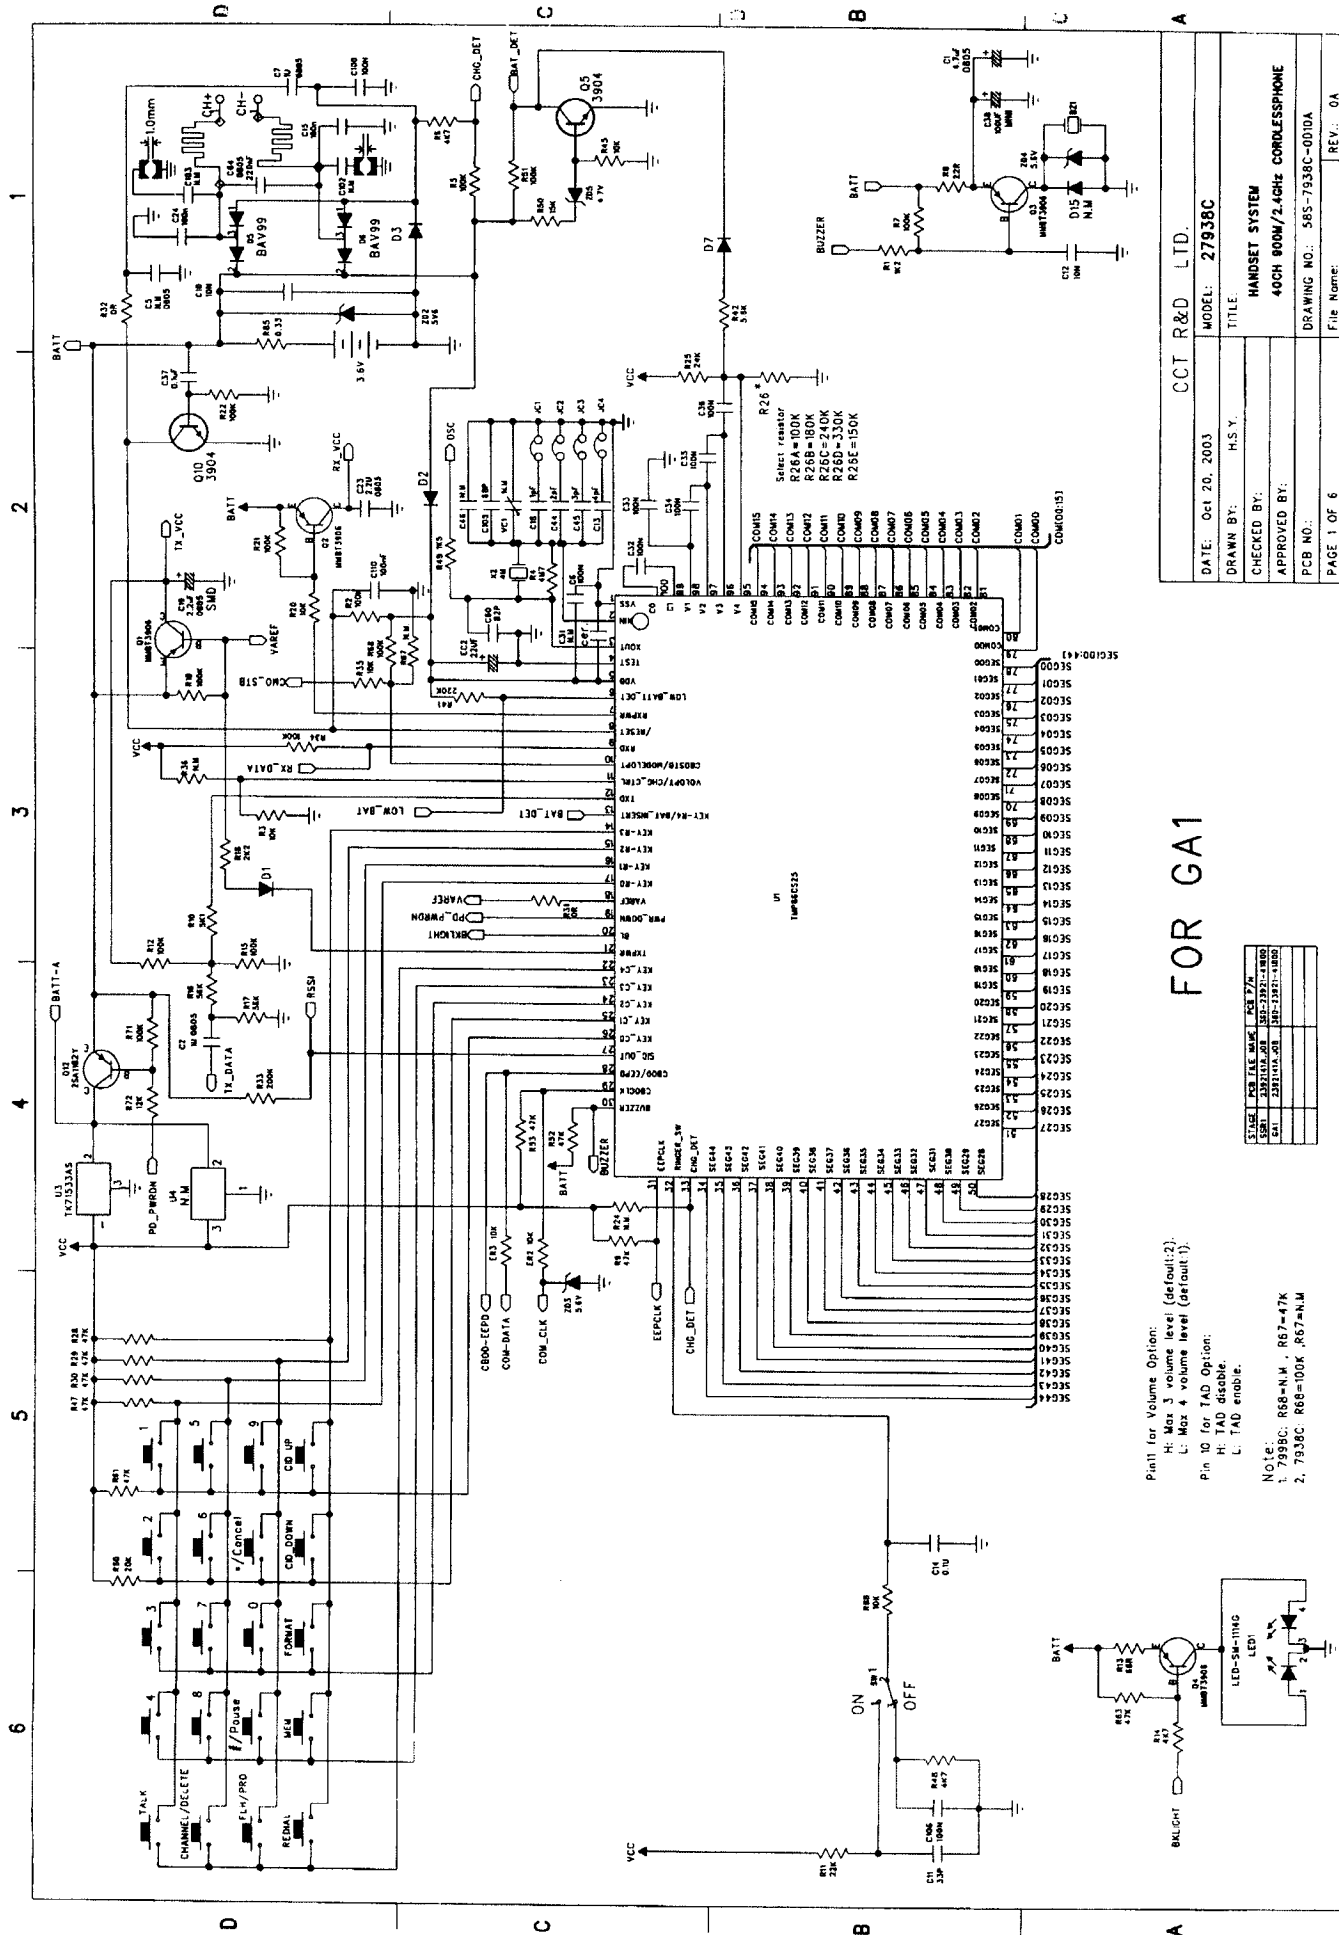


FOR GA1

Pin11 for Volume Option:
 H: Max 3 volume level (default:2);
 L: Max 4 volume level (default 1);
 Pin 10 for TAD Option:
 H: TAD disable;
 L: TAD enable.

Note:
 1. 7938C: R68=N.M., R67=47K
 2. 7938C: R68=100K, R67=N.M.

CCT R&D LTD.	
DATE: Oct 20, 2003	MODEL: 27938C
DRAWN BY: H.S.Y.	TITLE
CHECKED BY:	HANDSET SYSTEM
APPROVED BY:	40CH 900M/2.4GHz CORDLESSPHONE
PCB NO.:	DRAWING NO.: 565-7938C-001DA
PAGE 1 OF 6	File Name:

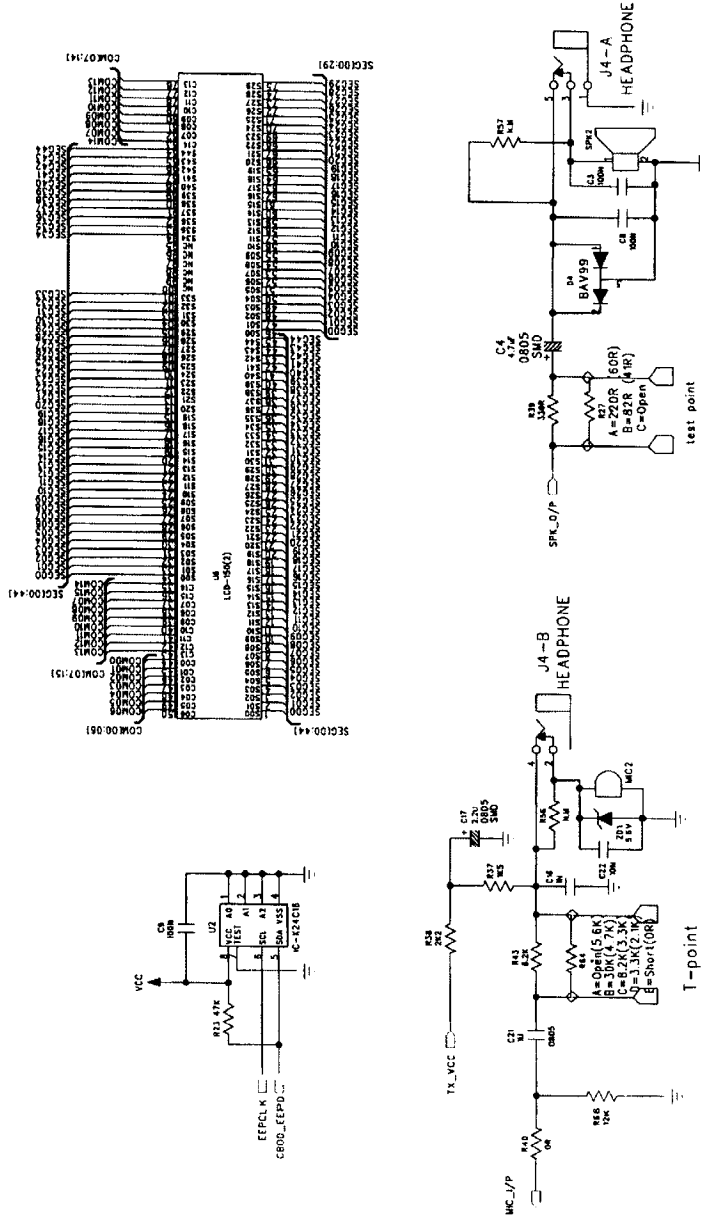

CCT R&D LTD.	
DATE: Oct 20, 2003	MODEL: 27938C
DRAWN BY: H.S.Y.	TITLE: HARDEST SYSTEM
CHECKED BY:	40CH 800W/2.4GHz CORDLESSPHONE
APPROVED BY:	
PCB NO.:	DRAWING NO.: 585-7938C-020A
PAGE 2 OF 6	File Name: REV.: 0A

