



香 港 標 準 及 檢 定 中 心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 1 of 16

Applicant: Columbia Telecommunications Group Inc.
174 Milbar Blvd. Farmingdale New York United
States 11735

Description of Samples: Model name: FM Microphone
Model no.: MIC-LM
Brand name: Columbia Telecommunications
FCC ID: GAFMIC2

Date Samples Received: 2004-04-29

Date Tested: 2004-05-11 to 2004-06-28

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----

K C Lee, EMC
for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 2 of 16

CONTENT:

| | |
|---|------------------|
| Cover | Page 1 of 16 |
| Content | Page 2-3 of 16 |
| <u>1.0 General Details</u> | |
| 1.1 Test Laboratory | Page 4 of 16 |
| 1.2 Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer | Page 4 of 16 |
| 1.3 Equipment Under Test [EUT] Description of EUT operation | Page 5 of 16 |
| 1.4 Date of Order | Page 5 of 16 |
| 1.5 Submitted Samples | Page 5 of 16 |
| 1.6 Test Duration | Page 5 of 16 |
| 1.7 Country of Origin | Page 5 of 16 |
| 1.8 Additional Information of EUT | Page 6 of 16 |
| <u>2.0 Technical Details</u> | |
| 2.1 Investigations Requested | Page 7 of 16 |
| 2.2 Test Standards and Results Summary | Page 7 of 16 |
| <u>3.0 Test Results</u> | |
| 3.1 Emission | Page 8-11 of 16 |
| 3.2 Bandwidth Measurement | Page 12-13 of 16 |

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香 港 標 準 及 檢 定 中 心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 3 of 16

Appendix A

List of Measurement Equipment

Page 14 of 16

Appendix B

Photographs

Page 15-16 of 16

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 4 of 16

No. : HM150928

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

Telephone: 852 2666 1888
Fax: 852 2664 4353

1.2 Applicant Details
Applicant

Columbia Telecommunications Group Inc.
174 Milbar Blvd. Farmingdale New York United States
11735

HKSTC Code Number for Applicant

COT008

Manufacturer

HONORGENS TOYS LTD.
Rm.502, 5/F, No.1 Hung To Road,
Kwun Tong, Kowloon, Hong Kong

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 5 of 16

No. : HM150928

**1.3 Equipment Under Test [EUT]
Description of Sample**

Model Name: FM Microphone
Manufacturer: HONORGENS TOYS LTD.
Brand Name: Columbia Telecommunications
Model Number: MIC-LM
Input Voltage: 3Vd.c ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Columbia Telecommunications Group Inc., FM Microphone. The transmitter is a 1 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic. and type is frequency modulation.

1.4 Date of Order

2004-04-29

1.5 Submitted Sample(s):

4 Samples per model

1.6 Test Duration

2004-05-11 to 2004-06-28

1.7 Country of Origin

China

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 6 of 16

No. : HM150928

1.8 Additional Information of EUT

User Manual
Part List
Circuit Diagram
Printed Circuit Board [PCB] Layout
Block diagram
FCC ID Label

Submitted

Not Available

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香 港 標 準 及 檢 定 中 心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 7 of 16

No. : HM150928

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4: 2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | |
|--|------------------|-----------------|------------------|-------------------------------------|--------------------------|-------------------------------------|
| Test Condition | Test Requirement | Test Method | Class / Severity | Test Result | | |
| | | | | Pass | Failed | N/A |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.239 | ANSI C63.4:2003 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2003 | Class B | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Conducted Emissions on AC, 0.15MHz to 30MHz | FCC 47CFR 15.207 | ANSI C63.4:2003 | Class B | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: N/A - Not Applicable

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 8 of 16

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.239
Test Method: ANSI C63.4:2003
Test Date: 2004-06-28
Mode of Operation: On mode

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

Test Setup:

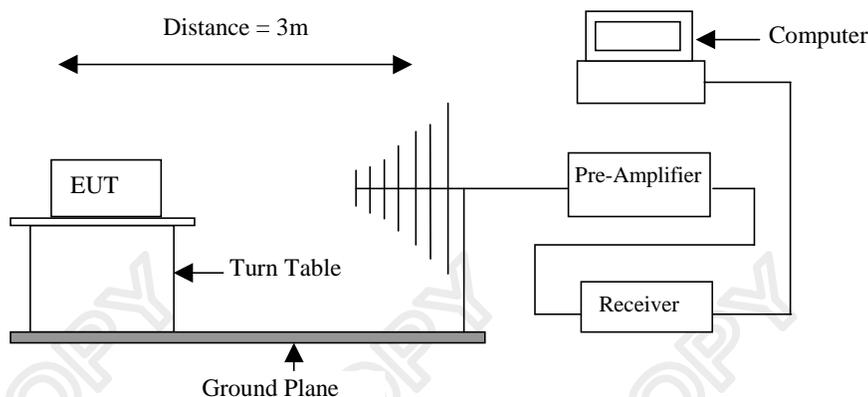

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 9 of 16

No. : HM150928

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:

| Frequency Range of Fundamental [MHz] | Peak Limits [$\mu\text{V/m}$] | Average Limits [$\mu\text{V/m}$] |
|--------------------------------------|---------------------------------|------------------------------------|
| 88-108 | 2,500 | 250 |

Results:

| Field Strength of Fundamental Emissions Peak Value | | | | | | |
|---|--|---|--------------------------------------|-----------------------------------|------------------------------|------------------|
| Frequency MHz | Measured Level @3m dB $\mu\text{V/m}$ | Correction Factor dB $\mu\text{V/m}$ | Field Strength dB $\mu\text{V/m}$ | Field Strength $\mu\text{V/m}$ | Limit @3m $\mu\text{V/m}$ | E-Field Polarity |
| 98.00 | 34.3 | 9.6 | 43.9 | 156.7 | 2,500 | Horizontal |

| Field Strength of Fundamental Emissions Average Value | | | | | | |
|--|--|---|--------------------------------------|-----------------------------------|------------------------------|------------------|
| Frequency MHz | Measured Level @3m dB $\mu\text{V/m}$ | Correction Factor dB $\mu\text{V/m}$ | Field Strength dB $\mu\text{V/m}$ | Field Strength $\mu\text{V/m}$ | Limit @3m $\mu\text{V/m}$ | E-Field Polarity |
| 98.00 | 34.2 | 9.6 | 43.8 | 154.9 | 250 | Horizontal |

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz $\pm 4.1\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth : 3MHz

Video Bandwidth 1Hz

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 10 of 16

No. : HM150928

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range [MHz] | Quasi-Peak Limits [μ V/m] |
|-----------------------|--------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| Radiated Emissions Quasi-Peak | | | | | | |
|----------------------------------|---------------------------|--------------------------|-----------------------|--------------------|---------------|------------------|
| Frequency MHz | Measured Level @3m dB V/m | Correction Factor dB V/m | Field Strength dB V/m | Field Strength V/m | Limit @3m V/m | E-Field Polarity |
| 196.00 | 25.5 | 11.2 | 36.7 | 68.4 | 150 | Horizontal |
| 294.00 | < 1.0 | 9.8 | < 10.8 | < 3.5 | 150 | Vertical |
| 392.00 | < 1.0 | 11.5 | < 12.5 | < 4.2 | 150 | Vertical |
| 490.00 | < 1.0 | 15.9 | < 16.9 | < 7.0 | 200 | Vertical |
| 588.00 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 200 | Vertical |
| 686.00 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 200 | Vertical |
| 784.00 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 200 | Vertical |
| 882.00 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 200 | Vertical |
| 980.00 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 200 | Vertical |

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz \pm 4.1dB

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 11 of 16

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

| | |
|--------------------|------------------|
| Test Requirement: | FCC 47CFR 15.107 |
| Test Method: | ANSI C63.4:2003 |
| Test Date: | 2004-06-28 |
| Mode of Operation: | N/A |

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香 港 標 準 及 檢 定 中 心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 12 of 16

No. : HM150928

3.2 20B Bandwidth of Fundamental Emission

| | |
|--------------------|----------------------------------|
| Test Requirement: | FCC 47 CFR 15.227 |
| Test Method: | ANSI C63.4:2003 (Section 13.1.7) |
| Test Date: | 2004-06-28 |
| Mode of Operation: | On mode |

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 13 of 16


Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range [MHz] | 20dB Bandwidth [KHz] | FCC Limits [MHz] |
|--------------------------|-------------------------|---------------------|
| 98.00 | 47.5 | 200 |

Result:

The following figure is the measured bandwidth of Fundamental Emission.

20dB Bandwidth of Fundamental Emission

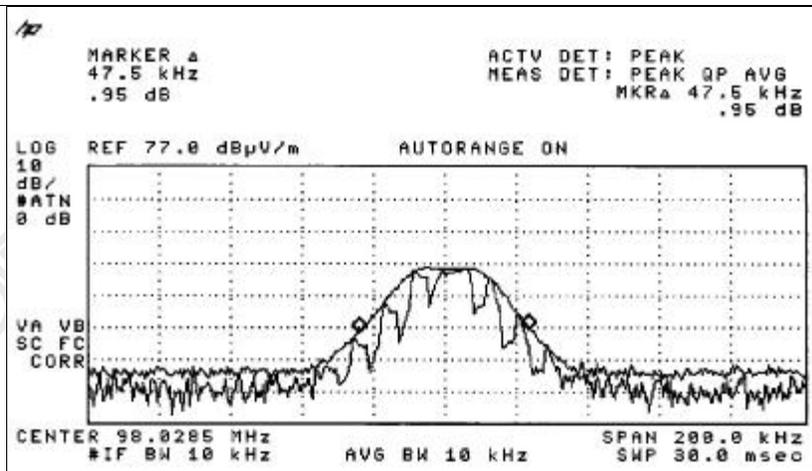

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21

TEST REPORT

Page 14 of 16

No. : HM150928

Appendix A

List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|--|---|--------------------------------|--|----------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 15/06/04 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 15/06/04 |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 15/06/04 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 15/06/04 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 15/06/04 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 15/06/04 |
| EM013 | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD | HP9000 HP A1097C HP9133L | 6226A60314 3151J39517 2623A02468 | 15/06/04 |
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 15/06/04 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 04/08/00 |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | N/A |
| EM083 | HKSTC OPEN AREA TEST SITE | HKSTC | N/A | N/A | 08/11/02 |
| EM131 | PORTABLE SPECTRUM ANALYSER | HEWLETT PACKARD | 8595EM | 3710A00155 | 13/01/04 |
| EM145 | EMI TEST RECEIVER | R & S | ESCS 30 | 830245/021 | 02/08/03 |
| EM194 | BICONILOG ANTENNA | EMCO | 3142B | 1795 | 21/10/03 |
| EM195 | ANTENNA POSITIONING MAST | EMCO | 2075 | 2368 | N/A |
| EM196 | MULTI-DEVICE CONTROLLER | EMCO | 2090 | 1662 | N/A |

Conducted Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|-------------------------------------|----------------------------------|------------|---------------------|----------|
| EM078 | VARIAC | SHANGHAI VOLTAGE | TDGC-3/0.5 | N/A | CM |
| EM081 | SMALL SCREENED ROOM | MIKO INST HK | N/A | N/A | 17/10/03 |
| EM119 | LISN | R & S | ESH3-Z5 | 0831.5518.52 | 01/10/02 |
| EM127 | ISOLATION TRANSFORMER 220 TO 300 | WING SUN | N/A | N/A | CM |
| EM142 | PULSES LIMITER | R & S | ESH3Z2 | 357.8810.52 | 07/07/03 |
| EM181 | EMI TEST RECEIVER | R & S | ESIB7 | 100072 | 06/01/04 |
| EM154 | SHIELDING ROOM | SIEMENA MATSUSHITA COMPONENTS | N/A | 803-740-057- 99A | 17/10/03 |
| EM197 | LISN | EMCO | 4825/2 | 1193 | 08/04/03 |

Remarks:

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstdc.org E-mail: hkstdc@hkstdc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstdc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 15 of 16

Appendix B

Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

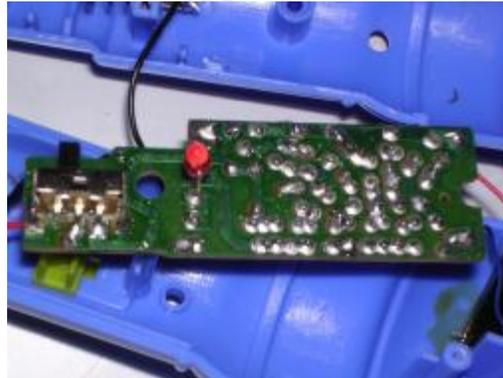

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心
Hong Kong Standards and Testing Centre

Date : 2004-07-21
No. : HM150928

TEST REPORT

Page 16 of 16

Photographs of EUT

Measurement of Radiated Emission Test Set Up



**** End of Test Report ****