

**FCC ID PER PART 15.235
EMI MEASUREMENT AND TEST REPORT**



For

Columbia Telecommunications Group Inc.

174 Milbar Blvd., Farmingdale,
New York, 11375 USA

FCC ID: GAFWT-SD2

2003-09-10

This Report Concerns: ☒ Original Report	Equipment Type: Walkie Talkie
Test Engineer: Hang Tan 	
Report No.: R0308143	
Test Date: 2003-09-09	
Reviewed By: Ming Jing 	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 OBJECTIVE	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	3
1.5 TEST FACILITY	4
1.6 TEST EQUIPMENT LIST	4
2 - SYSTEM TEST CONFIGURATION.....	5
2.1 JUSTIFICATION	5
2.2 BLOCK DIAGRAM.....	5
2.3 EQUIPMENT MODIFICATIONS.....	5
2.4 TEST SETUP BLOCK DIAGRAM	5
3 - CONDUCTED EMISSIONS TEST.....	6
4 - FIELD STRENGTH RADIATED EMISSION.....	7
4.1 APPLICABLE REQUIREMENTS.....	7
4.2 MEASUREMENT UNCERTAINTY	7
4.3 EUT SETUP	7
4.4 SPECTRUM ANALYZER SETUP	7
4.5 TEST PROCEDURE	8
4.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	8
4.7 SUMMARY OF TEST RESULTS.....	8
4.8 RADIATED EMISSIONS TEST RESULT DATA	8
5 - BAND EDGE.....	9
5.1 APPLICABLE REQUIREMENTS.....	9
5.2 TEST RESULTS.....	9

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant: Columbia Telecommunications Group Inc.
Product Description: Walkie Talkie
Trade Name: Columbia
Model: WT-SD2
FCC ID: GAFWT-SD2
Operating Frequency: 49.86MHz
Dimension: 2.75" L x 2.4" W x 8.5" H
Applicable standard(s): 15.235

**The test data gathered are from typical production samples provided by the manufacturer.*

1.2 Objective

This Type approval report is prepared on behalf of *Columbia Telecommunications Group Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules, Part 15, sec 235 for band edge, conducted and radiated margin.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	Panel 2408A00105 Display 2403A06544	2004-05-01
HP	Spectrum Analyzer	8593A	29190A00242	2004-05-01
HP	Amplifier	8447E	1937A01054	2004-05-01
HP	Quasi-Peak Adapter	85650A	2521A00718	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-05-01
Com-Power	LISN	LI-200	12005	2004-03-28
Com-Power	LISN	LI-200	12008	2004-03-28
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
Rohde & Schwarz	EMI Test Receiver	ESPI	1147 8007 07	2003-12-03

Statement of Traceability: Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to National Institute of Standard and Technology (NIST).

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing in a typical fashion (as normally used in a typical application).

The final qualification test was performed with the EUT operating at normal mode for the purpose of measurement.

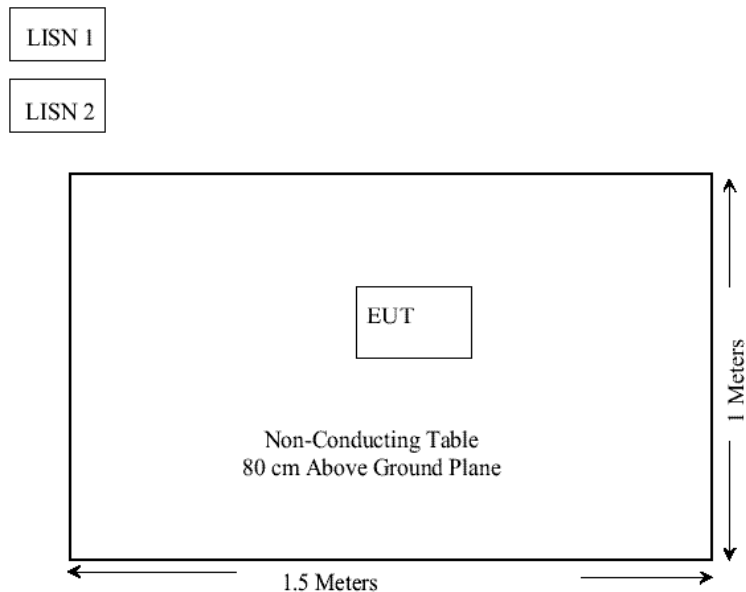
2.2 Block Diagram

Please refer to Exhibit D.

2.3 Equipment Modifications

No modification(s) was (were) made by BACL in final test to make sure the EUT compliant with the applicable limits and requirements.

2.4 Test Setup Block Diagram



3 - CONDUCTED EMISSIONS TEST

Per FCC 15.235 (c) (2), the total input power to the device measured at the battery or the power line terminals shall not exceed 100 milliwatts under any condition of modulation.

Not applicable because of battery operation.

4 - FIELD STRENGTH RADIATED EMISSION

4.1 Applicable Requirements

Per FCC 15.235 (a), the field strength of any emission within this band shall not exceed 10, 000 microvolts/meter at 3 meters.

Per FCC 15.235 (b), the field strength of any emissions appearing between the band edges and up to 10kHz above and below the band edges shall be attenuated at least 26dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signal exceeding 20 micorvolts/meter at 3 meters shall be reported in the application for certification.

4.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

4.3 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-1992. The specification used was the FCC Class B limits.

The DC power supply was connected to 120Vac/60Hz power source.

The spacing between the peripherals was 10 cm.

External I/O cables are draped over edge of test table or bundled when necessary.

The EUT was tested in 3 orthogonal positions.

4.4 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33, the EUT was tested to 1000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth.....	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth.....	1MHz

4.5 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -4 dBμV of specified limitation), and are distinguished with a "QP" in the data table.

The EUT was operating at normal to represent worst-case results during final qualification test. Therefore, this configuration was used for final test data recorded in the table(s) listed under section 4.7 of this report.

4.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Limit}$$

4.7 Summary of Test Results

According to the final data in section 4.6, the EUT complied with the FCC 15.235 (a) standards, and had the worst margin of:

- 3.6 dBμV at 49.86 MHz in the Vertical polarization

4.8 Radiated Emissions Test Result Data

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15.235		Comments
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB	
49.86	87.9	180	1.2	v	11.3	2.2	25.0	76.4	80	-3.6	Fund / Ave
148.58	38.9	90	1.3	v	13.4	3.7	25.0	31.0	43.52	-12.5	Peak
249.30	41.3	180	3.0	v	11.8	4.6	25.0	32.7	46.02	-13.3	Peak
149.58	36.8	270	1.4	h	13.4	3.7	25.0	28.9	43.52	-14.6	Peak
249.30	36.8	180	3.0	h	11.8	4.6	25.0	28.2	46.02	-17.8	Peak
49.86	71.6	180	1.4	h	11.3	2.2	25.0	60.1	80	-19.9	Fund / Peak
49.86	88.2	90	1.2	v	11.3	2.2	25.0	76.7	100	-23.3	Fund / Ave
49.86	72.0	180	1.4	h	11.3	2.2	25.0	60.5	100	-39.5	Fund / Peak

5 - BAND EDGE

5.1 Applicable Requirements

Per FCC 15.235 (b), the field strength of any emissions appearing between the band edges and up to 10kHz above and below the band edges shall be attenuated at least 26dB below the level of the unmodulated carrier or to the general limits of §15.209.

5.2 Test Results

Result: Pass.

Please refer the attached plots for more details.

