



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 4 for Head& Body
LTE Band 5 for Head& Body
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 17 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
LTE Band 71 for Head& Body



Test Laboratory: LCS-SAR Lab

GSM850 GSM 128CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, GSM (0); Communication System Band: GSM GSM850; Frequency: 824.2 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.225 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.701 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.230 W/kg



0 dB = 0.225 W/kg = -6.48 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

GSM850 GPRS 4TS 128CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, GPRS (0); Communication System Band: GSM 850; Frequency: 824.2 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.426 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.44 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

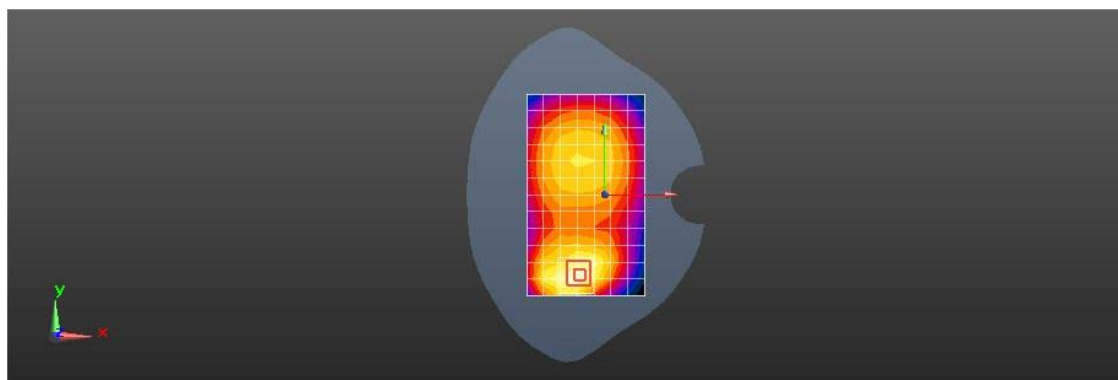

0 dB = 0.426 W/kg = -3.71 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

GSM1900 GSM 512CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, GSM (0); Communication System Band: GSM GSM1900; Frequency: 1850.2 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0954 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.249 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.107 W/kg



0 dB = 0.0954 W/kg = -10.20 dBW/kg



Test Laboratory: LCS-SAR Lab

GSM1900 GPRS 4TS 512CH Rear side 10mm

DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1

Communication System: UID 0, GPRS (0); Communication System Band: GSM 1900; Frequency: 1850.2 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used $f = 1850.2$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.236 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.553 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

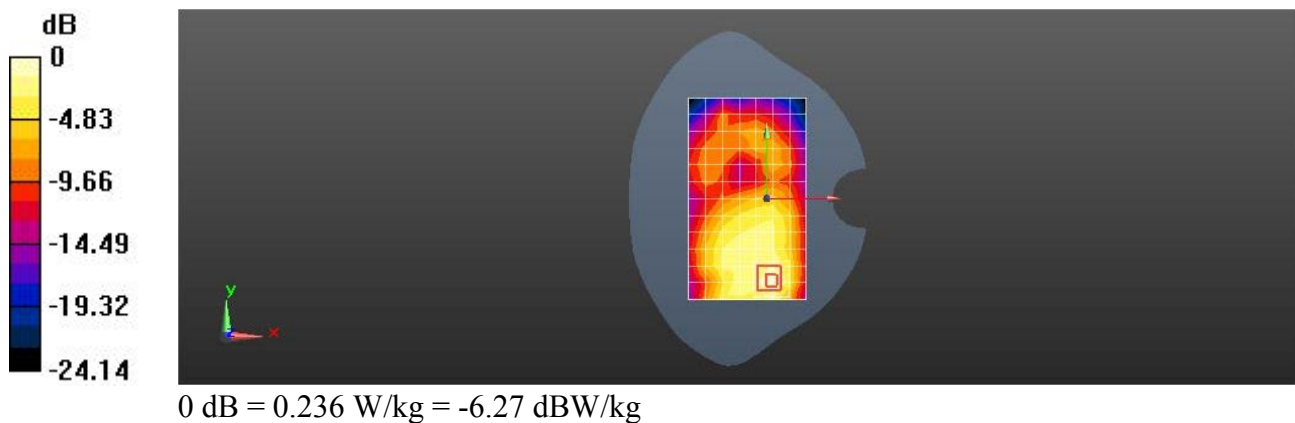

Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9400CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band II; Frequency: 1880 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0979 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.265 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.110 W/kg



0 dB = 0.0979 W/kg = -10.09 dBW/kg



Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9400CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band II; Frequency: 1880 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.242 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.582 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

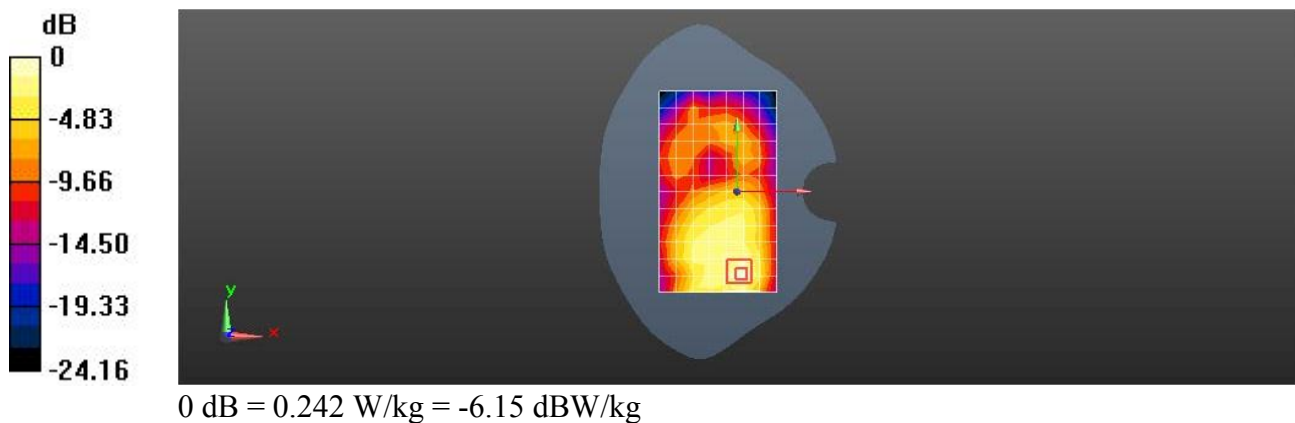

Test Laboratory: LCS-SAR Lab

WCDMA Band V RMC 4182CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band V; Frequency: 836.4 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.045$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.584 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.125 W/kg



0 dB = 0.121 W/kg = -9.17 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

WCDMA Band V RMC 4182CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA Band V; Frequency: 836.4 MHz; Communication System PAR: 3.4 dB; PMF: 1.01976

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.045$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.206 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.64 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

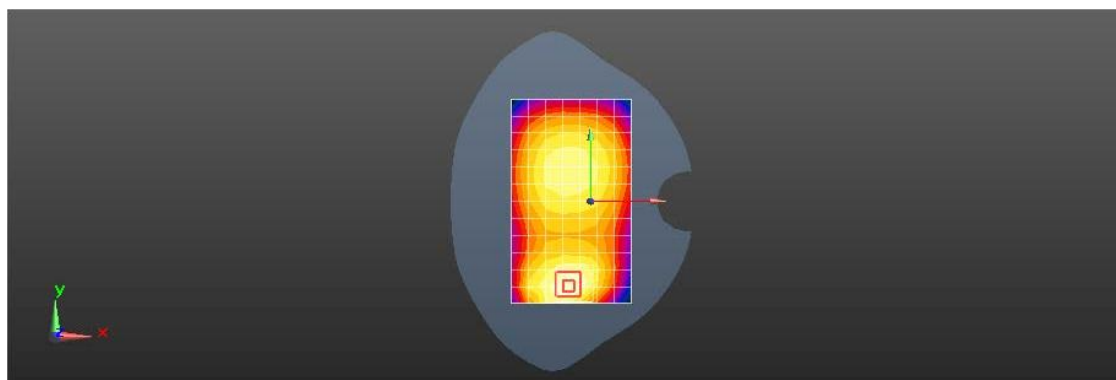

0 dB = 0.206 W/kg = -6.86 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 2 20M QPSK 1RB99 18900CH Right cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 2 20MHz; Frequency: 1880 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.628 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

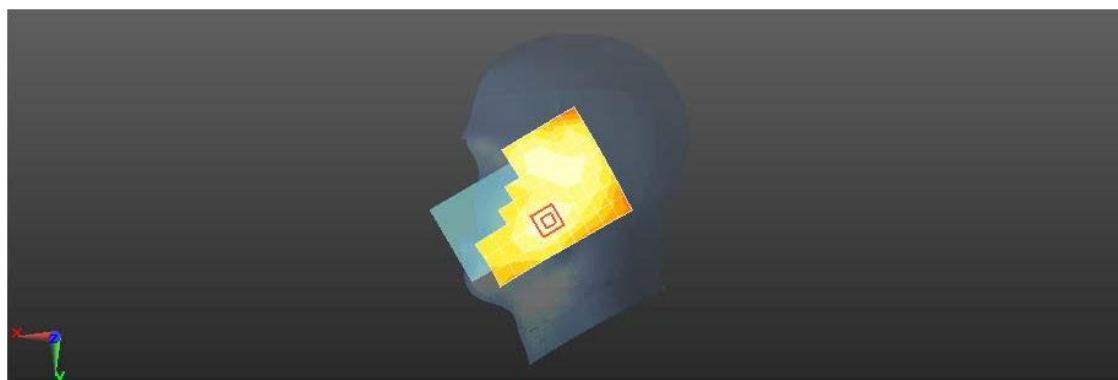

0 dB = 0.258 W/kg = -5.88 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 2 20M QPSK 1RB99 18900CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 2 20MHz; Frequency: 1880 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.694 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.420 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

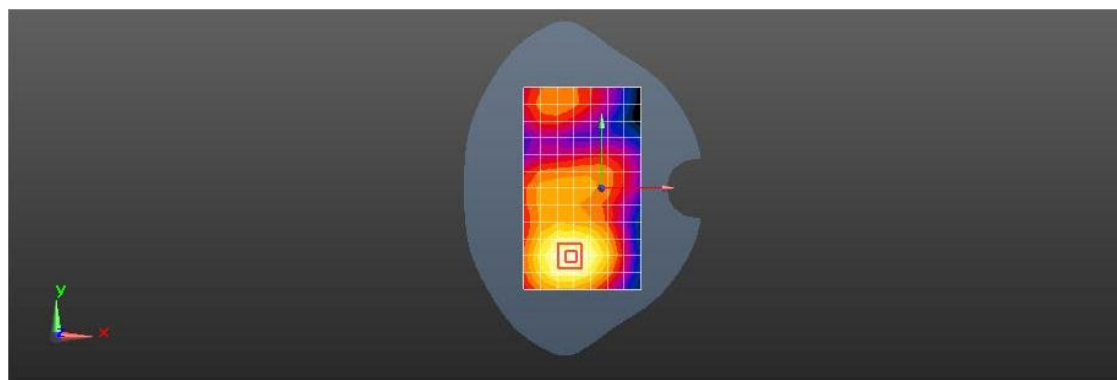

0 dB = 0.694 W/kg = -1.58 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 4 20M QPSK 1RB99 20175CH Right cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 4 20MHz; Frequency: 1732.5 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.551$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.325 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

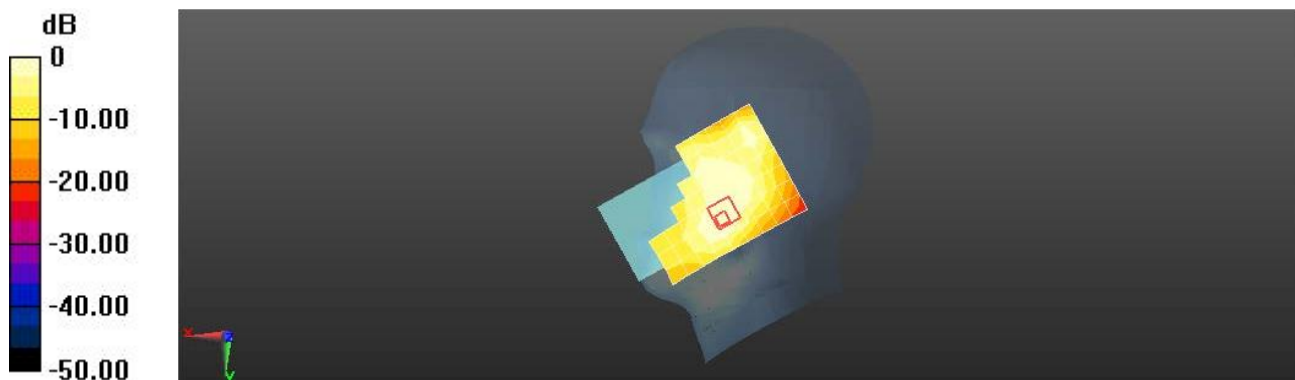

0 dB = 0.121 W/kg = -9.18 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 4 20M QPSK 1RB99 20175CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 4 20MHz; Frequency: 1732.5 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.551$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.643 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.267 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.660 W/kg

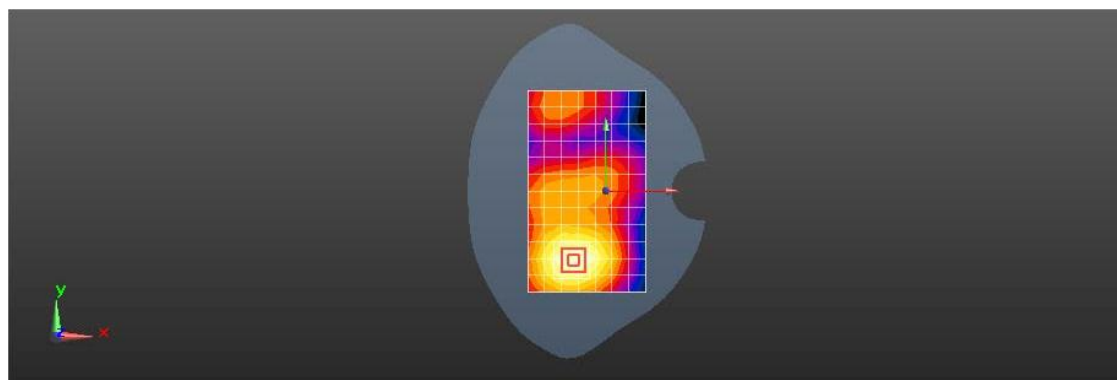

0 dB = 0.643 W/kg = -1.92 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB0 20450CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 5 10MHz; Frequency: 829 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 829$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.068$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.580 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.125 W/kg



0 dB = 0.121 W/kg = -9.18 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB0 20450CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 5 10MHz; Frequency: 829 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 829$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.068$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.62, 9.62, 9.62); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.361 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

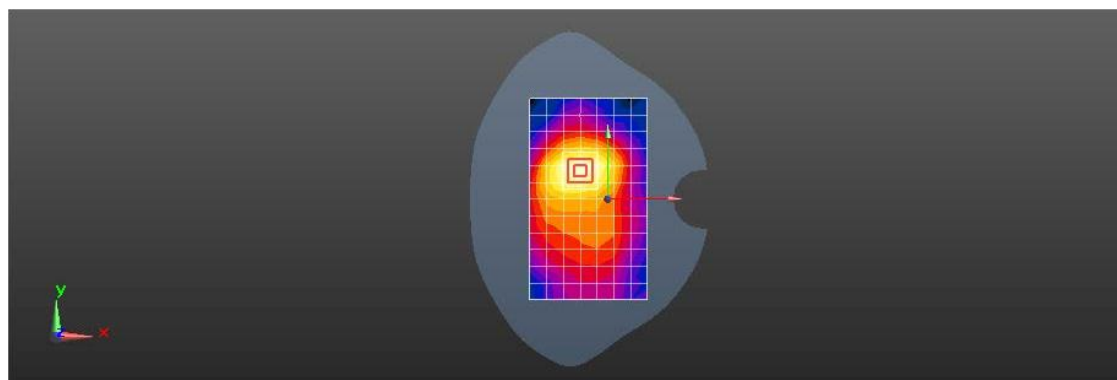

0 dB = 0.361 W/kg = -4.42 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB49 21350CH Right cheek

DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 7 20MHz; Frequency: 2560 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 38.736$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.485 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.603 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.533 W/kg

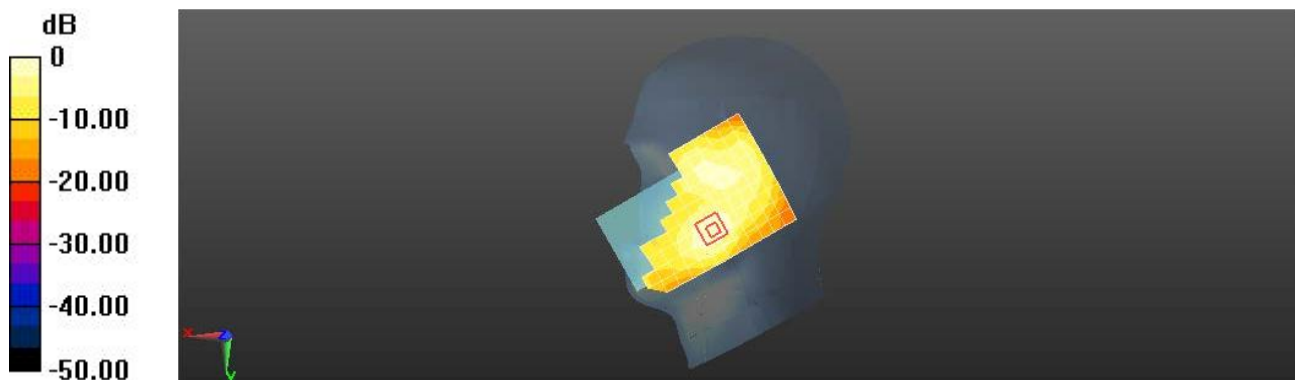

0 dB = 0.485 W/kg = -3.14 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB49 21350CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 7 20MHz; Frequency: 2560 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 38.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.983 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.43 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.980 W/kg

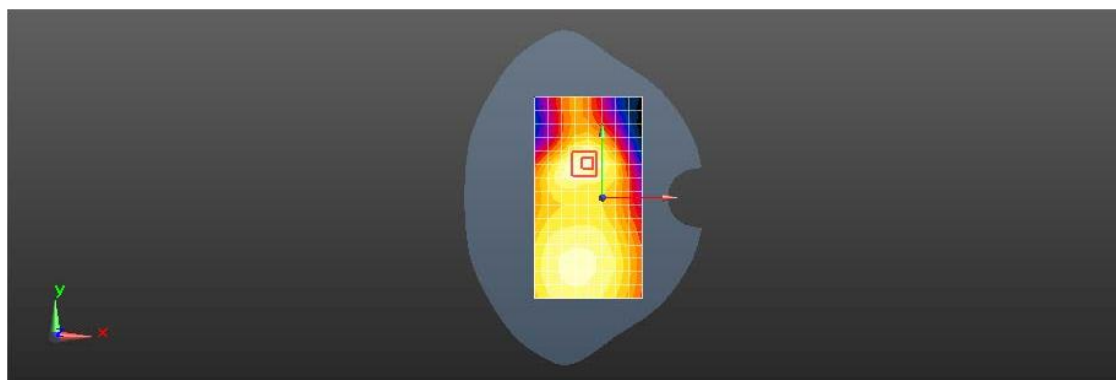

0 dB = 0.983 W/kg = -0.07 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 12 10M QPSK 1RB24 23060CH Left cheek

DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 12 10MHz; Frequency: 704 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 704$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.594$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.523 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

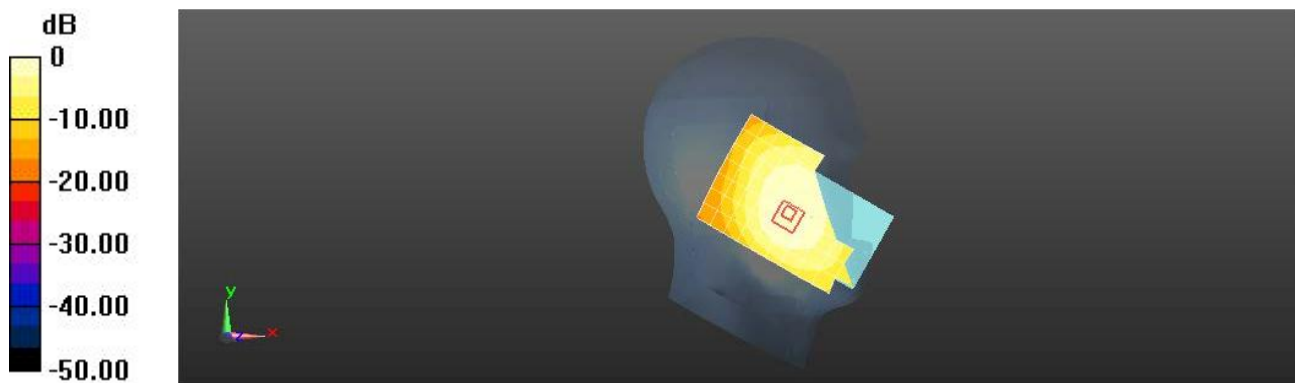

0 dB = 0.119 W/kg = -9.25 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 12 10M QPSK 1RB24 23060CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 12 10MHz; Frequency: 704 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 704$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.594$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.737 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

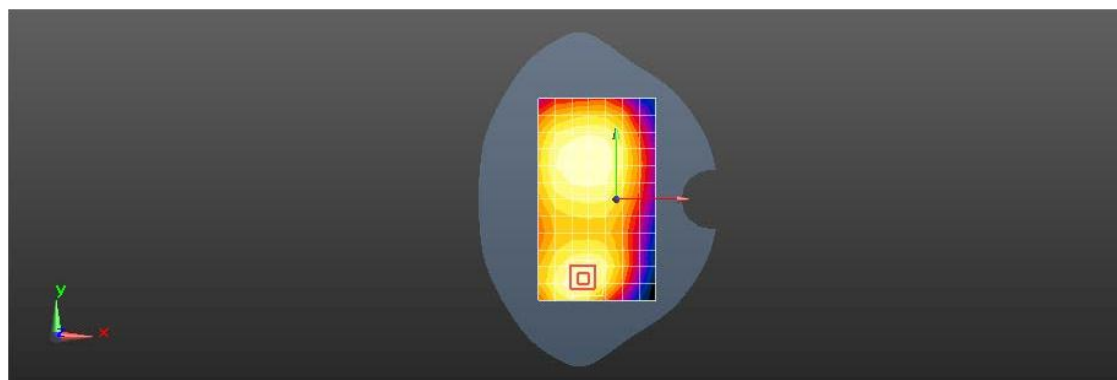

0 dB = 0.150 W/kg = -8.23 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 17 10M QPSK 1RB24 23780CH Left cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 17 10MHz; Frequency: 709 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 709$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.094$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.147 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.514 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.098 W/kg

0 dB = 0.147 W/kg = -8.34 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 17 10M QPSK 1RB24 23780CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 17 10MHz; Frequency: 709 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 709$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.094$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.788 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

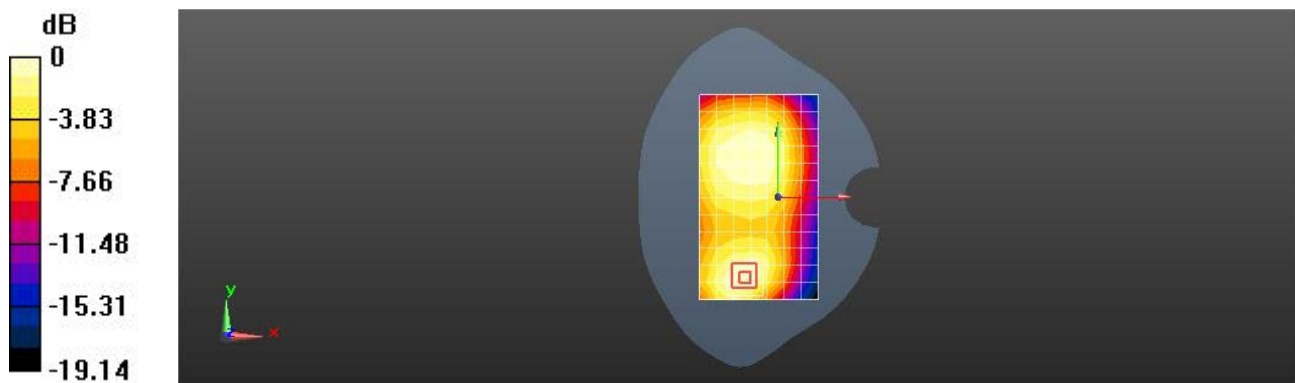

0 dB = 0.151 W/kg = -8.22 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 41 20M QPSK 1RB49 41490CH Right cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-TDD (0); Communication System Band: LTE Band 41 20MHz; Frequency: 2680 MHz; Communication System PAR: 9.21 dB; PMF: 1.77828

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 38.263$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.543 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.720 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.598 W/kg

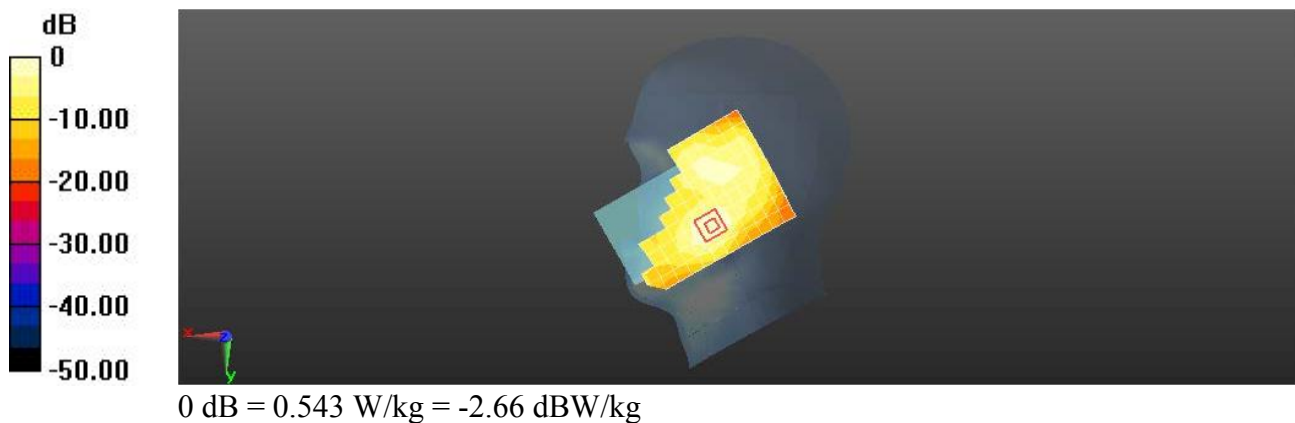

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 41 20M QPSK 1RB49 41490CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-TDD (0); Communication System Band: LTE Band 41 20MHz; Frequency: 2680 MHz; Communication System PAR: 9.21 dB; PMF: 1.77828

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 38.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.35, 7.35, 7.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.12 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

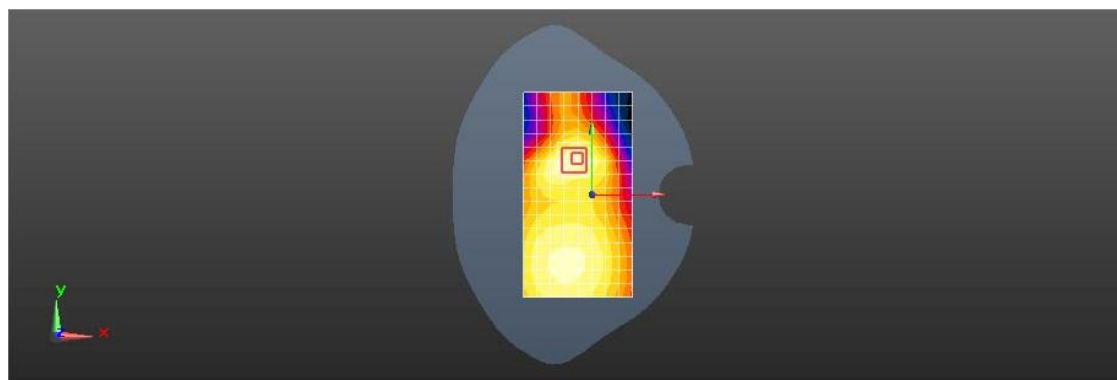

0 dB = 1.12 W/kg = 0.51 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 66 20M QPSK 1RB99 132322CH Right cheek**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 66 20MHz; Frequency: 1745 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.697$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.615 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.162 W/kg



0 dB = 0.153 W/kg = -8.16 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 66 20M QPSK 1RB99 132322CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 66 20MHz; Frequency: 1745 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.697$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.35, 8.35, 8.35); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.426 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.484 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

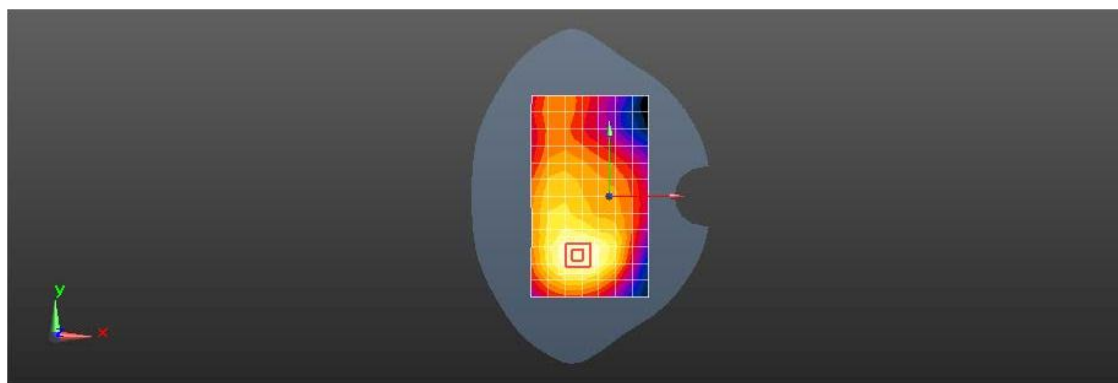

0 dB = 0.426 W/kg = -3.71 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 71 20M QPSK 1RB49 133222CH Left cheek

DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 71 20MHz; Frequency: 673 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 673$ MHz; $\sigma = 0.838$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.140 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.500 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.093 W/kg



0 dB = 0.140 W/kg = -8.53 dBW/kg



Test Laboratory: LCS-SAR Lab

LTE Band 71 20M QPSK 1RB49 133222CH Rear side 10mm**DUT: Mobile Phone; Type: FLIP 4G; Serial: A10103200-1**

Communication System: UID 0, LTE-FDD (0); Communication System Band: LTE Band 71 20MHz; Frequency: 673 MHz; Communication System PAR: 5.73 dB; PMF: 1.13894

Medium parameters used: $f = 673$ MHz; $\sigma = 0.838$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(10.02, 10.02, 10.02); Calibrated: 2023/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection),
- Electronics: DAE3 Sn419; Calibrated: 2023/6/20
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

flat/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.312 W/kg


flat/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.457 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

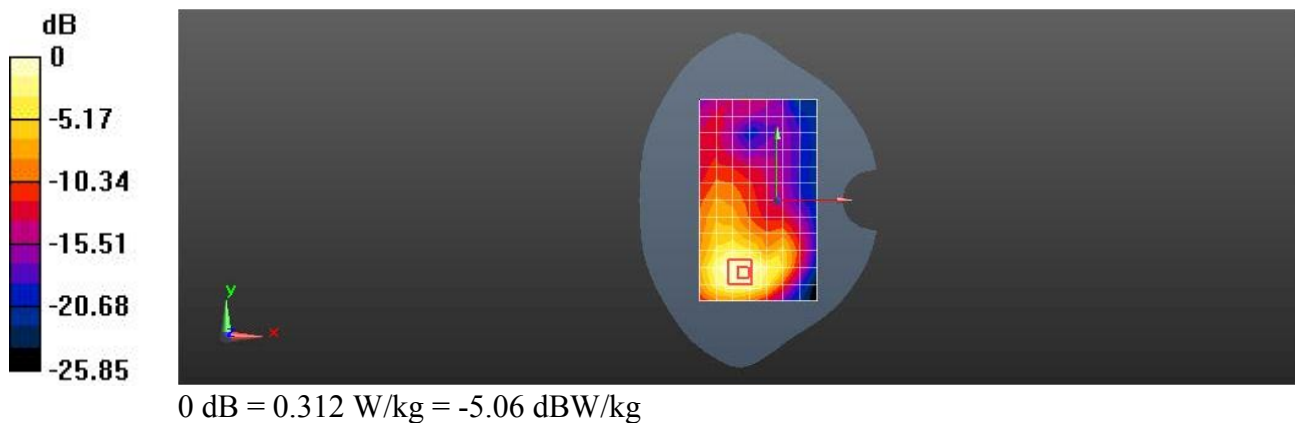

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity