

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		AE	
				CAGE CODE 55939		REV LTR	
		THIS TITLE PAGE CONTAINS PROPRIETARY AND DATA RIGHTS NOTATIONS.					
DOCUMENT TYPE ENGINEERING BULLETIN				CLASS A		INITIAL RELEASE DATE 4 SEP 87	
DIVISION BCAS		DEPARTMENT NO. 5892		PRODUCT LINE NO. DM-850		CONTRACT NO.	
TITLE INTEGRATED TEST SPECIFICATION FOR DM-850 PART NO. 7510184-9XX AND DM-855, PART NO. 7510184-855							
PREPARED BY: L. J. Allocco		DATE 9/3/87		APPROVED BY TECHNICAL MANAGER R. Fuller		DATE 9-3-87	
APPROVED BY ENGINEERING DEPARTMENT MANAGER C. Cunningham		DATE 9-3-87		APPROVED FOR SCM		DATE	
APPROVED FOR SQA		DATE		APPROVED BY:		DATE	
REF AWAEB/PSAEB NO.		CHECKER		PRODUCT DESIGN CHECKER (FOR REF, SPCL CONT PER EPM 1-A-40)		COGNIZANCE OF QE SUPVR (FOR REF, SPCL CONT PER EPM 1-A-40)	
FOR PAGE INDEX, SEE PAGE CR-2. REVISION RECORD FOLLOWS PAGE INDEX. THIS IS AN ELECTRONIC FACSIMILE OF THE CR-1 ON FILE WITH DOCUMENT CONTROL.							
PROPRIETARY NOTICE THIS DOCUMENT AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF HONEYWELL INC. NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED HEREIN SHALL BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF HONEYWELL INC. NOTICE FREEDOM OF INFORMATION ACT (5 USC 552) AND DISCLOSURE OF CONFIDENCE INFORMATION GENERALLY (18 USC 1905) THIS DOCUMENT IS BEING FURNISHED IN CONFIDENCE BY HONEYWELL INC. THE INFORMATION DISCLOSED HEREIN FALLS WITHIN EXEMPTION (b) (4) OF 5 USC 552 AND THE PROHIBITIONS OF 18 USC 1905. Copyright 1999 Honeywell Inc. All Rights Reserved							
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION		TITLE PAGE		CR-1 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		AE	
				CAGE CODE 55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
THE LATEST REVISION OF EACH SHEET IS INDICATED ON THE PAGE INDEX.							
<u>Page</u>	<u>Rev Ltr</u>	<u>Page</u>	<u>Rev Ltr</u>	<u>Page</u>	<u>Rev Ltr</u>	<u>Page</u>	<u>Rev Ltr</u>
Title		30	V	Appendix D		E-13	V
CR-1	AE	31	AE	D-0	V	E-14	V
Page Index		32	V	D-1	V	E-15	V
CR-2	AE	33	V	D-2	V	E-16	V
Revision		34	AE	D-3	V	E-17	V
Record		35	V	D-4	V	E-18	V
CR-3	AE	36	V	D-5	V	E-19	V
Table of		37	V	D-6	V	E-20	V
Contents		38	V	D-7	V	E-21	V
i	AA	39	V	D-8	V	E-22	V
ii	AA	40	V	D-9	V	E-23	V
1	Y	41	AE	D-10	V	E-24	V
2	AE	42	AD	D-11	V	E-25	V
3	AE	43	AD	D-12	V	E-26	V
4	AE	44	V	D-13	V	E-27	V
5	V	45	V	D-14	V	E-28	V
6	V	46	V	D-15	V	E-29	V
7	V	47	V	D-16	V		
8	V	48	AB	D-17	V	Appendix F	
9	V	49	V	D-18	V	F-0	V
10	V	50	V	D-19	V	F-1	V
11	V	51	AE	D-20	V	F-2	AE
12	V			D-21	V	F-3	AE
13	V	Appendix A		D-22	V	F-4	AB
14	V	A-0	V	D-23	V		
15	V	A-1	V	D-24	V	TOTAL	
16	V			D-25	V	PAGES: 137	
17	V	Appendix B		D-26	V		
18	V	B-0	V	D-27	V		
19	V	B-1	V	D-28	V		
20	V	B-2	V				
21	V	B-3	AE	Appendix E			
22	V	B-4	V	E-0	V		
23	AE	B-5	V	E-1	V		
24	V	B-6	V	E-2	V		
25	V	B-7	V	E-3	V		
26	V	B-8	V	E-4	V		
27	V	B-9	W	E-5	V		
28	V	B-10	V	E-6	V		
29	V	B-11	V	E-7	V		
				E-8	V		
		Appendix C		E-9	V		
		C-0	V	E-10	V		
		C-1	AD	E-11	V		
		C-2	V	E-12	V		
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION		PAGE INDEX		CR-2 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		AE	
				CAGE CODE 55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR	PAGE	DESCRIPTION				DATE AND APPROVAL	
V	SEE PAGE INDEX SHEET CR-2	SEE REV U FOR PREVIOUS REVISION INFORMATION. DOC. CONVERTED TO LATEST FORMAT C.O. 78246 (MAKE)				Tom Sisco 13 Jan 2000	
W	SEE PAGE INDEX SHEET CR-2	C.O. 102924 (MAKE)				M. Inouye 1 Mar 00	
Y	SEE PAGE INDEX SHEET CR-2	C.O. 24336 (BREAK IN*)				M. Inouye 10 Nov 00	
AA	SEE PAGE INDEX SHEET CR-2	C.O. 24679 (NA)				Max Howk 15 Jan 01	
AB	SEE PAGE INDEX SHEET CR-2	C.O. 26677A (BREAK IN*)				Mike Ports 1 Oct 01	
AC	SEE PAGE INDEX SHEET CR-2	C.O. 24411 (NA)				M Ports 10 Apr 02	
AD	SEE PAGE INDEX SHEET CR-2	C.O. 202201379A (NA)				M. Ports 9 Jul 02	
AE	SEE PAGE INDEX SHEET CR-2	C.O. 200203243A (NA)				 29 OCT 02  K. Stauffer	
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION		REVISION RECORDS		CR-3 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER																												
				CAGE CODE 55939			REV LTR																											
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																
REV LTR	Table of Contents <table><thead><tr><th>Title</th><th>Page</th></tr></thead><tbody><tr><td>1. SCOPE</td><td>1</td></tr><tr><td>2. REFERENCE DOCUMENTS.....</td><td>1</td></tr><tr><td>3. GENERAL INFORMATION</td><td>2</td></tr><tr><td>4. POWER REQUIREMENTS</td><td>3</td></tr><tr><td>5. TEST EQUIPMENT OR EQUIVALENT</td><td>3</td></tr><tr><td>6. TEST SETUP</td><td>4</td></tr><tr><td>7. TEST REQUIREMENTS</td><td>7</td></tr><tr><td>APPENDIX A CALIBRATION PROCEDURES.....</td><td>A-0</td></tr><tr><td>APPENDIX B ALIGNMENT PROCEDURES</td><td>B-0</td></tr><tr><td>APPENDIX C TEMPERATURE SCREENING</td><td>C-0</td></tr><tr><td>APPENDIX D FIELD TEST PROCEDURE</td><td>D-0</td></tr><tr><td>APPENDIX E FIELD ALIGNMENT PROCEDURE.....</td><td>E-0</td></tr><tr><td>APPENDIX F FINAL TEST REPORT.....</td><td>F-0</td></tr></tbody></table>						Title	Page	1. SCOPE	1	2. REFERENCE DOCUMENTS.....	1	3. GENERAL INFORMATION	2	4. POWER REQUIREMENTS	3	5. TEST EQUIPMENT OR EQUIVALENT	3	6. TEST SETUP	4	7. TEST REQUIREMENTS	7	APPENDIX A CALIBRATION PROCEDURES.....	A-0	APPENDIX B ALIGNMENT PROCEDURES	B-0	APPENDIX C TEMPERATURE SCREENING	C-0	APPENDIX D FIELD TEST PROCEDURE	D-0	APPENDIX E FIELD ALIGNMENT PROCEDURE.....	E-0	APPENDIX F FINAL TEST REPORT.....	F-0
Title							Page																											
1. SCOPE							1																											
2. REFERENCE DOCUMENTS.....							1																											
3. GENERAL INFORMATION							2																											
4. POWER REQUIREMENTS							3																											
5. TEST EQUIPMENT OR EQUIVALENT							3																											
6. TEST SETUP							4																											
7. TEST REQUIREMENTS							7																											
APPENDIX A CALIBRATION PROCEDURES.....							A-0																											
APPENDIX B ALIGNMENT PROCEDURES	B-0																																	
APPENDIX C TEMPERATURE SCREENING	C-0																																	
APPENDIX D FIELD TEST PROCEDURE	D-0																																	
APPENDIX E FIELD ALIGNMENT PROCEDURE.....	E-0																																	
APPENDIX F FINAL TEST REPORT.....	F-0																																	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER																																		
			CAGE CODE	55939		REV LTR																																	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																					
REV LTR	TABLE OF CONTENTS (cont) <table><thead><tr><th>Title</th><th>Page</th></tr></thead><tbody><tr><td>TEST NO.</td><td></td></tr><tr><td>1.0 DME SELF TEST CLEAR</td><td>11</td></tr><tr><td>2.0 DME PAIRED CHANNEL TEST 111.90 MHz.....</td><td>13</td></tr><tr><td>3.0 DME PAIRED CHANNEL TEST 111.95 MHz.....</td><td>18</td></tr><tr><td>4.0 DME PAIRED CHANNEL TEST 134.40 MHz.....</td><td>23</td></tr><tr><td>5.0 DME PAIRED CHANNEL TEST 108.00 MHz.....</td><td>28</td></tr><tr><td>6.0 DME PAIRED CHANNEL TEST 110.00 MHz.....</td><td>31</td></tr><tr><td>7.0 DME PAIRED CHANNEL TEST 117.90 MHz.....</td><td>34</td></tr><tr><td>8.0 RANGE ACCURACY</td><td>39</td></tr><tr><td>9.0 MORSE ID</td><td>41</td></tr><tr><td>10.0 SCANNING TEST.....</td><td>44</td></tr><tr><td>11.0 SQUITTER RATE RANGE ACCURACY.....</td><td>46</td></tr><tr><td>12.0 VELOCITY ACCURACY</td><td>47</td></tr><tr><td>13.0 PAST MODE</td><td>48</td></tr><tr><td>14.0 HOLD MODE.....</td><td>49</td></tr><tr><td>15.0 CLEAR MAINTENANCE LOG</td><td>51</td></tr></tbody></table>					Title	Page	TEST NO.		1.0 DME SELF TEST CLEAR	11	2.0 DME PAIRED CHANNEL TEST 111.90 MHz.....	13	3.0 DME PAIRED CHANNEL TEST 111.95 MHz.....	18	4.0 DME PAIRED CHANNEL TEST 134.40 MHz.....	23	5.0 DME PAIRED CHANNEL TEST 108.00 MHz.....	28	6.0 DME PAIRED CHANNEL TEST 110.00 MHz.....	31	7.0 DME PAIRED CHANNEL TEST 117.90 MHz.....	34	8.0 RANGE ACCURACY	39	9.0 MORSE ID	41	10.0 SCANNING TEST.....	44	11.0 SQUITTER RATE RANGE ACCURACY.....	46	12.0 VELOCITY ACCURACY	47	13.0 PAST MODE	48	14.0 HOLD MODE.....	49	15.0 CLEAR MAINTENANCE LOG	51
Title						Page																																	
TEST NO.																																							
1.0 DME SELF TEST CLEAR						11																																	
2.0 DME PAIRED CHANNEL TEST 111.90 MHz.....						13																																	
3.0 DME PAIRED CHANNEL TEST 111.95 MHz.....						18																																	
4.0 DME PAIRED CHANNEL TEST 134.40 MHz.....						23																																	
5.0 DME PAIRED CHANNEL TEST 108.00 MHz.....						28																																	
6.0 DME PAIRED CHANNEL TEST 110.00 MHz.....						31																																	
7.0 DME PAIRED CHANNEL TEST 117.90 MHz.....						34																																	
8.0 RANGE ACCURACY						39																																	
9.0 MORSE ID						41																																	
10.0 SCANNING TEST.....						44																																	
11.0 SQUITTER RATE RANGE ACCURACY.....						46																																	
12.0 VELOCITY ACCURACY						47																																	
13.0 PAST MODE						48																																	
14.0 HOLD MODE.....						49																																	
15.0 CLEAR MAINTENANCE LOG	51																																						
Honeywell		AW/CRITICAL NOTATION																																					
		SECURITY NOTATION	TABLE OF CONTENTS	ii PAGE																																			

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER						
				CAGE CODE 55939								
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.										
REV LTR	Y	<u>TITLE:</u> INTEGRATED TEST SPECIFICATION FOR DM-850 PART NO. 7510184-9XX AND DM-855, PART NO. 7510184-855										
Y												
1. SCOPE												
This Integrated Test Specification establishes the manufacturing and operational requirements that the DME modules listed below must meet to ensure that the units are in proper operating condition.												
<table><tr><td><u>TYPE</u></td><td><u>PART NUMBER</u></td></tr><tr><td>DM-850</td><td>7510184-90X</td></tr><tr><td>DM-855</td><td>7510184-855</td></tr></table>							<u>TYPE</u>	<u>PART NUMBER</u>	DM-850	7510184-90X	DM-855	7510184-855
<u>TYPE</u>	<u>PART NUMBER</u>											
DM-850	7510184-90X											
DM-855	7510184-855											
2. REFERENCE DOCUMENTS												
Assembly Prints/Schematics												
Power Supply/Modulator Assy 7510221												
Transmitter Module Assy 7510210												
Receiver Synthesizer Assy 7510190												
DME CMPTR/VIDEO CCA 7510180												
EPIC Interface CCA 7026160												
Honeywell		AW/CRITICAL NOTATION										
		SECURITY NOTATION		SUPPLEMENTS	1 PAGE							

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	3. GENERAL INFORMATION AE 3.1 Unless otherwise specified, all module level tests shall be done using the standard setup in Section 6. 3.2 Deleted. 3.3 All input signals shall be applied between the designated terminal and ground unless otherwise stated. 3.4 No warm-up period is required. 3.5 Perform Appendix A calibration before testing unit. 3.6 All power output measurements shall take into account loss in RF cable at 1100 MHz. 3.7 All alphanumeric symbols bracketed by greater-than/less-than "< >" symbols will require the characters be typed and "ENTER" or "Return" typed. 3.8 The test equipment may continuously monitor the RCB port of the DME module. If such monitoring is provided, the DME module shall generate no bus errors except when the power is off or being cycled off or on. AD 3.9 All tests shall be performed under conditions of 25 ± 10 °C and less than 90 percent relative humidity, unless otherwise specified. Temperature screening should be performed under conditions of -55 ± 10 °C and +70 ± 10 °C. 3.10 Unless otherwise specified all tests shall be performed with the antenna jack connected to a 50-ohm load. 3.11 Appendix B alignment procedures must be performed when the module is first integrated in production. 3.12 Instructions to setup test equipment or configure the radio will occur before the reading is taken. The test parameter reading will have a test number assigned. Taking the reading is the end of that test section and subsequent instructions belong to the next test parameter. 3.13 Tests are normally done in sequence and the test steps are written for this purpose. If tests are performed out of sequence the tester is responsible for insuring the correct mechanical and software setups are performed. 3.14 In cases where timing is required be sure to read the entire instruction before performing the test. The test setup and sequence is completed when the reading paragraph is performed. Any instructions after this reading are for the following test setup.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	2 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER																														
			CAGE CODE	55939																															
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																			
REV LTR																																			
	4. POWER REQUIREMENTS Unless otherwise specified, all tests shall be conducted with the power-input voltage adjusted to 27.5 ± 0.1 V dc. This voltage shall be measured between the power-input terminals of the U.U.T.. 5. TEST EQUIPMENT OR EQUIVALENT Manual Test Equipment <table border="0"> <tr> <td>R.F. Signal Generator</td> <td>IFR ATC1400/S1403 OR JcAIR SDX-2000</td> </tr> <tr> <td>Digital Multi-meter</td> <td>Fluke Model 8840</td> </tr> <tr> <td>Oscilloscope</td> <td>Tektronix Model 2430</td> </tr> <tr> <td>Radio Test Interface Unit (RTIU)</td> <td>Honeywell 7511400-902</td> </tr> <tr> <td>RTIU Software</td> <td>7512001-XXY</td> </tr> </table> Where X = media code as specified on drawing 7512001 and YY = 17 or greater (software version) NOTE: RTIU P/N 7511400-901 is equipped with software version 7512001-108. RTIU P/N 7511400-902 is equipped with software version 7512001-109. <table border="0"> <tr> <td>Harness Assembly RTIU-DM-855</td> <td>7511409-934</td> </tr> <tr> <td>Harness Assembly RTIU-DM-850</td> <td>7511409-911</td> </tr> <tr> <td>IBM PC Equivalent</td> <td>Hard drive, floppy, Monitor, RS-232 port.</td> </tr> <tr> <td>Power Supply</td> <td>28 VDC @ 2 amps</td> </tr> </table> Alternate Test Equipment EPIC-CATS <table border="0"> <tr> <td>Honeywell EPIC Computer Aided Test System</td> <td>T336384</td> </tr> <tr> <td>DME Module Adapter</td> <td>T336397</td> </tr> <tr> <td>DME Program</td> <td>MT7510184-501 Rev G</td> </tr> </table> PRIMUS-CATS <table border="0"> <tr> <td>Honeywell Computer Aided Test System</td> <td>T360001</td> </tr> <tr> <td>COM Module Adapter</td> <td>T360011</td> </tr> <tr> <td>DME Program</td> <td>MT7510184 Rev W</td> </tr> </table>					R.F. Signal Generator	IFR ATC1400/S1403 OR JcAIR SDX-2000	Digital Multi-meter	Fluke Model 8840	Oscilloscope	Tektronix Model 2430	Radio Test Interface Unit (RTIU)	Honeywell 7511400-902	RTIU Software	7512001-XXY	Harness Assembly RTIU-DM-855	7511409-934	Harness Assembly RTIU-DM-850	7511409-911	IBM PC Equivalent	Hard drive, floppy, Monitor, RS-232 port.	Power Supply	28 VDC @ 2 amps	Honeywell EPIC Computer Aided Test System	T336384	DME Module Adapter	T336397	DME Program	MT7510184-501 Rev G	Honeywell Computer Aided Test System	T360001	COM Module Adapter	T360011	DME Program	MT7510184 Rev W
R.F. Signal Generator	IFR ATC1400/S1403 OR JcAIR SDX-2000																																		
Digital Multi-meter	Fluke Model 8840																																		
Oscilloscope	Tektronix Model 2430																																		
Radio Test Interface Unit (RTIU)	Honeywell 7511400-902																																		
RTIU Software	7512001-XXY																																		
Harness Assembly RTIU-DM-855	7511409-934																																		
Harness Assembly RTIU-DM-850	7511409-911																																		
IBM PC Equivalent	Hard drive, floppy, Monitor, RS-232 port.																																		
Power Supply	28 VDC @ 2 amps																																		
Honeywell EPIC Computer Aided Test System	T336384																																		
DME Module Adapter	T336397																																		
DME Program	MT7510184-501 Rev G																																		
Honeywell Computer Aided Test System	T360001																																		
COM Module Adapter	T360011																																		
DME Program	MT7510184 Rev W																																		
AD																																			
AE																																			
AE																																			
AD																																			
AE																																			

Honeywell	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	3 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
AE	6. TEST SETUP 6.1 For -901 & -902 modules connect per Figure 1. 6.2 For -855 modules connect per Figure 2. 6.3 Range Calibration procedure per appendix A must be performed before continuing I.T. tests. 6.4 Appendix B alignment procedure must be performed when module is first integrated in production. 6.5 <u>Initialization Setup</u> Turn power on the Computer and wait for RTIU screen. Connect U.U.T. per Paragraph 6.1 or 6.2 above. Turn the RTIU AC power on. (If not already on.) Connect U.U.T. to RTIU CABLE Connect a 600 ohm resistor between P1G3 (H) and P1H3 (Low) (568 DATA) Connect a 600 ohm resistor between P1J3 (H) and P1K3 (Low) (568 CLK) Connect a 600 ohm resistor between P1J6 (H) and P1C2 (Low) (568 SYNC) When main menu appears on screen: Select DME module (DM-850).<11> FMS Installed<I> OPEN EFIS/MLS Control<F> OPEN SYS 2 DME INST<R> OPEN Turn the RTIU 28 VDC: ON RCB Source Display<P> 6.6 <u>Initial Setup for the IFR ATC1400/S1403</u> Freq/Select: 111.90 VOR Pair Signal Level: -70 dBm Ident: "OFF" Squitter: 2700 PPS TACAN Modulation: On Reply Efficiency: 100% Velocity 0 Kts Acceleration 0 ft/s/s Range 34 NMI DME P2 Dev. 0.0 Microseconds -1/NORM Switch: Norm Suppressor: Off Suppressor Var: Set for +18 V Pulse Amplitude CW/Norm: Norm SLS/Echo: OFF Freq. Step Rate: MAN				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	4 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939		
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				

REV LTR

6.7

Initial Setup for JcAIR SDX2000

Menu Page	Operation	Selection		NOTES
Main Menu:	Select:	DME		
<u>MEASURED PULSE</u>	Select:	P2		
<u>EXPANDED MENU</u>	Select	Expanded menu		Located just below <u>Measured Pulse</u> . Larger of two icons.
<u>P2 POSITION OFFSET</u>	Select	P2 Position Offset Default Done		
<u>EFFICIENCY</u>	Select	Efficiency Default Done		
<u>DME MODE (Output Frequency and Mode Select)</u>				
	Select	DME Mode VOR .00		
	Select	VOR PAIR:	DEFAULT DONE	
<u>SQUITTER</u>	Select	Squitter Rate DEFAULT DONE		
<u>REPLY POWER</u>	Select	REPLY POWER	TOP POWER DEFAULT DONE ON DONE	
<u>TRIG SCOPE</u>	Select	TRIG SCOPE AT REPLY DONE		
<u>ECHO PAIR</u>	Select	ECHO PAIR OFF DONE		
<u>IDENT</u>	Select	IDENT OFF DONE		
<u>EQUALIZER</u>	Select	EQUALIZER OFF		

Honeywell

AW/CRITICAL NOTATION

SECURITY NOTATION

SUPPLEMENTS

5
PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER																																																																																																																																												
				CAGE CODE 55939																																																																																																																																														
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																																																																																																																																
REV LTR																																																																																																																																																		
	<table><tr><td>Menu Page</td><td>Operation</td><td colspan="2">Selection</td><td>NOTES</td></tr><tr><td><u>568 DISTANCE</u></td><td>Select</td><td>568 DISTANCE</td><td></td><td></td></tr><tr><td></td><td></td><td>DEFAULT</td><td></td><td></td></tr><tr><td></td><td></td><td>DONE</td><td></td><td></td></tr><tr><td><u>568 CONTROL</u></td><td>Select</td><td>568 CONTROL</td><td></td><td></td></tr><tr><td></td><td></td><td>INTERNAL</td><td></td><td></td></tr><tr><td><u>SUPPRESION</u></td><td>Select</td><td>SUPPRESSION</td><td></td><td></td></tr><tr><td></td><td></td><td>ON</td><td></td><td></td></tr><tr><td></td><td></td><td>VOLTS</td><td></td><td></td></tr><tr><td></td><td></td><td>18.00</td><td></td><td></td></tr><tr><td></td><td></td><td>DONE</td><td></td><td></td></tr><tr><td></td><td></td><td>OFF</td><td></td><td></td></tr><tr><td></td><td></td><td>DONE</td><td></td><td></td></tr><tr><td><u>SELF INTERR</u></td><td>Select</td><td>SELF INTERR</td><td></td><td></td></tr><tr><td></td><td></td><td>OFF</td><td></td><td></td></tr><tr><td colspan="2"><u>Collapse to Single Menu</u></td><td></td><td></td><td></td></tr><tr><td><u>RANGE</u></td><td>Select</td><td>RANGE</td><td></td><td></td></tr><tr><td></td><td></td><td>DEFAULT</td><td></td><td></td></tr><tr><td></td><td></td><td>DONE</td><td></td><td></td></tr><tr><td><u>NORMAL/ -1</u></td><td>Select</td><td>NORMAL/ -1</td><td></td><td></td></tr><tr><td></td><td></td><td>NORMAL</td><td></td><td></td></tr><tr><td><u>VELOCITY</u></td><td>Select</td><td>VELOCITY</td><td></td><td></td></tr><tr><td></td><td></td><td>DEFAULT</td><td></td><td></td></tr><tr><td><u>DIRECTION</u></td><td>Select</td><td>DIRECTION</td><td></td><td></td></tr><tr><td></td><td></td><td>OUTBOUND</td><td></td><td></td></tr><tr><td><u>ACCEL ft/s/s</u></td><td>Select</td><td>ACCEL -ft/s/s</td><td></td><td></td></tr><tr><td></td><td></td><td>DEFAULT</td><td></td><td></td></tr><tr><td></td><td></td><td>DONE</td><td></td><td></td></tr></table>						Menu Page	Operation	Selection		NOTES	<u>568 DISTANCE</u>	Select	568 DISTANCE					DEFAULT					DONE			<u>568 CONTROL</u>	Select	568 CONTROL					INTERNAL			<u>SUPPRESION</u>	Select	SUPPRESSION					ON					VOLTS					18.00					DONE					OFF					DONE			<u>SELF INTERR</u>	Select	SELF INTERR					OFF			<u>Collapse to Single Menu</u>					<u>RANGE</u>	Select	RANGE					DEFAULT					DONE			<u>NORMAL/ -1</u>	Select	NORMAL/ -1					NORMAL			<u>VELOCITY</u>	Select	VELOCITY					DEFAULT			<u>DIRECTION</u>	Select	DIRECTION					OUTBOUND			<u>ACCEL ft/s/s</u>	Select	ACCEL -ft/s/s					DEFAULT					DONE		
Menu Page	Operation	Selection		NOTES																																																																																																																																														
<u>568 DISTANCE</u>	Select	568 DISTANCE																																																																																																																																																
		DEFAULT																																																																																																																																																
		DONE																																																																																																																																																
<u>568 CONTROL</u>	Select	568 CONTROL																																																																																																																																																
		INTERNAL																																																																																																																																																
<u>SUPPRESION</u>	Select	SUPPRESSION																																																																																																																																																
		ON																																																																																																																																																
		VOLTS																																																																																																																																																
		18.00																																																																																																																																																
		DONE																																																																																																																																																
		OFF																																																																																																																																																
		DONE																																																																																																																																																
<u>SELF INTERR</u>	Select	SELF INTERR																																																																																																																																																
		OFF																																																																																																																																																
<u>Collapse to Single Menu</u>																																																																																																																																																		
<u>RANGE</u>	Select	RANGE																																																																																																																																																
		DEFAULT																																																																																																																																																
		DONE																																																																																																																																																
<u>NORMAL/ -1</u>	Select	NORMAL/ -1																																																																																																																																																
		NORMAL																																																																																																																																																
<u>VELOCITY</u>	Select	VELOCITY																																																																																																																																																
		DEFAULT																																																																																																																																																
<u>DIRECTION</u>	Select	DIRECTION																																																																																																																																																
		OUTBOUND																																																																																																																																																
<u>ACCEL ft/s/s</u>	Select	ACCEL -ft/s/s																																																																																																																																																
		DEFAULT																																																																																																																																																
		DONE																																																																																																																																																
Honeywell		AW/CRITICAL NOTATION																																																																																																																																																
		SECURITY NOTATION		SUPPLEMENTS	6 PAGE																																																																																																																																													

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER																																										
				CAGE CODE 55939																																												
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																														
REV LTR	7. TEST REQUIREMENTS 7.1 <u>Software Applicability</u> The following UUT software versions shall be installed for the listed dash number and MOD letter status of the UUT. The software version number refers to the software installed and not the EPROM part number. These numbers shall be verified during TEST 1.000 Table 1. Module Modification Status vs. Software Version <table><tr><th colspan="4">Module Dash Number</th><th></th><th></th></tr><tr><th></th><th>-855</th><th>-902</th><th>-901</th><th>MOD</th><th>Software Version</th></tr><tr><td></td><td></td><td></td><td>X</td><td>NONE</td><td>7510228-104 7510243-101</td></tr><tr><td></td><td></td><td></td><td>X</td><td>A,B</td><td>7510228-106 7510243-102</td></tr><tr><td></td><td></td><td>X</td><td></td><td>C</td><td>7510228-108 7510243-104</td></tr><tr><td></td><td></td><td>X</td><td></td><td>G</td><td>7510228-108 7510243-105</td></tr><tr><td></td><td>X</td><td>X</td><td></td><td>K</td><td>7510228-111 7510243-105</td></tr></table>						Module Dash Number							-855	-902	-901	MOD	Software Version				X	NONE	7510228-104 7510243-101				X	A,B	7510228-106 7510243-102			X		C	7510228-108 7510243-104			X		G	7510228-108 7510243-105		X	X		K	7510228-111 7510243-105
Module Dash Number																																																
	-855	-902	-901	MOD	Software Version																																											
			X	NONE	7510228-104 7510243-101																																											
			X	A,B	7510228-106 7510243-102																																											
		X		C	7510228-108 7510243-104																																											
		X		G	7510228-108 7510243-105																																											
	X	X		K	7510228-111 7510243-105																																											
Honeywell		AW/CRITICAL NOTATION																																														
		SECURITY NOTATION		SUPPLEMENTS	7 PAGE																																											

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE 55939	REV LTR
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		

REV	LTR




Figure 1. DME Module Test Setup

Honeywell


AW/CRITICAL NOTATION

SECURITY NOTATION

SUPPLEMENTS

8
PAGE

REV LTR

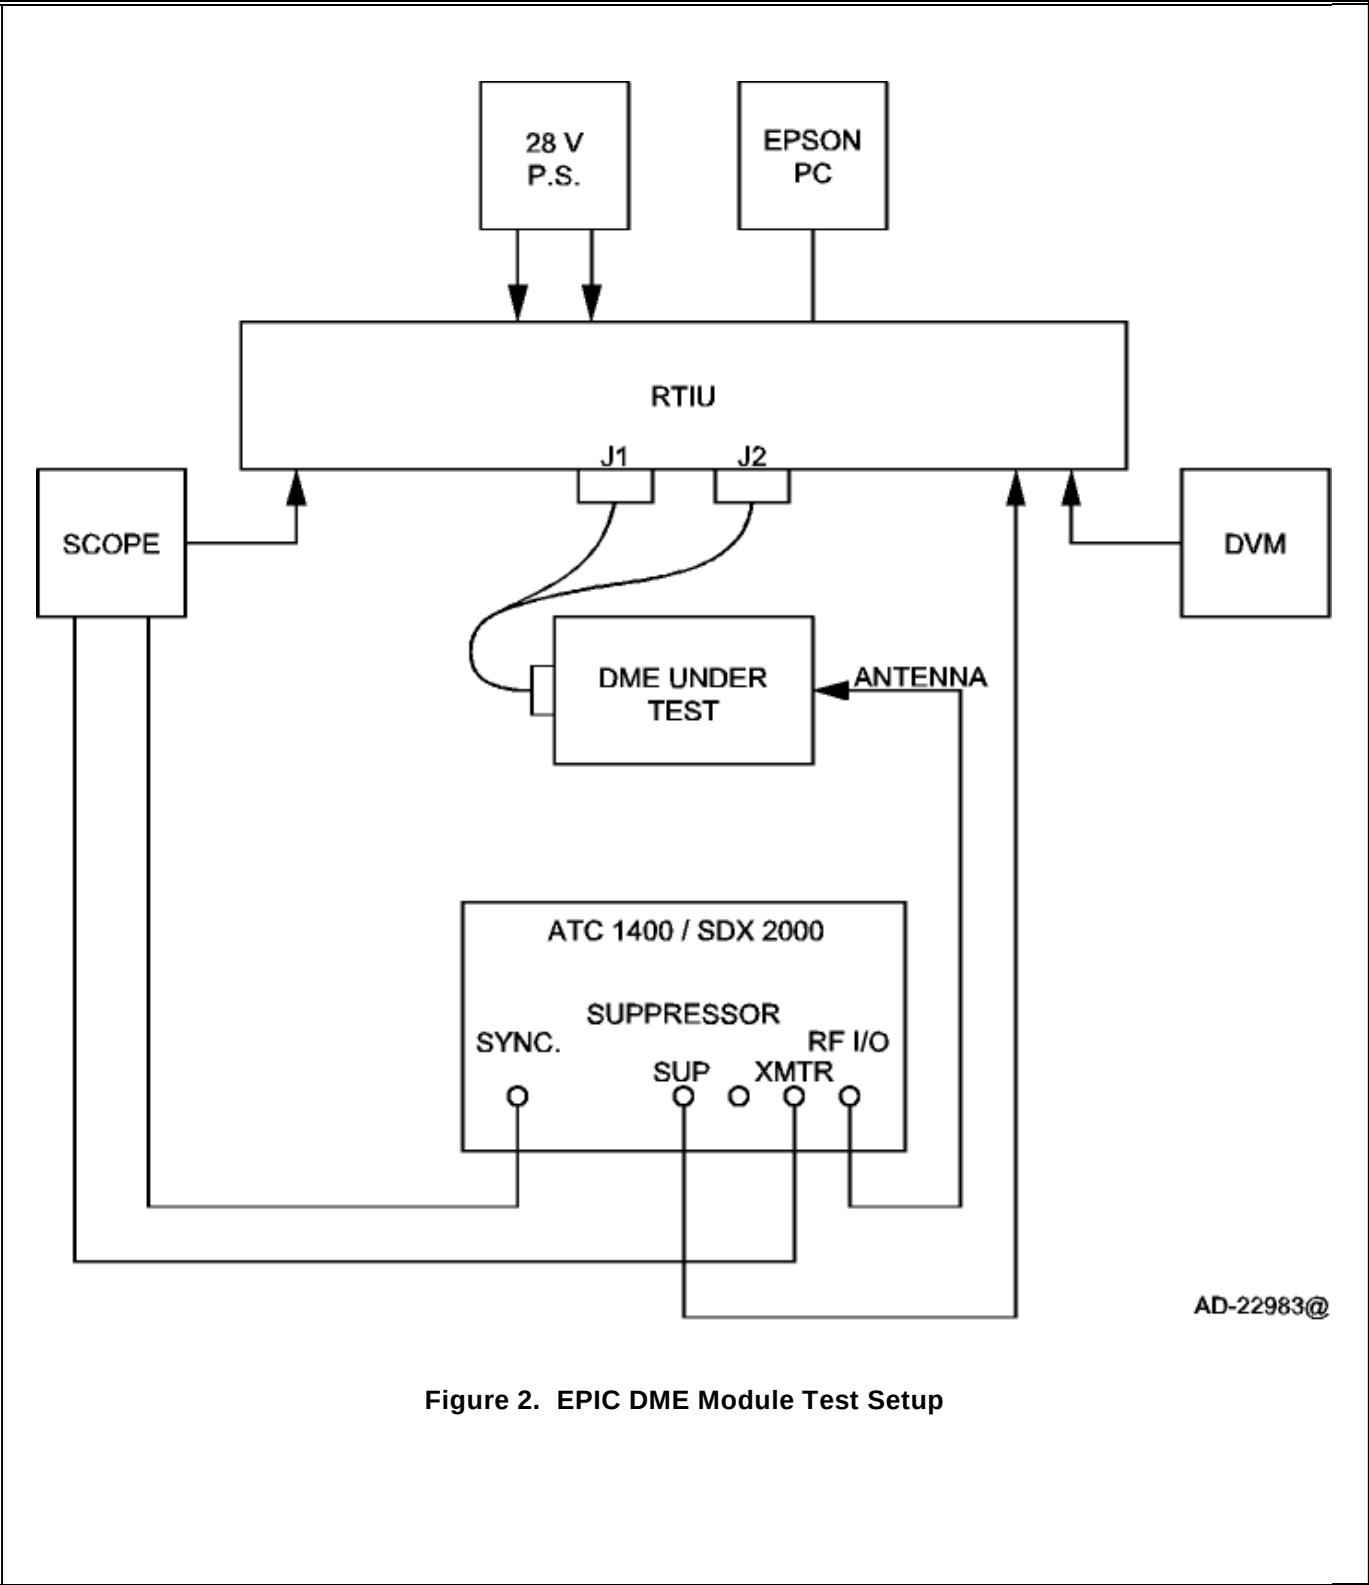

AD-22983@

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	<u>Column</u>	<u>Description</u>				
	Rev Ltr	This column is used to identify revised material.				
	Test No.	Tests are numbered in sequence in steps of 10. If new tests are added adding 1-9 to the end of the appropriate section will number them e.g. add new test to 1.010 results in 1.011.				
	Opr Limits	Unit under test (UUT) shall meet these limits whenever tested at other than the manufacturing facility. When an item is marked OPTIONAL in this column, the corresponding test is not required except as an aid in troubleshooting.				
	Test Description	These items are the parameters to which the unit under test was designed. In addition, these items aid in troubleshooting by specifying the input and output signal terminals. For brevity, all conditions required are not repeated for each test. Conditions established in previous tests will also apply.				
	Switch Pos	Perform switch settings in order specified. When an item is entered in Work Steps Column opposite a switch setting other than the first or when there is additional space between switches, perform this item before setting any other switches.				
	Work Steps	When work step items are entered opposite first Switch Pos, perform all switch settings first. When items are entered opposite switch setting other than first setting or when there is additional space between switches, perform work step item before setting any other switches.				
	Mfg Limits	Unit under test shall meet these limits prior to customer delivery.				
	Code	A "1" in the column indicates that the material in the next column applies only to manual test procedures. A "2" in the column indicates that the material in the next column applies only to Automatic Test Equipment procedures. A blank column indicates that the material in the next column applies equally to manual and automated test procedures.				
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION	SUPPLEMENTS		10 PAGE	

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
						CAGE CODE 55939		REV LTR	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.									
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION	
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS	
	1.000			<u>DME SELF TEST CLEAR</u> Clear Power on Count	Test Setup #1 <H> <C>		<u>DME SELF TEST CLEAR</u> Bench Source Display Clear Power on Count		
	1.010	POC: 0					<u>RTIU:</u> <u>RTIU:</u> Maintenance Page Power on Count shall be as specified.		POC: 0
	1.020	BENCH CMD: 1		Clear Maintenance Log	<M>		Clear Maintenance Log <u>RTIU:</u> Maintenance Page BENCH CMD shall be as specified.		BENCH CMD: 1
				Set Software Version	<V>		Enter number shown in Table 1: as the dash number of the 7510243 part for current MOD letter of the DME.		
	1.030			Software Version A Verification	<P> <M> <X>		RCB Source Display Maintenance Display Display All Verify the software version for 7510228 is correct for the current MOD and DASH number of the radio under test		See Table 1
	1.040			Software Version B Verification			Verify the software version for 7510243 is correct for the current MOD and DASH number of the radio under test		See Table 1
	1.050						<u>RTIU:</u> Maintenance Log RCB Source Display DME On/Off: Off Wait 5 Sec. DME On/Off: On Maintenance Display		No Errors
	1.060	POC: 1		Power On Count Verification	<P> <O> <O> <M> <X>		<u>RTIU:</u> Observe the CRT. The POC shall be as specified.		POC: 1
Honeywell				AW/CRITICAL NOTATION					
				SECURITY NOTATION		SUPPLEMENTS		11 PAGE	

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
					<P> <L> <A>		RCB Source Display Verify "A" channel DME STATUS: VH NH If FF HL reset.	
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		12 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	2.000			<u>DME PAIRED CHANNEL TEST 111.90 MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 111.90 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 111.90 VOR PAIR Frequency 111.90 paired channel All channels	
	2.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <111.90> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	2.020	1080 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1080 MHz ± 90 kHz
	2.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	2.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		13 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	2.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	2.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> RTIU: Observe RCB "L-SIDE (A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		14 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	2.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified.	34.00 ± 0.04 NM
	2.080	34.00 ± 0.05		Measure the RS-422 range accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts.	34.00 ± 0.04 NM
	2.090	1.36 ± 0.06 V dc		Measure the analog range voltage.	<P>		The voltage at J1U3 shall be as specified. RCB Source Display	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		15 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	2.100	3.5 ± 0.5 uSec		<u>For All Dash Numbers</u> <u>PULSE WIDTH</u> Measure the first interrogation pulse. The pulse shall be as specified. <u>Rise & Fall Times</u>			<u>For All Dash Numbers</u> <u>PULSE WIDTH</u> Connect an oscilloscope channel to the detected transmitter pulse on the ground station test equipment. Set the oscilloscope to measure the first interrogation pulse. <u>NOTE:</u> Measure the pulse width at the 50% points of the voltage waveform. The pulse width observed on the oscilloscope shall be as specified. <u>Rise & Fall Times</u> Set the oscilloscope to measure the rise and fall times of detected pulse. With the oscilloscope measure the rise time of the detected pulse. The pulse rise time between the 10% and 90% points shall be as specified.	3.5 ± 0.5 uSec
	2.110	Less than or equal to 3.0 uSec		Check the rise time (between 10% and 90% voltage point on the pulse) of the pulse. The reading shall be as specified.			With the oscilloscope measure the rise time of the detected pulse. The pulse rise time between the 10% and 90% points shall be as specified.	Less than or equal to 3.0 uSec
	2.120	Less than or equal to 3.0 uSec		Verify the fall time (between 90% and 10% voltage point on the pulse) of the pulse. The reading shall be as specified.			With the oscilloscope measure the fall time of the detected pulse. The pulse rise time between the 90% and 10% points shall be as specified	Less than or equal to 3.0 uSec
	2.130	Greater than or equal to 95%		<u>Pulse Flatness</u> Verify that the pulse level between the 95% points on the rising and falling edges does not decrease below the value specified.			<u>Pulse Flatness</u> With the oscilloscope measure the flatness of the detected pulse between the 95% rise and fall points. The pulse amplitude shall be as specified.	Greater than or equal to 97%
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		16 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	2.140	Less than or equal to 1 dB		<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse. Measure the difference in pulse amplitude between the first and second pulses. The amplitude difference shall be as specified.			<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse. With the oscilloscope measure the difference in amplitude between the first and second pulse. The second pulse amplitude shall be as specified.	Less than or equal to 1 dB
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		17 PAGE

ENGINEERING SPECIFICATION			SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
					CAGE CODE 55939			
			SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV	TEST	SPECIFICATION			PROCEDURE		SPECIFICATION	
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	3.000			<u>DME PAIRED CHANNEL TEST 111.95 MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 111.95 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 111.95 VOR PAIR Frequency 111.95 paired channel All channels	
	3.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <111.95> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	3.020	1080 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1080 MHz ± 90 kHz
	3.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	3.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell			AW/CRITICAL NOTATION					
			SECURITY NOTATION		SUPPLEMENTS		18 PAGE	

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	3.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	3.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> Observe RCB page on the RTIU. "L-SIDE(A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		19 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	3.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified.	34.00 ± 0.04 NM
	3.080	34.00 ± 0.05		Measure the RS-422 range accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts.	34.00 ± 0.04 NM
	3.090	1.36 ± 0.06 V dc		Measure the analog range voltage. Tests 3.100 through 3.140 are mandatory only for original manufacturing tests.	<P>		The voltage at J1U3 shall be as specified. RCB Source Display Ground station test equipment range set to 0 NM. Tests 3.100 through 3.140 are mandatory only for original manufacturing tests.	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		20 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	3.100	Less then or equal to -90 dBm		<u>For All Dash Number Units</u> <u>SENSITIVITY</u> Measure the minimum R. F. signal input that causes the distance flag to disappear. The level shall be as specified.			<u>For All Dash Number Units</u> <u>SENSITIVITY</u> Adjust the R.F. level attenuator to -120 dBm. Wait until the distance read out is flagged. (ASCII Happy Face appears next to distance read out) Slowly adjust the R.F. attenuator until the flag disappears. The R.F. level shall be as specified Adjust the ground station simulator R.F. output to - 70 dBm.	Less then or equal to -93 dBm
	3.110	0.00 ± 0.04 NM		<u>RANGE ACCURACY</u> Verify RCB range accuracy			<u>RANGE ACCURACY</u> Observe the RTIU RCB Page "L-SIDE(A)" range. The reading shall be as specified.	0.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		21 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	3.120	0.00 ± 0.05		<u>For –9XX Units Only</u> Measure the ARINC 568 range accuracy.	<N>		<u>For –9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified.	0.00 ± 0.04 NM
	3.130	0.00 ± 0.05		Measure the RS 422 accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified.	0.00 ± 0.04 NM
	3.140	0.00 ± 0.06 V dc		Verify analog range voltage.			<u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) TO 28 V dc RTN The voltage at J1U3 shall be as specified.	0.00 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		22 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AE	4.000			<u>FOR ALL DASH NUMBER UNITS</u> <u>DME PAIRED CHANNEL TEST 134.40 MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 134.40 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 134.40 VOR PAIR Frequency 134.40 paired channel All channels	
	4.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <134.40> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	4.020	1025 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1025 MHz ± 90 kHz
	4.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	4.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		23 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	4.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	4.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> Observe RCB page on the RTIU. "L-SIDE(A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		24 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	4.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified. On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts. The voltage at J1U3 shall be as specified.	34.00 ± 0.04 NM
	4.080	34.00 ± 0.05 NM		Measure the RS-422 range accuracy.				34.00 ± 0.04 NM
	4.090	1.36 ± 0.06 V dc		Measure the analog range voltage.	<P>		RCB Source Display	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		25 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	4.120	Less than or equal to 3.0 uSec		Verify the fall time (between 90% and 10% voltage point on the pulse) of the pulse. The reading shall be as specified.			With the oscilloscope measure the fall time of the detected pulse. The pulse rise time between the 90% and 10% points shall be as specified	Less than or equal to 3.0 uSec
	4.130	Greater than or equal to 95%		<u>Pulse Flatness</u> Verify that the pulse level between the 95% points on the rising and falling edges does not decrease below the value specified.			<u>Pulse Flatness</u> With the oscilloscope measure the flatness of the detected pulse between the 95% rise and fall points. The pulse amplitude shall be as specified.	Greater than or equal to 97%
	4.140	Less than or equal to 1 dB		<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse.			<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse.	Less than or equal to 1 dB
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		27 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	5.000			<u>DME PAIRED CHANNEL TEST 108.00.MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 108.00 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 108.00 VOR PAIR Frequency 108.00 paired channel All channels	
	5.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <108.00> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	5.020	1041 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1041 MHz ± 100 kHz
	5.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		28 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	5.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	5.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	5.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> Observe RCB page on the RTIU. "L-SIDE(A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		29 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	5.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. as specified.	34.00 ± 0.04 NM
	5.080	34.00 ± 0.05 NM		Measure the RS-422 range accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts.	34.00 ± 0.04 NM
	5.090	1.36 ± 0.06 V dc		Measure the analog range voltage.	<P>		The voltage at J1U3 shall be as specified. RCB Source Display	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		30 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AE	6.000			<u>FOR ALL DASH NUMBER UNITS</u> <u>DME PAIRED CHANNEL TEST 110.00.MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 110.00 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 110.00 VOR PAIR Frequency 110.00 paired channel All channels	
	6.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <110.00> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	6.020	1061 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1061 MHz ± 90 kHz
	6.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	6.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		31 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	6.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	6.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> Observe RCB page on the RTIU. "L-SIDE(A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		32 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	6.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified.	34.00 ± 0.04 NM
	6.080	34.00 ± 0.05 NM		Measure the RS-422 range accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts.	34.00 ± 0.04 NM
	6.090	1.36 ± 0.06 V dc		Measure the analog range voltage.	<P>		The voltage at J1U3 shall be as specified. RCB Source Display	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		33 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AE	7.000			<u>FOR ALL DASH NUMBER UNITS</u> <u>DME PAIRED CHANNEL TEST 117.90MHZ</u>	Test Setup #1		<u>DME PAIRED CHANNEL TEST 117.90 MHZ</u> <u>GROUND STATION EQ:</u> Set to measure 117.90 VOR PAIR Frequency 117.90 paired channel All channels	
	7.010	9-11 PPS		Interrogator Freq. P.R.F.	<F> <117.90> <G>		Verify the P.R.F. on the ground station equipment. The reading shall be as specified.	9-11 PPS
	7.020	1150 MHz ± 100 kHz		Interrogator Frequency Accuracy			Verify the Interrogator Frequency on the ground station equipment. The reading shall be as specified.	1150 MHz ± 90 kHz
	7.030	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 1</u> Measure P1 peak power			<u>PEAK POWER PULSE 1</u> Set ground station equipment to measure the P1 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
	7.040	Greater than or equal to 350 watts		<u>PEAK POWER PULSE 2</u> Measure P2 peak power			<u>PEAK POWER PULSE 2</u> Set ground station equipment to measure the P2 pulse. The equipment power meter shall read as specified.	Greater than or equal to 360 watts
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		34 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	7.050	Less than or equal to -90 dBm		<u>SENSITIVITY</u> Measure the minimum signal needed to remove the distance display flag.			<u>SENSITIVITY</u> Set the ground station R.F. attenuator to -120 dBm. Wait until the distance read out on the RTIU is flagged. (ASCII Happy Face will appear next to distance read out) Slowly adjust the R.F. attenuator level until the flag disappears. The attenuator reading shall be as specified. (NOTE: all cable losses and equipment errors shall be compensated.) Set ground station attenuator for -70 dBm.	Less than or equal to -93 dBm
	7.060	34.00 ± 0.05 NM		<u>RANGE ACCURACY</u> Measure the range accuracy.			<u>RANGE ACCURACY</u> Observe RCB page on the RTIU. "L-SIDE(A)". The range reading shall be as specified.	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		35 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	7.070	34.00 ± 0.05 NM		<u>For – 9XX Units Only</u> Measure the ARINC 568 range accuracy	<N>		<u>For – 9XX Units Only</u> 422/568 Source Display On the RTIU observe the 568 (ACTIVE) range. The range reading shall be as specified.	34.00 ± 0.04 NM
	7.080	34.00 ± 0.05 NM		Measure the RS-422 range accuracy.			On the RTIU observe the 422 (ACTIVE) range. The range reading shall be as specified. <u>RTIU:</u> Connect a DVM (+) to J1U3 and DVM (-) to 28 V dc RTN. Set DVM to measure DC volts.	34.00 ± 0.04 NM
	7.090	1.36 ± 0.06 V dc		Measure the analog range voltage.	<P>		The voltage at J1U3 shall be as specified. RCB Source Display	1.36 ± 0.05 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		36 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	7.100	3.5 ± 0.5 uSec		<u>For All Dash Numbers</u> <u>PULSE WIDTH</u> Measure the first interrogation pulse. The pulse shall be as specified. <u>Rise & Fall Times</u>			<u>For All Dash Numbers</u> <u>PULSE WIDTH</u> Connect an oscilloscope channel to the detected transmitter pulse on the ground station test equipment. Set the oscilloscope to measure the first interrogation pulse. <u>NOTE:</u> Measure the pulse width at the 50% points of the voltage waveform. The pulse width observed on the oscilloscope shall be as specified. <u>Rise & Fall Times</u> Set the oscilloscope to measure the rise and fall times of detected pulse. With the oscilloscope measure the rise time of the detected pulse. The pulse rise time between the 10% and 90% points shall be as specified.	3.5 ± 0.5 uSec
	7.110	Less than or equal to 3.0 uSec		Check the rise time (between 10% and 90% voltage point on the pulse) of the pulse. The reading shall be as specified.			With the oscilloscope measure the rise time of the detected pulse. The pulse rise time between the 10% and 90% points shall be as specified.	Less than or equal to 3.0 uSec
	7.120	Less than or equal to 3.0 uSec		Verify the fall time (between 90% and 10% voltage point on the pulse) of the pulse. The reading shall be as specified.			With the oscilloscope measure the fall time of the detected pulse. The pulse rise time between the 90% and 10% points shall be as specified	Less than or equal to 3.0 uSec
	7.130	Greater than or equal to 95%		<u>Pulse Flatness</u> Verify that the pulse level between the 95% points on the rising and falling edges does not decrease below the value specified.			<u>Pulse Flatness</u> With the oscilloscope measure the flatness of the detected pulse between the 95% rise and fall points. The pulse amplitude shall be as specified.	Greater than or equal to 97%
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		37 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	7.140	Less than or equal to 1 dB		<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse. Measure the difference in pulse amplitude between the first and second pulses. The amplitude difference shall be as specified.			<u>Differential Pulse Amplitude</u> NOTE: The amplitude of the second pulse shall be greater than 89% and less than 112% of the amplitude of the first pulse. With the oscilloscope measure the difference in amplitude between the first and second pulse. The second pulse amplitude shall be as specified.	Less than or equal to 1 dB
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		38 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
						CAGE CODE 55939		REV LTR	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.									
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION	
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS	
		8.000		<u>RANGE ACCURACY</u>	Test Setup #1		<u>RANGE ACCURACY</u> <u>GROUND STATION EQ:</u> range to 0.00 NM, and select VOR PAIR 111.90 Frequency 111.90 VOR PAIR ALL CHANNELS		
	8.010	0 ± 0.05 NM		Measure range accuracy with range input set for 0 NM. The reading shall be as specified.	<F> <111.90> <G>		<u>RTIU:</u> Observe “L-SIDE (A)” Range. The reading shall be as specified. Set ground station equipment range to 10.00 NM.	0 ± 0.04 NM	
	8.020	10.00 ± 0.05 NM		Measure range accuracy with range input set for 10.00 NM. The reading shall be as specified.			<u>RTIU:</u> Observe “L-SIDE (A)” Range. The reading shall be as specified. Set ground station equipment range to 100.00 NM.	10.00 ± 0.04 NM	
	8.030	100.00 ± 0.05 NM		Measure range accuracy with range input set for 100.00 NM. The reading shall be as specified.			<u>RTIU:</u> Observe “L-SIDE (A)” Range. The reading shall be as specified. Set ground station equipment range to 225.00 NM.	100.00 ± 0.04 NM	
	8.040	225.00 ± 0.06 NM		Measure range accuracy with range input set for 225.00 NM. The reading shall be as specified.			<u>RTIU:</u> Observe “L-SIDE (A)” Range. The reading shall be as specified. Set ground station equipment range to 300.00 NM.	225.00 ± 0.05 NM	
	8.050	300.00 ± 0.06 NM		Measure range accuracy with range input set for 300.00 NM. The reading shall be as specified.			<u>RTIU:</u> Observe “L-SIDE (A)” Range. The reading shall be as specified.	300.00 ± 0.05 NM	
Honeywell				AW/CRITICAL NOTATION					
				SECURITY NOTATION		SUPPLEMENTS		39 PAGE	

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	8.060	300.00 ± 0.06 NM		<u>For –9XX Units only</u> Measure range accuracy with range input set for 300.00 NM. The reading shall be as specified.	<N> <K> <2> <P>		<u>For –9XX Units only</u> 422/568 Source Display RS-422 Port (2) <u>RTIU:</u> Observe the RS-422 distance display for Channel A. The reading shall be as specified. RCB Source Display	300.00 ± 0.05 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		40 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AE	9.000			<u>FOR ALL DASH NUMBER UNITS</u> <u>Morse ID</u>	Test Setup #1 <N> <N>		<u>Morse ID</u> 422/568 Source Display Discrete Source Display Set ground station equipment <u>IDENT</u> : CODE	
AE	9.010	ACT ID KEY 1 & 2 must GO HI		Apply an IDENT CODE to the RF antenna port. The discrete output at ACT ID KEY 1 (P2-18) and ACT ID KEY 2 (P2-15) shall go to TTL HI.	<N> <A> <1>		<u>RTIU</u> : Observe discrete ACT ID keys 1 and 2. Shall be as specified. Audio Source Display Select Audio (1) Set ground station equipment <u>IDENT</u> : TONE	ACT ID KEY 1 & 2 must GO HI
	9.020	4.9 – 5.7 V dc		Apply an IDENT TONE to the RF antenna port. The audio output at P2-25 shall be as specified.	<A> <2>		<u>RTIU</u> : Observe AUDIO LEV (). The level shall be as specified. Select Audio (2)	5.0 – 5.6 V dc
	9.030	4.9 – 5.7 V dc		Apply an IDENT TONE to the RF antenna port. The audio output at P2-26 shall be as specified.	<P> <P> <P>		<u>RTIU</u> : Observe AUDIO LEV (). The level shall be as specified. Set ground station equipment <u>IDENT</u> : OFF Connect an oscilloscope to RTIU J2T1 and 28 V dc RTN Discrete Source Display 422/568 Source Display RCB Source Display	5.0 – 5.6 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		41 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
Y	9.040	28 ± 4 V dc when unit transmits		Toggling of mutual suppression line through the radio bus. The output at P2-1 shall indicate as shown.			Observe the oscilloscope. The pulse displayed shall read as specified.	28 ± 4 V dc when unit transmits
	9.050	40 ± 20 uSec		Measure the pulse width of the mutual suppression pulse at P2-1. The pulse shall be as specified.			Set Oscilloscope to measure a 20 to 60 uSec pulse width. Observed the oscilloscope. The pulse width shall be as specified.	40 ± 20 uSec
	9.060	Range display flagged after 10 sec.		Apply an external mutual suppression pulse with the amplitude of 18.0 V to P2-1. The radio shall respond by flagging the RANGE output after the time specified. (ALL EXCEPT –855)			Set the ground station equipment mutual suppressor to ON. Connect the ground station suppressor pulse to the RTIU pins J2T1 (H) and 28 V dc RTN RTIU: Observe “L-SIDE (A)” distance display. The display shall be as specified.	Range display flagged after 10 sec.
AD							(ALL EXCEPT –855) Set ground station equipment mutual suppression OFF. Connect a DVM to RTIU J1D1 (H) and 28 V dc RTN	
AD	9.070	28 ± 4 V dc		With no external mutual suppression applied the voltage at P2-38 shall be as specified.			Observe the DVM. The amplitude shall be as specified.	28 ± 4 V dc
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		42 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AD	9.080	10 ± 2 sec		(ALL UNITS) With RF removed from the antenna port DISTANCE, TTS, and GROUD SPEED outputs from the radio shall flag invalid in the time specified.			(ALL UNITS) <u>NOTE: THE NEXT TEST IS A TIMED TEST.</u> Set ground station equipment R.F. Level to -120 dBm. RTIU: Observe "L-SIDE (A)" DISTANCE, TTS, and GROUND SPEED. The displays will be flagged at the time specified.	10 ± 2 sec
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		43 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	10.000			<u>Scanning Test</u>	Test Setup #1 <F> <108.00> <A> <F> <117.90> <D>		<u>Scanning Test</u> Frequency 108.00 Channel A Frequency 117.90 Channel D Set ground station equipment RANGE: 10 NM, FREQUENCY 108.00 VOR PAIR	
	10.010	10 ± 0.05 NM		Set the radio Channel A for 108.00 MHz and Channel D for 117.90 MHz. Apply a 108.00 VOR PAIR signal with a range delay of 10 Nautical Miles. Channel A shall respond showing the specified range.			<u>RTIU:</u> Observer "L-SIDE (A)" distance. The distance display shall be as specified.	10 ± 0.04 NM
	10.020	FLAGGED		Set the radio Channel A for 108.00 MHz and Channel D for 117.90 MHz. Apply a 108.00 VOR PAIR signal with a range delay of 10 Nautical Miles. Channel D shall respond showing the specified range.			<u>RTIU:</u> Observer "R-SIDE (D)" distance. The distance display shall be as specified.	FLAGGED
	10.030	FLAGGED		Set the radio Channel A for 108.00 MHz and Channel D for 117.90 MHz. Apply a 117.90 VOR PAIR signal with a range delay of 122 Nautical Miles. Channel A shall respond showing the specified range.			Set ground station RANGE: 122 NM, FREQUENCY: 117.90 VOR PAIR <u>RTIU:</u> Observer "L-SIDE (A)" distance. The distance display shall be as specified.	FLAGGED
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		44 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	10.040	122 ± 0.05 NM		Set the radio Channel A for 108.00 MHz and Channel D for 117.90 MHz. Apply a 117.90 VOR PAIR signal with a range delay of 122 Nautical Miles. Channel D shall respond showing the specified range.			RTIU: Observer “R-SIDE (D)” distance. The distance display shall be as specified.	122 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		45 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	11.000			<u>Squitter Rate Range Accuracy</u> <u>Range Accuracy at 700 Squitter</u>	Test Setup #1		<u>Squitter Rate Range Accuracy</u> <u>Range Accuracy at 700 Squitter</u> Set ground station equipment Squitter Rate: 700, Range: 34.00 NM Frequency 111.90 All Channels	
	11.010	34.00 ± 0.05 NM		L-SIDE(A) distance shall be as specified. <u>Range Accuracy at 4700 Squitter</u>	<F> <111.90> <G>		<u>RTIU:</u> Observe the “L-SIDE (A) distance display. The display shall read as specified. <u>Range Accuracy at 4700 Squitter</u> Set ground station equipment Squitter Rate: 4700	34.00 ± 0.04 NM
	11.020	34.00 ± 0.05 NM		L-SIDE(A) distance shall be as specified.			<u>RTIU:</u> Observe the “L-SIDE (A) distance display. The display shall read as specified. Set ground station equipment Squitter Rate: 2700	34.00 ± 0.04 NM
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		46 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	12.000			<u>VELOCITY ACCURACY</u>	Test Setup #1 <F> <111.90 <A>		<u>VELOCITY ACCURACY</u> Frequency 111.90 All Channels <u>NOTE: THIS TEST IS A TIME TEST.</u> Set ground station equipment VELOCITY: 350.0 KTS. Wait 90 sec <u>RTIU:</u> Observe "L-SIDE (A) GROUND SPEED. The reading shall be as specified. Set ground station equipment VELOCITY: 0.0 KTS	
	12.010	350.0 ± 5 KTS		The GROUND SPEED shall be as specified.				350.0 ± 4 KTS
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		47 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
	13.000			<u>PAST MODE</u>	Test Setup #1		<u>PAST MODE</u>	
					<F> <111.90> <A> <S> <A> <A>		Frequency 111.90 All Channels Test On Past Channel	
	13.010	DME PASS		Message			<u>RTIU:</u> Observe "L-SIDE (A)" Radio MSG. The reading shall be as specified.	DME PASS
AB	13.020	10.0 NM		DISTANCE			<u>RTIU:</u> Observe "L-SIDE (A)" DISTANCE. The reading shall be as specified.	10.0 NM
AB	13.030	120.0 KTS		GROUND SPEED			<u>RTIU:</u> Observe "L-SIDE (A)" GROUND SPEED. The reading shall be as specified.	120.0 KTS
AB	13.040	5		TTS			<u>RTIU:</u> Observe "L-SIDE (A)" TTS. The reading shall be as specified.	5
AB	13.050	TEST		IDENT			<u>RTIU:</u> Observe "L-SIDE (A)" IDENT. The reading shall be as specified.	TEST
					<S>		Test Mode OFF	
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		48 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
						CAGE CODE 55939		REV LTR	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.									
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION	
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS	
	14.000			<u>HOLD MODE</u> <u>For -9XX units only</u>	Test Setup #1		<u>HOLD MODE</u> <u>For -9XX units only</u>		
					<F> <111.90> <A> <L> <A> <N>		Frequency 111.90 All Channels DME HOLD Past 422/568 Source Display		
	14.010	DME STATUS: HOLD		With the radio set for HOLD MODE the 422 ACTIVE (A) STATUS shall be as specified.			<u>RTIU:</u> Observed 422 ACTIVE (A) STATUS. The reading shall be as specified.	DME STATUS: HOLD	
					<N>		Discrete Source Display		
	14.020	HIGH		With the radio set for HOLD MODE the TTL output at P2-19 (HOLD HI Z) shall be as specified.			<u>RTIU:</u> Observed Discrete HOLD HI Z. The reading shall be as specified	HIGH	
	14.030	LOW		With the radio set for HOLD MODE the TTL output at P2-22 (HOLD LO Z) shall be as specified.			<u>RTIU:</u> Observed Discrete HOLD LO Z. The reading shall be as specified	LOW	
					<P> <P> <L> <A> <N>		422/568 Source Display RCB Source Display DME HOLD OFF 422/568 Source Display		
	14.040	NOT HOLD		With the radio HOLD MODE OFF the 422 ACTIVE (A) STATUS shall be as specified.			<u>RTIU:</u> Observed DME STATUS. The reading shall be as specified	NOT HOLD	
					<N>		Discrete Source Display		
	14.050	LOW		With the radio HOLD MODE OFF the TTL output at P2-19 (HOLD HI Z) shall be as specified.			<u>RTIU:</u> Observed HOLD HI Z. The reading shall be as specified	LOW	
	14.060	HIGH		With the radio HOLD MODE OFF the TTL output at P2-22 (HOLD LO Z) shall be as specified.			<u>RTIU:</u> Observed HOLD LOW Z. The reading shall be as specified	HIGH	
Honeywell				AW/CRITICAL NOTATION					
				SECURITY NOTATION		SUPPLEMENTS		49 PAGE	

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
				SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV	TEST	SPECIFICATION				PROCEDURE		SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
					<P> <P>		422/568 Source Display RCB Source Display	
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		50 PAGE

ENGINEERING SPECIFICATION				SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
						CAGE CODE 55939		
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV	TEST	SPECIFICATION			PROCEDURE			SPECIFICATION
LTR	NO.	OPR LIMITS	C	TEST DESCRIPTION	SWITCH POS	C	WORK STEPS	MFG LIMITS
AE	15.000			FOR ALL DASH NUMBER UNITS CLEAR MAINTENANCE LOG	Test Setup #1		CLEAR MAINTENANCE LOG	
	15.010	POC: 0		Clear POC.	<H> <C>		Bench Page Clear Power On Count After clearing the power on count the RTIU monitor shall read as specified.	POC: 0
	15.020	BENCH CMD: 1		Clear Maintenance Log	<M>		Clear Maintenance Log After clearing the maintenance log the RTIU monitor shall read as specified.	BENCH CMD: 1
	15.030	END LIST		Verify Memory Cleared.	<P> <M> <X> <P> <E>		After sending update all data the RTIU monitor shall read as specified. RCB PAGE Main Page Test is Complete! Turn RTIU 28 V dc OFF before removing UUT.	END LIST
Honeywell				AW/CRITICAL NOTATION				
				SECURITY NOTATION		SUPPLEMENTS		51 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	APPENDIX A CALIBRATION PROCEDURES					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	A-0 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR	<u>RANGE CALIBRATION</u> A1. [RTIU] <F> Select Frequency <111.90> Frequency <A> Channel A2. [ATC 1400] RANGE: 1.00 NM A3. [RTIU] <H> BENCH PAGE <Z> Zero Mile Offset <O> Zero Miles <P> RCB SOURCE DISPLAY A4. Read L-SIDE (A) distance on display. Should be in the order of .970 to 1.030 NM. Calculate offset error by subtracting this number from 1.000 NM. This is the error. Example: NM read on display after zeroing = 1.017 1.000 - <u>1.017</u> - 0.017 Error Offset = -0.017 * 1000 = -17 A5. [RTIU] <H> BENCH PAGE <Z> Zero Mile Offset <-17> Enter number calculated in A4. <P> RCB SOURCE DISPLAY A6. Read L-SIDE (A) distance on display. Shall be as specified: 1.000 ± 0.005 NM. A7. [ATC 1400] RANGE: 34.00 NM A8. Continue with I.T.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	A-1 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	APPENDIX B ALIGNMENT PROCEDURES				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		B-0 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE	55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			

REV
LTR

Additional Test Equipment

H. P. RF Power Meter Model 8900C or equivalent
DME RF Extender Cable, P/N T-360074-3
DME Nanohex to BNC Cable, P/N T-360074-5

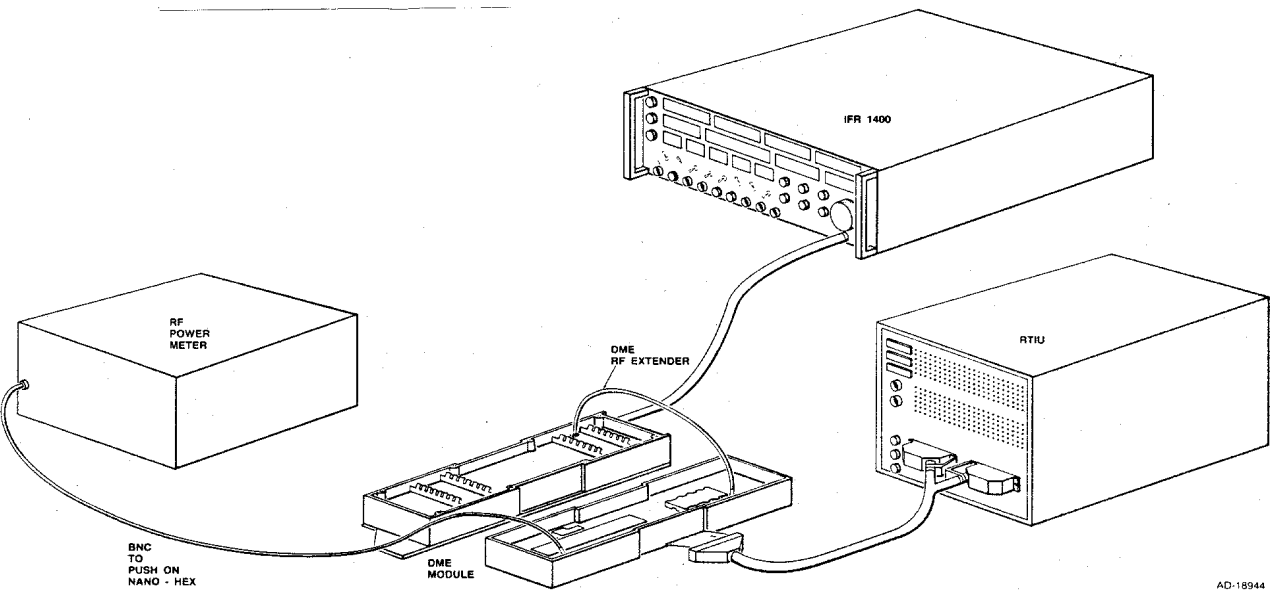


Figure B-1. Test Setup

Honeywell	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	B-1 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE	55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			

REV
LTR

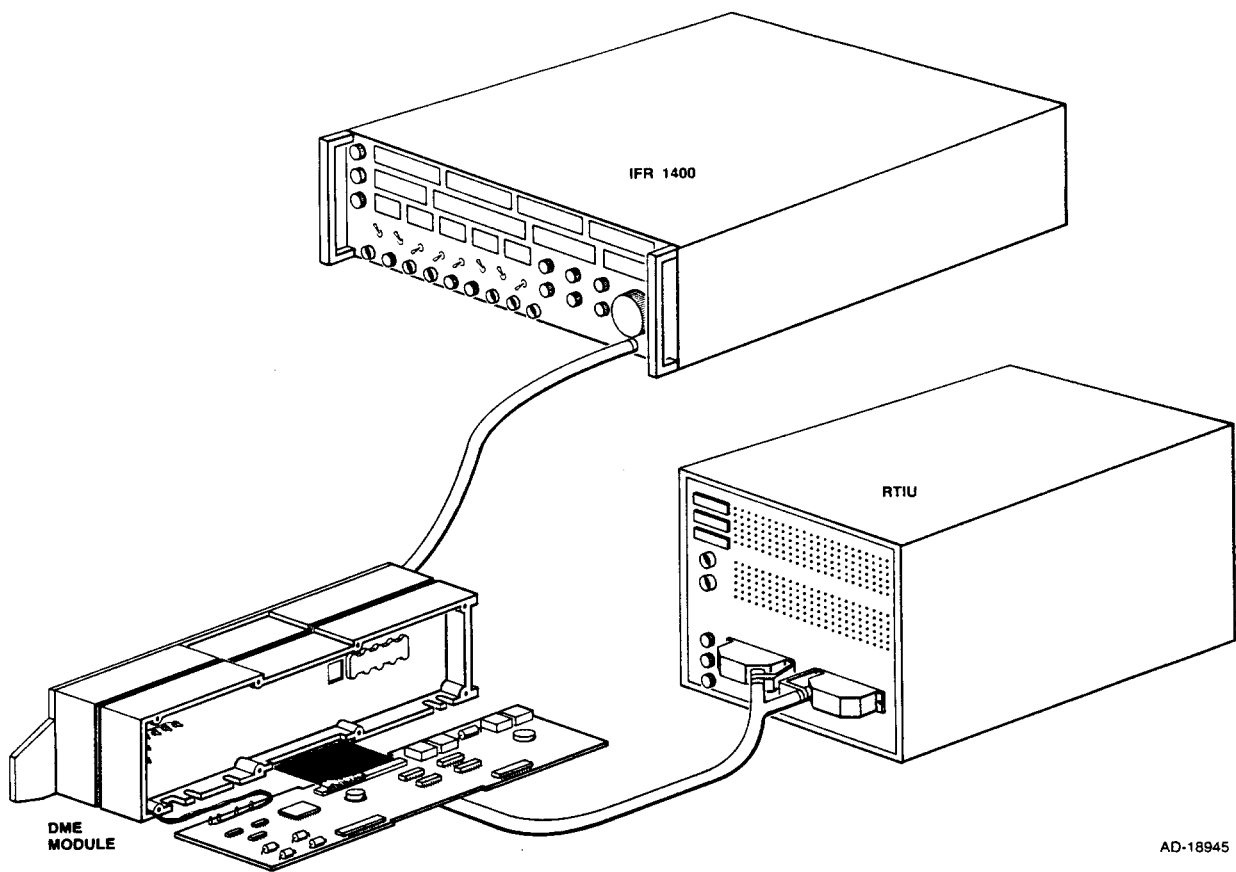


Figure B-2. Test Setup

Honeywell	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	B-2 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
AE	1. MODULATOR/POWER SUPPLY A4 CCA ADJUSTMENTS Disassemble DME to gain access to the A4 Modulator/Power Supply CCA. NOTE: Set trimmer caps on A3 CCA (C25, C34, and C35) to full CCW position. Gaussian Pulse Pair Amplitude 1.1 Adjust the Oscilloscope to 10 V dc/Div, 5 microseconds. Sec./Div, Internal Sync. 1.2 Turn the 28 V dc on the RTIU ON. 1.3 Connect a scope probe to A3FL4, and sync scope for Gaussian Pulse pair. Adjust A4R10 for pulse amplitude of +53 volts peak from base line. 1.4 Connect a scope probe to A3FL5, and sync scope. Gaussian Pulse pair should be identical to A3FL4. 1.5 Connect a scope probe to A3FL6, and sync scope for Final Gaussian Pulse pair. Adjust A4R28 for maximum amplitude. Pulse width at the 50% amplitude point must be 3.5 ± 0.5 microseconds. sec. FORWARD POWER MONITOR 1.6 Adjust the Oscilloscope to 2 V dc/Div, 5 microseconds. Sec./Div, Internal Sync. 1.7 Enter the following RTIU commands: <F> <108> <G> 1.8 Connect a scope probe to A4TP2. Adjust A4R42 for 6-volt level from ground reference. POWER SUPPLY SWITCHING FREQUENCY 1.9 Adjust the Oscilloscope to 2 V dc/Div, 2 microseconds. Sec./Div, Internal Sync. 1.10 Connect a scope probe to cathode junction of A4CR109 and A4CR110. Adjust A4R101 for 80 KHz, (pulse spacing of 12.5 microseconds from leading edge to leading edge). Stake all pots on A4 CCA with gray RTV.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		B-3 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	2. RECEIVER A2 CCA ALIGNMENT RF BANDPASS ADJUSTMENT 2.1 <u>Disassemble DME to gain access to the A2 Receiver CCA.</u> NOTE: Insure that trimmer caps on A3 CCA are adjusted fully CCW. 2.2 Adjust the Oscilloscope to 50 mVac/Div, 10 microvolts. sec./Div 2.3 Enter the following RTIU commands: <F> <117.9> <G>Adjust the IFR 1400 to: 2.4 Freq.: 117.90 VOR Pair 2.5 RF Level: -25 dBm CW 2.6 Turn the 28 V dc on the RTIU ON 2.7 Connect a scope probe to A2U1 pin 4. Adjust A3R12, R16, R28, and R23 for max output. Minimum 100 mV. 2.8 Adjust the IFR 1400 to: 2.9 Freq.: 134.40 VOR Pair 2.10 RF Level: -25 dBm CW					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION	SUPPLEMENTS	B-4 PAGE		

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	2.11 Enter the following RTIU commands: <F> <134.4> <G> 2.12 Connect a scope probe to A2U1 pin 4. Observe output: Minimum of 150 mV. If correct, proceed to next step. If not correct, adjust A3R12, R16, R28, and R23 and recheck step 1. IF GAIN ADJUSTMENT 2.13 Adjust the Oscilloscope to 1 V dc/Div, 2 microvolts. sec./Div 2.14 Adjust the IFR 1400 to: 2.15 Freq.: 134.40 VOR Pair 2.16 RF Level: -70 dBm NORM 2.17 Enter the following RTIU commands: <F> <134.4> <G> 2.18 Connect a scope probe to A2FL113. Observe two video pulses approx. 5V peak. Adjust A2C77, C83, and C89 for max gain, while lowering ATC1400 RF Level. 2.19 Adjust the IFR 1400 to: 2.20 RF Level: -120 dBm NORM 2.21 Observe "Happy Face" flag next to "Distance" field on RCB page. Read noise level on Oscilloscope and adjust A2C89 for 2V max noise level. Slowly increase ATC1400RF Level until flag on RCB page disappears. DME must trigger at -93 dBm MIN. 2.22 Adjust the IFR 1400 to: 2.23 Freq.: 117.90 VOR Pair 2.24 RF Level: -120 dBm				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	B-5 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	2.25 Enter the following RTIU commands: <F> <117.9> <G> 2.26 Repeat noise and ranging checks from step 1. 2.27 Stake all pots and adjustable caps on A2 CCA with gray RTV.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	B-6 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	3. TRANSMITTER A3 CCA ALIGNMENT Xmitter Power Output 3.1 Adjust the Oscilloscope to 200 mV dc/Div, 2 microvolts/seconds/div., Channel One (Xmitter Output from ATC1400). 3.2 Enter the following RTIU commands: <F> <117.9> <G> 3.3 Note ATC1400 Xmitter Power Watts 3.4 Enter the following RTIU commands: <F> <134.4> <G> 3.5 Note ATC1400 Xmitter Power Watts. Xmitter Power should be 420 watts min. at both frequencies. Stub tune Xmitter power levels for 117.9 (Xmit freq. 1150 MHz) and 134.4 (Xmit freq. 1025 MHz) so that they are within 40 watts of each other. 3.6 Enter the following RTIU commands: <F> <111.9> <G> 3.7 Xmitter Power at 111.9 (Xmit freq. 1080 MHz) should be greater than at 134.4 and 117.9. 3.8 Check Xmitter Output pulse shape and width, (3.1 mic. sec. to 3.9 mic. sec.) and retune Xmitter if necessary.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		B-7 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	4. TRANSMITTER SELF TEST CIRCUIT TEST 4.1 Enter the following RTIU commands: <S> <A> <A> 4.2 Observe RCB page. Radio MSGS field should read "DME TEST" for approx. 10 seconds then change to "DME PASS." Channel A should read: Frequency, 108.00; Distance, 10.00; GND speed, 120; TTS, 5; IDENT, Test; DME OPMODE, Test; and DME Status should be flashing. 5. COMPUTER/VIDEO A1 CCA ADJUSTMENTS Range LSI Crystal Oscillator Adjustment 5.1 Adjust the IFR 1400 to: 5.2 Freq.: 111.90 VOR Pair 5.3 RF Level: -70 dBm 5.4 Range: 300.00 NM 5.5 Enter the following RTIU commands: <F> <111.9> <G> 5.6 Observe Distance field on RCB Page. Adjust A1C23 until 300.00 ± 0.05 NM is displayed. After each adjustment, wait 10 seconds for range to stabilize. 5.7 Stake A1C23 with gray RTV. 12 MHz Clock Adjustment <u>NOTE:</u> Adjusting 12 MHz Clock affects Transmitter output frequency. High, middle, and low xmit channels should be checked after clock adjustment to ensure frequencies are within spec. (Center freq. ±0.090).				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	B-8 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	W					
5.8 <u>Attach Frequency Counter to A1TP8.</u>						
5.9 Adjust A1C1 for 12.0005 MHz.						
5.10 Stake A1C1 with gray RTV.						
Analog 40 mV/NM Adjustment						
5.11 Adjust the IFR 1400 to:						
5.12 Freq.: 111.90 VOR Pair						
5.13 RF Level: -70 dBm NORM						
5.14 Range: 1.00 NM						
5.15 Connect a Digital Multi Meter (DMM) to RTIU front panel pins J1U3 (+) and GRND.						
5.16 Enter the following RTIU commands:						
<F>						
<111.9>						
<G>						
5.17 Adjust A1R13 for 0.040 V dc on DMM.						
5.18 Adjust the IFR 1400 to:						
5.19 Range: 300.00 NM						
5.20 Adjust A1R7 for +12 V dc on DMM.						
5.21 Adjust the IFR 1400 to:						
5.22 Range: 1.00 NM						
5.23 Repeat steps 1 and 2 as necessary.						
5.24 Stake A1R7 and A1R13 with gray RTV.						
Analog Audio Adjustment						
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		
				B-9 PAGE		

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	5.25 Adjust the IFR 1400 to: 5.26 Freq.: 111.90 VOR Pair 5.27 RF Level: -70 dBm 5.28 Code/Tone Switch: Tone 5.29 Enter the following RTIU commands: <F> <111.9> <G> <N> <N> 5.30 Observe on Discrete Source Display, ACT ID Key 1 and ACT ID Key 2 read "HIGH." 5.31 Enter the following RTIU commands: <N> <A> <1> 5.32 Observe ACT Audio 1 has been selected. Adjust A1R102 for a reading of 5.3 V ac rms. 5.33 Enter the following RTIU commands: <A> <2> 5.34 Observe ACT Audio 2 has been selected. Adjust A1R103 for a reading of 5.3 V ac rms. 5.35 Adjust the IFR 1400 to: 5.36 Code/Tone Switch: OFF 5.37 Enter the following RTIU commands: <P> <P> <P>					
		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		B-10 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	5.38 Return to RCB Page, and observe NO Flags. NOTE: Do not stake A1R102 and A1R103. Analog Flag Output Test 5.39 Adjust the IFR 1400 to: 5.40 Freq.: 111.90 VOR Pair 5.41 RF Level: -70 dBm 5.42 Range: 34 NM 5.43 Enter the following RTIU commands: <F> <111.9> <G> 5.44 Connect a digital multi-meter (DMM) to RTIU to front panel pins J1D1 (+) and 28 V dc RTN. 5.45 Observe 34.00 NM (approx.) in Distance field on RCB page, and 28 ± 2 V dc on DMM. 5.46 Adjust the IFR 1400 to: 5.47 Suppressor Switch: ON 5.48 After 15 seconds, "Happy Face" flags should appear on Distance, GND Speed, and TTS fields on RCB page, and 0 ± 1 V dc on DMM. 5.49 Adjust the IFR 1400 to: 5.50 Suppressor Switch: OFF 5.51 Observe NO "Happy Face" flags, 34.00 NM (approx.) in Distance field on RCB page, and 28 ± 2 V dc on DMM.					
		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		B-11 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	APPENDIX C TEMPERATURE SCREENING				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	C-0 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	AD APPENDIX C TEMPERATURE SCREENING NOTE: The following test is required to ensure proper operation over specified temperature range. Reference "General Information" Section 3.9. 1. DME MODULE, 7510184, FUNCTIONAL TESTS OVER TEMPERATURE 1.1 Check module operation to specification below at 25 C. 1.2 Turn off module and lower temperature to -55 C. 1.3 After 30 minutes, turn on module and check operation to specification below. 1.4 Turn unit off. Raise chamber temperature to +70 C. 1.5 After 30 minutes, turn on module and check operation to specification below. 2. DME MODULE TEMPERATURE TEST SPECIFICATION 2.1 Perform the following test to closed DME module at VOR paired frequencies of: 134.40 MHz (1025 MHz TRANSMIT) 113.00 MHz (1101 MHz TRANSMIT) 117.95 MHz (1150 MHz TRANSMIT)					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	C-1 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER												
		CAGE CODE	55939													
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.															
REV LTR																
With a standard DME test signal of -85 dBm measure: <table><tr><td></td><td>SPECIFICATION</td></tr><tr><td>OUTPUT POWER:</td><td>200W MINIMUM</td></tr><tr><td>RCB ACCURACY:</td><td>±0.05 NM ±.1% @ 1.0, 10.0 AND 275 NM</td></tr><tr><td>RS-422 ACCURACY:</td><td>±0.05 NM ±.1% @ 10.0 NM</td></tr><tr><td>ANALOG ACCURACY:</td><td>±100 mV AT 100 NM</td></tr><tr><td>FREQUENCY STABILITY:</td><td>±100 kHz</td></tr></table> Also verify the following outputs at temperature: HOLD AND HOLD* OUTPUTS ANALOG FLAG OUTPUT IDENT DIGITAL OUTPUT IDENT ANALOG OUTPUT SELF TEST -10 NM 120 KTS 5 MIN "TEST" "DME PASS"						SPECIFICATION	OUTPUT POWER:	200W MINIMUM	RCB ACCURACY:	±0.05 NM ±.1% @ 1.0, 10.0 AND 275 NM	RS-422 ACCURACY:	±0.05 NM ±.1% @ 10.0 NM	ANALOG ACCURACY:	±100 mV AT 100 NM	FREQUENCY STABILITY:	±100 kHz
	SPECIFICATION															
OUTPUT POWER:	200W MINIMUM															
RCB ACCURACY:	±0.05 NM ±.1% @ 1.0, 10.0 AND 275 NM															
RS-422 ACCURACY:	±0.05 NM ±.1% @ 10.0 NM															
ANALOG ACCURACY:	±100 mV AT 100 NM															
FREQUENCY STABILITY:	±100 kHz															
Honeywell	AW/CRITICAL NOTATION															
	SECURITY NOTATION	SUPPLEMENTS		C-2 PAGE												

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	APPENDIX D DM-850 DME MODULE FIELD TEST PROCEDURE				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-0 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION		SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	TITLE: FIELD TEST PROCEDURE FOR THE DME MODULE, PART NO. 7510184-VAR 1. SCOPE This test procedure gives the steps necessary to put the DME Module in serviceable condition. This procedure is for approved field service organizations only. 2. GENERAL INFORMATION 2.1 <u>Signal Measurements</u> All input signals must be applied between the given terminal and ground, unless specified differently. All output voltages should be measured with respect to ground, unless specified differently. Ground is specified as any one of the four test points labeled GND on the RTIU front panel, or chassis ground. 2.2 <u>Standard Test Conditions</u> All tests must be done under temperature conditions of 25 ± 15 degrees Celsius, and less than 90 percent relative humidity, unless specified differently. 2.3 <u>Warmup</u> Permit 15 minutes of warmup time for the test equipment. 2.4 <u>Document Compatibility</u> This appendix is a field certification document for the DM-850 DME Interrogator Module. It is compatible to the factory Integrated Test Specification (IT), in the front of this document. If the IT is changed in any manner which would conflict with this appendix, the appendix must be changed to reflect the IT. 3. POWER REQUIREMENTS +28 ± 1.0 V dc			
Honeywell		AW/CRITICAL NOTATION		
		SECURITY NOTATION	SUPPLEMENTS	D-1 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION		SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	4. REQUIRED TEST EQUIPMENT 4.1 <u>Honeywell Built/Supplied</u> RU-850 Radio Test Interface Unit (RTIU), Part No. 7511400-90X Adapter Cable, DM-850 DME module, Part No. 7511409-911 RTIU Software, Part No. 7512001-1rr Where 1 = media code = 5 1/4" diskette rr = 08 software version for RTIU Part No. 7511400-901 or 09 or greater software version for RTIU Part No. 7511400-902 4.2 <u>Vendor Built</u> Personal Computer, IBM compatible with 80286, 80386, or 80486 microprocessor and 12 MHz or higher clock speed, 640K or more RAM Oscilloscope, Tektronix 465B or equivalent with 10:1 probes DMM, Fluke 8000A or equivalent (4 1/2 digits recommended) DME Signal Simulator, IFR Model 1400 or 1400A or equivalent 4.3 <u>Shop Built/Supplied</u> Test Leads: DMM test leads to fit the test points on the RTIU front panel (0.080 pin jacks) DMM test leads with needle probes 4.4 <u>Coaxial Cable Considerations</u> RG-58: 50 Ω coaxial cables with BNC connectors on both ends to connect between the signal simulator and oscilloscope. RG-214: 50 Ω coaxial cable with slide-on coaxial connector, Part No. 7500335-7 on one end, and on the other end a connector to connect to the DME signal simulator (N-Type for IFR). The length of this cable must be a whole number of half waves at the center operating frequency of 1100 MHz. One half-wave length in space at 1100 MHz is 5.367 in. or 136.36 mm. The velocity factor of the chosen coaxial cable must be factored into the equation when you make the cable. RG-214 has a velocity factor of 0.677, and results in half-wave cable lengths of 3.634 in. or 92.32 mm. EXAMPLE: If you assemble a 10 half-wave length of RG-214 -- from the above, 1 half-wave length is 3.634 in. By multiplying by 10, you arrive at a figure of 36.34 in. of RG-214 coaxial cable. If you use metric measurements -- from the above, 1 half-wave length is 92.32 mm. By multiplying by 10, you get a figure of 923.2 mm. These lengths include the coaxial connectors.			
Honeywell		AW/CRITICAL NOTATION		
		SECURITY NOTATION	SUPPLEMENTS	D-2 PAGE

REV
LTR

5. TEST SETUP

Connect the test equipment as shown in figure D-1.

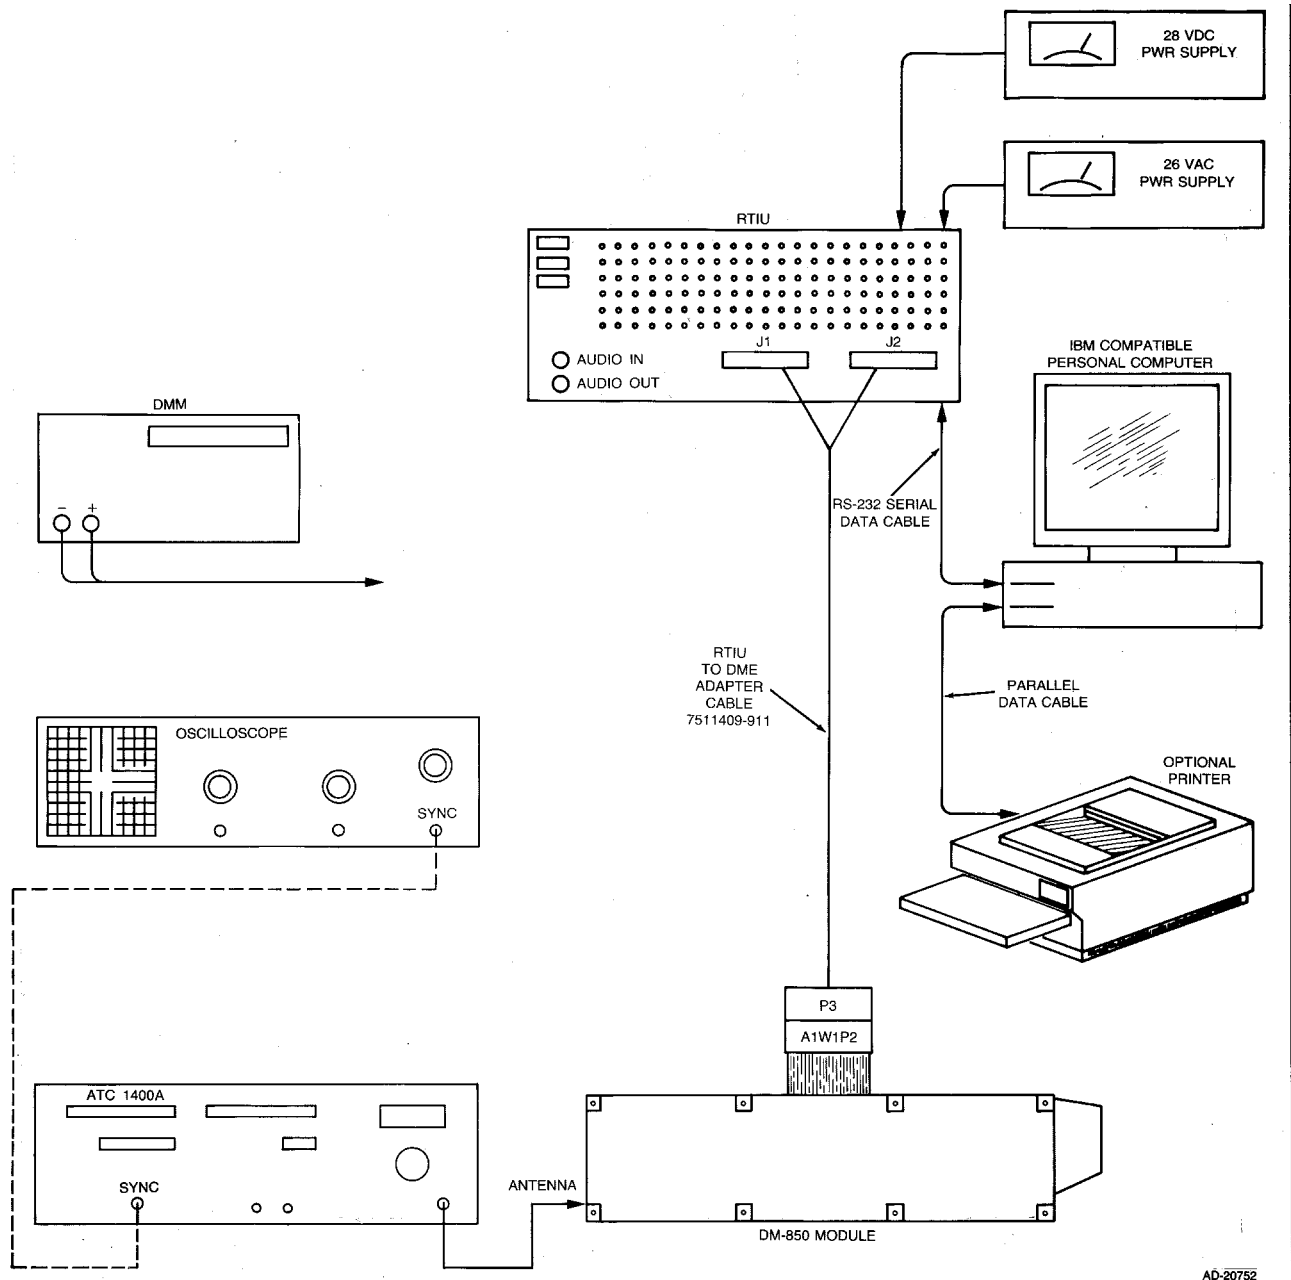


Figure D-1. Test Setup

AD-20752

ENGINEERING SPECIFICATION	SECURITY NOTATION		SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
			CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	6. GENERAL TEST INFORMATION CAUTION: THE DME TRANSMITTER MUST BE TERMINATED INTO A 50 Ω LOAD AT ALL TIMES TO PREVENT DAMAGE TO THE DME MODULE. DO NOT REMOVE THE ANTENNA CABLE WITH POWER APPLIED TO THE DME MODULE. DAMAGE TO THE DME MODULE MAY RESULT. 6.1 <u>Test Procedure</u> The test procedure must be done in its entirety upon completion of any modification or repair to the unit under test (UUT). 6.2 <u>Procedure Sequence</u> The procedure sequence is based on functional requirements. It is recommended that these procedures be done in the order given. Individual tests may be done provided that the preliminary setup procedures are followed and that all tests are started at a major test heading. Warmup is not required for the UUT. 6.3 <u>RTIU Keystrokes on the PC</u> Keystrokes for RTIU commands are found inside the < > symbols. The keystrokes within the < > symbols are first entered on the keyboard followed by a "RETURN" or "ENTER" keystroke on the keyboard. Any other keystroke or error in a keystroke sequence may put the RTIU into an unknown condition, which makes it necessary for the RTIU software to be restarted (rebooted).			
	AW/CRITICAL NOTATION			
	SECURITY NOTATION	SUPPLEMENTS	D-4 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	7. TEST SETUP REQUIREMENTS 7.1 <u>Initial Setup for the IFR ATC-1400 Test Set</u> Settings for the IFR signal simulator: Channel: 111.90 MHz, VOR Pair, (Channel 56X) Signal Level: -70 dBm Ident: "Off" position Squitter: 2700 PPS TACAN Modulation: ON Reply Efficiency: 100% Velocity: Initial tests begin with IFR in range mode. IN/OUT: IN Acceleration: Initial tests begin with IFR in range mode. Range: 34 NM DME P2 Dev: 0.0 Microseconds -1/Norm: Norm Suppressor: OFF Suppressor Var: Set for 18 V Pulse Amplitude CW/Norm: Norm SLS/Echo: OFF Freq. Step Rate: MAN 7.2 <u>Setup for the RTIU Test Set</u> <u>NOTE:</u> For detailed test procedures using the RTIU, refer to Honeywell Pub. No. 31-3800-10, Volume III, Users Guide For Testing SRZ-850 Series Integrated Radio System. A. Set up RTIU per Figure 1 of the test and adjustment procedure. Set the RTIU and PC main power switch (top switch on the RTIU) to ON. B. Load the RTIUMAIN program into the PC. C. After the RTIU has been initialized, the MAIN MENU will come into view on the PC Monitor. Select the DM-850 for test. D. From the MAIN MENU, select the command that follows: DM-850 for test <11>				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-5 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER												
				CAGE CODE 55939														
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																
REV LTR																		
	8. TEST PROCEDURES 8.1 <u>Pilot Activated Self-Test</u> NOTE: This test is an overall performance test of the DME module. All RF, IF and digital process circuitry is functionally tested. A. On the RCB page, select the commands that follow: SELF TEST as PAST for CHANNEL A <S> <A> <A> B. Monitor the results that follow:<table><tr><td>RTIU Monitor</td><td>DME OPMODE</td><td>PAST</td></tr><tr><td></td><td>RADIO MSGS</td><td>DME TEST</td></tr><tr><td colspan="3">Wait 10 seconds:</td></tr><tr><td></td><td>RADIO MSGS</td><td>DME PASS</td></tr></table> NOTE: After the words DME PASS appear in the RADIO MSGS field, the DME should display a distance of 10 NM, groundspeed of 120 KTS and 5 minutes TTS. C. Select the command that follows: SELF TEST <S> NOTE 1: When the ENTER key is pressed, the self-test function will be terminated. If the DME is not taken out of the self-test mode, it will not operate in its normal DME mode. NOTE 2: If a self-test failure occurs, the DME's maintenance log should be read to localize the problem to a specific circuit card or area.						RTIU Monitor	DME OPMODE	PAST		RADIO MSGS	DME TEST	Wait 10 seconds:				RADIO MSGS	DME PASS
RTIU Monitor	DME OPMODE	PAST																
	RADIO MSGS	DME TEST																
Wait 10 seconds:																		
	RADIO MSGS	DME PASS																
Honeywell		AW/CRITICAL NOTATION																
		SECURITY NOTATION		SUPPLEMENTS	D-7 PAGE													

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER		
			CAGE CODE	55939		REV LTR	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.							
REV LTR							
	8.3 <u>PRF Rate</u> <u>NOTE:</u> This test makes sure the transmit section of the DME digital and analog modulator PRF circuitry is operating correctly. The rate of transmission is controlled by software and initiated by the A1U2 microcontroller generating the T/R switch, Bracket pulse, P1 and P2 pulses. A. On the RCB page, select the commands that follow: CHANGE FREQUENCY <F> to 111.90 MHz <111.90> for all CHANNELS <G> (DME XMIT FREQUENCY at 111.90 VOR PAIRED IS 1080 MHz) B. Set IFR 1400 signal simulator to a frequency of 111.90. C. Monitor the results that follow: <table border="1" style="width: 100%;"> <tr> <td style="width: 60%;">IFR 1400 PRF Readout</td> <td style="width: 40%;">9 - 11 pulses per second</td> </tr> </table> <u>NOTE:</u> If the test fails, refer to Computer Video CCA, A1, schematic diagram sheet No. 1. Check circuit point E16 (XMIT) for proper P1-P2 pulses out of the A1 CCA. Check circuit point E14 (T/R) for the presence of the proper T/R pulse. Lack of either of these pulses indicates a probable failure on the A1 CCA and its associated circuitry. If transmit pulses are being properly supplied to the modulator A4 CCA, and transmitter A3 CCA, improper interrogations out of the DME to the IFR 1400 indicates a problem on either the A3 or A4 CCAs. No adjustments are available which will directly affect the DME interrogation rate.					IFR 1400 PRF Readout	9 - 11 pulses per second
IFR 1400 PRF Readout	9 - 11 pulses per second						
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION	SUPPLEMENTS		D-9 PAGE		

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER		
				CAGE CODE	55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.						
REV LTR	8.4 <u>DME Frequency Accuracy</u> <u>NOTE:</u> This test makes sure the transmitter frequency is accurate. The drive frequency is developed by the VCO section on the Receiver A2 CCA. A. The IFR 1400 must remain on a frequency of 111.90 MHz. The DME must remain ON or have all channels set to a frequency of 111.90. B. Monitor the results that follow: <table><tr><td>IFR 1400 Frequency Readout</td><td>1080 ± 0.09 MHz</td></tr></table> <u>NOTE:</u> If this test fails, check the frequency accuracy of the 12 MHz clock to the synthesizer, also check for the proper VCO positive dc drive level at A2 FL114. To do this check, channel the DME and IFR 1400 to 134.40 MHz (channel 1X). Connect DMM to A2FL114 and ground, the voltage must be +1.70 V dc. If it is not, adjust A2C63 until the voltage is +1.70 V dc. If it is not possible to adjust A2C63 to attain the proper drive level, troubleshoot the A2 synthesizer and VCO circuitry. After repair or adjustment, channel the DME and IFR 1400 to a frequency of 111.90 MHz and repeat the test.						IFR 1400 Frequency Readout	1080 ± 0.09 MHz
IFR 1400 Frequency Readout							1080 ± 0.09 MHz	
Honeywell		AW/CRITICAL NOTATION						
		SECURITY NOTATION		SUPPLEMENTS	D-10 PAGE			

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	8.5 <u>Peak Power</u> <u>NOTE:</u> This test examines the DME modulator/transmitter circuitry. All power measurements must take into account the RF cable losses between the DME and the IFR 1400 at 1100 MHz. A. Set the IFR 1400 to a frequency of 133.60 MHz (DME xmit frequency of 1087 MHz). B. On the RCB page, select the commands that follow: CHANGE FREQUENCY to 133.60 MHz for all CHANNELS <F> <133.60> <G> C. Set the IFR 1400 peak power switch to F1/P1. D. Monitor the results that follow: IFR 1400 Peak Power Readout >360 watts E. Set the IFR 1400 peak power switch to F2/P2. F. Monitor the results that follow: IFR 1400 Peak Power Readout >360 watts G. Set the IFR 1400 frequency to 134.40 (DME xmit frequency of 1025). H. Select the commands that follow: CHANGE FREQUENCY to 134.40 MHz for all CHANNELS <F> <134.40> <G> I. Set the IFR 1400 peak power switch to F1/P1. J. Monitor the results that follow: IFR 1400 Peak Power Readout >360 watts K. Set the IFR 1400 peak power switch to F2/P2.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-11 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR												
		CAGE CODE	55939													
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.															
REV LTR	L. Monitor the results that follow: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">IFR 1400 Peak Power Readout</td> <td style="text-align: right; padding: 2px 5px;">>360 watts</td> </tr> </table> M. Set the IFR 1400 frequency to 117.90 (DME xmit frequency of 1150). N. Select the commands that follow: <table style="width: 100%;"> <tr> <td style="width: 70%;">CHANGE FREQUENCY</td> <td style="text-align: right;"><F></td> </tr> <tr> <td>to 117.90 MHz</td> <td style="text-align: right;"><117.90></td> </tr> <tr> <td>for all CHANNELS</td> <td style="text-align: right;"><G></td> </tr> </table> O. Set the IFR 1400 peak power switch to F1/P1. P. Monitor the results that follow: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">IFR 1400 Peak Power Readout</td> <td style="text-align: right; padding: 2px 5px;">>360 watts</td> </tr> </table> Q. Set the IFR 1400 peak power switch to F2/P2. R. Monitor the results that follow: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">IFR 1400 Peak Power Readout</td> <td style="text-align: right; padding: 2px 5px;">>360 watts</td> </tr> </table> <u>NOTE:</u> If this test fails, do the procedures that follows. The modulator (A2 CCA) adjustments which affect peak power are A2R10 and A2R28. Channel both the DME and the IFR 1400 to 111.90 MHz. Connect an oscilloscope between A2E15 and ground. Sync the scope on the Gaussian Pulse pair and adjust A2R10 for a pulse amplitude of +50 V dc from ground to pulse peak. Connect scope to A2E14 and ground; adjust A2R28 for a pulse amplitude of +50 V dc from ground to pulse peak. The pulse peak at E14 must be Gaussian shaped (rounded) and the pulse width at the 50% amplitude points must be 3.5 ± 0.5 microseconds wide. Transmitter RF adjustments are made on the A3 CCA with variable capacitors A3C25, A3C34 and A3C35. For these adjustments do the transmitter alignment procedure in appendix E.				IFR 1400 Peak Power Readout	>360 watts	CHANGE FREQUENCY	<F>	to 117.90 MHz	<117.90>	for all CHANNELS	<G>	IFR 1400 Peak Power Readout	>360 watts	IFR 1400 Peak Power Readout	>360 watts
IFR 1400 Peak Power Readout	>360 watts															
CHANGE FREQUENCY	<F>															
to 117.90 MHz	<117.90>															
for all CHANNELS	<G>															
IFR 1400 Peak Power Readout	>360 watts															
IFR 1400 Peak Power Readout	>360 watts															
Honeywell		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="3" style="text-align: center; padding: 2px;">AW/CRITICAL NOTATION</td> </tr> <tr> <td style="width: 33%; text-align: center; padding: 2px;">SECURITY NOTATION</td> <td style="width: 33%; text-align: center; padding: 2px;">SUPPLEMENTS</td> <td style="width: 33%; text-align: center; padding: 2px;">D-12 PAGE</td> </tr> </table>			AW/CRITICAL NOTATION			SECURITY NOTATION	SUPPLEMENTS	D-12 PAGE						
AW/CRITICAL NOTATION																
SECURITY NOTATION	SUPPLEMENTS	D-12 PAGE														

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER																
			CAGE CODE	55939		REV LTR															
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																					
REV LTR																					
	8.6 Receiver Sensitivity NOTE: This test is designed to find the minimum signal which will cause the DME to recognize and process valid replies, display accurate range data and output +28 V dc to pull the DME flag. A. The IFR 1400 must remain on a frequency of 117.90 MHz (UUT receive frequency of 1213 MHz). The DME must remain on or have all channels set to a frequency of 117.90. B. Set the IFR 1400 RF output level to -120 dBm. C. Wait until the distance readout on the RCB page shows a flagged condition (happy face symbol before the distance information field on the RCB page). D. Slowly increase the IFR 1400 RF output level until the happy face symbol goes away. E. Monitor the results that follow: <table border="1"> <tr> <td>IFR 1400 -dBm Attenuator Dial</td> <td>Less than or equal to -92 dBm</td> </tr> </table> F. On the RCB page, select the commands that follow: <table> <tr> <td>CHANGE FREQUENCY</td> <td><F></td> </tr> <tr> <td>to 134.40 MHz</td> <td><134.40></td> </tr> <tr> <td>for all CHANNELS</td> <td><G></td> </tr> </table> G. Set IFR 1400 frequency to 134.40 MHz (DME receive frequency of 962 MHz) and RF output level to -120 dBm. H. Wait until the distance readout on the RCB page shows a flagged condition (happy face symbol before the distance information field on the RCB page). I. Slowly increase the IFR 1400 RF output level until the happy face symbol goes away. J. Monitor the results that follow: <table border="1"> <tr> <td>IFR 1400 -dBm Attenuator Dial</td> <td>Less than or equal to -92 dBm</td> </tr> </table> K. Select the commands that follow: <table> <tr> <td>CHANGE FREQUENCY</td> <td><F></td> </tr> <tr> <td>to 134.40 MHz</td> <td><134.45></td> </tr> <tr> <td>for all CHANNELS</td> <td><G></td> </tr> </table>					IFR 1400 -dBm Attenuator Dial	Less than or equal to -92 dBm	CHANGE FREQUENCY	<F>	to 134.40 MHz	<134.40>	for all CHANNELS	<G>	IFR 1400 -dBm Attenuator Dial	Less than or equal to -92 dBm	CHANGE FREQUENCY	<F>	to 134.40 MHz	<134.45>	for all CHANNELS	<G>
IFR 1400 -dBm Attenuator Dial	Less than or equal to -92 dBm																				
CHANGE FREQUENCY	<F>																				
to 134.40 MHz	<134.40>																				
for all CHANNELS	<G>																				
IFR 1400 -dBm Attenuator Dial	Less than or equal to -92 dBm																				
CHANGE FREQUENCY	<F>																				
to 134.40 MHz	<134.45>																				
for all CHANNELS	<G>																				
Honeywell		AW/CRITICAL NOTATION																			
		SECURITY NOTATION	SUPPLEMENTS		D-13 PAGE																

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
	L. Set IFR 1400 frequency to 134.45 MHz (DME receive frequency of 1088 MHz) and RF output level to -120 dBm. M. Wait until the distance readout on the RCB page shows a flagged condition (happy face symbol before the distance information field on the RCB page). N. Slowly increase IFR 1400 RF output level until the happy face symbol goes away. O. Monitor the results that follow: IFR 1400 -dBm Attenuator Dial Less than or equal to -92 dBm <u>NOTE:</u> This is the receiver Acquisition Sensitivity Level. When the happy face symbol goes away, the DME must begin to display distance information on the RCB and 422/568 pages. P. Return the IFR signal output level to -70 dBm. <u>NOTE:</u> If this test fails, do the receiver alignment procedure in appendix E. Sensitivity adjustments can only be made while performing the receiver alignment procedure.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-14 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	8.8 <u>Analog Range Accuracy</u> <u>NOTE:</u> This test measures the accuracy of the DME analog range output. A. Setup (1) The IFR 1400 must remain on a frequency of 134.40 MHz. The DME must remain on or have all channels set to a frequency of 134.40. Set the IFR 1400 DME distance to a range of 34 NM. (2) Make sure that the IFR generator is in Range mode (mode switch is in range position and IFR is displaying 34 nautical miles). (3) Connect a DMM between RTIU front panel pins J1U3 (HI) and GND (LO). B. Monitor the results that follow: DMM 1.36 ± 0.05 V dc <u>NOTE:</u> If this test fails, do the procedures that follow: Analog range calibration is performed on the Computer Video A1 CCA. Set the IFR 1400 DME distance to a range of 34 NM and make sure the DME has channels A,B,C and D on the same channel as the IFR 1400. The DME must be on and communicating with the RTIU. The distance information should be displayed on the RCB page. Set the IFR 1400 to 1 NM in range mode. Connect a DMM between RTIU front panel pins J1U3 (HI) and GND (LO). Adjust A1R13 (Offset) for a +0.040 ± 0.002 V dc reading on the DMM. Set the IFR 1400 to 300 NM and adjust A1R7 (Gain) for a +12.00 ± 0.5 V dc reading on the DMM. Since the DME analog offset and gain adjustments can interact it may necessary to repeat both adjustments.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-16 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE 55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	8.9 Range Accuracy At Selected Distances NOTE: This test measures the DME range accuracy display characteristics from 10 to 300 NM. A. The IFR 1400 must remain on a frequency of 134.40 MHz. The DME must remain on or have all channels set to a frequency of 134.40. B. Set IFR distance to 00.0 NM. C. Monitor the results that follow: RTIU Monitor Distance field, channels A through D must be 0 ± 0.04 NM. D. Repeat step B with the distances that follow entered into the IFR 1400: 10.00 NM, 100.00 NM, 225.00 NM and 300.00 NM. E. Monitor the results that follow: RTIU Monitor 10.00 ± 0.04 NM 100.00 ± 0.04 NM 225.00 ± 0.05 NM 300.00 ± 0.05 NM NOTE: If this test fails, a calibration or digital signal processing problem exists. Do the Digital Range alignment procedure in appendix E.		
	Honeywell AW/CRITICAL NOTATION SECURITY NOTATION SUPPLEMENTS D-17 PAGE		

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
				CAGE CODE 55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR							
8.10 RS-422 Channel 2 Bus Test NOTE: This test makes sure that both RS-422 digital buses are operating correctly with data being output and displayed for both RS-422 channels. Microcontroller U101 on the Computer Video A1 CCA is the controller for the RS-422 data bus. U101 acts as a converter changing data from RCB bus structure to the RS-422 format. A. The IFR 1400 must remain on a frequency of 134.40 MHz. The DME must remain on or have all channels set to a frequency of 134.40. B. The DME must be on and displaying distance information on the RCB page. C. On the RCB page, select the commands that follow: Go to the 422/568 page select PICK RS422 PORT as 2 <N> <K> <2> NOTE: Since DME information is normally output to the RTIU through port 1, port 2 must be selected by the PICK A PORT command. The DME under test will now begin communicating with the RTIU through RS-422 port 2. D. Monitor the results that follow: RTIU Monitor When the RTIU begins to display port 2 data on the CRT screen, no noticeable change on the screen will be apparent if the DME is operating correctly. NOTE: If this test fails, U101 or its associated circuitry is the probable cause.							
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION		SUPPLEMENTS		D-18 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	(2) Once audio has been selected, make sure that the IFR 1400 tone switch is in the 1350 HZ position. (3) Monitor the results that follow: RTIU Monitor The AUD LEVEL field must show 5.3 ± 0.30 Vrms (4) Select the commands that follow: SELECT ACT AUDIO as 2 <A> <2> (testing number two active audio channel) (5) Monitor the results that follow: RTIU Monitor The AUD LEVEL field must show 5.3 ± 0.30 Vrms NOTE: If this test fails after passing the Digital Audio test procedure, do the procedures that follow. ACT analog audio is adjustable through the casting without opening the DME module. See figure E-1 in appendix E for location of channel 1 and 2 ACT analog audio potentiometers. To set the amplitude of ACT 1 AUDIO, adjust A1R102; for ACT 2 AUDIO, adjust A1R103.					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	D-20 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
	8.12Morse Identifier NOTE: This test makes sure the digital decoding, encoding and display of the morse identifier are operating correctly. A. The IFR 1400 must remain on a frequency of 134.40 MHz. The DME must remain on or have all channels set to a frequency of 134.40. On the IFR 1400 set the TACAN switch to the OFF position. B. The DME must be ON and displaying distance information on the RCB page. C. Set the IFR 1400 tone switch to the IDENT position. D. Set the RTIU 28V DC power switch to OFF. Wait 10 seconds and then set the RTIU 28V DC power switch back to ON. E. Monitor the results that follow: RTIU Monitor Within 120 seconds the "IFR" identifier will be decoded and displayed under the A and D channel columns. F. On the IFR 1400, set the TACAN switch to the ON position.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	D-21 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR				
		CAGE CODE 55939					
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.							
REV LTR	8.13 <u>Mutual Suppression</u> <u>NOTE:</u> The mutual suppression line is connected between all L band transceivers in the aircraft and is used to eliminate interference caused when one unit is in the transmit mode while another is in the receive mode. During transmit, a high level suppression pulse is output by the L band transceiver that is transmitting. This in turn shuts down all other onboard L band receivers preventing them from picking up unwanted transmissions. Mutual suppression is initiated at the start of every transmit cycle and is controlled by the T/R switch. The pulsewidth is dependent upon the channel being selected for transmit (W,X,Y,Z). A. The IFR 1400 must remain on a frequency of 134.40 MHz. The DME must remain on or have all channels set to a frequency of 134.40. B. The DME must be on and displaying distance information on the RCB page. C. Connect the suppressor output of the IFR 1400 to the RTIU, IFR common/shield ground to RTIU front panel pin GND and the IFR 1400 suppressor center conductor to front panel pin J2T1. D. Set the IFR 1400 suppression switch to ON. E. Monitor the results that follow: <table border="1"> <tr> <td data-bbox="406 1008 1128 1234">RTIU Monitor</td> <td data-bbox="1128 1008 1505 1234">After 11 seconds, all range data must be flagged (a happy face symbol preceding distance, ground speed and TTS information fields).</td> </tr> </table> F. Set the IFR 1400 suppressor switch to OFF. Remove the cable between the IFR suppression jack and the RTIU. G. Connect an oscilloscope probe to RTIU front panel pins J2T1 (probe tip) and GND (probe ground). The oscilloscope must be set to internal sync with scope triggering on the positive or rising edge of the suppression pulse. H. When the DME transmits, a high level mutual suppression pulse will be output on J2T1. I. Monitor the results that follow: <table border="1"> <tr> <td data-bbox="406 1509 1128 1650">Oscilloscope</td> <td data-bbox="1128 1509 1505 1650">The pulse amplitude must be 28 ± 2.0 V dc. The pulse-width must be 25 ± 2.0 μsec.</td> </tr> </table> <u>NOTE:</u> If this test fails, a problem in the A1U2 microcontroller produced T/R switch or the analog drive circuitry on the Modulator/Power Supply A4 CCA exists.			RTIU Monitor	After 11 seconds, all range data must be flagged (a happy face symbol preceding distance, ground speed and TTS information fields).	Oscilloscope	The pulse amplitude must be 28 ± 2.0 V dc. The pulse-width must be 25 ± 2.0 μ sec.
	RTIU Monitor	After 11 seconds, all range data must be flagged (a happy face symbol preceding distance, ground speed and TTS information fields).					
Oscilloscope	The pulse amplitude must be 28 ± 2.0 V dc. The pulse-width must be 25 ± 2.0 μ sec.						
<table border="1"> <tr> <td data-bbox="94 1829 571 1980" rowspan="2"> Honeywell </td> <td colspan="2" data-bbox="571 1829 1531 1887"> AW/CRITICAL NOTATION </td> </tr> <tr> <td data-bbox="571 1887 954 1980"> SECURITY NOTATION </td> <td data-bbox="954 1887 1531 1980"> SUPPLEMENTS D-22 PAGE </td> </tr> </table>			Honeywell	AW/CRITICAL NOTATION		SECURITY NOTATION	SUPPLEMENTS D-22 PAGE
Honeywell	AW/CRITICAL NOTATION						
	SECURITY NOTATION	SUPPLEMENTS D-22 PAGE					

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184 CAGE CODE 55939	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		

REV LTR

8.14 DME Scanning

NOTE: This test examines the scanning function of the DME. The DME must under proper strap conditions, scan up to four channels for distance information and two additional channels for the morse identifiers.

A. Set the IFR 1400 to a frequency of 108.00 MHz, Range Mode, and the RF signal level to -70 dBm and distance to 10.0 NM.

B. Select the RCB page.

C. On the RCB page, select the commands that follow:

CHANGE FREQUENCY
to 108.00 MHz
for channel A

<F>
<108.00>
<A>

CHANGE FREQUENCY
to 117.90 MHz
for channel D

<F>
<117.90>
<D>

D. Monitor the results that follow:

RTIU Monitor

Channel A distance field
10 ± 0.04 NM.

Channel D distance field
flagged

E. Set the IFR 1400 to a frequency of 117.90 MHz, and distance to 122 NM.

F. Monitor the results that follow:

RTIU Monitor

Channel A distance field
flagged

Channel D distance field
122 ± 0.05 NM.

NOTE: If this test fails, do a Pilot Activated Self Test (PAST) to localize the problem to a specific area.

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER										
		CAGE CODE 55939											
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.												
REV LTR	8.15 Range Accuracy Under Varying Squitter Rate NOTE: DME Squitter is transmitted by the DME ground stations between active replies at an average rate of 2700 pulse pairs per second. Since replies to all airborne interrogations are also generated by the ground stations, the DME must be capable of recognizing and decoding only those replies that were generated by its interrogation. A. The IFR 1400 must remain on a frequency of 117.90 MHz. B. Set the IFR 1400 squitter rate to 700 and distance to 34.00 NM. C. On the RCB page, select the commands that follow: <table> <tr> <td>CHANGE FREQUENCY</td> <td><F></td> </tr> <tr> <td>to 117.90 MHz</td> <td><117.90></td> </tr> <tr> <td>for all channels</td> <td><G></td> </tr> </table> D. Monitor the results that follow: <table> <tr> <td>RTIU Monitor</td> <td>The distance field on channels A through D must be 34 ± 0.04 NM</td> </tr> </table> E. Set the IFR 1400 squitter rate to 4700. F. Monitor the results that follow: <table> <tr> <td>RTIU Monitor</td> <td>The distance field on channels A through D must be 34 ± 0.04 NM</td> </tr> </table> NOTE: A failure of this test indicates a digital problem in the A1U2 microcontroller, A1U8 LSI or their associated circuitry. If the failure occurs only at low squitter rates, the AGC circuitry may be faulty.			CHANGE FREQUENCY	<F>	to 117.90 MHz	<117.90>	for all channels	<G>	RTIU Monitor	The distance field on channels A through D must be 34 ± 0.04 NM	RTIU Monitor	The distance field on channels A through D must be 34 ± 0.04 NM
	CHANGE FREQUENCY	<F>											
to 117.90 MHz	<117.90>												
for all channels	<G>												
RTIU Monitor	The distance field on channels A through D must be 34 ± 0.04 NM												
RTIU Monitor	The distance field on channels A through D must be 34 ± 0.04 NM												
	AW/CRITICAL NOTATION												
	SECURITY NOTATION	SUPPLEMENTS	D-24 PAGE										

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	8.16 <u>Velocity Accuracy</u> <u>NOTE:</u> Velocity or groundspeed is determined by measuring the rate at which the DME ground station reply timing changes. A. The IFR 1400 must remain on a frequency of 117.90 MHz. The DME must remain on or have all channels set to a frequency of 117.90. B. Set the IFR 1400 to VELOCITY mode, set velocity (groundspeed) to 350 KTS and set the IN/OUT slew switch to the IN position. C. Wait 90 seconds for the GND SPEED to stabilize. D. Monitor the results that follow: RTIU Monitor The GND SPEED field must show 350 ± 4 KTS <u>NOTE:</u> If this test fails, a faulty A1U2 processor, A1U8 LSI and/or their associated digital circuitry exists.					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	D-25 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR	8.17 <u>Hold Mode</u> <u>NOTE:</u> This test makes sure the DME discrete hold outputs are enabled and disabled by the presence of a hold command from the cockpit RMU. A. The IFR 1400 must remain on a frequency of 117.90 MHz. The DME must remain on or have all channels set to a frequency of 117.90. B. On the RCB page, select the commands that follow: DME HOLD on CHANNEL A <L> <A> C. Monitor the results that follow: RTIU Monitor The DME STATUS field must show the abbreviation HL D. Select the command that follows: Go to the DISCRETE page <N> <N> E. Monitor the results that follow: RTIU Monitor In LOGIC column, make sure that HOLD HI Z is HIGH, and HOLD LO Z is LOW. F. Select the commands that follow: Go to the RCB page select DME HOLD on CHANNEL A <P> <P> <L> <A> G. Monitor the results that follow: RTIU Monitor The DME STATUS field must show the abbreviation NH H. Select the commands that follow: Go to the DISCRETE page <N> <N>				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		D-26 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
	I. Monitor the results that follow: RTIU MonitorIn LOGIC column, make sure that HOLD HI Z is LOW, and HOLD LO Z is HIGH. J. Select the commands that follow: Go to the RCB page<P> <P> NOTE: If this test fails, examine the digital circuitry on the Computer/Video A1 CCA. When a hold command is received through the RCB, microcontroller A1U2 will signal analog controller A1U101 to toggle the discrete HOLD and NOT HOLD lines.					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	D-27 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	APPENDIX E DM-850 DME MODULE FIELD ADJUSTMENT AND ALIGNMENT PROCEDURE				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	E-0 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER						
		CAGE CODE 55939							
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.								
REV LTR	TITLE: FIELD ADJUSTMENT AND ALIGNMENT PROCEDURE FOR DM-850 DME INTERROGATOR MODULE, PART NO. 7510184-VAR. 1. SCOPE When a test fails or when it is necessary to repair the DME module, do one or more of the alignment procedures in this appendix. It is recommended that only the procedures related to the individual test discrepancy be done. 2. EQUIPMENT AND MATERIALS REQUIRED In addition to the equipment necessary to do the DME test procedures, the tools specified below are necessary to do the measurements and adjustments in this procedure. • Cable Assembly, DME RF Extender (2ea.), Honeywell Part No. T360074-3 • Tuning Tool, Johanson 8777, (Honeywell Part No. 7500634-2) • RF Tuning Tool, Murata Erie ME502, (Honeywell Part No. 7500634-1) • Male BNC to Banana Adapter, User supplied • Resistor, 10 kΩ 1/8 watt, User supplied • Capacitor, 22 μF, 50 VDCW, User supplied 3. GENERAL INFORMATION 3.1 <u>RTIU Keystrokes on PC</u> Keystrokes for RTIU commands are found inside the < > symbols. The keystrokes within the < > symbols are first entered on the keyboard followed by a "RETURN" or "ENTER" keystroke. Any other keystroke, or error in a keystroke sequence, can put the RTIU into an unknown condition, which makes it necessary for the RTIU software to be restarted (rebooted). 3.2 <u>Coaxial Cable Considerations</u> Do not use RG-58 coaxial cable when connecting the UUT RF input to the IFR 1400 Test Set. RG-214 coaxial cable is recommended. RG-214 50Ω coaxial cable with slide-on coaxial connector (Part No. 7500335-7) on one end, and on the other end a connector to connect to the DME signal simulator (N-Type for IFR). The length of this cable must be a whole number of half waves at the center operating frequency of 1100 MHz. One-half wave length in space at 1100 MHz is 5.367 in. or 136.36 mm. The velocity factor of the coaxial cable must be factored into the equation when you make the cable. RG-214 has a velocity factor of 0.667, and results in half-wave cable lengths of 3.634 in. or 92.32 mm. EXAMPLE: If you assemble a 10 half-wave length of RG-214 -- from the above, 1 half-wave length is 3.634 in. By multiplying by 10, you arrive at a figure of 36.34 in. of RG-214 coaxial cable.								
	<table border="1"> <tr> <td data-bbox="94 1829 571 1976" rowspan="2">  </td> <td colspan="3" data-bbox="571 1829 1528 1885">AW/CRITICAL NOTATION</td> </tr> <tr> <td data-bbox="571 1885 954 1976">SECURITY NOTATION</td> <td data-bbox="954 1885 1383 1976">SUPPLEMENTS</td> <td data-bbox="1383 1885 1528 1976">E-1 PAGE</td> </tr> </table>				AW/CRITICAL NOTATION			SECURITY NOTATION	SUPPLEMENTS
	AW/CRITICAL NOTATION								
	SECURITY NOTATION	SUPPLEMENTS	E-1 PAGE						

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
	If you use metric measurements -- from the above, 1 half-wave length is 92.32 mm. By multiplying by 10, you get a figure of 923.2 mm. These lengths include the coaxial connectors. 3.3 <u>Trimmer Capacitor Adjustments</u> A. If a trimmer capacitor adjustment is necessary, carefully remove adhesive from capacitor before doing the adjustment. B. Use RF tuning tool, Murata Erie ME502 (Honeywell Part No. 7500634-1), to adjust trimmer capacitors. C. After adjustments have been completed, apply gray RTV 3145 adhesive (HMN 97P5378) to all trimmer capacitors. 4. DISASSEMBLY FOR ALIGNMENT <u>NOTE:</u> Refer to the Illustrated Parts List (IPL) for the DME exploded view. After removing the casting screws, the module casting will split into two sections. One section contains the A1 and A2 CCAs and the other section contains the A3 and A4 CCAs. With the module split in halves and folded open the A2 and A3 CCAs should be exposed and facing up. Remove the shield that separates the two castings. To access the modulator/power supply CCA A4, remove the four screws used to attach the CCA to the casting and fold the CCA out away from the casting.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	E-2 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR	5. ALIGNMENT SETUP REQUIREMENTS See the test setup in appendix D for RTIU and IFR 1400 operation and initial switch position information. 5.1 <u>RTIU Setup</u> <u>NOTE:</u> For detailed test procedures using the RTIU, refer to Honeywell Pub. No. 31-3800-10, Volume III, Users Guide For Testing SRZ-850 Series Integrated Radio System. D. Set the RTIU and PC main power switch (top switch on the RTIU) to ON. E. Load the RTIUMAIN program into the PC. F. After the RTIU has been initialized, the PRIMUS II® MAIN MENU will come into view on the PC Monitor. 5.2 <u>DM-850 Setup</u> <u>CAUTION:</u> THE DME TRANSMITTER MUST AT ALL TIMES BE TERMINATED INTO A 50Ω LOAD TO PREVENT DAMAGE TO THE DME MODULE. DO NOT REMOVE THE ANTENNA CABLE WITH POWER APPLIED TO THE DME MODULE. A. Select the command that follows: Select the DM-850 for test <11> (The first page that will appear is the DM-850 CONFIGURATION page) B. Select the STRAP commands that follow: FMCS INSTALLED (OPEN) <I> SYS 2 DME INST (OPEN) <R> EFIS/MLS CONTROL (OPEN) <F> C. Set the RTIU 28V DC power switch to ON. D. After approximately 5 seconds the UUT will begin to communicate with the RTIU, and the ERRORS field on the monitor must be blank.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	E-3 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE	55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			

REV
LTR

6. DME MODULE

Refer to figure E-1 for adjustment and test point locations.

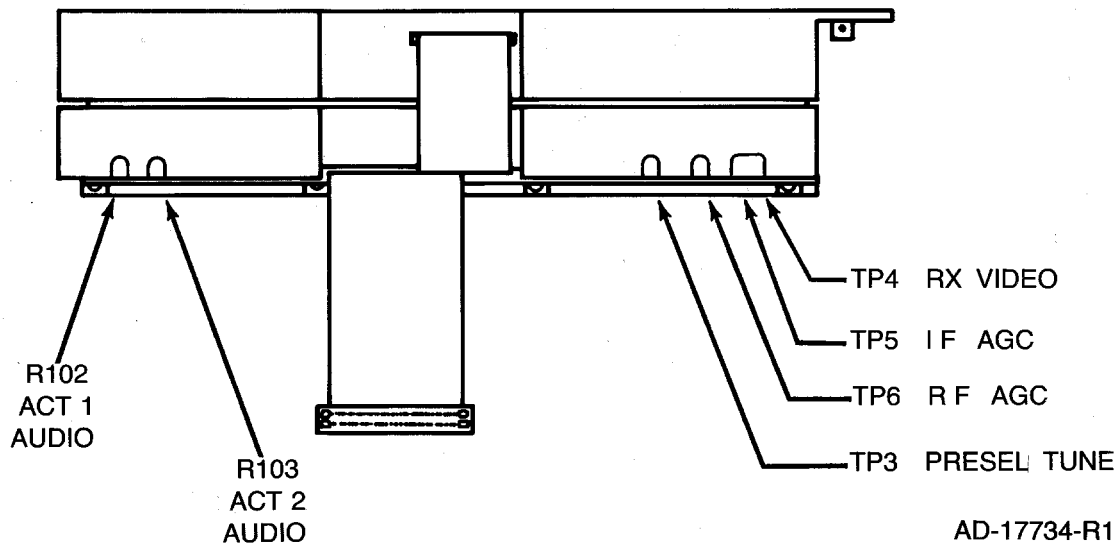


Figure E-1. Audio Adjustment and Test Point Location

Honeywell	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	E-4 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION		SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	7. MODULATOR/POWER SUPPLY CCA A4 ADJUSTMENTS 7.1 <u>Power Supply Switching Frequency</u> NOTE: Under normal operating conditions, the power supply switching frequency of the DME and the other RNZ-850 modules is controlled by the ADF module microprocessor. This is done to prevent interference between the power supplies and the ADF Receiver when it is tuned to low frequencies. In the event of an ADF failure, the DME must default to a known switching frequency. To set the default frequency, a potentiometer in the power supply must be adjusted. A. Gain access to the Modulator/Power Supply CCA A4 by doing the Disassembly for Alignment instructions. B. Disable the power supply sync by connecting a jumper between the RTIU front panel pins marked +5 V dc and J2S1. C. Connect an oscilloscope probe to the cathode junction of CR109, CR110 on the A4 CCA. See figure E-2 for component locations. D. On the A4 CCA layout, locate A4R101. E. Adjust A4R101 for a pulse spacing of 12.5 microseconds, from leading edge to leading edge. This adjustment sets the power supply switching frequency to 80 kHz. NOTE: This adjustment does not directly affect the accuracy of the different supply voltages developed on the A4 CCA. 7.2 <u>Modulator - Gaussian Pulse Pair Amplitude</u> NOTE: Modulator adjustments have a direct effect on DME peak power out. If the modulator is not properly adjusted, it can result in out of tolerance peak power readings on the IFR 1400 power meter. A. Set the IFR 1400 frequency to 108 MHz VOR paired. B. Make sure that the RCB page on the RTIU Monitor is shown and that the FREQUENCY for channels A through F is 108.00. C. Setup the oscilloscope for 10V/DIV, 5μs/DIV and internal sync. Connect the scope probe to A4E15 (35 W GAUSSIAN). Sync the scope to the gaussian pulse pair at A4E15 (35 W GAUSSIAN). See figure E-2 for test point locations. D. Adjust A4R10 for a pulse pair amplitude of +50 volts peak, from the baseline of scope trace to gaussian pulse peak.			
Honeywell	AW/CRITICAL NOTATION			
	SECURITY NOTATION	SUPPLEMENTS	E-5 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
	E. Remove the scope probe from A4E15 and connect it to A4E14. Sync the scope to the gaussian pulse pair at A4E14 (FINAL GAUSSIAN). F. Adjust A4R28 for a pulse pair amplitude of +50 volts peak, from the baseline of scope trace to gaussian pulse peak. Pulse width at the 50% amplitude points must be 3.5 ± 0.5 microseconds. 7.3 <u>Forward Power Monitor</u> A. Set the IFR 1400 frequency to 108 MHz VOR paired. B. Make sure the RCB page is shown on the RTIU Monitor and that the FREQUENCY for channels A through F is 108.00. C. Connect an oscilloscope probe to A1U25 pin 4 [A1U25 pin 9 for -903 CCA] (FWD PWR). D. Adjust A4R42 for 6-volt peak gaussian pulses. Measure from pulse baseline to pulse peak.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	E-6 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	8. RECEIVER/VCO CCA A2 ALIGNMENT 8.1 <u>Voltage Controlled Oscillator (7510190-901 CCAs only)</u> A. On the RCB page, select the commands that follow: CHANGE FREQUENCY <F> to 134.40 MHz <134.40> for channels A through F <G> Go to the BENCH PAGE <H> <u>NOTE:</u> This is the lowest frequency generated by the VCO. B. Remove the synthesizer cover on the A2 CCA. C. Connect the DMM to A2FL114 (SYNTH TUNE). Adjust A2C63 for a +1.70 V dc reading on the DMM. The VCO frequency generated at this voltage is 1025 MHz. See figure E-3 for component locations. D. On the BENCH PAGE, the SYN LCK VOUT field must read greater than 3.5 V dc. E. Select the commands that follow: CHANGE FREQUENCY <F> to 117.90 MHz <117.90> for channels A through F <G> <u>NOTE:</u> This is the highest frequency generated by the VCO. F. The VCO drive voltage at A2FL114 must be less than +12 V dc. G. On the BENCH PAGE, the SYN LCK VOUT field must read greater than 3.5 V dc.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		E-7 PAGE

ENGINEERING SPECIFICATION


SECURITY NOTATION

55939

REV LTR

SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.

REV
LTR

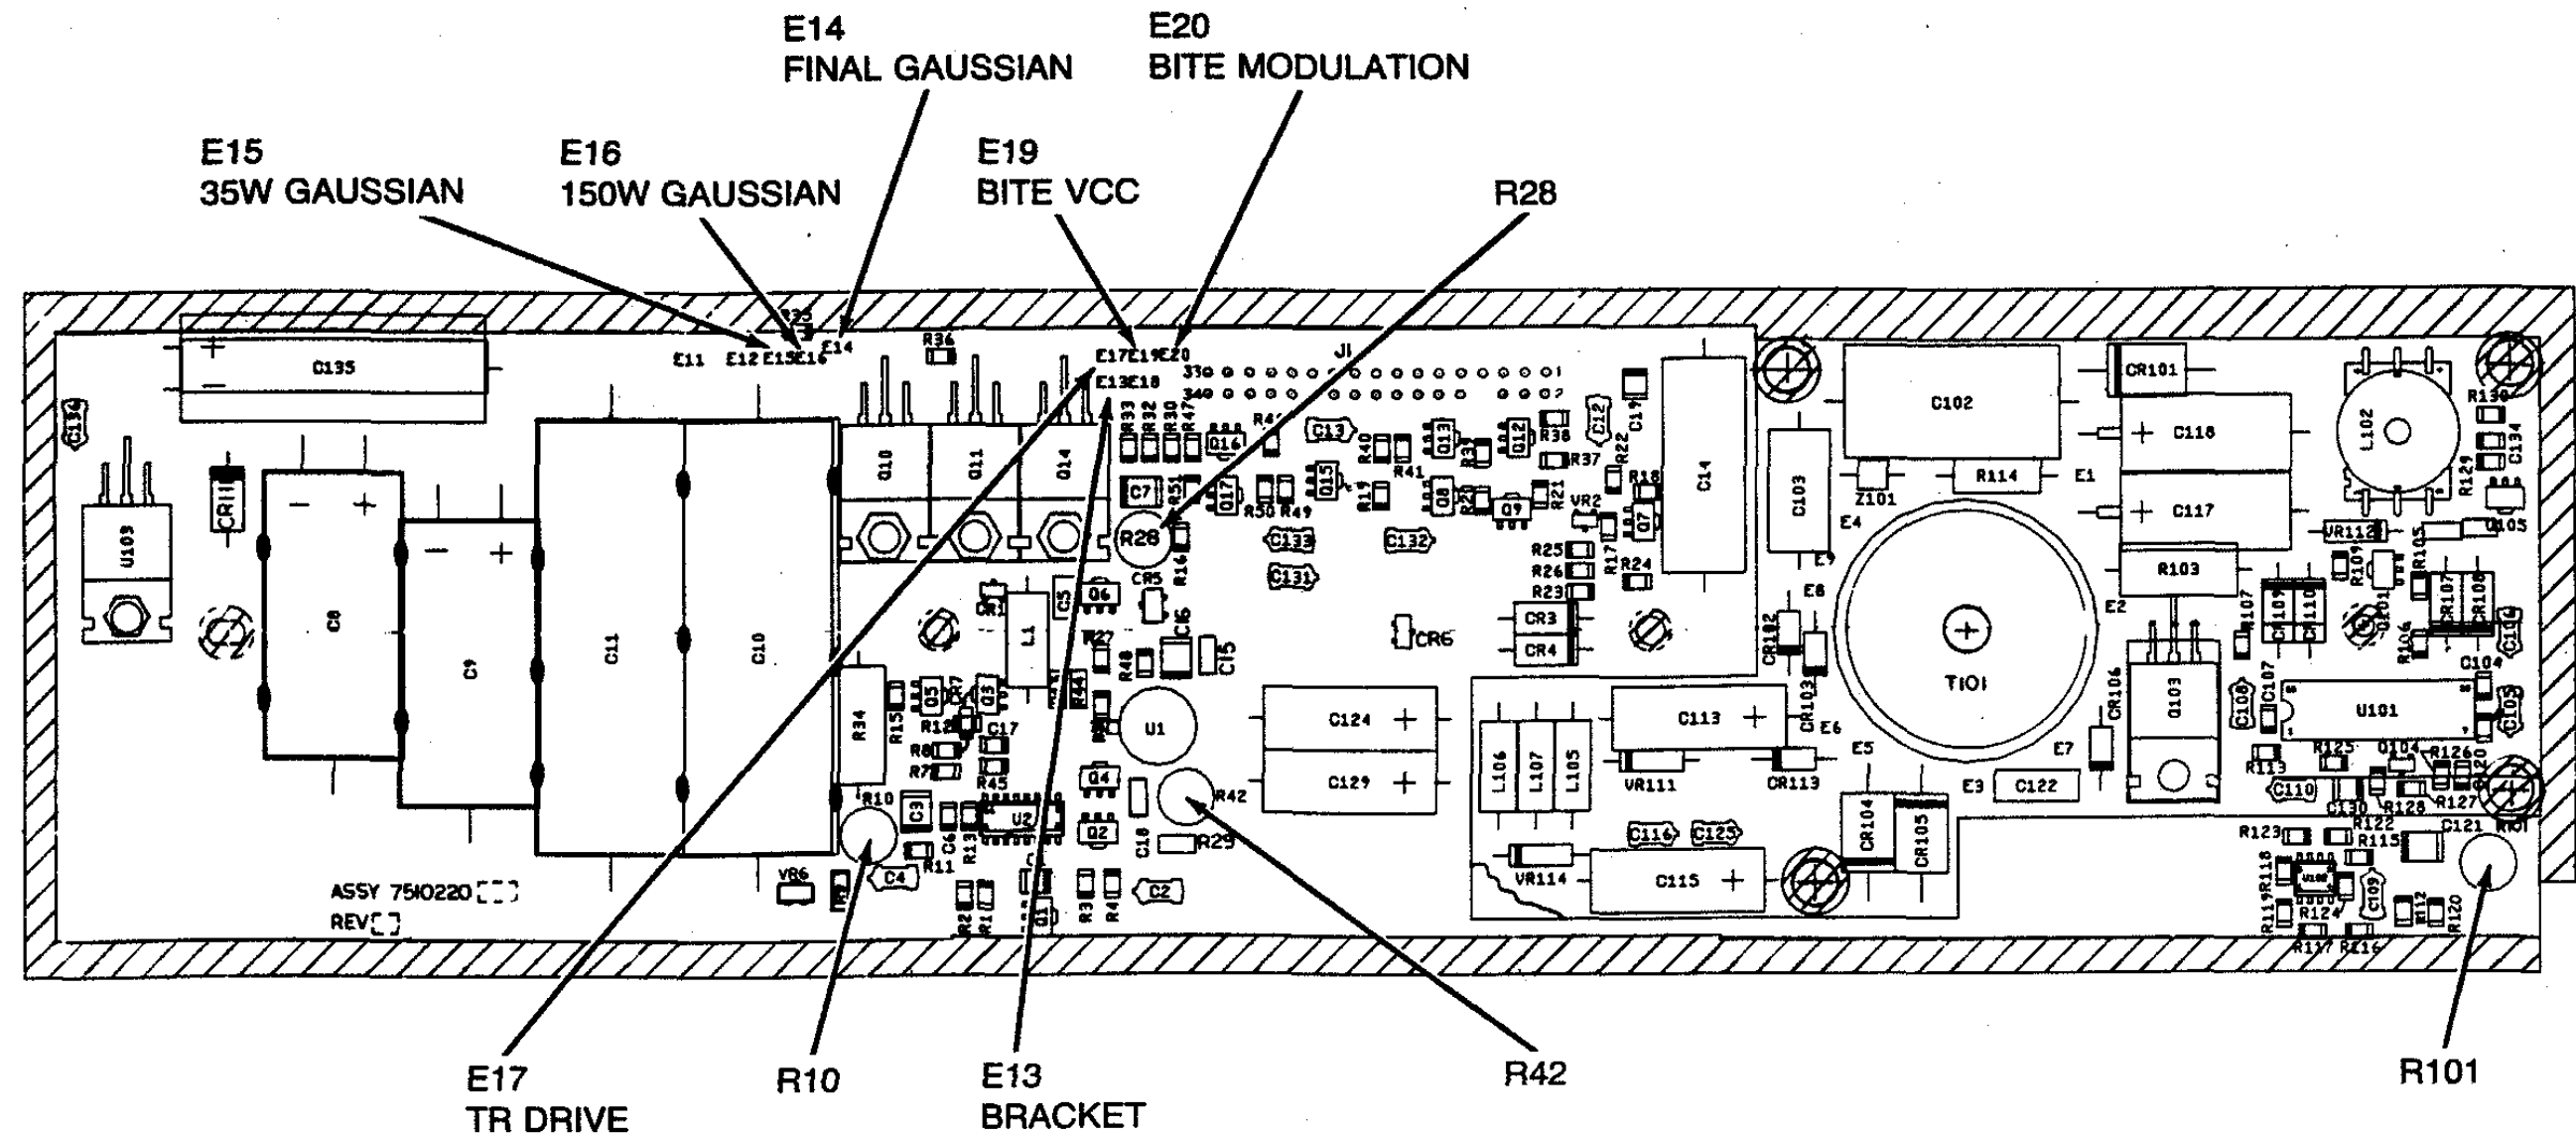

NOTE: THIS SHEET IS FOR 7510220-901 CCA

AD-20481-R1

Figure E-2. Modulator/Power Supply CCA A4 Test Points and Adjustable Component Locations (Sheet 1)

Honeywell

AW/CRITICAL NOTATION

SUPPLEMENTS

E-8
PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE 55939	REV LTR
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		

REV
LTR



Figure E-2. Modulator/Power Supply CCA A4 Test Points and Adjustable Component Locations (Sheet 2)


	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	E-9 PAGE

AW/CRITICAL NOTATION

SUPPLEMENTS

E-9
PAGE

REV
LTR

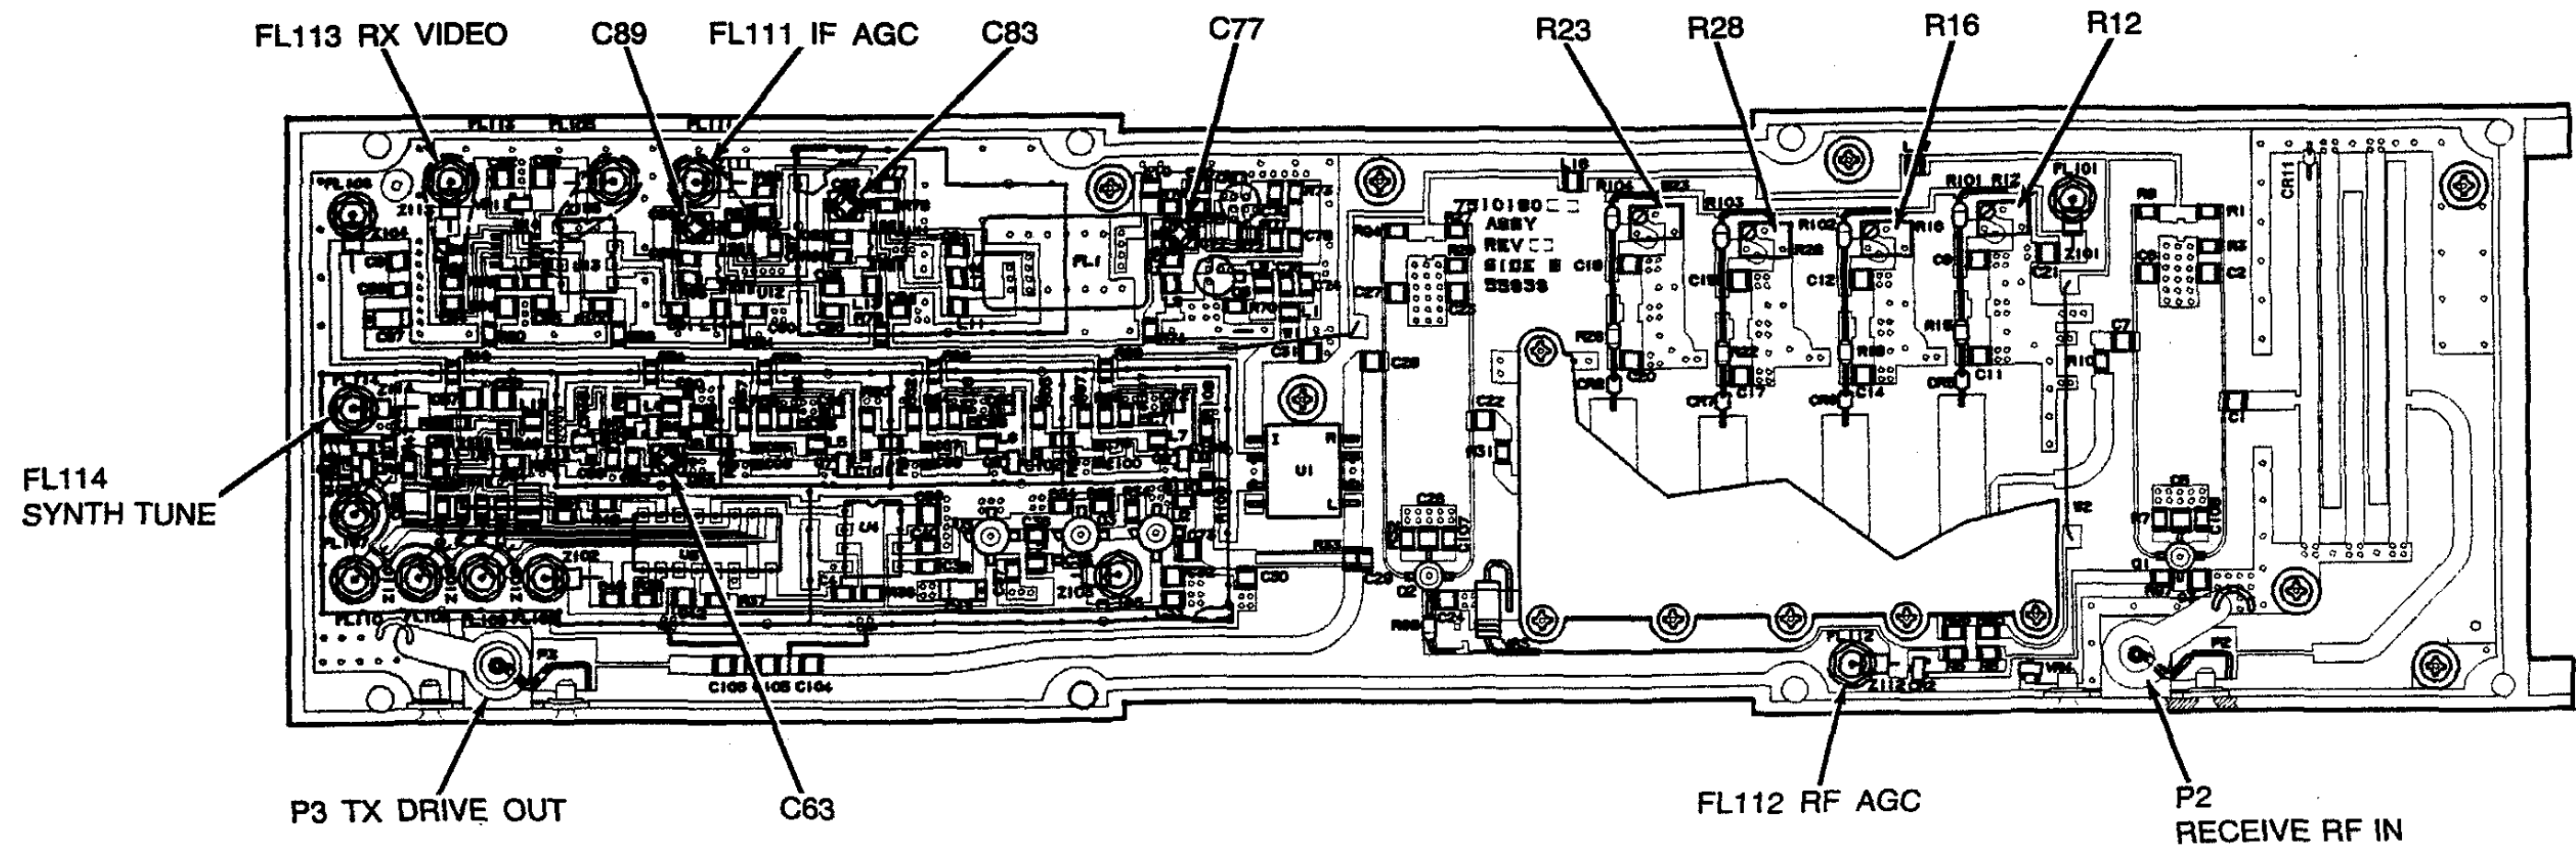

NOTE: THIS SHEET IS FOR 7510190-901 CCAs.

AD-20479-R2

Figure E-3. Receiver CCA A2 Test Points and Adjustable Component Locations (Sheet 1)

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
		CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		

REV
LTR




Figure E-3. Receiver CCA A2 Test Points and Adjustable Component Locations (Sheet 2)

	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	E-11 PAGE

AW/CRITICAL NOTATION


SUPPLEMENTS

E-11
PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	8.2 RF AGC Test NOTE: Before you do the RF or IF alignment procedure, complete the tests that follow to determine whether the alignment is necessary. A. Set the IFR 1400 frequency to 135.25 and the RF level to -90 dBm. All other settings remain the same as the setup in appendix D. B. On the RCB page, select the commands that follow: CHANGE FREQUENCY <F> to 135.25 MHz <135.25> for channels A through F <G> NOTE: This is the middle of the receiver bandwidth. C. Set the IFR 1400 NORM/CW/OFF switch to the OFF position. D. Connect an oscilloscope probe to test point A1TP6. This test point is accessible through the casting without opening the module. See figure E-1 for test point location. E. Set the oscilloscope coupling to GND and position the trace to the second graticule line up from the bottom of the scope display. This is the reference point from which to measure the RF AGC. F. Set the oscilloscope horizontal to 5ms/DIV, vertical to 1V/DIV and coupling to DC. Measure from the GND reference level to the top of the inverted AGC pulses. If the AGC is working properly it should be approximately 5 ± 1.0 volts (5 divisions on the scope display). See figure E-4 for the RF AGC waveform with no signal applied to the DME module. G. Increase the RF signal level and monitor the RF AGC waveform. The waveform must move towards 0 V dc to reduce the receiver gain.					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		E-12 PAGE


ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR						
8.3	<u>IF AGC Test</u>					
	<u>NOTE:</u> Before you do the RF or IF alignment procedure, complete the tests that follow to determine whether the alignment is necessary.					
	A. Set the IFR 1400 frequency to 135.25 and the RF level to -90 dBm. All other settings remain the same as the setup in appendix D.					
	B. On the RCB page, select the commands that follow:					
	CHANGE FREQUENCY to 135.25 MHz					<F> <135.25>
	<u>NOTE:</u> This is the middle of the receiver bandwidth.					
	C. Set the IFR 1400 NORM/CW/OFF switch to the OFF position.					
	D. Connect a scope probe to A1TP5 (IF AGC). See figure E-1 for test point location.					
	E. Set the oscilloscope to GND and position the trace to the second graticule line up from the bottom of the scope display. This is the reference point from which to measure the IF AGC. Set the horizontal sweep to 5ms/DIV, vertical to 5V/DIV and coupling to DC.					
	F. On the oscilloscope, measure from the GND reference level to the bottom of the AGC pulses.					
	G. If the AGC is working properly, the pulses should be approximately 12 ± 2.5 V dc from the ground reference line on the scope display. See figure E-5 for the IF AGC waveform with no signal applied to the DME module.					
	<u>NOTE:</u> If the AGC is not working properly, do not continue with the receiver alignment tests. Stop and troubleshoot the AGC circuitry until the problem is corrected, then return to the RF and IF tests.					
	H. Monitor the RF AGC waveform and slowly increase the RF signal level. The waveform must move towards 15 volts dc to reduce the receiver gain.					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		E-13 PAGE

REV
LTR

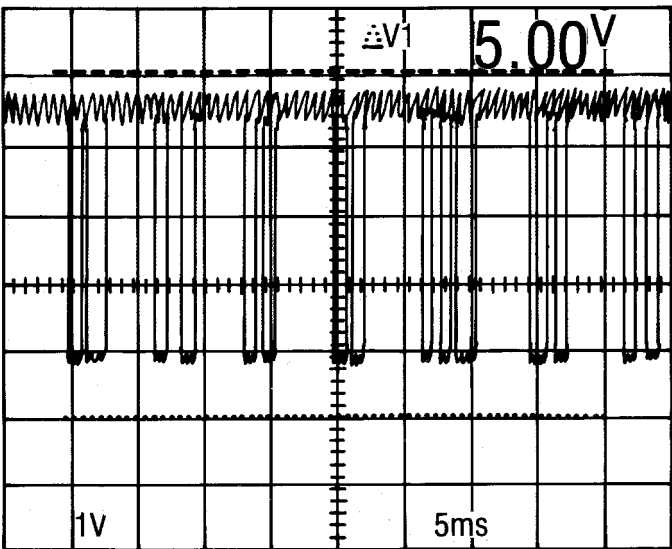

AD-18234

Figure E-4. RF AGC Waveform (TP6)

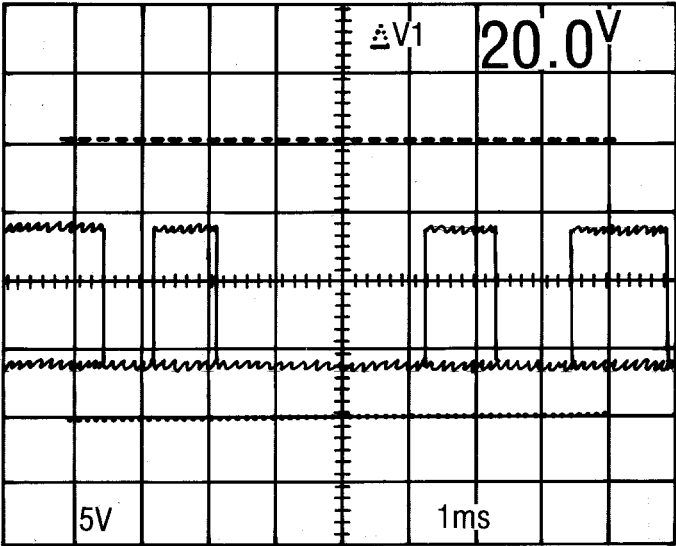

AD-18232

Figure E-5. IF AGC Waveform (TP5)


ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
				CAGE CODE 55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR							
8.4	<u>Receiver Alignment</u> A. Set the IFR 1400 frequency to 135.25, the RF level to -90 dBm and the TACAN modulation switch to OFF. All other settings remain the same as the setup in appendix D. B. On the RCB page, select the commands that follow: CHANGE FREQUENCY <F> to 135.25 MHz <135.25> for channels A through F <G> <u>NOTE:</u> This is the middle of the receiver bandwidth. C. Connect an oscilloscope probe to RX VIDEO test point A1TP4. This test point is accessible through the casting without opening the DME module. See figure E-1 for location of A1TP4. D. Examine the RX VIDEO waveform at A1TP4 for a pulse pair that has the same characteristics as the one in figure E-6. See figure E-1 for TP4 location. <u>NOTE:</u> If the waveform is present and displays the same character-istics, then receiver sensitivity is correct at the center of the band. If the pulse pair is not present, but the DME passes the RF and IF AGC tests, troubleshoot the RF and IF stages to isolate the defective component. E. Select the commands that follow: CHANGE FREQUENCY <F> to 134.40 MHz <134.40> for channels A through F <G> <u>NOTE:</u> This is the low end of the receiver band. F. Set the IFR 1400 frequency to 134.40, the RF level to -90 dBm and the TACAN modulation switch to OFF. All other settings remain the same as the setup in appendix D. G. Check the RX VIDEO at A1TP4 for a pulse pair that has the same characteristics as the one in figure E-6. H. Select the commands that follow: CHANGE FREQUENCY <F> to 117.90 MHz <117.90> for channels A through F <G> <u>NOTE:</u> This is the high end of the receiver band. I. Set the IFR 1400 frequency to 117.90, the RF level to -90 dBm and the TACAN modulation switch to OFF. All other settings remain the same as the setup in appendix D.						
Honeywell		AW/CRITICAL NOTATION					
		SECURITY NOTATION		SUPPLEMENTS		E-15 PAGE	

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE	55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			

REV
LTR

- J. Check the RX VIDEO at A1TP4 for a pulse pair that has the same characteristics as the one in figure E-6.
- NOTE:

If the waveform matches at all three frequencies and does not disappear into the noise, the RF and IF do not require alignment. If the waveform is present at the center frequency of 135.250 and appears to be the same as shown in figure E-6, but is weak or noisy at the other frequencies, do the DME alignment procedure.

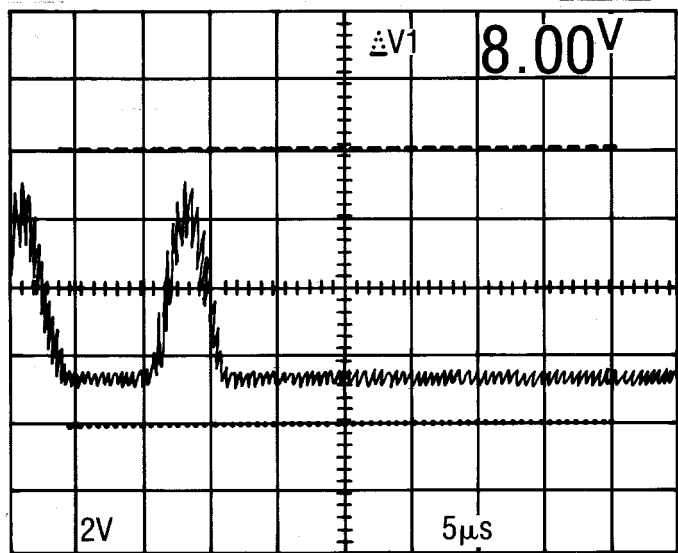


AD-18233

Figure E-6. RX VIDEO Pulse Pair Waveform (TP4)

Honeywell	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	E-16 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR					
8.5	Receiver RF Alignment NOTE: The DME Receiver is comprised of two sections, the RF and IF circuitry. It is recommended that the receiver alignment be done only when a repair has been made in the RF or IF circuitry. If during testing/fault isolation, it is determined that the DME has good sensitivity, but is not flat across the band, the alignment procedure should be done. A. Gain access to the DME Receiver CCA A2 by doing the Disassembly for Alignment instructions. Install the RF extender cables, Part No. T360074-3. B. Connect the two DME RF extender cables, Part No. T360074-3, between A2P2, A2P3 and A3J2, A3J3 respectively. C. Set the IFR 1400 frequency to 134.40 and the RF level to -90 dBm. D. Set the RTIU 28V DC power switch to ON. The DME will begin to communicate with the RTIU and the ERROR message field on the Monitor must be blank, indicating normal operation. E. Select the commands that follow: CHANGE FREQUENCY to 134.40 MHz for channels A through F <F> <134.40> <G> NOTES: 1. This is a receive frequency of 962 MHz, low end of DME band. 2. Because of the preselector construction and the use of GaAsFETs, the RF section is much more sensitive at the high end of the band. Since this is the case, when the RF circuitry is tuned for maximum sensitivity at the low end of the band it typically still has good sensitivity at the high end of the band. F. Connect the oscilloscope channel 1 probe to A1TP4 (RX VIDEO). Set the scope vertical to 2V/DIV and sync up to IF AGC pulse train. G. Connect a 10 kΩ resistor and a 22 μF capacitor between A1FL111 and a DMM as shown in figure E-7. H. Adjust A2R12, A2R16, A2R28 and A2R23 (figure E-3) in the preselector for the maximum dc voltage level attainable on the DMM. This is the point at which the RF signal is the strongest. Repeat the adjustments until no further increase in dc voltage is possible. Recheck DME sensitivity at the high end of the band.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	E-17 PAGE	

REV
LTR

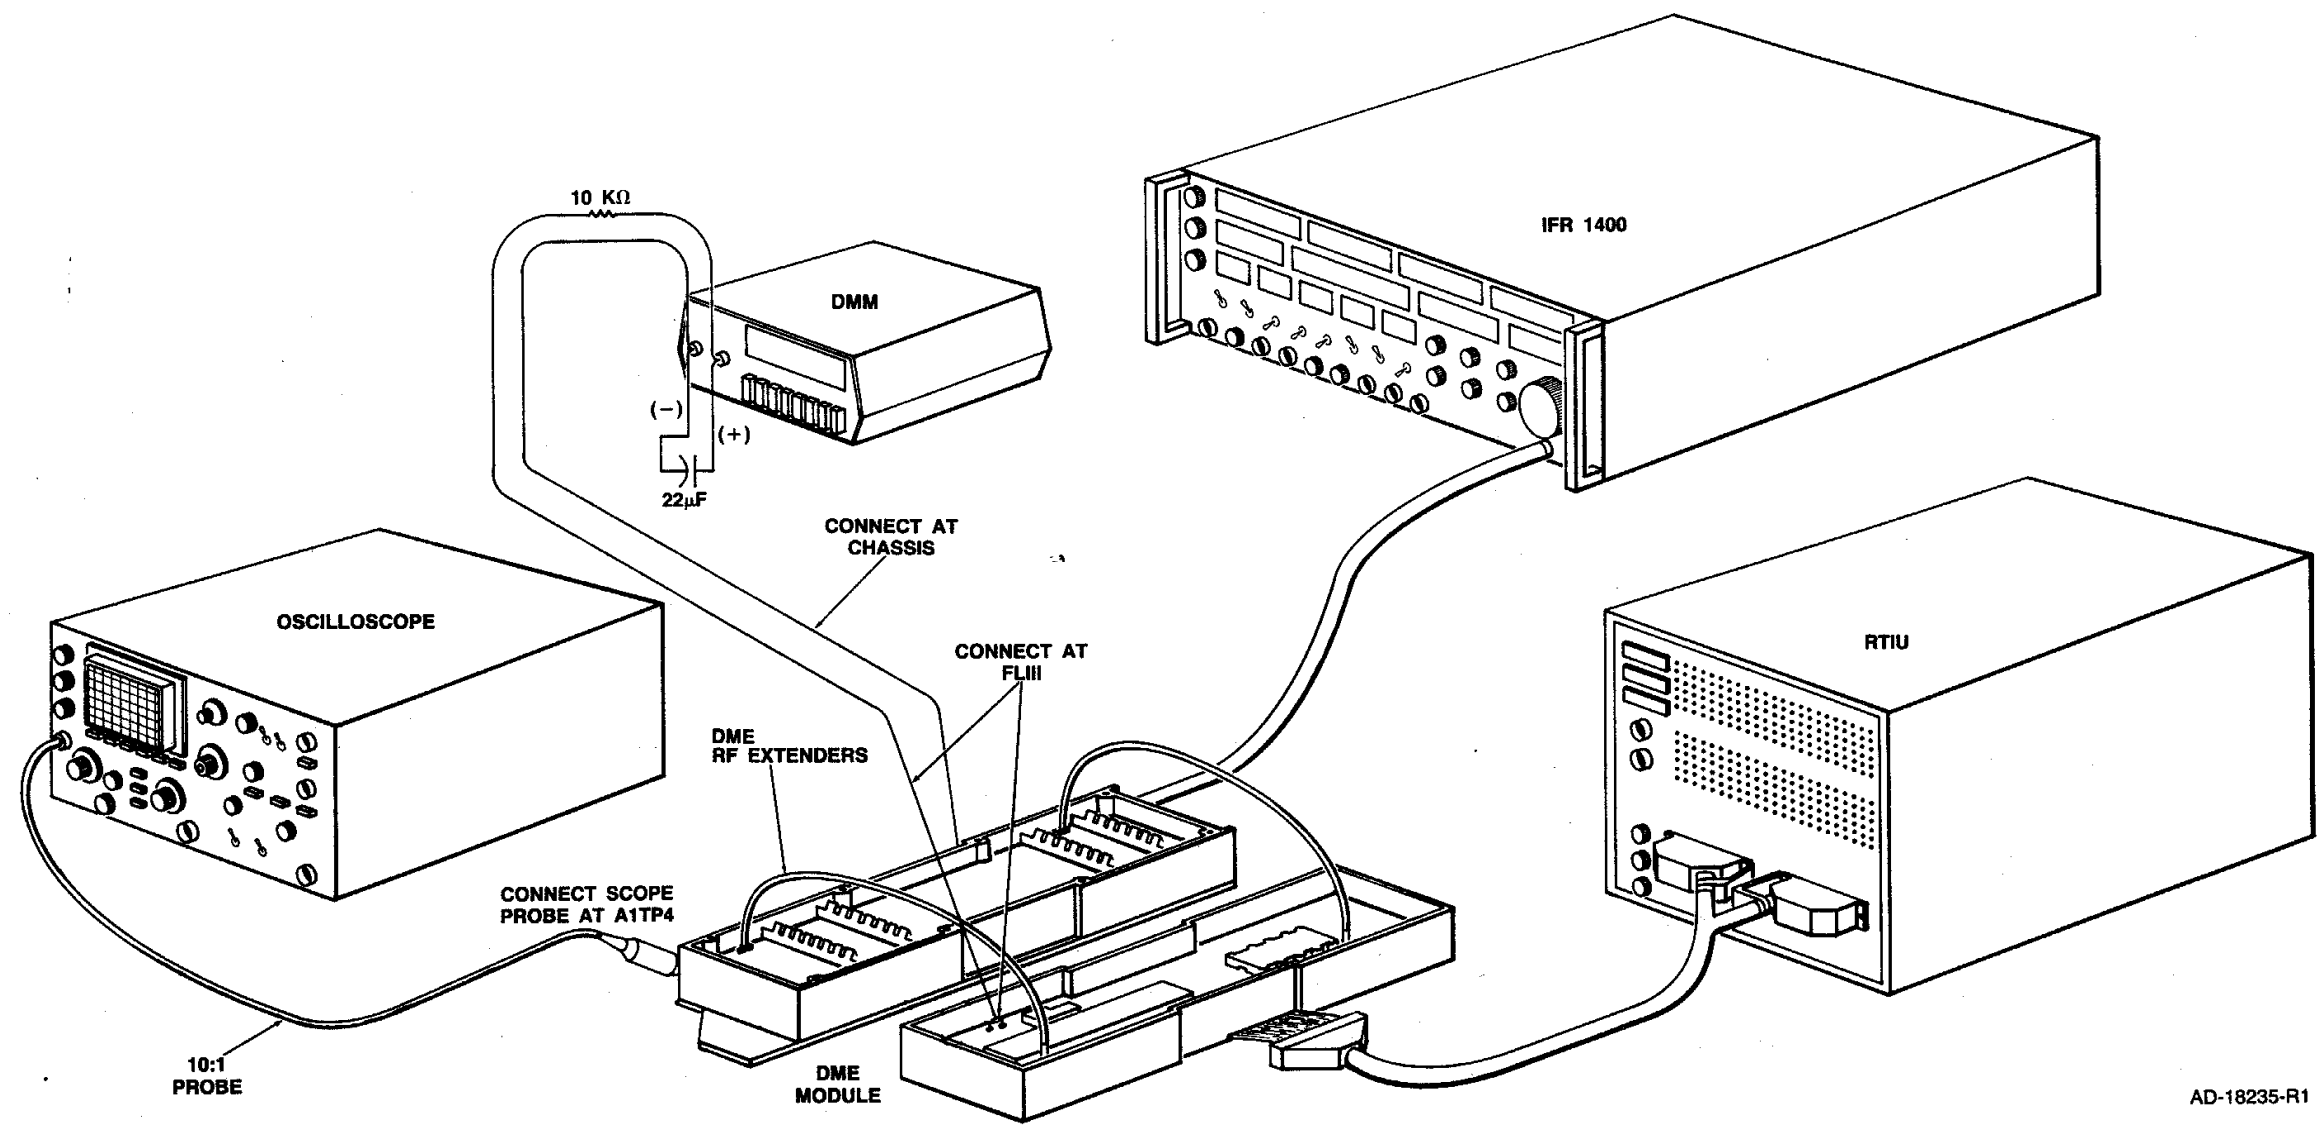

AD-18235-R1

Figure E-7. RF and IF Alignment Setup

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	8.6 Receiver IF Alignment NOTE: The DME Receiver is comprised of two sections, the RF and IF circuitry. It is recommended that the receiver alignment be done only when a repair has been made in the RF or IF circuitry. If during testing/troubleshooting, it is determined that the DME has good sensitivity, but is not flat across the band, the alignment procedure should be done. A. Gain access to the DME Receiver CCA A2 by doing the Disassembly for Alignment instructions. Install the RF extender cables, Part No. T360074-3. B. Connect the two DME RF extender cables, Part No. T360074-3, between A2P2, A2P3 and A3J2, A3J3 respectively. C. Set the IFR 1400 frequency to 134.40 and the RF level to -90 dBm. D. Set the RTIU 28V DC power switch to ON. The DME will begin to communicate with the RTIU and the ERROR message field on the monitor must be blank, indicating normal operation. E. Select the commands that follow: CHANGE FREQUENCY to 134.40 MHz for channels A through F <F> <134.40> <G> F. Connect the oscilloscope channel 1 probe to A1TP4 (RX VIDEO). Set the scope vertical to 2V/DIV and sync up to IF AGC pulse train. G. Connect a 10 kΩ resistor and a 22 μF capacitor between A1FL111 and a DMM, as shown in figure E-7. H. Monitor the pulse pair on the scope and the dc voltage on the DMM. CAUTION: DAMAGE TO THE TRIMMER CAPACITORS CAN RESULT IF THE PROPER TOOL IS NOT USED. THE HONEYWELL AUTHORIZED RF TUNING TOOL FOR THE DME IS (ME 502), PART NO. 7500634-1. I. Adjust trimmer capacitors A2C77, A2C83 and A2C89 (figure E-3) for the maximum dc voltage on the DMM, and the maximum pulse pair amplitude on the oscilloscope that contains the least amount of noise. J. Repeat the adjustments until no further increase in voltage or pulse pair amplitude is possible.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		E-19 PAGE

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR	
		CAGE CODE 55939		
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	9. TRANSMITTER CCA A3 ADJUSTMENTS NOTE: Transmitter adjustments are made to achieve maximum peak power across the transmitter band from 1025 to 1150 MHz. Before doing the transmitter alignment section, do the Disassembly for Alignment instructions and install the DME RF extender cables, Part No. T360074-3. <u>Peak Power Out</u> A. On the RCB page, select the commands that follow: CHANGE FREQUENCY <F> to 133.60 MHz <133.60> for channels A through F <G> <u>NOTE:</u> This is the middle of the transmitter bandwidth. B. Using tuning tool, Part No. 7500634-1, slowly adjust A3C25, A3C34 and A3C35 for a maximum peak power reading on the IFR 1400 power meter. If this reading is not greater than 350 watts, troubleshoot the DME transmitter to isolate the defective component. See figure E-8 for capacitor locations. C. Select the commands that follow: CHANGE FREQUENCY <F> to 134.40 MHz <134.40> for channels A through F <G> <u>NOTE:</u> This is the low end of the transmitter band. D. Check the peak power reading on the IFR 1400. It must be greater than 350 watts. If the power indication is not greater than 350 watts, slowly adjust A3C25, A3C34 and A3C35 (figure E-8) for an indication slightly greater than 350 watts. E. Select the commands that follow: CHANGE FREQUENCY <F> to 117.90 MHz <117.90> for channels A through F <G> <u>NOTE:</u> This is the high end of the transmitter band. F. Examine the peak power reading on the IFR 1400. It must be greater than 350 watts. <u>NOTE</u> If the power indication is not greater than 350 watts, slowly adjust A3C25, A3C34 and A3C35 for an indication slightly greater than 350 watts. G. Make sure the peak power out is greater than 350 watts at 133.60 MHz and at 134.40 MHz.			
Honeywell	AW/CRITICAL NOTATION			
	SECURITY NOTATION	SUPPLEMENTS	E-20 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		REV LTR				
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.						
REV LTR		<u>NOTE:</u> It may be necessary to go back and forth between transmitter alignment steps to achieve equal peak power out on all three channels. Make all adjustments slowly; the IFR power meter will not change instantaneously with each adjustment so give it time to react to any adjustments made to the transmitter.				
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS		E-21 PAGE

REV
LTR

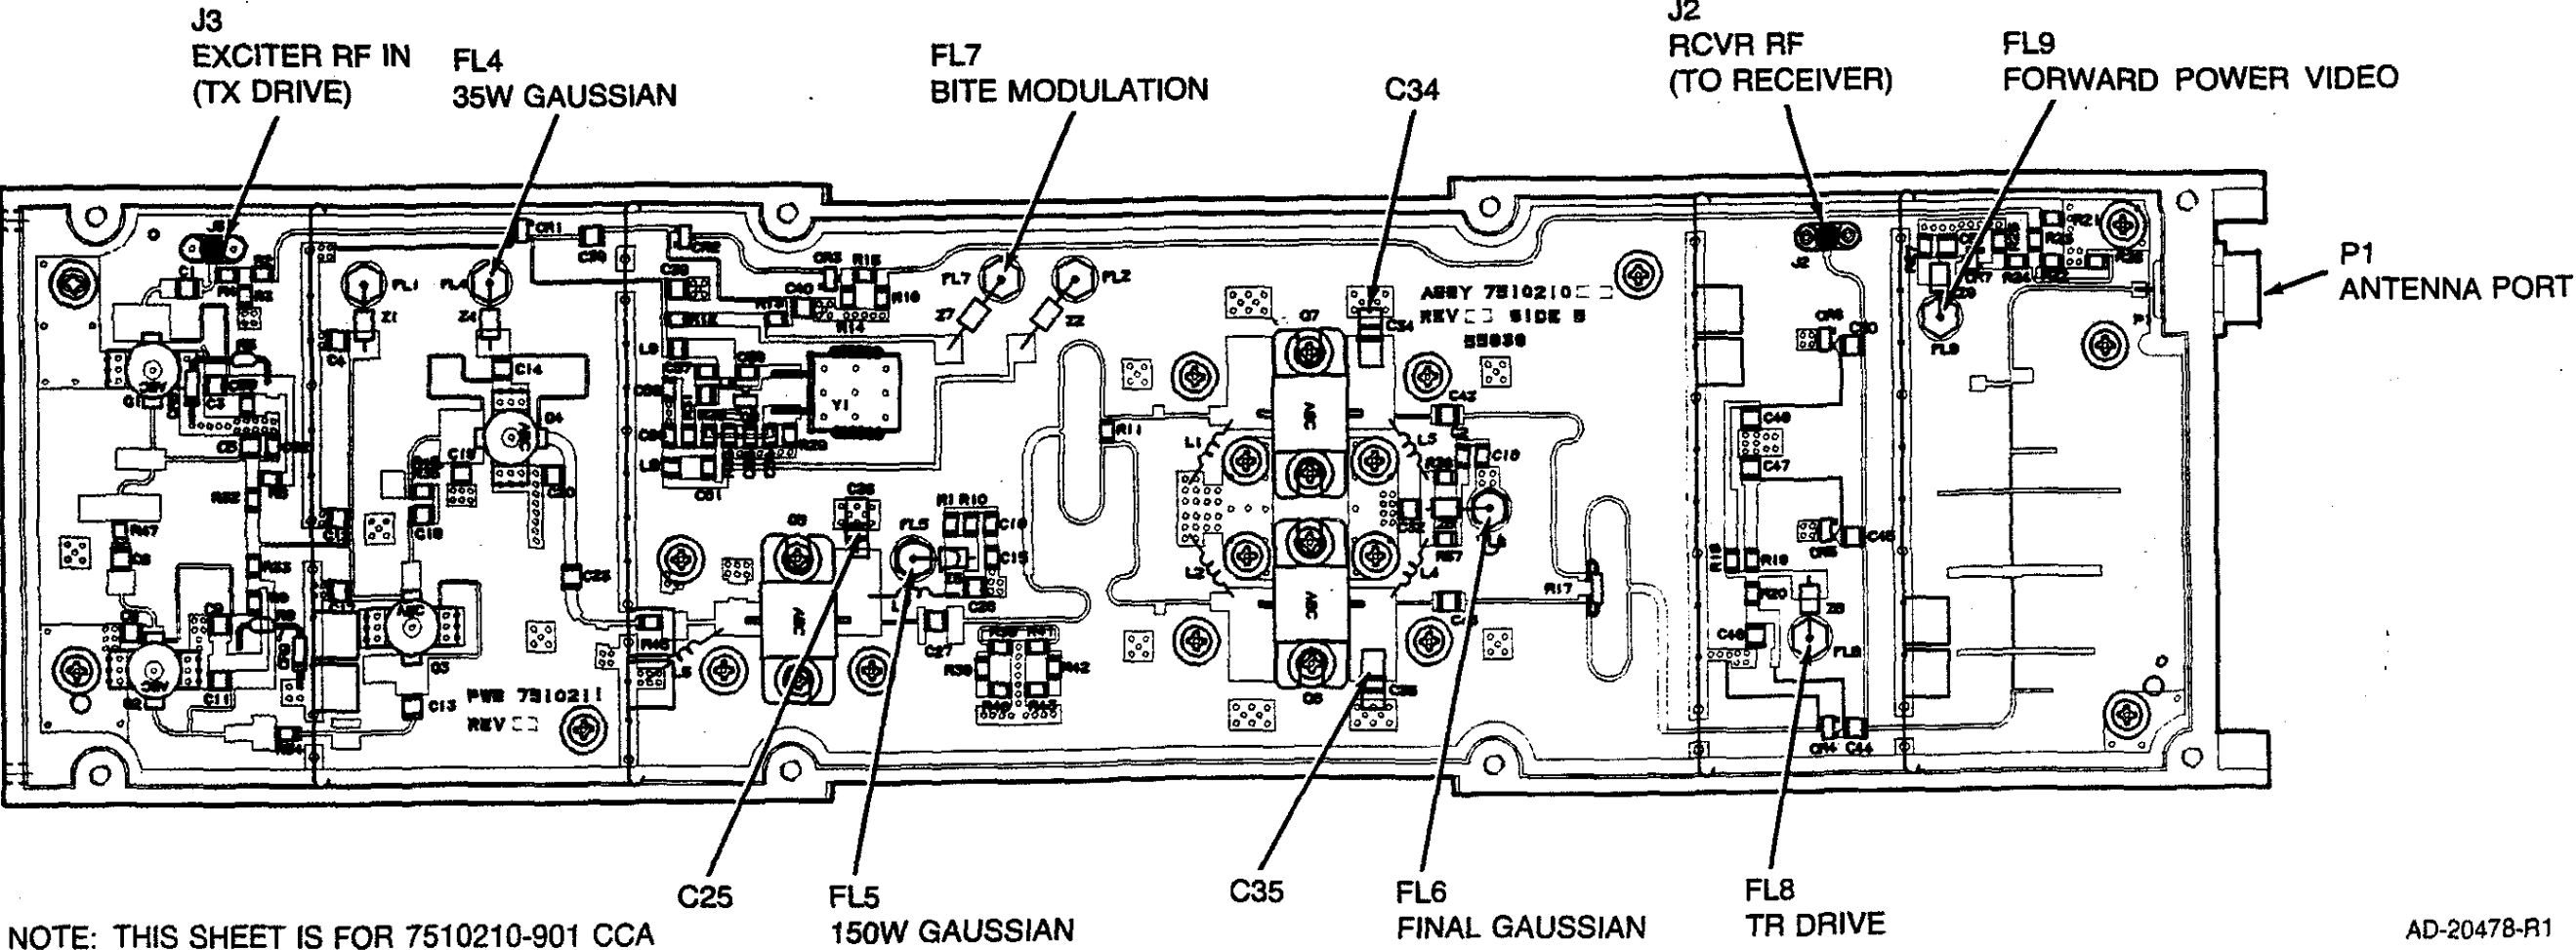


Figure E-8. Transmitter CCA A3 Test Points and Adjustable Component Locations (Sheet 1)

ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
		CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		

REV
LTR




Figure E-8. Transmitter CCA A3 Test Points and Adjustable Component Locations (Sheet 2)

	AW/CRITICAL NOTATION		
	SECURITY NOTATION	SUPPLEMENTS	E-23 PAGE

AW/CRITICAL NOTATION

SECURITY NOTATION

SUPPLEMENTS

E-23
PAGE


ENGINEERING SPECIFICATION	SECURITY NOTATION	SPEC NO. IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
		CAGE CODE 55939	
	SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.		
REV LTR	10. COMPUTER VIDEO CCA A1 ADJUSTMENTS 10.1 <u>Analog Aircraft Audio 1</u> NOTE: Analog audio adjustments can be accomplished without opening the DME casting. See figure E-1 for details. A. Make sure that the DME frequency displayed on the RTIU Monitor and the IFR 1400 are identical, and that the DISTANCE flag is not visible. B. On the RCB page, select the commands that follow: Go to the AUDIO page SELECT ACT AUDIO as ACT 1 audio <N> <N> <N> <A> <1> C. Set the IFR 1400 tone switch to the 1350 Hz position. D. Monitor the audio voltage being displayed on the AUDIO page. E. Adjust A1R102 for a reading of 5.3 Vrms. 10.2 <u>Analog Aircraft Audio 2</u> NOTE: Analog audio adjustments can be accomplished without opening the DME casting. See figure E-1 for details. A. Make sure that the DME frequency shown on the RTIU monitor and the IFR 1400 are identical, and that the DISTANCE flag is not visible. B. On the RCB page, select the commands that follow: Go to the AUDIO page SELECT ACT AUDIO as ACT 2 audio <N> <N> <N> <A> <2> C. Set IFR 1400 tone switch to the 1350 Hz position. D. Monitor the audio voltage being shown on the AUDIO page. E. Adjust A1R103 for a reading of 5.3 Vrms.		
	Honeywell		AW/CRITICAL NOTATION SECURITY NOTATION SUPPLEMENTS E-24 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE	55939	
SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.					
REV LTR					
	10.3 <u>Microprocessor Clock Speed</u> A. The DME must be on and communicating with the RTIU and displaying range data on the RCB page. B. Connect an oscilloscope probe to A1U2 pin 21 (TP8 on -903 CCAs). Make sure that a clock signal is present on this line. Remove the scope probe and connect a frequency counter probe on the same pin and adjust A1C1 until the counter reads 12.000 MHz. See figure E-9 for component and test point locations. 10.4 <u>Range LSI Calibration</u> A. The DME must be on and communicating with the RTIU and displaying range data on the RCB page. B. Connect the frequency counter probe to A1U8 pin 12 (TP9 on -903 CCAs) and adjust A1C23 until the counter reads 16.182 MHz. (The crystal fundamental frequency is 16.18254 MHz.) C. On the IFR 1400, set the range to 300 NM. Adjust A1C23 until 300.00 ±0.01 NM is displayed on the RCB page DISTANCE field. After each adjustment, wait 10 seconds for the range data to stabilize in the RCB page distance field before making another adjustment. <u>NOTE:</u> This adjustment sets the LSI counter for the correct amount of gain at 300.00 NM. D. Perform Digital Range Calibration as specified in paragraph 10.5.				
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS		E-25 PAGE

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO.		IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER	
				CAGE CODE		55939		REV LTR	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.							
REV LTR									
	10.5 <u>Digital Range Calibration</u> NOTE: The Digital Range Calibration offset entry must be done after the range gain adjustment is made in Range LSI Calibration. A. The DME must be on and communicating with the RTIU and displaying range data on the RCB page. B. Change the range setting on the IFR 1400 to 1.00 NM. C. Select the commands that follow: Go to the BENCH page ZERO MILE OFFSET as "0" (zero) Go to the RCB page <H> <Z> <0> <P> D. Read and record the distance displayed in the DISTANCE message field. It must between 0.970 and 1.030 NM. E. Calculate the offset error by subtracting the number displayed in the distance field from 1.000 NM. This is the offset error that must be entered into the DME NOVRAM through the computer keyboard. Example: Correct NM that should be displayed = Actual NM displayed on RCB page = Error = 1.000 -1.017 -0.017 Multiply error by 1000 (1000 * -0.017) = -17 Computed Offset Error = -17 F. Select the commands that follow: Go to the BENCH page ZERO MILE OFFSET enter Computed Offset Error with sign, + - Go to the RCB page <H> <Z> <error> <P> G. On the RCB page, make sure that the distance now reads 1.000 ± 0.005 NM.								
Honeywell		AW/CRITICAL NOTATION							
		SECURITY NOTATION		SUPPLEMENTS			E-26 PAGE		

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	10.6 <u>Analog Range Calibration</u> <u>NOTE:</u> The Digital Range Calibration must be done before you do the Analog Range Calibration. A. The DME must be on and communicating with the RTIU and displaying range data on the RCB page. B. Set the IFR 1400 range to 1.00 NM. C. Connect a DMM between the RTIU front panel pins J1U3 (+) and GND. Adjust A1R13 (ANALOG OFFSET) for a +0.040 V dc reading on the DMM. See figure E-9 for A1R13 location. D. Set the IFR 1400 range to 300.00 NM. E. Adjust A1R7 (ANALOG GAIN) for a +12.00 V dc reading on the DMM. See figure E-9 for A1R7 location.					
Honeywell		AW/CRITICAL NOTATION				E-27 PAGE
		SECURITY NOTATION		SUPPLEMENTS		


REV
LTR

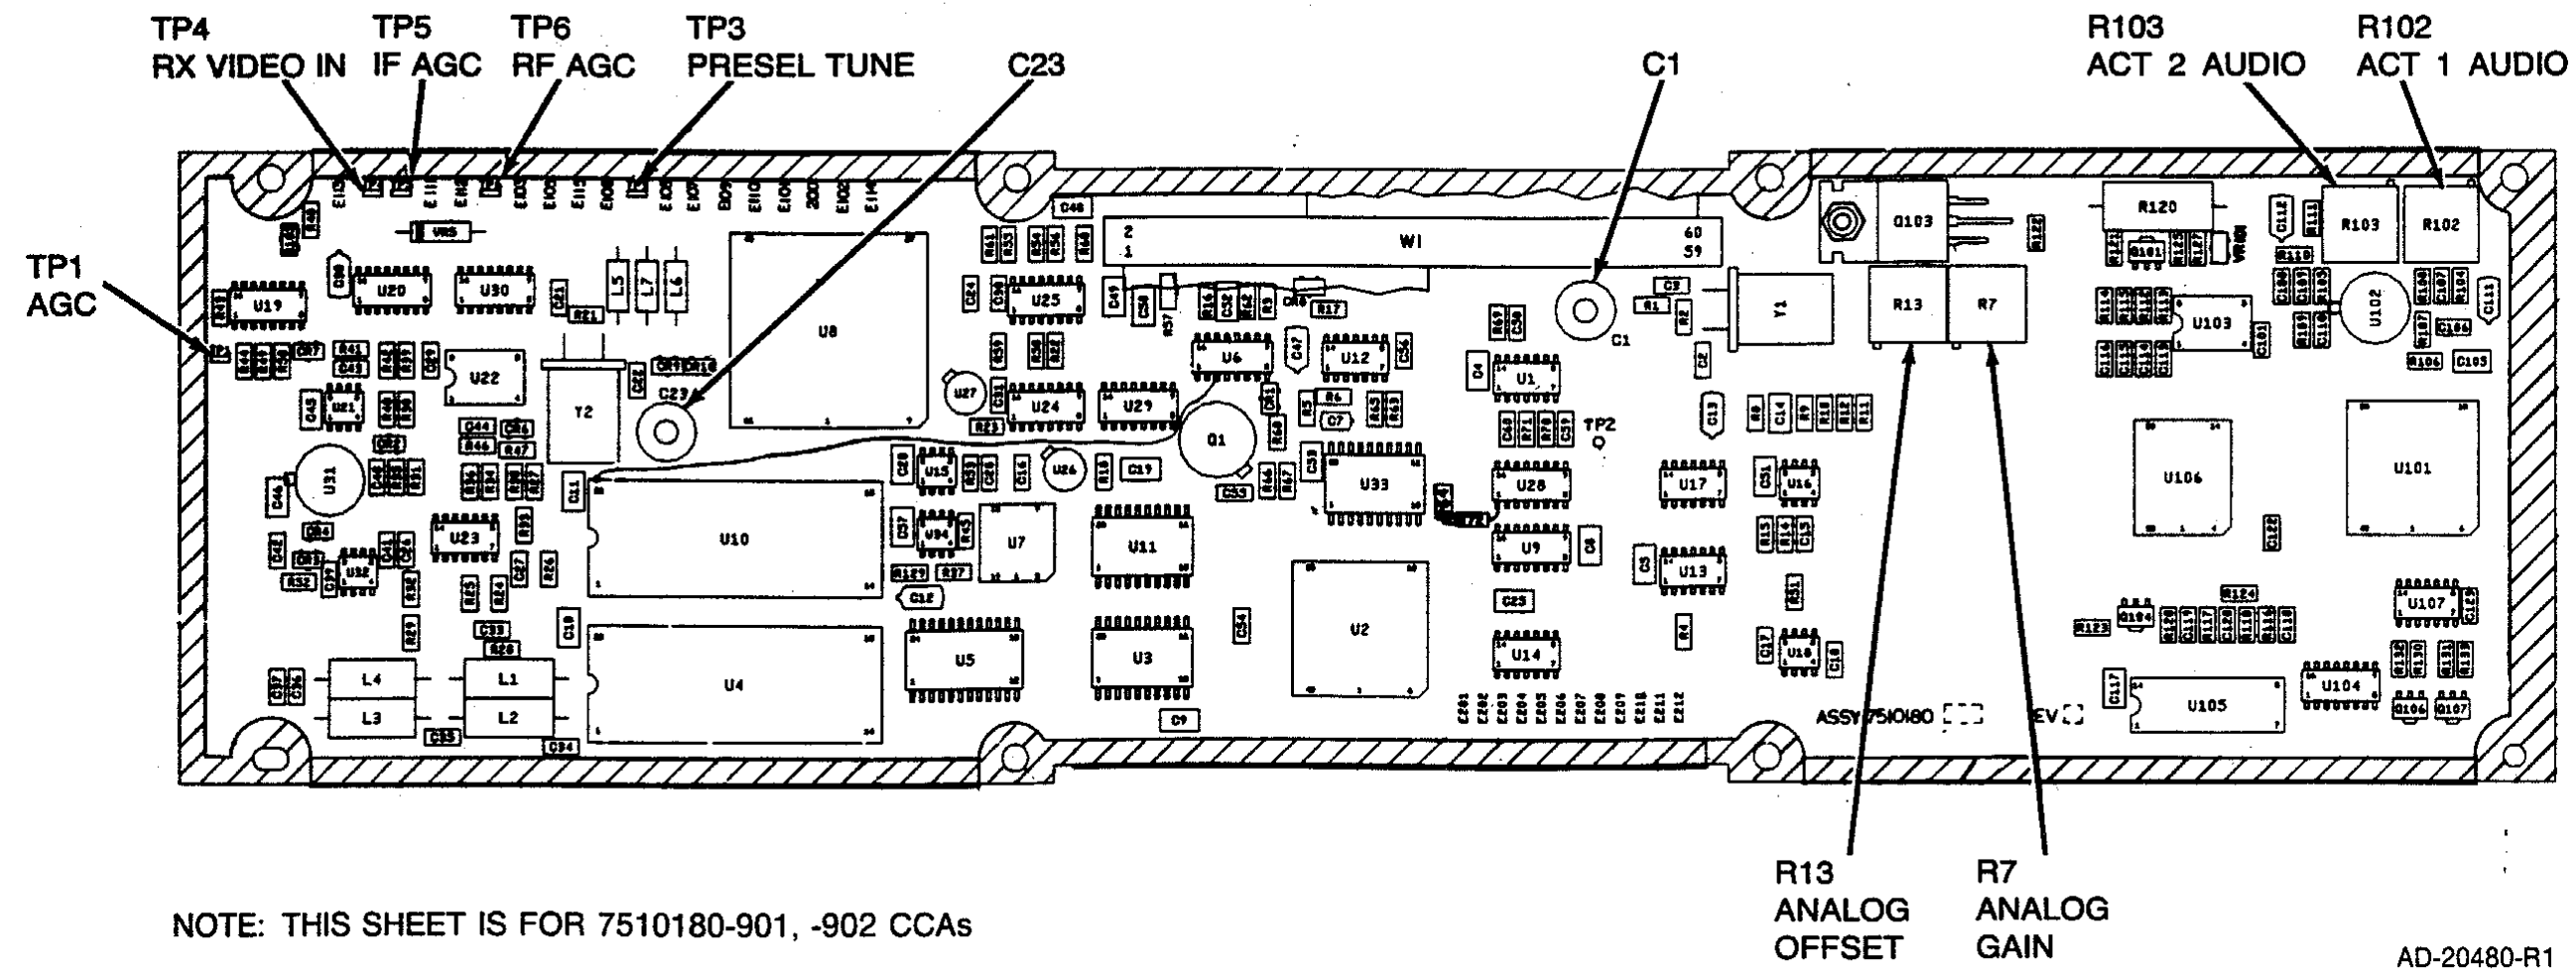

NOTE: THIS SHEET IS FOR 7510180-901, -902 CCAs

Figure E-9. Computer Video CCA A1 Test Points and Adjustable Component Locations (Sheet 1)

REV
LTR

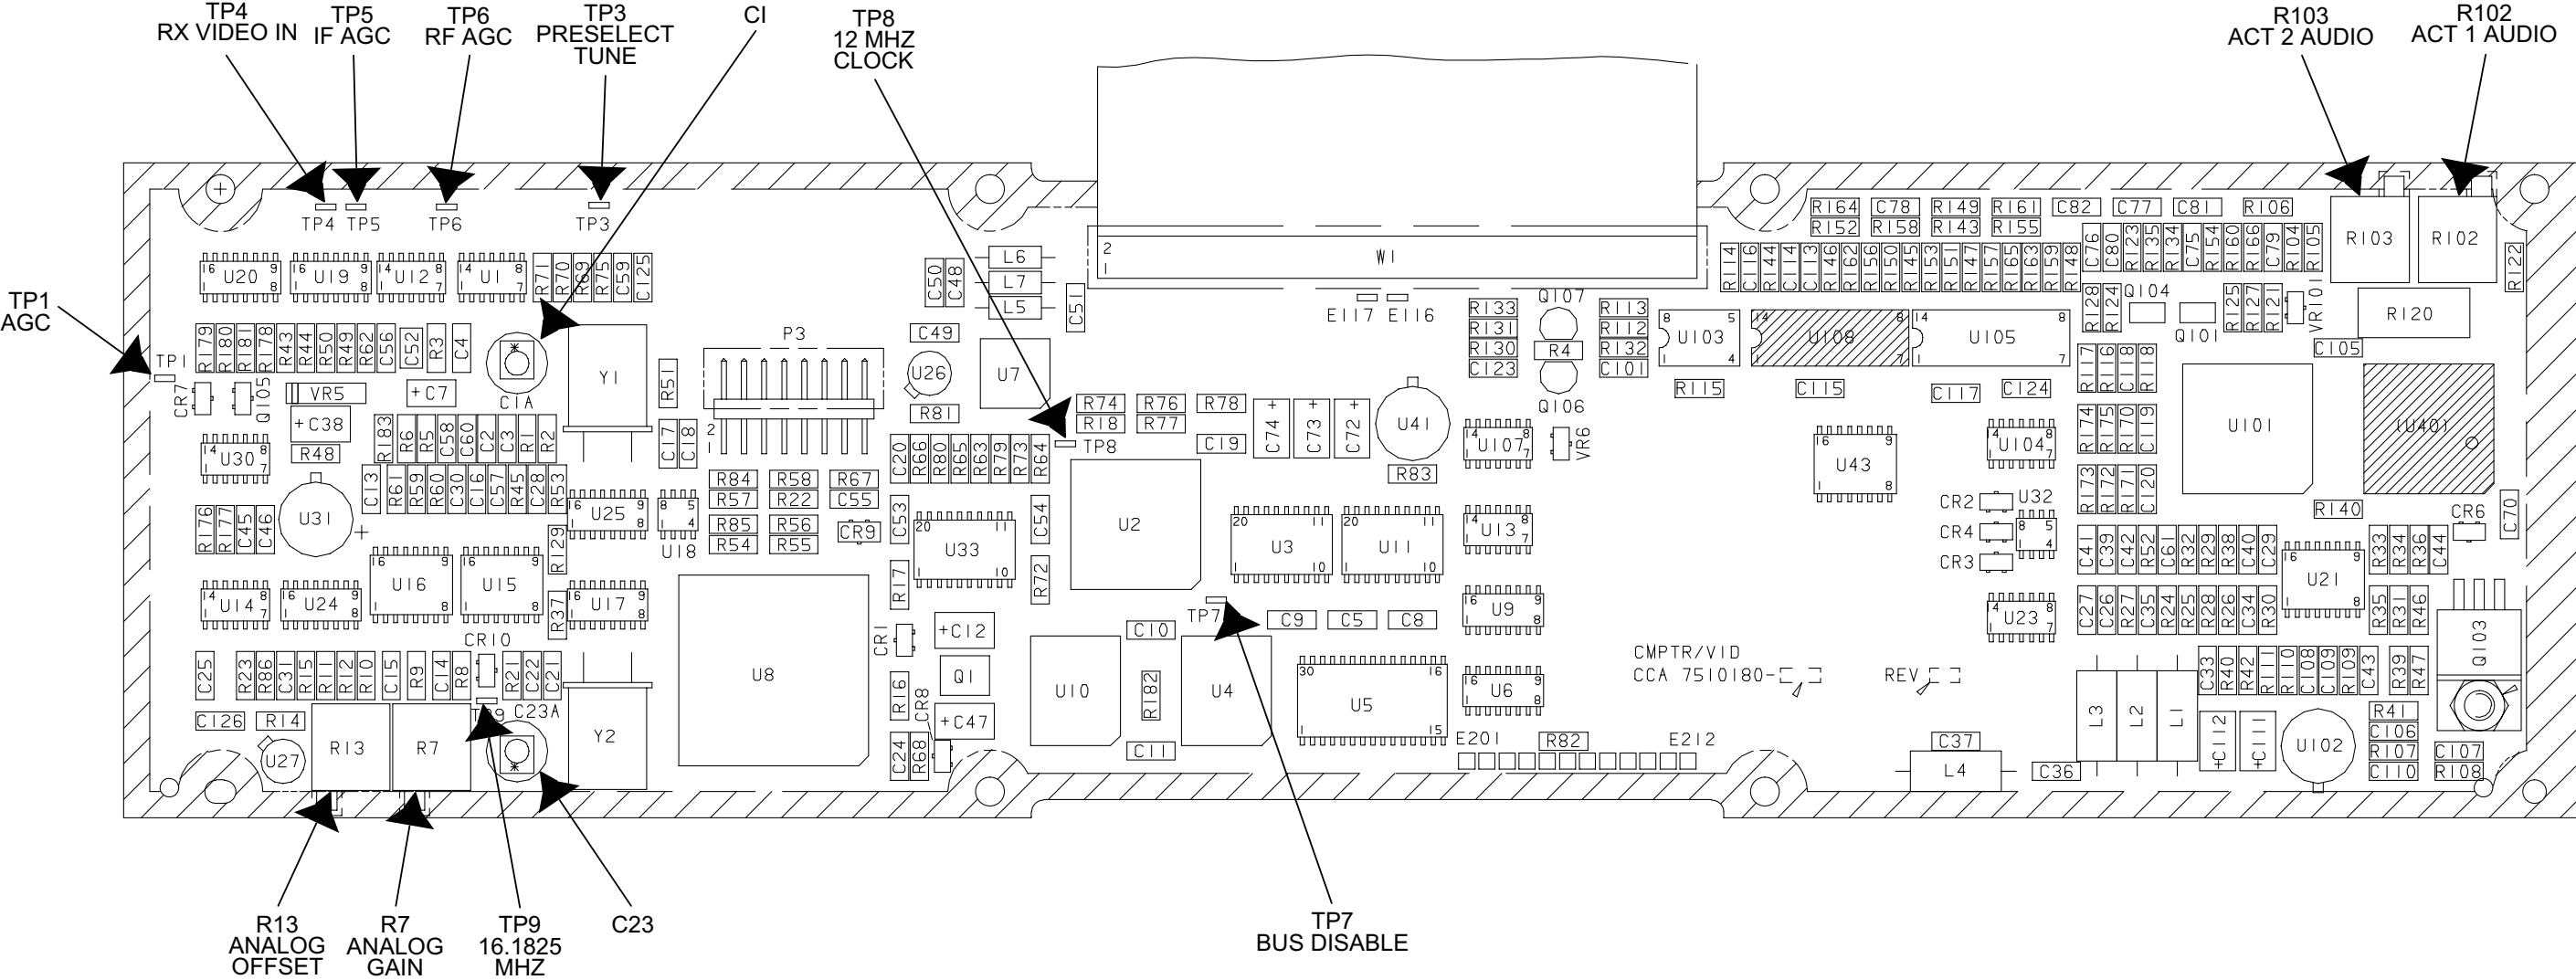

NOTE: THIS SHEET IS FOR 7510180-903 CCA.

E7510180-903-2-C(R)
AD-34855@

Figure E-9. Computer Video CCA A1 Test Points and Adjustable Component Locations (Sheet 2)

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
				CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.				
REV LTR	APPENDIX F QUALITY CONTROL FUNCTIONAL TEST REPORT					
Honeywell		AW/CRITICAL NOTATION				
		SECURITY NOTATION		SUPPLEMENTS	F-0 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	QUALITY CONTROL FUNCTIONAL TEST REPORT				
	PART NO. 7510184-			SERIAL/SHOP NO.	
	TEST FIXTURES AND SUPPORT EQUIPMENT				
	Test Fixture or Type	Serial Number	Model	SPC/ID	REV
	RTIU				
	PC				
	Oscilloscope				
	IFR1400A				
	S1403				
	DMM				
	RTIU Software				
P/N 7510184		REV.	CO.	DATE:	
IT NO. 7510184		REV.	CO.	DATE:	
APPROVED BY					
TESTER			DATE	FTR SHEET 1 OF 4	
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	F-1 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION		SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER																																																																																																																																																																	
				CAGE CODE 55939																																																																																																																																																																			
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.																																																																																																																																																																					
REV LTR	QUALITY CONTROL FUNCTIONAL TEST REPORT																																																																																																																																																																						
AB	PART NO. 7510184-			SERIAL/SHOP NO.																																																																																																																																																																			
	<table><tr><td>1.000</td><td colspan="2">POWER ON CURRENT TEST</td></tr><tr><td>1.010</td><td colspan="2">POC</td></tr><tr><td>1.020</td><td colspan="2">BNH CMD</td></tr><tr><td>1.030</td><td colspan="2">VER</td></tr><tr><td>1.040</td><td colspan="2">VER</td></tr><tr><td>1.050</td><td colspan="2">ERRORS</td></tr><tr><td>1.060</td><td colspan="2">POC</td></tr><tr><td colspan="3"> </td></tr><tr><td>2.000</td><td colspan="2">DME PAIRED CHANNEL TEST 111.90 MHz</td></tr><tr><td>2.010</td><td colspan="2">PPS</td></tr><tr><td>2.020</td><td colspan="2">MHz</td></tr><tr><td>2.030</td><td colspan="2">WATTS</td></tr><tr><td>2.040</td><td colspan="2">WATTS</td></tr><tr><td>2.050</td><td colspan="2">dBm</td></tr><tr><td>2.060</td><td colspan="2">NM</td></tr><tr><td>2.070</td><td colspan="2">NM</td></tr><tr><td>2.080</td><td colspan="2">NM</td></tr><tr><td>2.090</td><td colspan="2">VDC</td></tr><tr><td>2.100</td><td colspan="2">USEC</td></tr><tr><td>2.110</td><td colspan="2">USEC</td></tr><tr><td>2.120</td><td colspan="2">USEC</td></tr><tr><td>2.130</td><td colspan="2">%</td></tr><tr><td>2.140</td><td colspan="2">dB</td></tr></table>			1.000	POWER ON CURRENT TEST		1.010	POC		1.020	BNH CMD		1.030	VER		1.040	VER		1.050	ERRORS		1.060	POC					2.000	DME PAIRED CHANNEL TEST 111.90 MHz		2.010	PPS		2.020	MHz		2.030	WATTS		2.040	WATTS		2.050	dBm		2.060	NM		2.070	NM		2.080	NM		2.090	VDC		2.100	USEC		2.110	USEC		2.120	USEC		2.130	%		2.140	dB		<table><tr><td>3.000</td><td colspan="2">DME PAIRED CHANNEL TEST 111.95 MHz</td></tr><tr><td>3.010</td><td colspan="2">PPS</td></tr><tr><td>3.020</td><td colspan="2">MHz</td></tr><tr><td>3.030</td><td colspan="2">WATTS</td></tr><tr><td>3.040</td><td colspan="2">WATTS</td></tr><tr><td>3.050</td><td colspan="2">dBm</td></tr><tr><td>3.060</td><td colspan="2">NM</td></tr><tr><td>3.070</td><td colspan="2">NM</td></tr><tr><td>3.080</td><td colspan="2">NM</td></tr><tr><td>3.090</td><td colspan="2">VDC</td></tr><tr><td>3.100</td><td colspan="2">dBm</td></tr><tr><td>AC 3.110</td><td colspan="2">NM</td></tr><tr><td>3.120</td><td colspan="2">NM</td></tr><tr><td>3.130</td><td colspan="2">NM</td></tr><tr><td>3.140</td><td colspan="2">VDC</td></tr><tr><td colspan="3"> </td></tr><tr><td>4.000</td><td colspan="2">DME PAIRED CHANNEL TEST 134.40</td></tr><tr><td>4.010</td><td colspan="2">PPS</td></tr><tr><td>4.020</td><td colspan="2">MHz</td></tr><tr><td>4.030</td><td colspan="2">WATTS</td></tr><tr><td>4.040</td><td colspan="2">WATTS</td></tr><tr><td>4.050</td><td colspan="2">dBm</td></tr><tr><td>4.060</td><td colspan="2">NM</td></tr><tr><td>4.070</td><td colspan="2">NM</td></tr><tr><td>4.080</td><td colspan="2">NM</td></tr><tr><td>4.090</td><td colspan="2">VDC</td></tr><tr><td>4.100</td><td colspan="2">USEC</td></tr><tr><td>4.110</td><td colspan="2">USEC</td></tr><tr><td>4.120</td><td colspan="2">USEC</td></tr><tr><td>4.130</td><td colspan="2">%</td></tr><tr><td>4.140</td><td colspan="2">dB</td></tr></table>			3.000	DME PAIRED CHANNEL TEST 111.95 MHz		3.010	PPS		3.020	MHz		3.030	WATTS		3.040	WATTS		3.050	dBm		3.060	NM		3.070	NM		3.080	NM		3.090	VDC		3.100	dBm		AC 3.110	NM		3.120	NM		3.130	NM		3.140	VDC					4.000	DME PAIRED CHANNEL TEST 134.40		4.010	PPS		4.020	MHz		4.030	WATTS		4.040	WATTS		4.050	dBm		4.060	NM		4.070	NM		4.080	NM		4.090	VDC		4.100	USEC		4.110	USEC		4.120	USEC		4.130	%		4.140	dB
1.000	POWER ON CURRENT TEST																																																																																																																																																																						
1.010	POC																																																																																																																																																																						
1.020	BNH CMD																																																																																																																																																																						
1.030	VER																																																																																																																																																																						
1.040	VER																																																																																																																																																																						
1.050	ERRORS																																																																																																																																																																						
1.060	POC																																																																																																																																																																						
2.000	DME PAIRED CHANNEL TEST 111.90 MHz																																																																																																																																																																						
2.010	PPS																																																																																																																																																																						
2.020	MHz																																																																																																																																																																						
2.030	WATTS																																																																																																																																																																						
2.040	WATTS																																																																																																																																																																						
2.050	dBm																																																																																																																																																																						
2.060	NM																																																																																																																																																																						
2.070	NM																																																																																																																																																																						
2.080	NM																																																																																																																																																																						
2.090	VDC																																																																																																																																																																						
2.100	USEC																																																																																																																																																																						
2.110	USEC																																																																																																																																																																						
2.120	USEC																																																																																																																																																																						
2.130	%																																																																																																																																																																						
2.140	dB																																																																																																																																																																						
3.000	DME PAIRED CHANNEL TEST 111.95 MHz																																																																																																																																																																						
3.010	PPS																																																																																																																																																																						
3.020	MHz																																																																																																																																																																						
3.030	WATTS																																																																																																																																																																						
3.040	WATTS																																																																																																																																																																						
3.050	dBm																																																																																																																																																																						
3.060	NM																																																																																																																																																																						
3.070	NM																																																																																																																																																																						
3.080	NM																																																																																																																																																																						
3.090	VDC																																																																																																																																																																						
3.100	dBm																																																																																																																																																																						
AC 3.110	NM																																																																																																																																																																						
3.120	NM																																																																																																																																																																						
3.130	NM																																																																																																																																																																						
3.140	VDC																																																																																																																																																																						
4.000	DME PAIRED CHANNEL TEST 134.40																																																																																																																																																																						
4.010	PPS																																																																																																																																																																						
4.020	MHz																																																																																																																																																																						
4.030	WATTS																																																																																																																																																																						
4.040	WATTS																																																																																																																																																																						
4.050	dBm																																																																																																																																																																						
4.060	NM																																																																																																																																																																						
4.070	NM																																																																																																																																																																						
4.080	NM																																																																																																																																																																						
4.090	VDC																																																																																																																																																																						
4.100	USEC																																																																																																																																																																						
4.110	USEC																																																																																																																																																																						
4.120	USEC																																																																																																																																																																						
4.130	%																																																																																																																																																																						
4.140	dB																																																																																																																																																																						
AE	TESTER			DATE		FTR SHEET 2 OF 4																																																																																																																																																																	
Honeywell		AW/CRITICAL NOTATION																																																																																																																																																																					
		SECURITY NOTATION		SUPPLEMENTS	F-2 PAGE																																																																																																																																																																		

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO. IT7510184		SEE PAGE INDEX FOR THIS SHEET REV LETTER
			CAGE CODE 55939		
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	QUALITY CONTROL FUNCTIONAL TEST REPORT				
	PART NO. 7510184-		SERIAL/SHOP NO.		
AA	5.000 DME PARIED CHANNEL TEST 108.00		8.000 RANGE ACCURACY		
	5.010 PPS		8.010 NM		
	5.020 MHz		8.020 NM		
	5.030 WATTS		8.030 NM		
	5.040 WATTS		8.040 NM		
	5.050 dBm		8.050 NM		
	5.060 NM		8.060 NM		
	5.070 NM				
	5.080 NM		9.000 MORSE ID		
	5.090 VDC		9.010 KEYS 1&2		
AA	6.000 DME PARED CHANNEL TEST 110.00 MHz		9.020 VDC		
	6.010 PPS		9.030 VDC		
	6.020 MHz		9.040 VDC		
	6.030 WATTS		9.050 USEC		
	6.040 WATTS		9.060 SEC		
	6.050 dBm		9.070 VDC		
	6.060 NM		9.080 SEC		
	6.070 NM				
	6.080 NM		10.000 SCANNING TEST		
	6.090 VDC		10.010 NM		
AC	7.00 DME PARED CHANNEL TEST 117.90 MHz		10.020 FLAG		
	7.010 PPS		10.030 FLAG		
	7.020 MHz		10.040 NM		
	7.030 WATTS		11.000 SQITTER RATE RANGE ACCURACY		
	7.040 WATTS		11.010 NM		
	7.050 dBm		11.020 NM		
	7.060 NM				
	7.070 NM		12.000 VELOCITY ACCURACY		
	7.080 NM		12.010 KTS		
	7.090 VDC		13.000 PAST MOVE		
AE	7.100 USEC		13.010 MSG		
	7.110 USEC		13.020 NM		
	7.120 USEC		13.030 KTS		
	7.130 %		13.040 TTS		
	7.140 dB		13.050 IDENT		
TESTER		DATE		FTR SHEET 3 OF 4	
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	F-3 PAGE	

ENGINEERING SPECIFICATION		SECURITY NOTATION	SPEC NO.	IT7510184	SEE PAGE INDEX FOR THIS SHEET REV LETTER REV LTR
			CAGE CODE	55939	
		SEE THE TITLE PAGE FOR PROPRIETARY AND DATA RIGHTS NOTATIONS.			
REV LTR	QUALITY CONTROL FUNCTIONAL TEST REPORT				
AB AB AB AB	PART NO. 7510184-		SERIAL/SHOP NO.		
	14.000 HOLD MODE 14.010 STATUS 14.020 HI 14.030 LO 14.040 STATUS 14.050 HI 14.060 LO				
	15.000 CLEAR MAINT. LOG TEST 15.010 POC 15.020 BH CMD 15.030 LIST				
TESTER		DATE	FTR SHEET 4 OF 4		
Honeywell		AW/CRITICAL NOTATION			
		SECURITY NOTATION	SUPPLEMENTS	F-4 PAGE	