

**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: February 26, 2003
Date of Submission: April 30, 2003

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Honeywell Inc, Commercial Flight Systems Group
Equipment: HS-700
FCC ID: GB8HS-700
FCC Rules: 87.131 and Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cva

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Honeywell Inc, Commercial Flight Systems Group

FCC ID: GB8HS-700

BY APPLICANT:

- | | |
|--|---|
| 1. LETTER OF AUTHORIZATION | X |
| 2. IDENTIFICATION DRAWINGS, 2.1033(c)(11) | |
| ☒ LABEL | |
| ☒ LOCATION OF LABEL | |
| ☒ COMPLIANCE STATEMENT | |
| ☒ LOCATION OF COMPLIANCE STATEMENT | |
| 3. PHOTOGRAPHS, 2.1033(c)(12) | X |
| 4. DOCUMENTATION: 2.1033(c) | |
| (3) USER MANUAL | X |
| (9) TUNE UP INFO | X |
| (10) SCHEMATIC DIAGRAM | X |
| (10) CIRCUIT DESCRIPTION | X |
| BLOCK DIAGRAM | X |
| PARTS LIST | X |
| ACTIVE DEVICES | X |
| 5. MPE REPORT | X |
| 6. REQUEST FOR CONFIDENTIALITY | X |

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: GB8HS-700

MODEL: HS-700

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 87.131 and Confidentiality

DATE OF REPORT: February 26, 2003

ON THE BEHALF OF THE APPLICANT:

Honeywell International Inc.
Commercial Electronic Systems

AT THE REQUEST OF:

P.O. X502124L-06B

Mailing:

Honeywell Inc.
Aerospace Electronic Systems
5353 W. Bell Road
Glendale, AZ 85038

Attention of:

Charles Dosdall, Manager
(602) 436-4653
email: Charlie.dosdall@honeywell.com

SUPERVISED BY:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	ERP Carrier Power (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	10
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	17
2.1055(a)(1)	Frequency Stability (Temperature Variation)	37
2.1055(b)(1)	Frequency Stability (Voltage Variation)	40
2.202(g)	Necessary Bandwidth and Emission Bandwidth	41

PAGE NO.

1 of 41.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

TEST REPORT

- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0320040
- d) Client: Honeywell Inc, Commercial Flight Systems Group
Business and Commuter Aviation Systems
PO Box 29000
Phoenix, AZ 85038-9000
- e) Identification: HS-700
FCC ID: GB8HS-700
EUT Description: Inmarsat Aircraft Telecommunications System
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: February 26, 2003
EUT Received: January 22, 2003
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:
- 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 41.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

87.131 and Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:
 Honeywell International Inc.
 Commercial Electronic Systems
 21111 N. 19th Avenue
 Phoenix, AZ 85027

MANUFACTURER:
 Honeywell Inc.
 Aerospace Electronic Systems
 5353 W. Bell Road
 Glendale, AZ 85038

(c)(2): FCC ID: GB8HS-700

MODEL NO: HS-700

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 21K0G1D TDMA
 38K0FD1W 16 QAM

(c)(5): FREQUENCY RANGE, MHZ: 1626.5 to 1660.5

(c)(6): POWER RATING, Watts: 40
___ Switchable ___ Variable x N/A

FCC GRANT NOTE: BM - The output power is continuously variable from the value listed in this entry to 50%-55% of the value listed.

(c)(7): MAXIMUM POWER RATING, Watts: 60

DUT RESULTS: Passes x Fails

PAGE NO. 4 of 41.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 28

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 41.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- x 87 - Aviation Services
- _____ 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 - Fixed Microwave Services

PAGE NO.

6 of 41.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 41.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 1643.5, 1626.5, 1660.5

POWER SETTING	R. F. POWER, WATTS
High	40


PERFORMED BY:



Morton Flom, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
TEST 2: FREQUENCY STABILITY

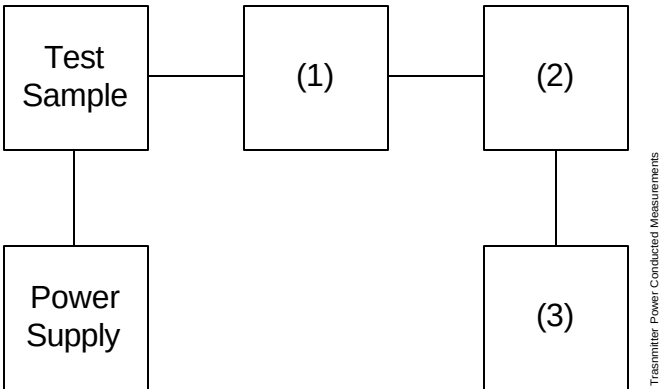

Asset Description (as applicable)	s/n
(1) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) <u>POWER METERS</u>	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) <u>FREQUENCY COUNTER</u>	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 41.


NAME OF TEST: ERP Carrier Power (Radiated)

SPECIFICATION: TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

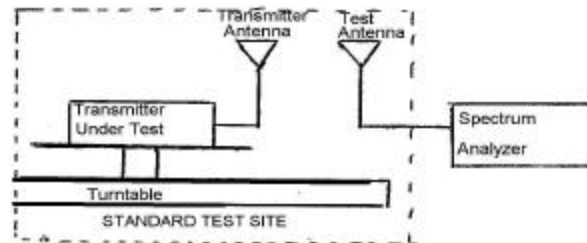

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} S 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	1626.5 MHz		1643.5 MHz		1660.5 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	34.8	1.4	39.2	1.8	32.9	2.2
45°	37.6	1.4	48.3	1.8	35.7	2.2
90°	42.5	1.4	43.8	1.8	44.3	2.2
135°	38.0	1.4	33.9	1.8	35.2	2.2
180°	37.8	1.4	36.7	1.8	40.5	2.2
225°	46.9	1.4	43.0	1.8	33.4	2.2
270°	38.9	1.4	36.0	1.8	43.1	2.2
315°	43.0	1.4	36.6	1.8	33.5	2.2

	1626.5 MHz	1643.5 MHz	1660.5 MHz
Av. Radiated Power:	41.34 dbm	41.49 dbm	39.53 dbm

PAGE NO. 10 of 41.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz	= 1643.5, 1626.5, 1660.5
SPECTRUM SEARCHED, GHz	= 0 to 10 x F_c
MAXIMUM RESPONSE, Hz	= Digital, N/A
ALL OTHER EMISSIONS	= = 20 dB BELOW LIMIT


PERFORMED BY:



Morton Flom, P. Eng.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
TEST B. OUT-OF-BAND SPURIOUS

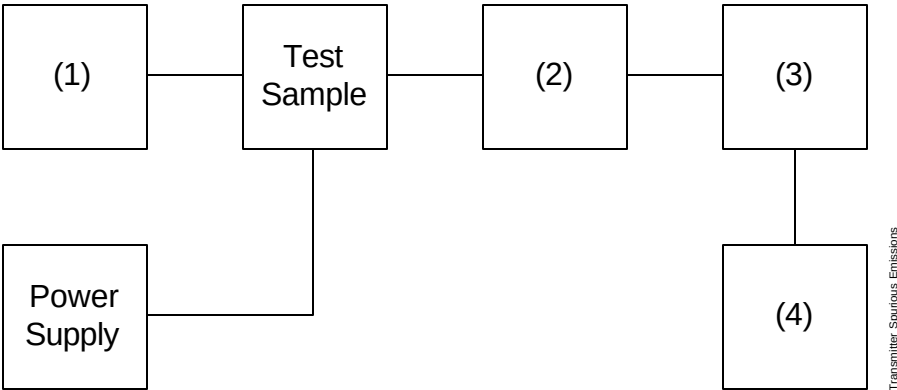

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO. 12 of 41.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc

-(43+10xLOG P) = -59 (40 Watts)

g0310134: 2003-Jan-28 Tue 10:33:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1626.500000	3253.017000	-33.1	-79.6	-20.1
1643.500000	3286.928100	-33.5	-80	-20.5
1660.500000	3320.903600	-33.3	-79.8	-20.3
1626.500000	4879.500000	-28.6	-75.1	-15.6
1643.500000	4930.483500	-33.4	-79.9	-20.4
1660.500000	4981.524500	-33.8	-80.3	-20.8
1626.500000	6505.773700	-27.3	-73.8	-14.3
1643.500000	6574.158700	-26.6	-73.1	-13.6
1660.500000	6642.184000	-26.5	-73	-13.5
1626.500000	8132.657200	-27.8	-74.3	-14.8
1643.500000	8217.562700	-28.1	-74.6	-15.1
1660.500000	8302.557700	-27.5	-74	-14.5
1626.500000	9759.163100	-27.4	-73.9	-14.4
1643.500000	9861.084600	-28	-74.5	-15
1660.500000	9963.159700	-28	-74.5	-15
1626.500000	11385.529300	-28.1	-74.6	-15.1
1643.500000	11504.418400	-27.8	-74.3	-14.8
1660.500000	11623.714400	-27	-73.5	-14
1626.500000	13011.988100	-22.7	-69.2	-9.7
1643.500000	13147.916400	-21.7	-68.2	-8.7
1660.500000	13283.951100	-22.8	-69.3	-9.8
1626.500000	14638.664800	-22.2	-68.7	-9.2
1643.500000	14791.549900	-21.4	-67.9	-8.4
1660.500000	14944.481500	-20.9	-67.4	-7.9
1626.500000	16264.828500	-21.4	-67.9	-8.4
1643.500000	16435.095300	-21.3	-67.8	-8.3
1660.500000	16604.775300	-21.9	-68.4	-8.9
1626.500000	17891.695300	-20.8	-67.3	-7.8
1643.500000	18078.405400	-19.5	-66	-6.5
1660.500000	18265.448100	-21.4	-67.9	-8.4
1626.500000	19518.165400	-14.4	-60.9	-1.4

PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO. 13 of 41.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth = 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

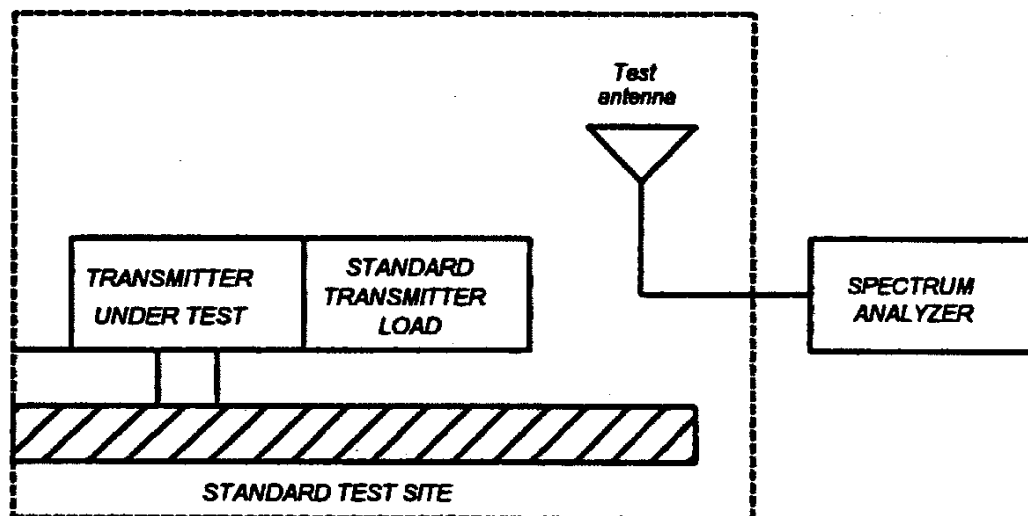

PAGE NO. 14 of 41.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to $\pm$ the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

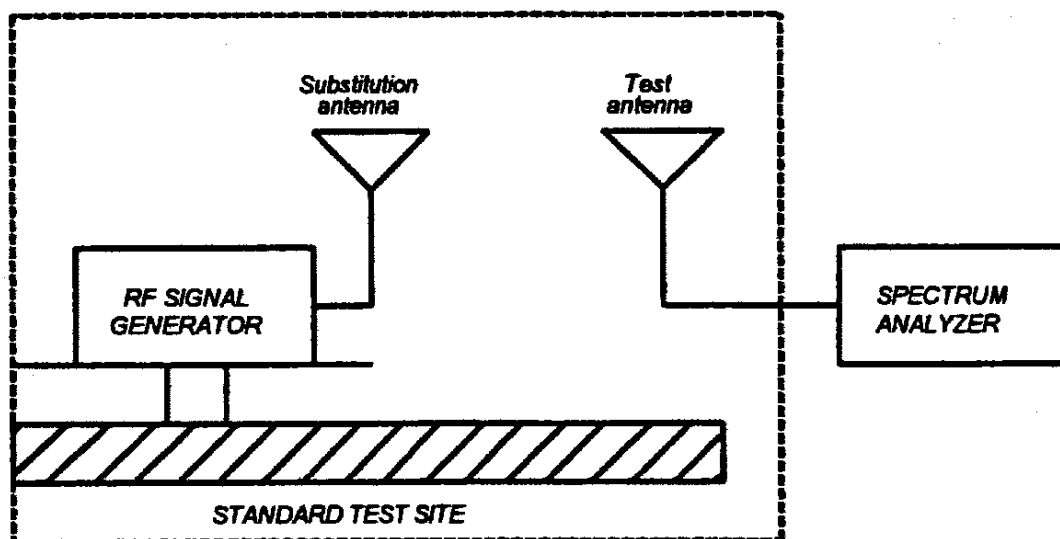

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 15 of 41.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4			
<u>TRANSDUCER</u>			
i00088 EMC0 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065 EMC0 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103 EMC0 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-03
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Jan-03
i00033 HP 85462A	3625A00357	12 mo.	Jan-03
i00048 HP 8566B	2511AD1467	6 mo.	Jan-03
<u>MICROPHONE, ANTENNA PORT, AND CABELING</u>			
Microphone	Yes/No <u>N</u>	Cable Length <u>1.0</u> Meters	
Antenna Port Terminated	Yes/No <u>Y</u>	Load <u>N/A</u>	Antenna Gain <u>0</u> dBd
All Ports Terminated by	Load <u>Y</u>	Peripheral <u>N</u>	

PAGE NO. 16 of 41.

NAME OF TEST: Field Strength of Spurious Radiation
 g0310111: 2003-Jan-23 Thu 11:56:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dbc
1643.500000	3286.999999	-21.3	≤ -66.3
1643.500000	4930.549998	-35.5	≤ -66.3
1643.500000	6574.224997	-40.5	≤ -66.3
1643.500000	8217.683330	-39.6	≤ -66.3
1643.500000	9861.141663	-37.6	≤ -66.3
1643.500000	11504.599995	-37.5	≤ -66.3
1643.500000	13148.116661	-36.3	≤ -66.3
1643.500000	14791.716661	-35.1	≤ -66.3
1643.500000	16435.166660	-36.7	≤ -66.3

PERFORMED BY:



Morton Flom, P. Eng.

PAGE NO. 17 of 41.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

18 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310119: 2003-Jan-28 Tue 08:57:00
 STATE: 2:High Power

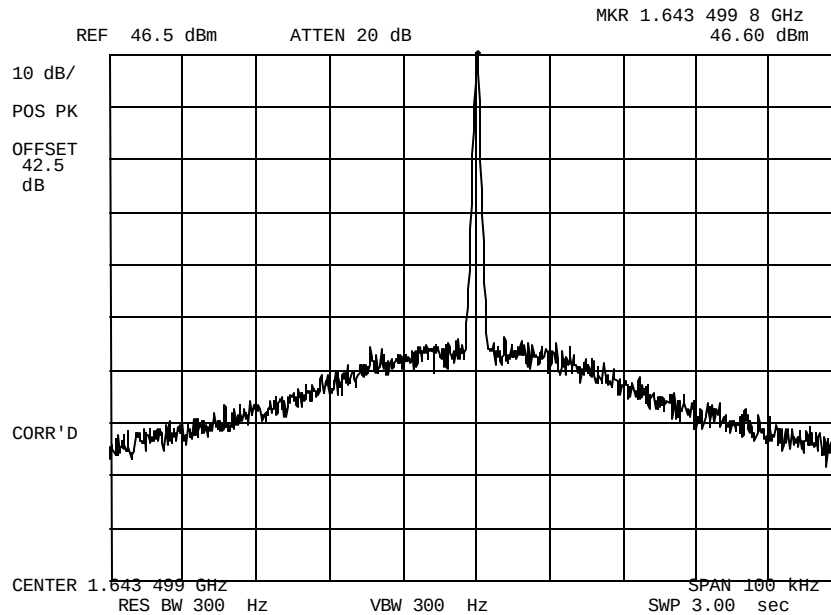

POWER:
 MODULATION:

HIGH
 NONE
 CW WAVE


PERFORMED BY:

M. Morton P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

19 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310129: 2003-Jan-28 Tue 09:54:00
 STATE: 2:High Power

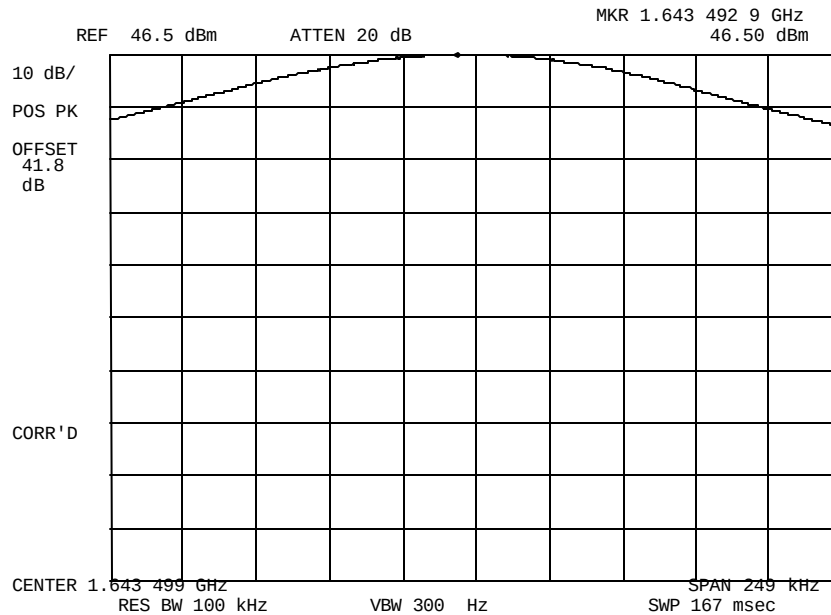

POWER: HIGH
 MODULATION: TDMA @ 1643.5 MHZ
 REFERENCE LEVEL RULES 2.1051, 87.131


PERFORMED BY:

M. Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

20 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310130: 2003-Jan-28 Tue 09:56:00
 STATE: 2:High Power

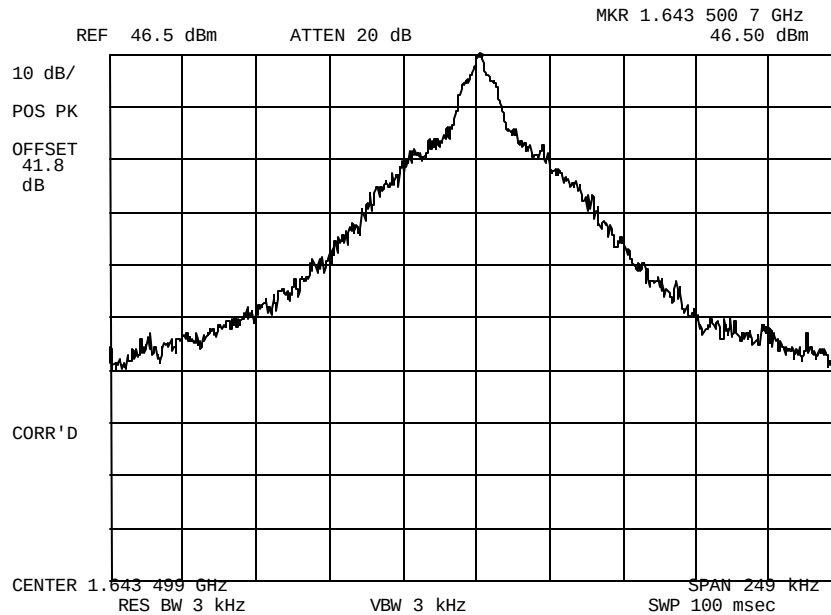

POWER: HIGH
 MODULATION: TDMA @ 1643.5 MHZ
 RULES 2.1049, 87.135(C)
 DESIGNATOR 21K0G1D


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

21 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310131: 2003-Jan-28 Tue 09:57:00
STATE: 2:High Power

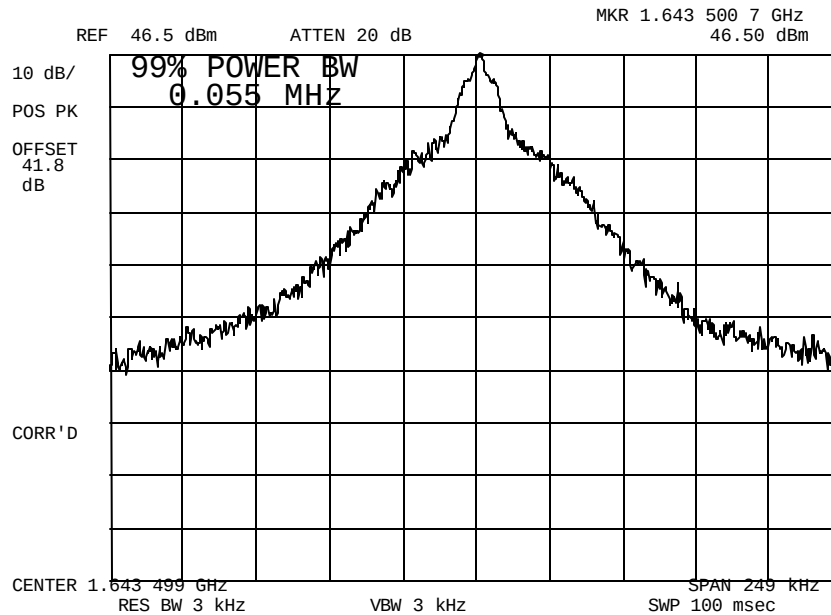

POWER: HIGH
MODULATION: TDMA @ 1643.5 MHz
RULES 2.1049, 87.135(C)
DESIGNATOR 21K0G1D
99% Power Bandwidth


PERFORMED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

22 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310132: 2003-Jan-28 Tue 09:59:00
 STATE: 2:High Power

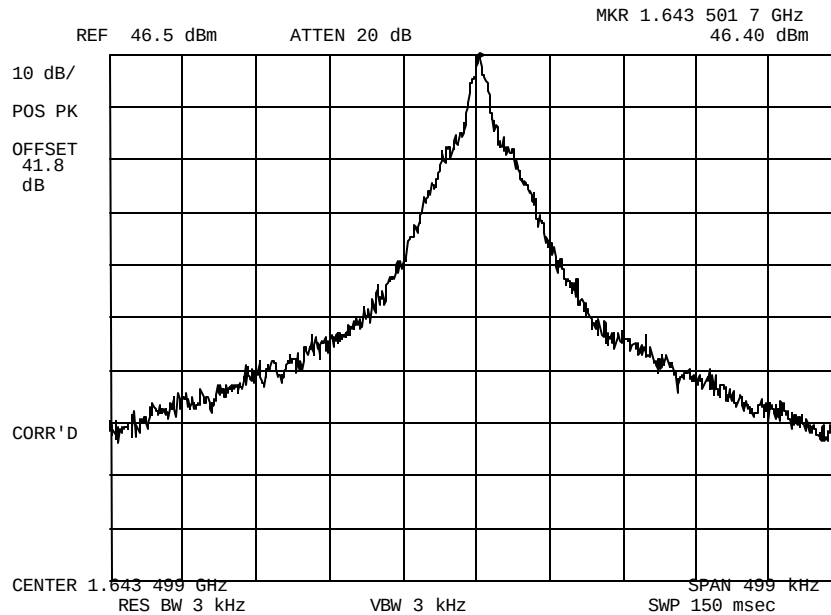

POWER: HIGH
 MODULATION: TDMA @ 1643.5 MHZ
 RULES 2.1051, 87.131 BANDWIDTH EDGES


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

23 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310138: 2003-Jan-28 Tue 11:15:00
 STATE: 2:High Power

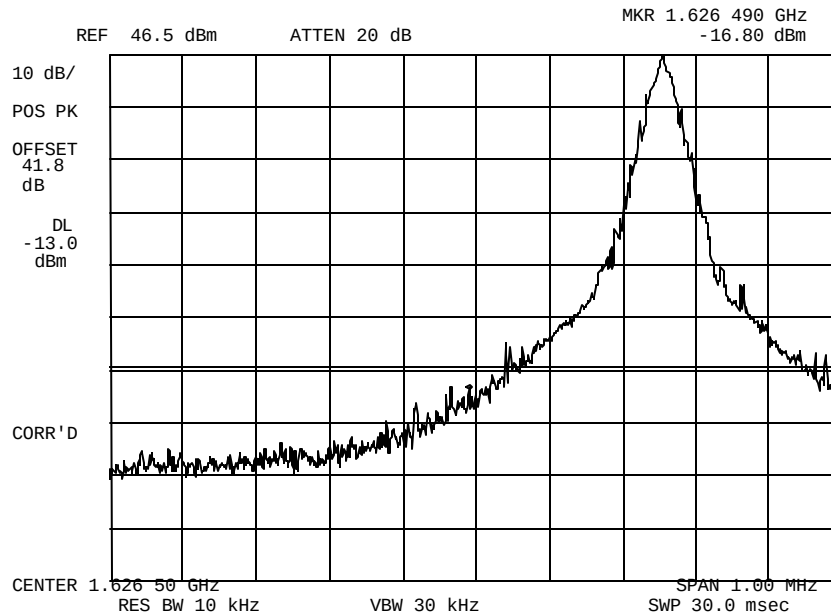

POWER: HIGH
 MODULATION: TDMA
 LOWER BANDEDGE CH 1626.5 MHZ

M. Flom P. Eng.


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

24 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310139: 2003-Jan-28 Tue 11:17:00
 STATE: 2:High Power

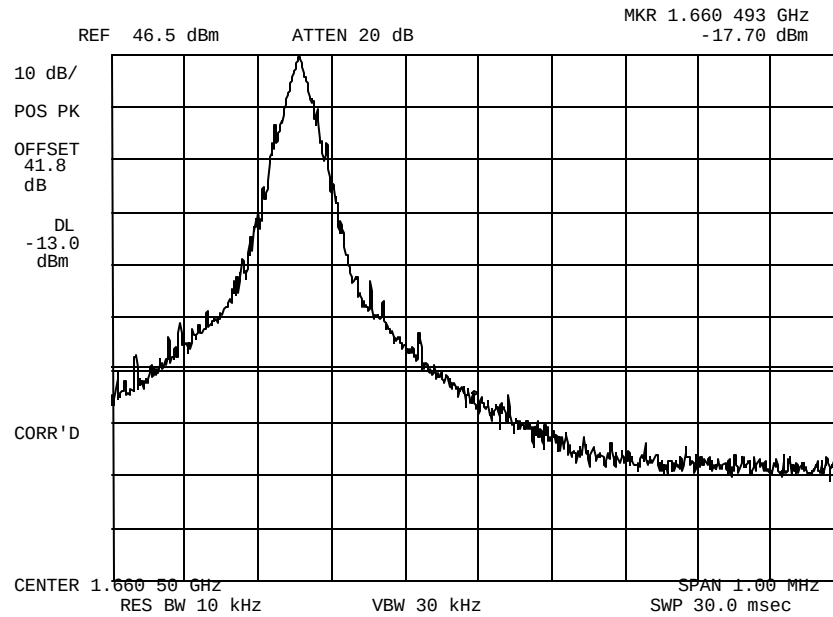

POWER: HIGH
 MODULATION: TDMA
 UPPER BANDEDGE CH 1660.5 MHz

M. Flom P. Eng.


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

25 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310133: 2003-Jan-28 Tue 10:08:00
 STATE: 2:High Power

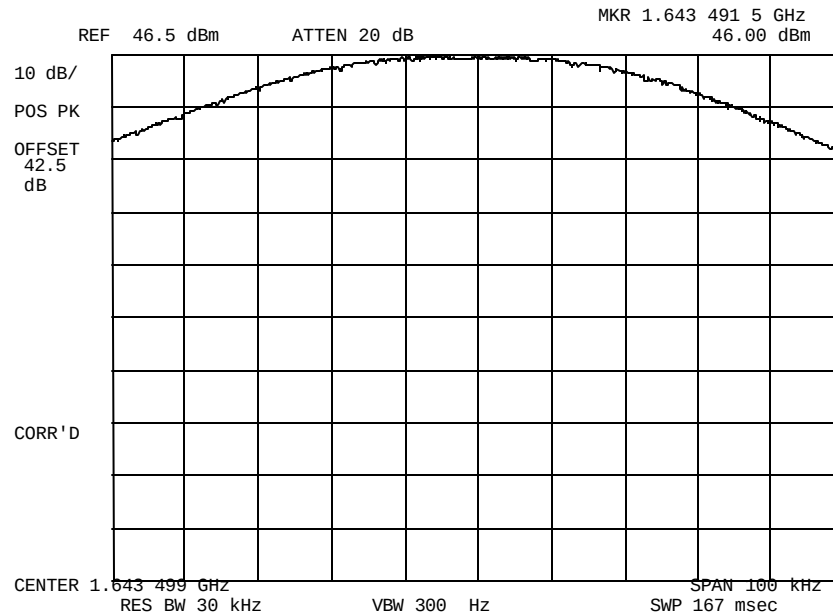

POWER: HIGH
 MODULATION: 16 QAM @ 33.6 K/SYMBOLS PER SECOND
 REFERENCE LEVEL


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

26 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310126: 2003-Jan-28 Tue 09:37:00
STATE: 2:High Power

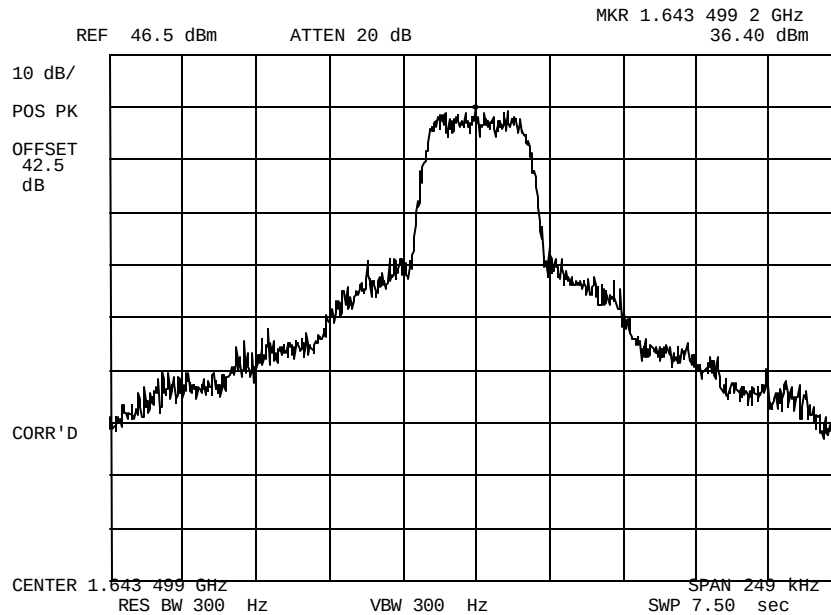

POWER: HIGH
MODULATION: 16 QAM @ 33.6 K/SYMBOLS PER SECOND
RULES 2.1049, 87.135(C)
DESIGNATOR 38K0FD1W


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

27 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310127: 2003-Jan-28 Tue 09:38:00
STATE: 2:High Power

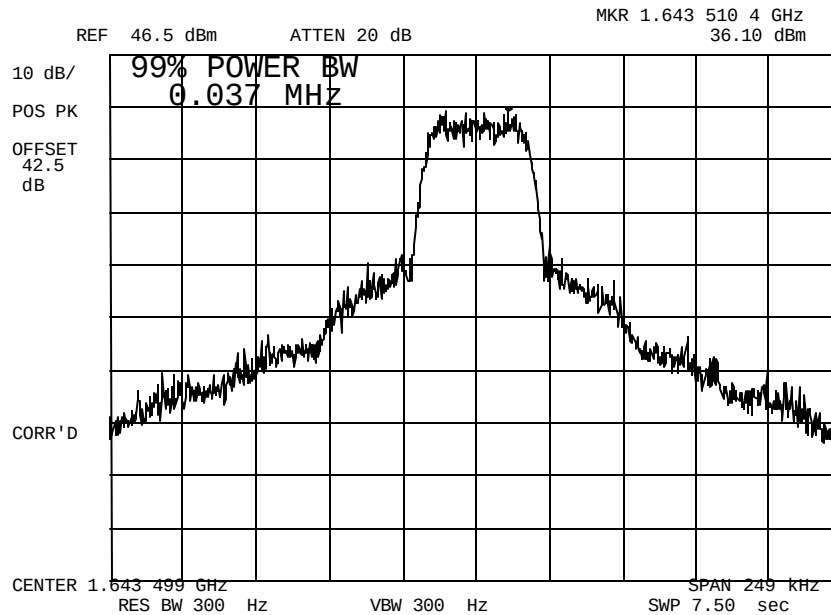

POWER: HIGH
MODULATION: 16 QAM @ 33.6 K/SYMBOLS PER SECOND
RULES 2.1049, 87.135(C)
DESIGNATOR 38K0FD1W
99% Power Bandwidth


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

28 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310128: 2003-Jan-28 Tue 09:40:00
 STATE: 2:High Power

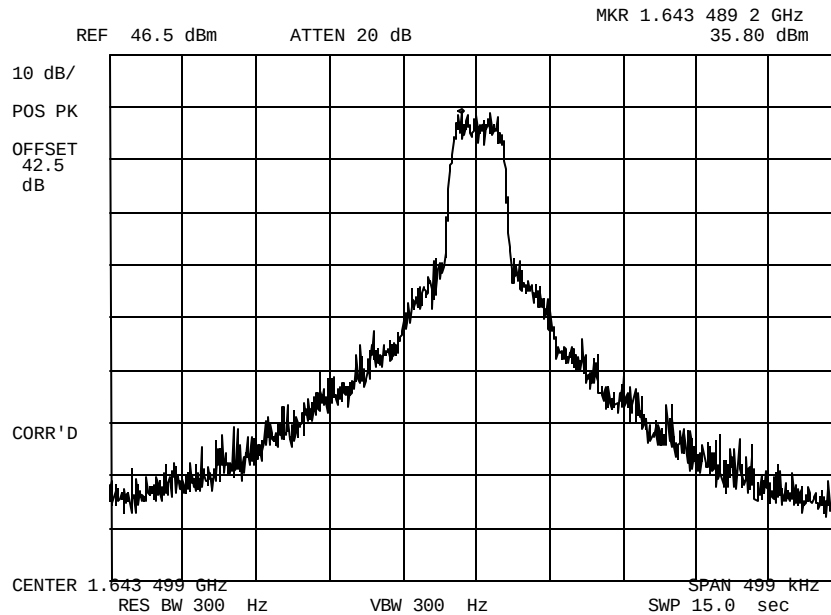

POWER: HIGH
 MODULATION: 16 QAM @ 33.6 K/SYMBOLS PER SECOND
 RULES 2.1049, 87.135(C) DESIGNATOR
 38K0FD1W
 99% Power Bandwidth


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

29 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310137: 2003-Jan-28 Tue 11:12:00
 STATE: 2:High Power

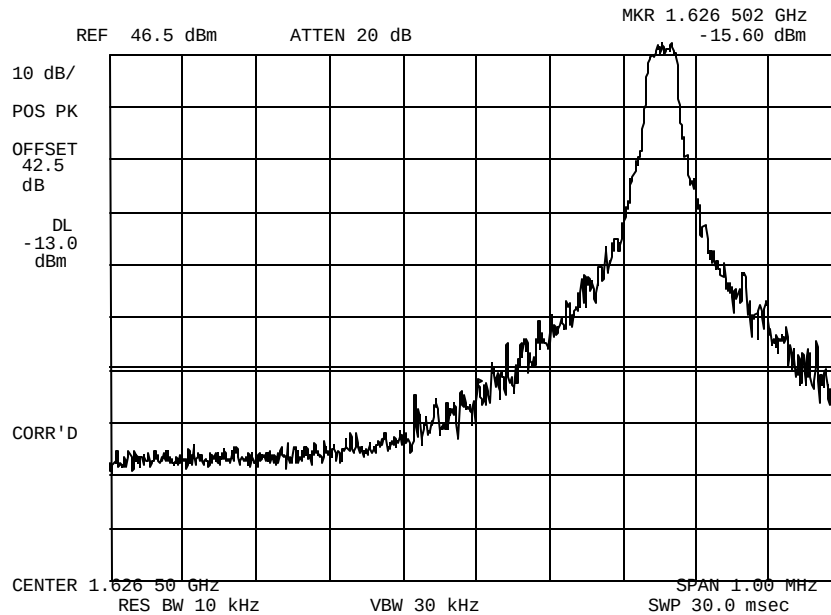

POWER: HIGH
 MODULATION: 16 QAM @ 33.6 K/SYMBOLS PER SECOND
 LOWER BANDEDGE CH 1626.5 MHZ


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

30 of 41.

```
NAME OF TEST:      Emission Masks (Occupied Bandwidth)
g0310136: 2003-Jan-28 Tue 11:08:00
STATE: 2:High Power
```

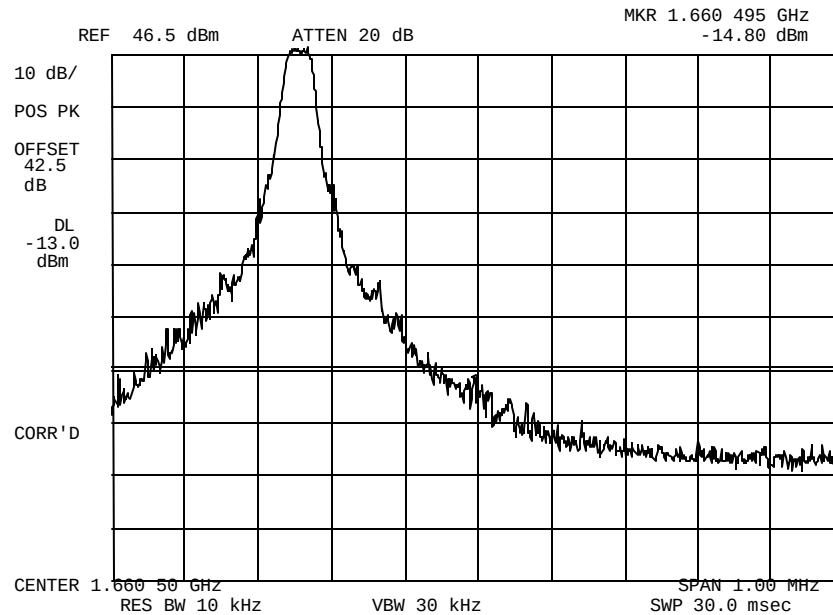

```
POWER:      HIGH
MODULATION:  16 QAM @ 33.6 K/SYMBOLS PER SECOND
             UPPER BANDEDGE CH 1660.5 MHZ
```


PERFORMED BY:

M. Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

31 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310123: 2003-Jan-28 Tue 09:18:00
STATE: 2:High Power

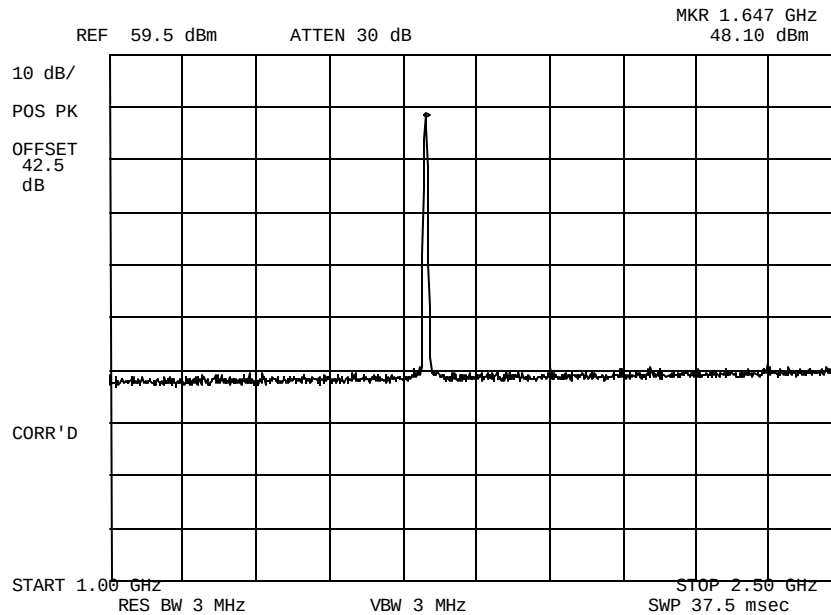

POWER: HIGH
MODULATION: TDMA 1643.5 MHZ
TX SPURS 1 - 2.5 GHZ
RULE PARTS 2.1051 and 87.131


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

32 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310124: 2003-Jan-28 Tue 09:21:00
 STATE: 2:High Power

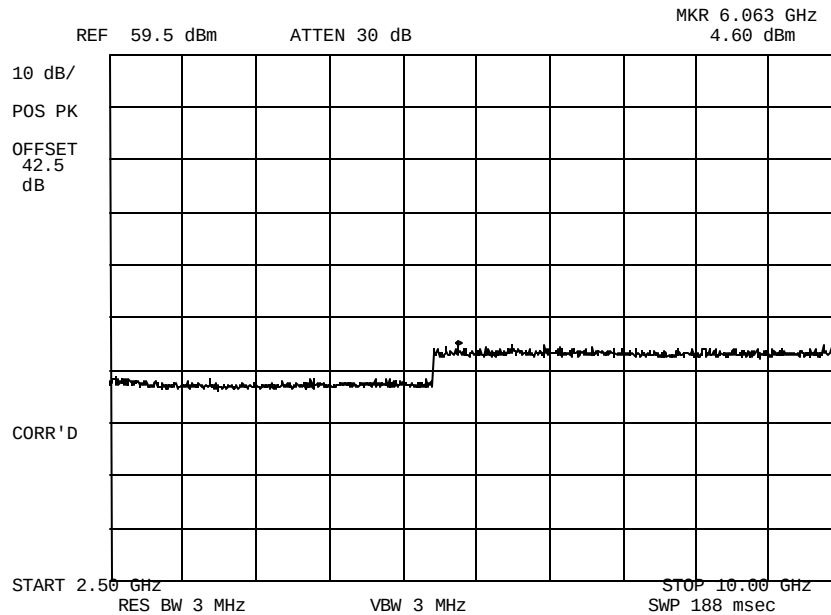

POWER: HIGH
 MODULATION: TDMA 1643.5 MHZ
 TX SPURS 2.5 - 10 GHZ
 RULE PARTS 2.1051 and 87.131


PERFORMED BY:

Morton Flom, P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

33 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310125: 2003-Jan-28 Tue 09:22:00
 STATE: 2:High Power

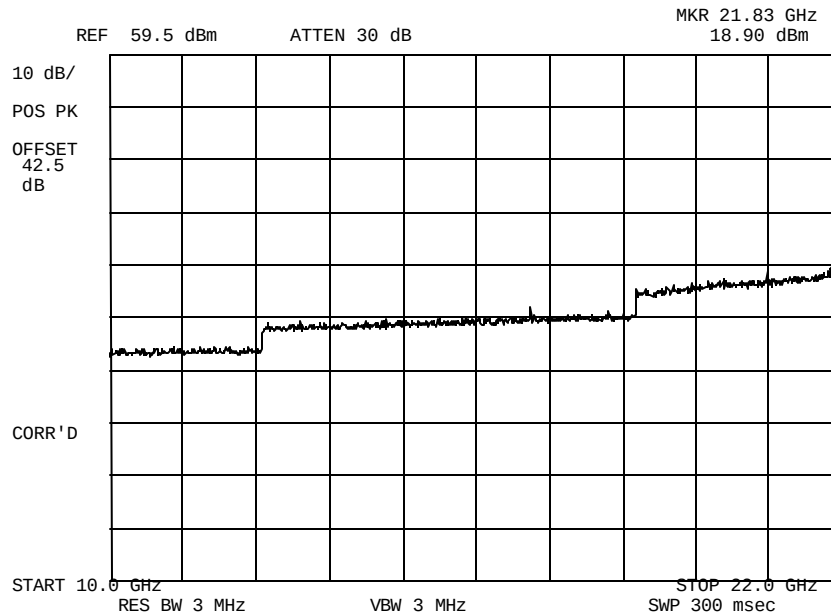

POWER: HIGH
 MODULATION: TDMA 1643.5 MHZ
 TX SPURS 10 - 22 GHZ
 RULE PARTS 2.1051 and 87.131


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

34 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310120: 2003-Jan-28 Tue 09:06:00
 STATE: 2:High Power

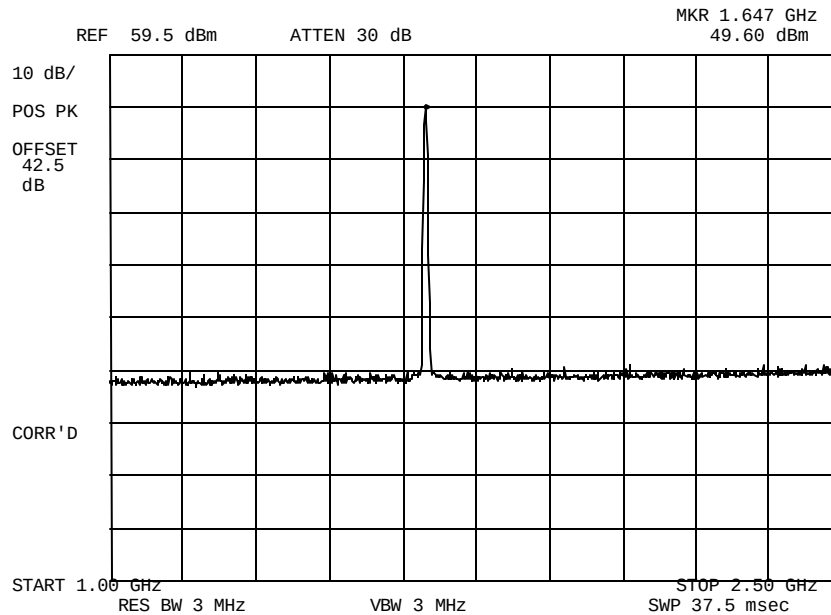

POWER: HIGH
 MODULATION: 16 QAM 33.6 KILO SYMBOLS PER SECOND
 TRANSMITTER SPURS 1 - 2.5 GHz
 RULE PARTS 2.1051 and 87.131


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

35 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310121: 2003-Jan-28 Tue 09:09:00
 STATE: 2:High Power

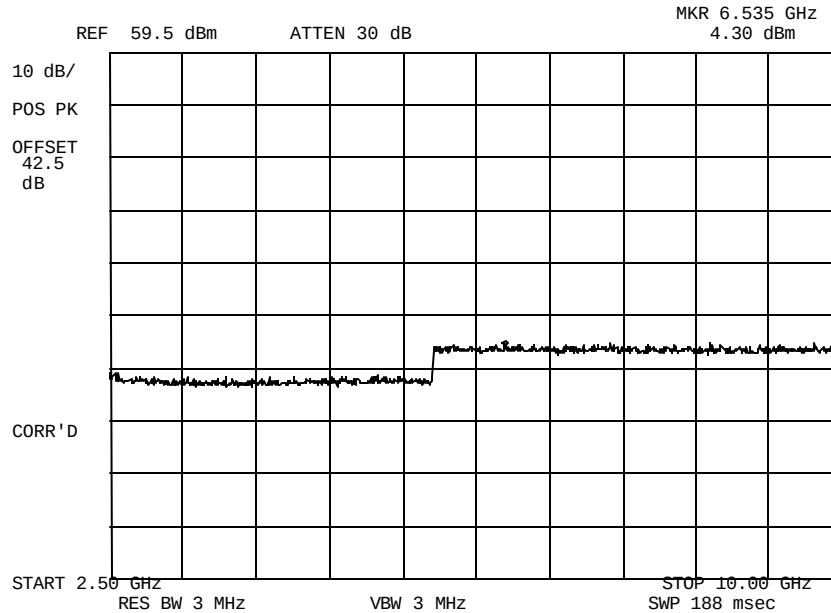

POWER: HIGH
 MODULATION: 16 QAM 33.6 KILO SYMBOLS PER SECOND
 TX SPURS 2.5 - 10 GHZ RULE
 PARTS 2.1051 and 87.131


PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO.

36 of 41.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310122: 2003-Jan-28 Tue 09:11:00
 STATE: 2:High Power

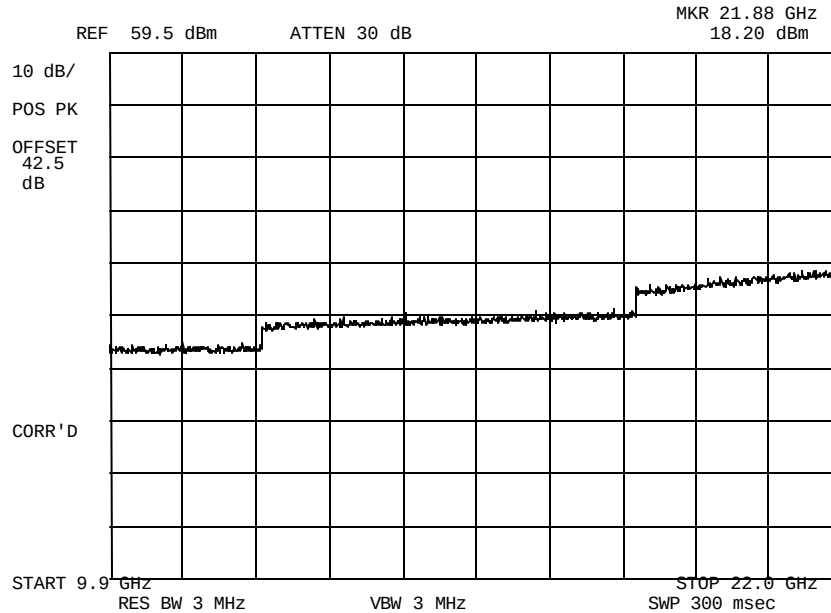

POWER: HIGH
 MODULATION: 16 QAM 33.6 KILO SYMBOLS PER SECOND
 TX SPURS 10 - 22 GHZ RULE
 PARTS 2.1051 and 87.131

PERFORMED BY:

Morton Flom, P. Eng.

PAGE NO. 37 of 41.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

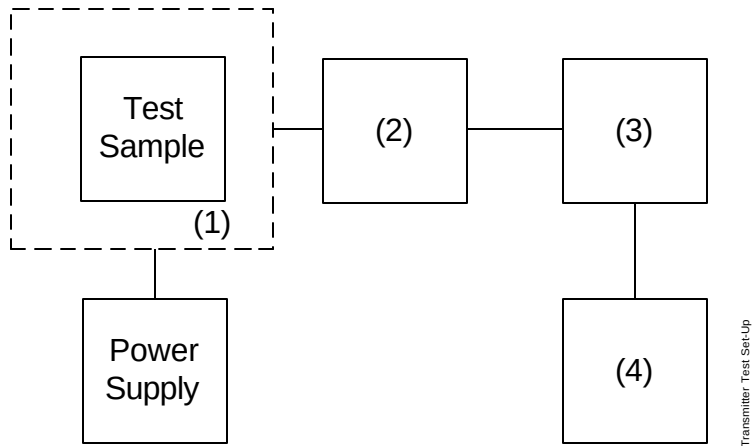

Asset	Description	s/n
(1) <u>TEMPERATURE, HUMIDITY, VIBRATION</u>		
i00027	Tenney Temp. Chamber	9083-765-234
i00	Weber Humidity Chamber	
i00	L.A.B. RVH 18-100	
(2) <u>COAXIAL ATTENUATOR</u>		
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3) <u>R.F. POWER</u>		
i00014	HP 435A POWER METER	1733A05839
i00039	HP 436A POWER METER	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(4) <u>FREQUENCY COUNTER</u>		
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A	2105A01087

PAGE NO. 39 of 41.

NAME OF TEST: Frequency Stability (Temperature Variation)

<u>DEGREES, CELSIUS</u>		<u>HZ</u>
-20	1643499864	-136
-10	1643499853	-147
0	1643499834	-166
10	1643499847	-153
20	1643499844	-156
25	1643500170	0
30	1643499843	157
40	1643499861	-139
50	1643499890	-110

PAGE NO. 40 of 41.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055(d)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
115	32.2	16435005	1	0
100	28	16435004	0	0
85	23.8	16435004	1	0

PAGE NO. 41 of 41.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 21K0G1D

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	=
MAXIMUM DEVIATION (D), kHz	=
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2xM)+(2xDxK)
	= 55 KHz, measured

MODULATION = 38K0FD1W

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	=
MAXIMUM DEVIATION (D), kHz	=
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2xM)+(2xDxK)
	= 37 KHz, measured

PERFORMED BY:
END OF TEST REPORT



Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.