

| REV | Δ | Description                  | Sheet Effected | Date     | Drawn    | Checked |
|-----|---|------------------------------|----------------|----------|----------|---------|
| A   |   |                              |                | 17.03.04 | D.Lanuel | S.Cohen |
| B   |   | Paragraph 3a-Text is changed | 5              | 01.05.05 | D.Lanuel | S.Cohen |
| C   |   | Date is changed              | 6,7,9,13       | 01.05.05 | D.Lanuel | S.Cohen |

EMC Laboratory




# SA-03G Remote Control 3 Button

FCCID: GCD-SA03G  
Manufactured by  
Rosslare Ltd.

EMC Test Report

According FCC Part 15 Requirements

Feb 2004

|             | Function/Title   | Name     | Signature                                                                             | Date     |
|-------------|------------------|----------|---------------------------------------------------------------------------------------|----------|
| Prepared by | Test Engineer    | D.Lanuel |  | 01.05.05 |
| Checked by  | Test Engineer    | D.Lanuel |  | 01.05.05 |
| Approved by | EMC Lab. Manager | S.Cohen  |  | 01.05.05 |

## Table of Contents

| Para |                                                             | Page |
|------|-------------------------------------------------------------|------|
| 1    | INTRODUCTION.....                                           | 3    |
| 2    | TEST SUMMARY AND SIGNATURES. ....                           | 4    |
| 3    | E.U.T INFORMATION.....                                      | 5    |
| 4    | BANDWIDTH OF THE EMISSION PART 15.231—TEST RESULTS .....    | 6    |
| 5    | FIELD STRENGTH OF FUNDAMENTAL PART 15.231-TEST RESULTS..... | 7    |
| 6    | RADIATED EMISSION PART 15.231 & 15.205-TEST RESULTS .....   | 9    |
| 7    | RADIATED EMISSION PART 15.109-TEST RESULTS. ....            | 13   |
| 8    | PLOTS.....                                                  | 15   |

## 1 Introduction

### a. Scope

This document describes the measurement procedures and tests for FCC part 15 of the SA-03G 3 Button Manufactured by Rosslare Ltd.

### b. Description of equipment Under Test

|                               |                 |
|-------------------------------|-----------------|
| Equipment Under Test:         | SA-03G 3 Button |
| FCCID                         | GCD-SA03G       |
| Manufacturer:                 | Rosslare Ltd.   |
| Serial Numbers:               | 3004220         |
| Mode of Operation:            | TX MODE         |
| Receiver operating frequency: | 433.92MHZ       |
| Year of Manufacture:          | 2004            |

### c. Applicant Information:

|                                                                  |                                                                                       |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Applicant:                                                       | Rosslare Ltd.                                                                         |
| Applicant Address                                                | FLAT 12, 9/F WING FAT IND BLDG.<br>12 WANG TAI RD., KOWLOON BAY.<br>KOWLOON HONG KONG |
| Telephone:                                                       | +972-3-9386838                                                                        |
| FAX:                                                             | +972-3-9386830                                                                        |
| The testing was observed by:<br>following applicant's personnel: | ALEN GREEN                                                                            |

### d. Test Performance:

|                                |                                                                                               |
|--------------------------------|-----------------------------------------------------------------------------------------------|
| Date of reception for testing: | 10.03.04                                                                                      |
| Dates of testing               | 11.03.04                                                                                      |
| Test Laboratory Location       | TADIRAN EMC LAB , Hashoftim 26 Holon<br>58102 ISRAEL<br>Tel: 972-3-5574476 Fax: 972-3-5575320 |

|                                         |                                                                                                                                                                        |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicable EMC Specification:<br>(FCC), | Federal Communication Commission<br><br>Code of Federal Regulations 47,<br>FCC Docket 89-103,Part 15: Radio<br>Frequency Devices, Sections 15.109,<br>15.209 & 15.231. |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 2 Test Summary and Signatures.


TADIRAN EMC Laboratory has completed testing of E.U.T in accordance with the requirements of the FCC Part 15 Regulations for Class B equipment.

**The E.U.T was found to comply with the requirements of the FCC Part 15 Regulations given below**

| Test | Test Description              | Section            | PASS/FAIL |
|------|-------------------------------|--------------------|-----------|
| 1    | Bandwidth of the emission     | 15.231             | PASS      |
| 2    | Field strength of fundamental | 15.231             | PASS      |
| 3    | Radiation emission            | 15.109             | PASS      |
| 4    | Radiation emission            | 15.231 &<br>15.205 | PASS      |


a. Test performed by:

Mr. D. Lanuel Test Engineer



b. Test Report prepared by:

Mr. D. Lanuel Test Engineer



c. Test Report Approved by:

Mr. Samuel Cohen EMC Lab. Manager




### 3 E.U.T Information

#### a. E.U.T description

- 1.1 The SA-03 3-button remote control is a small handheld remote control transmitter, to Arm/Disarm the security system.
- 1.2 The SA-03 is a stand-alone unit, operating only on internal battery power supply. The unit consists of one (1) PCB, one (1) microcontroller – which controls the detector operation, and a RF transmitter section. The unit does not have a RF receiver section.
- 1.3 The SA-03 3-button remote control has one RF channel, at 433.92 MHz carriers with OOK modulation.
- 1.4 The SA-03 3-button remote control transmits identification and status signals in 100ms. No supervisory signal is transmitted from the device.
- 1.5 When the Remote Control detects activity 5 identical transmissions are sent. The time between the end of one transmission and the start of the subsequent one being random. This time interval varies between 105ms and 400 ms. However, the total TX period is always less than 1 s.
- 1.6 The battery used is a 12vdc alkaline, 23A - replaceable.

#### b. E.U.T Test Configuration

E.U.T. test configuration is shown in figure bellow

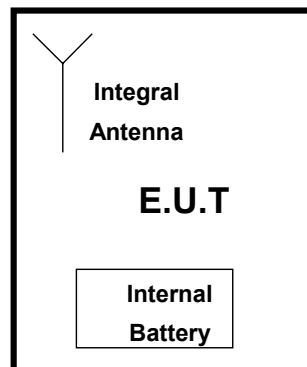

#### c. E.U.T Mode of Operation description

- (1) 433.92MHz TX Mode operated by battery

#### 4 BANDWIDTH OF THE EMISSION part 15.231—TEST RESULTS

E.U.T: SA-03G 3 BUTTON S/N 3004220  
 Test Method: ANSI 63.4  
 Date: 10/03/04  
 Relative Humidity: 29%  
 Ambient Temperature: 21c  
 Air Pressure: 1053hpa  
 Test Setup: Figure 11

Testing Engineer: D.Lanuel



Date 17/03/04

a. Test Results Summary & Conclusions

**The E.U.T was found in compliance with Bandwidth of Radiated Emission fundamental frequency requirement**

b. Limits of bandwidth

The test unit shall meet the limits of Table 1

TABLE- 1 Limits For Bandwidth

| Frequency (MHz) | Bandwidth Max Limits (%) | Bandwidth Max Limits (KHz) |
|-----------------|--------------------------|----------------------------|
| 433.92          | 0.25                     | 1085                       |

c. Test Instrumentation and Equipment

TABLE- 2 Test Instrumentation and Equipment

| Item              | Model | Manufacturer | Next Date Calibration |
|-------------------|-------|--------------|-----------------------|
| Spectrum Analyzer | 8593E | HP           | 31/01/05              |
| Broadband Antenna | BTA-L | FRANKONIA    | 10.04.05              |

d. Test Results

TABLE- 3 Bandwidth Test Result

| Frequency (MHz) | Bandwidth (KHz) | Bandwidth Max Limit (KHz) | Plot No | PASS/ FAIL |
|-----------------|-----------------|---------------------------|---------|------------|
| 433.92          | 55.5            | 1085                      | Plot-1  | PASS       |

e. Procedure

**The Bandwidth is determined at the point 20db down from the modulated carrier, while the spectrum analyzer was set to "max hold" and R.BW –10KHz.**

## 5 field strength of fundamental part 15.231-TEST RESULTS

E.U.T: SA-03G 3 BUTTON S/N 3004220  
Test Method: ANSI 63.4  
Date: 11/03/04  
Relative Humidity: 29%  
Ambient Temperature: 20c  
Air Pressure: 1053hpa  
Test Setup: Figure 11

**Testing Engineer:**

D.Lanuel



**Date** 17/03/04

a. Test Results Summary & Conclusions

**The E.U.T was found in compliance with fundamental frequency requirement**

b. Limits of Field Strength for fundamental according 15.231

The test unit shall meet the limits of Table 4.

TABLE- 4 **Limits For Fundamental**

| Frequency (MHz) | Average Max Limits<br>(dB $\mu$ V/m) | Peak Max Limits<br>(dB $\mu$ V/m) |
|-----------------|--------------------------------------|-----------------------------------|
| 433.92          | 81                                   | 101                               |

c. Test Instrumentation and Equipment

TABLE- 5 **Test Instrumentation and Equipment**

| Item              | Model | Manufacturer | Next Date Calibration |
|-------------------|-------|--------------|-----------------------|
| Spectrum Analyzer | 8593E | HP           | 31/01/05              |
| Broadband Antenna | BTA-L | FRANKONIA    | 10.04.05              |

## d. Test Results

TABLE- 6 **Average Factor**

| TX Period( min) | Duty Cycle(min)  | Average Factor(db)   |
|-----------------|------------------|----------------------|
| 12.8ms          | $12.8/100=0.128$ | $20\log 0.128=-17.8$ |

TABLE- 7 **Peak Result of Fundamental**

| Frequency (MHz) | Peak Result (dB $\mu$ V/m) | peak Limits (dB $\mu$ V/m) | Margined ( dB) | Plot No | Pass/Fail |
|-----------------|----------------------------|----------------------------|----------------|---------|-----------|
| 433.916         | 90.4                       | 101                        | 10.6           | Plot-2  | PASS      |

TABLE- 8 **Average Result of Fundamental**

| Peak Result (dB $\mu$ V/m) | Average Factor | Calculation Results | Average Limits (dB $\mu$ V/m) | Margined ( dB) | Pass / Fail |
|----------------------------|----------------|---------------------|-------------------------------|----------------|-------------|
| 90.4                       | -17.8          | 72.6                | 81                            | 8.4            | PASS        |

## e. Test Procedure

The EUT was placed on the top of rotating table 0.8 meters above the ground and the table was rotated 360°, the height of antenna is varied from one to 4 meters (vertical and horizontal polarization) to determine the max field strength of fundamental

## 6 Radiated emission part 15.231 & 15.205-test results

E.U.T: SA-03G 3 BUTTON S/N 3004220  
Test Method: ANSI 63.4  
Date: 10/03/04  
Relative Humidity: 29%  
Ambient Temperature: 21c  
Air Pressure: 1053hpa  
Test Setup: Figure 11

**Testing Engineer:** D.Lanuel



**Date** 16/03/04

a. Test Results Summary & Conclusions

**The E.U.T was found in compliance with 15.231**

b. Limits of Radiated Interference Field Strength according 15.231

The test unit shall meet the limits of Table 9.

TABLE- 9 **Limits For 15.231(b)**

| Frequency range(MHz) | Average Limits (dB $\mu$ V/m) | peak Limits (dB $\mu$ V/m) |
|----------------------|-------------------------------|----------------------------|
| 0.009 – 3500         | 61                            | 81                         |

c. Test Instrumentation and Equipment

TABLE- 10 **Test Instrumentation and Equipment**

| Item                                | Model     | Manufacturer    | Next Date Calibration |
|-------------------------------------|-----------|-----------------|-----------------------|
| Spectrum Analyzer                   | 8593E     | HP              | 31/01/05              |
| Loop Antenna (9KHz-30MHz)           | HFH2-Z2   | Rohde & Schwarz | 13.11.05              |
| Double Ridge Guide Antenna(1-18GHz) | 3105      | EMCO            | 24.04.05              |
| Broadband Antenna                   | BTA-L     | FRANKONIA       | 10.04.05              |
| Low Noise Amplifier (0-1GHz)        | AM-1300-N | MITEQ           | 14.01.05              |
| Low Noise Amplifier (1-4GHz)        | AMM 003N  | AVANTEK         | 14.01.05              |
| Low Noise Amplifier (2-6GHz)        | MWA-02060 | ELISRA          | 14.01.05              |

## d. Preliminary Test Results

TABLE- 11 Preliminary Test Results for intentional Emissions in TX Mode 15.231

| Antenna Polarization | Freq. Range MHz | Res. BW (kHz) | Plot No. | PASS/FAIL |
|----------------------|-----------------|---------------|----------|-----------|
| Both Hor.& Ver       | 0.009 – 0.15    | 0.2           | Plot-3   | Pass      |
|                      | 0.15 - 30       | 9             | Plot-4   | Pass      |
|                      | 30-1000         | 120           | Plot-5   | Pass      |
|                      | 1000-2.800      | 1000          | Plot-6   | Pass      |
|                      | 2.800-5000      | 1000          | Plot-7   | Pass      |

## e. Final Results

TABLE- 12 Six Highest Peak Emission Test Results

| Mode Of Operation | Freq. (MHz)                                            | peak Reading (*) (dB $\mu$ V/m) | Limit dB $\mu$ V/m | Margin (dB) | Pass/Fail |
|-------------------|--------------------------------------------------------|---------------------------------|--------------------|-------------|-----------|
| TX                | The Emission are at least 20db below the limit(81dbuV) |                                 |                    |             |           |

TABLE- 13 Six Highest Average Emission Test Results

| Mode Of Operation | Freq. (MHz)                                            | Calculated (dB $\mu$ V/m) | Limit dB $\mu$ V/m | Margin (dB) | Pass/Fail |
|-------------------|--------------------------------------------------------|---------------------------|--------------------|-------------|-----------|
| TX                | The Emission are at least 20db below the limit(61dbuV) |                           |                    |             |           |

**f. Test Procedure****(1) Preliminary Test Procedure**

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a chamber shielded
- 2) The E.U.T was set 3 meters away from the receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The Antenna height varied from one meter above the ground over its full-allowed range of travel and the table was rotated 360°to determine the maximum value of the field strength
- 4) The antenna was set both horizontal and vertical polarization.

**(2) Final Test Procedure**

- 1) The EUT was tested at open area for each suspected emission
- 2) The test procedure was performed according paragraph (1) and figure 11

g. Final Test Setup

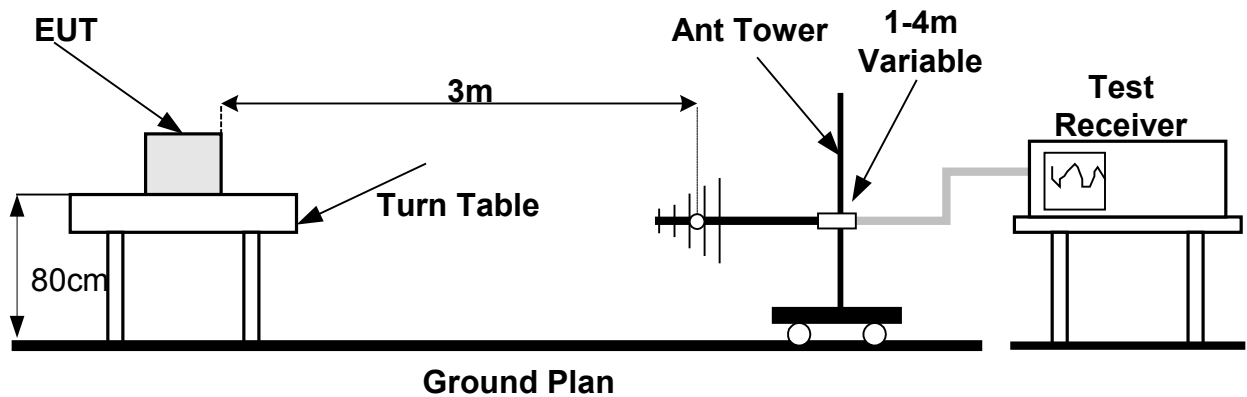


Figure 11 Radiated Emission Set up

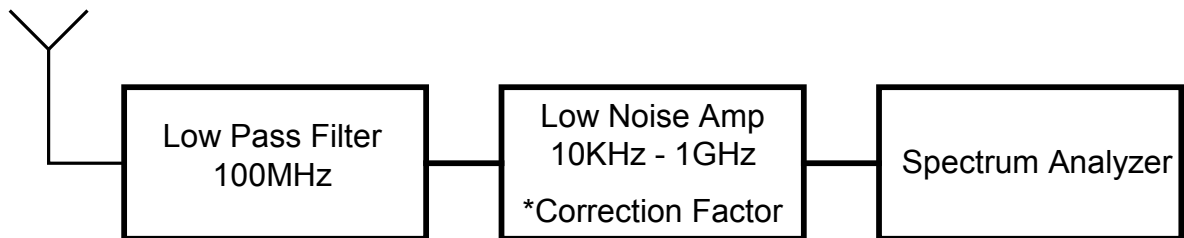


Figure 12 Radiated Emission test 10KHz – 30MHz

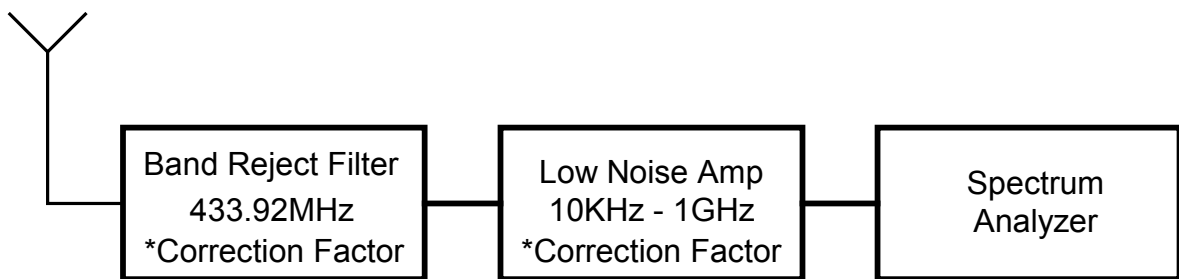


Figure 13 Radiated Emission test 30MHz – 1GHz

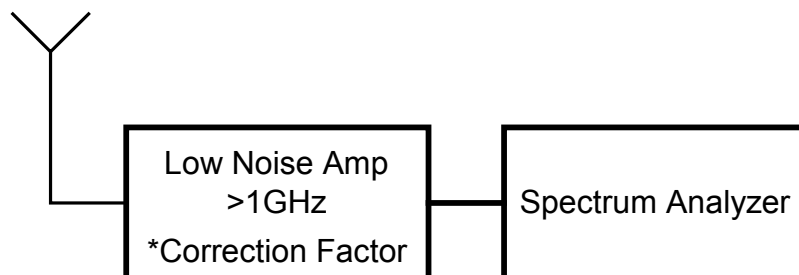



Figure 14 Radiated Emission test above 1GHz

## 7 Radiated emission part 15.109-test results.

### a. Preliminary Radiated emission Test Result According Part 15.109

|                      |                             |
|----------------------|-----------------------------|
| E.U.T:               | SA-03G 3 BUTTON S/N 3004220 |
| Test Method:         | ANSI 63.4                   |
| Date:                | 10/03/04                    |
| Relative Humidity:   | 29%                         |
| Ambient Temperature: | 21c                         |
| Air Pressure:        | 1053hpa                     |
| Test Setup:          | Figure 11                   |

**Testing Engineer:** D.Lanuel



**Date** 11/03/04

### b. Test Results Summary & Conclusions

**The E.U.T was found in compliance with 15.109**

### c. Limits of Radiated Interference Field Strength according 15.109

The test unit shall meet the limits of Table 14 for Class B equipment.

**TABLE- 14 Limits For 15.109 Class B equipment**

| Frequency Range (MHz) | Quasi-peak Limits (dB $\mu$ V/m) |
|-----------------------|----------------------------------|
| 30 - 88               | 40                               |
| 88 - 216              | 43                               |
| 216 - 960             | 46                               |
| 960 - 2000            | 54                               |

## d. Test Instrumentation and Equipment

TABLE- 15 Test Instrumentation and Equipment

| Item                                | Model     | Manufacturer | Next Date Calibration |
|-------------------------------------|-----------|--------------|-----------------------|
| Spectrum Analyzer                   | 8593E     | HP           | 31/01/05              |
| Double Ridge Guide Antenna(1-18GHz) | 3105      | EMCO         | 24.04.05              |
| Broadband Antenna(30-1000MHz)       | BTA-L     | FRANKONIA    | 10.04.05              |
| Low Noise Amplifier (0-1GHz)        | AM-1300-N | MITEQ        | 14.01.05              |
| Low Noise Amplifier (1-4GHz)        | AMM 003N  | AVANTEK      | 14.01.05              |
| Low Noise Amplifier (2-6GHz)        | MWA-02060 | ELISRA       | 14.01.05              |

## e. Preliminary Results

TABLE- 16 Preliminary Test Results for Unintentional Emissions in **RX** Mode 15.109

| Configuration | Antenna Polarization | Freq. Range MHz | Res. BW (kHz) | Plot No. | PASS/F AIL |
|---------------|----------------------|-----------------|---------------|----------|------------|
| TX            | Both                 | 30-1000         | 120           | Plot-9   | Pass       |
|               |                      | 1000-2.800      | 120           | -        | Pass       |
|               |                      | 2000-50000      | 2000          | -        | Pass       |


## f. Final Test Results

TABLE- 17 Six Highest RX Mode 15.109

| Mode Of Operation | Freq. (MHz) | peak Reading (*) (dB $\mu$ V/m)                                | Limit dB $\mu$ V/m | Margin (dB) | Polarity Ver/Hor | Height (m) |
|-------------------|-------------|----------------------------------------------------------------|--------------------|-------------|------------------|------------|
| TX                | 30-1000     | The Emissions are at least 20db below the unintentional limits |                    |             |                  |            |
|                   | 1000-5000   | No Emission-Background noise only                              |                    |             |                  |            |


g. Test Procedure  
See paragraph 7.f

## 8 Plots

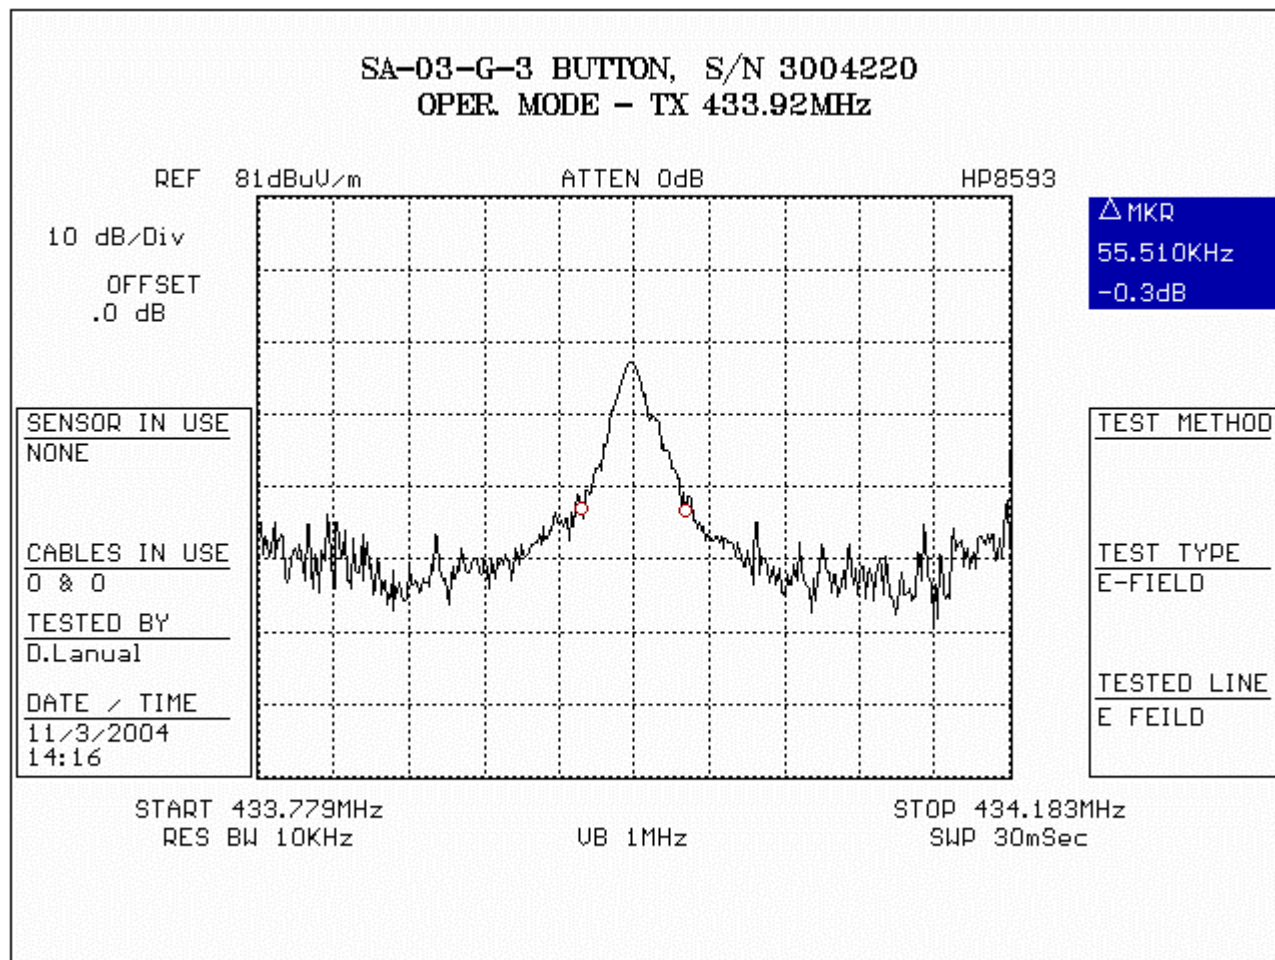


Plot 1      Bandwidth


| Frequency (MHz) | Pk   |
|-----------------|------|
| 433.924         | 90.4 |

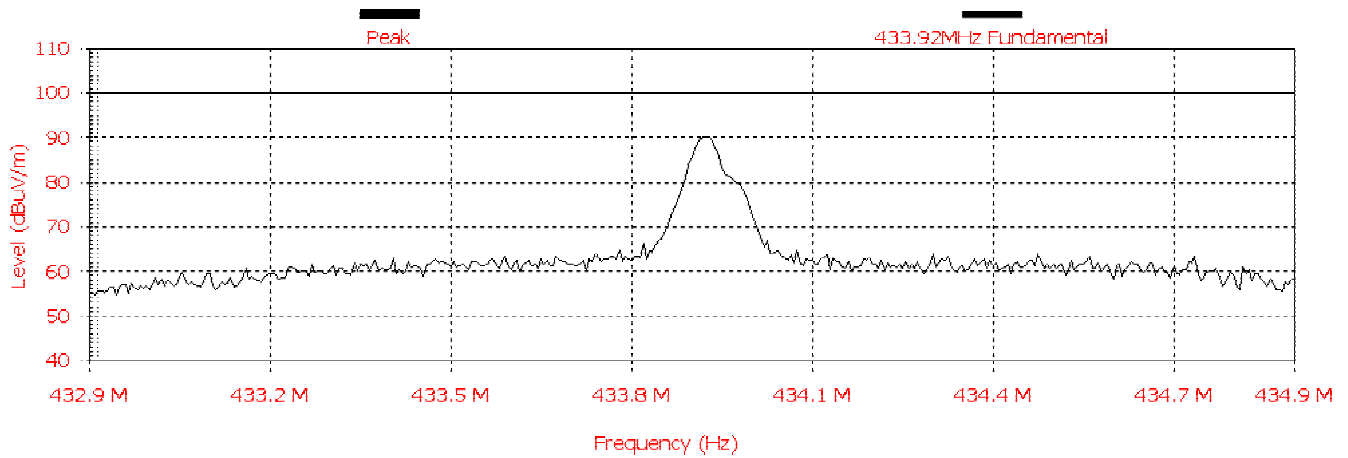

Plot 2 Field strength of fundamental

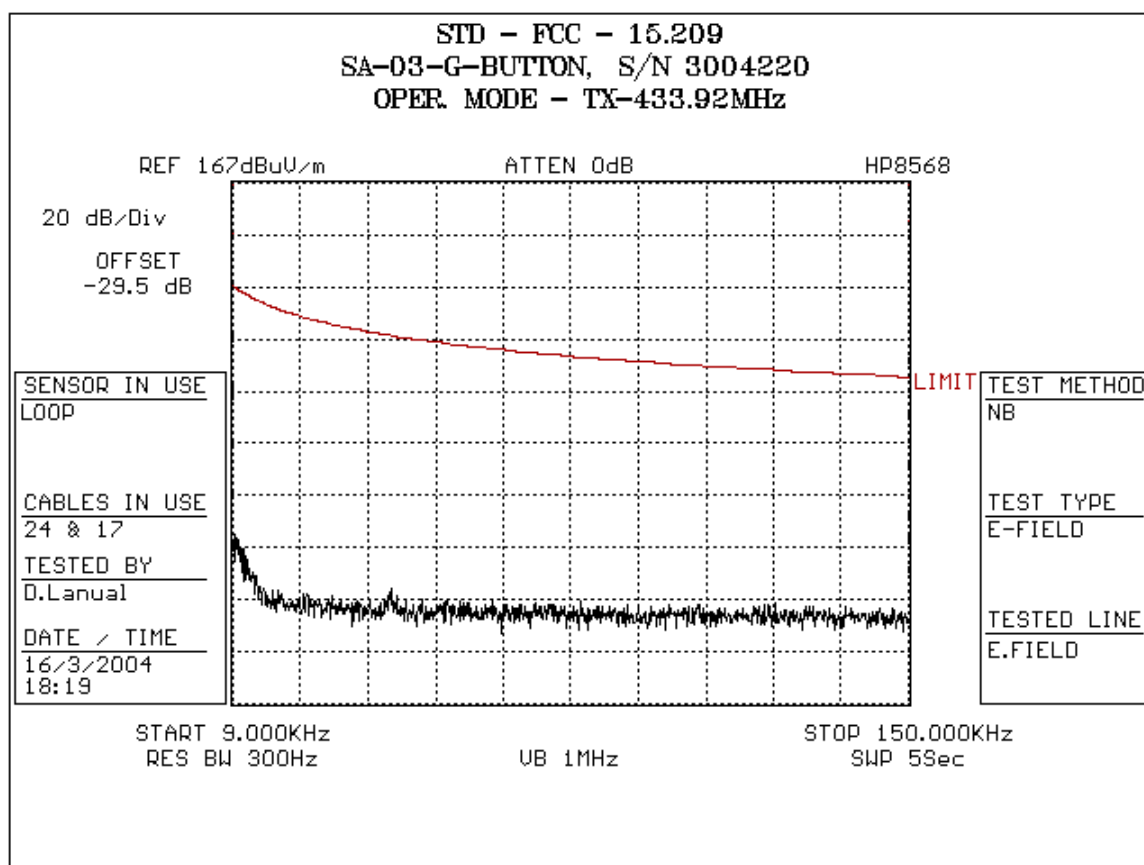


Plot 3      15.231 Radiated Emission

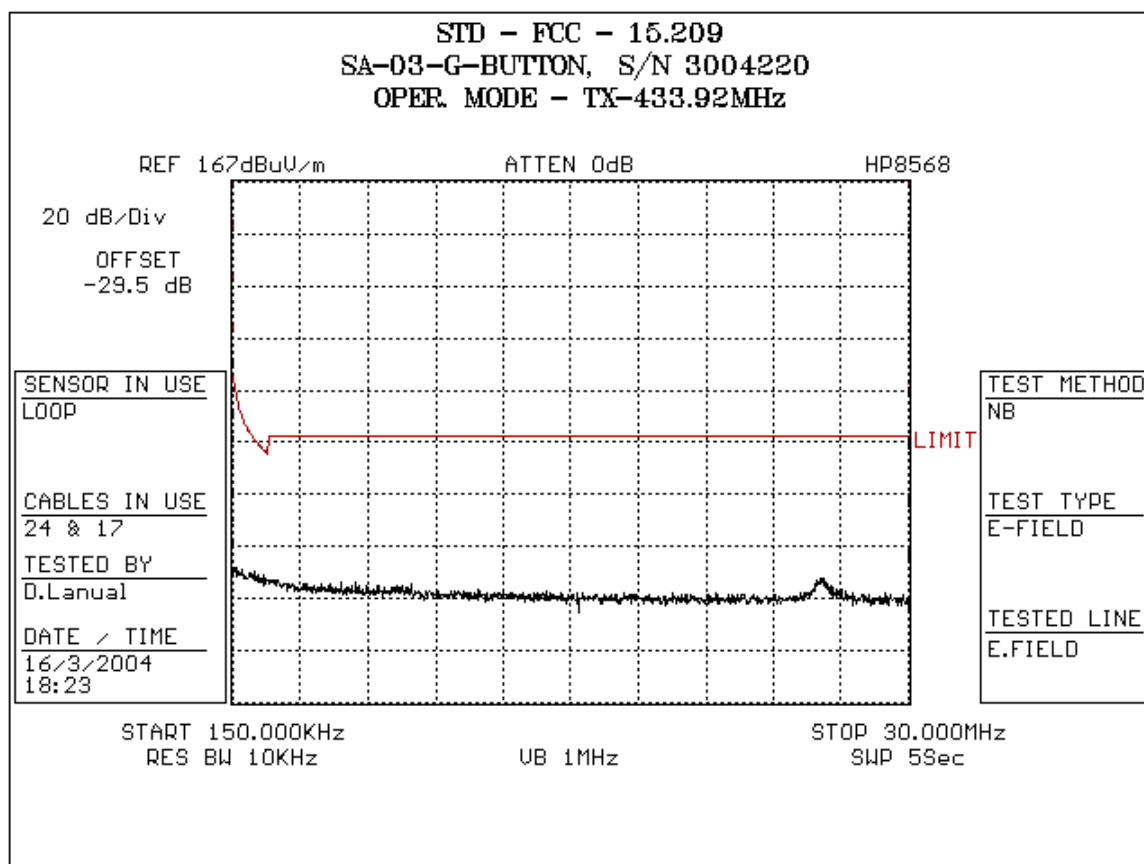

Plot 4      15.231 Radiated Emission


| Frequency (MHz) | QP |
|-----------------|----|
| 865.25          | 50 |

**Analyzer setting: R.BW-120K, V.BW-1MHz, QP detector**

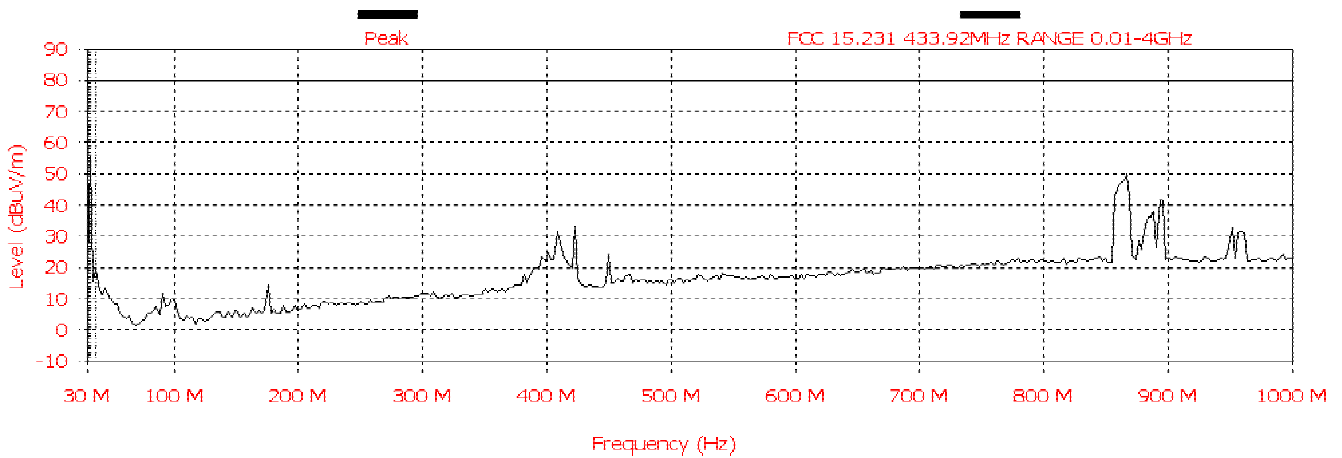


Plot 5-15.231 Radiated Emissions

**Analyzer setting: R.BW-1M, V.BW-3MHz, peak detector**

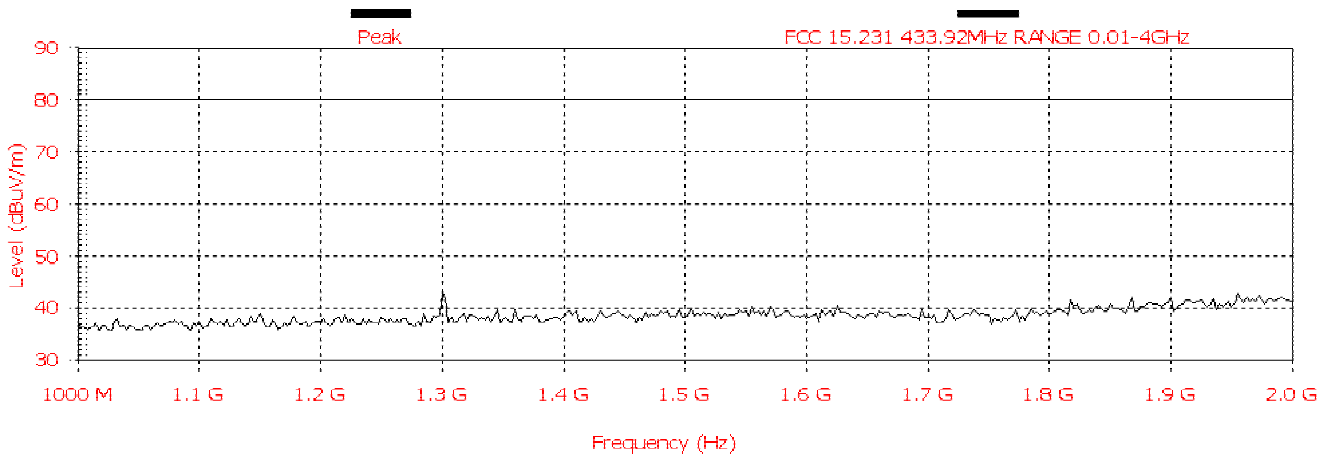

Plot 6-15.231 Radiated Emissions


**Analyzer setting: R.BW-1M, V.BW-3MHz, peak detector**

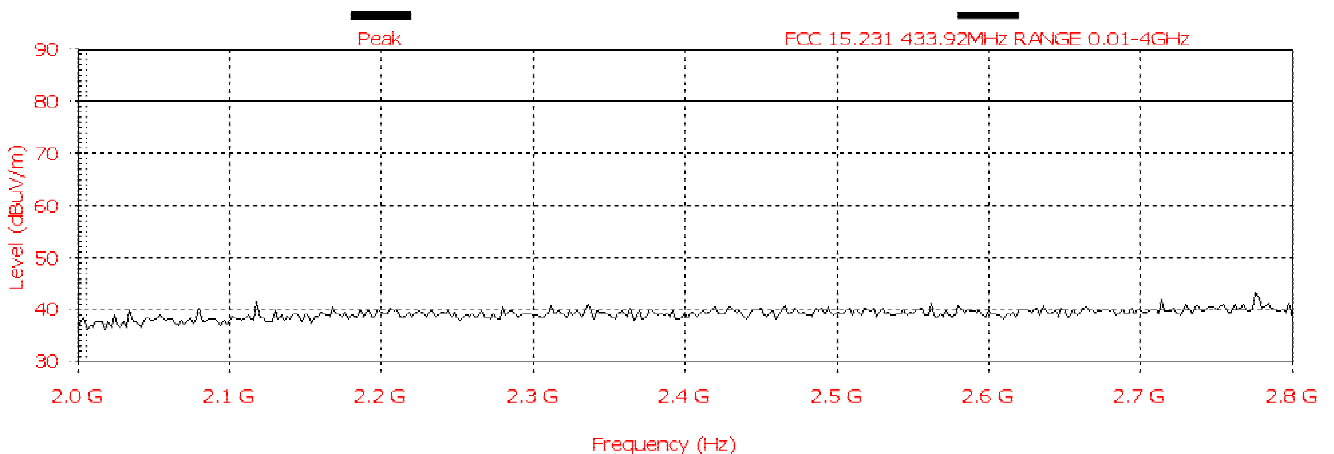


Plot 7-15.231 Radiated Emissions

| Frequency (MHz) | QP   |
|-----------------|------|
| 3471.3          | 59.1 |


**Analyzer setting: R.BW-1M, V.BW-3MHz, peak detector**

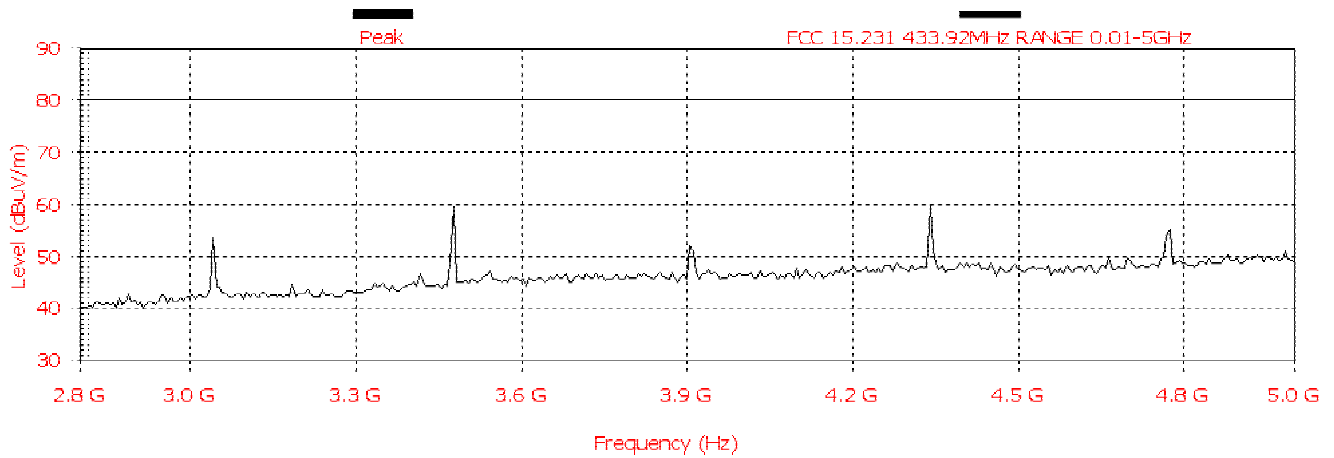

**Analyzer setting: R.BW-120K, V.BW-1MHz, QP detector**

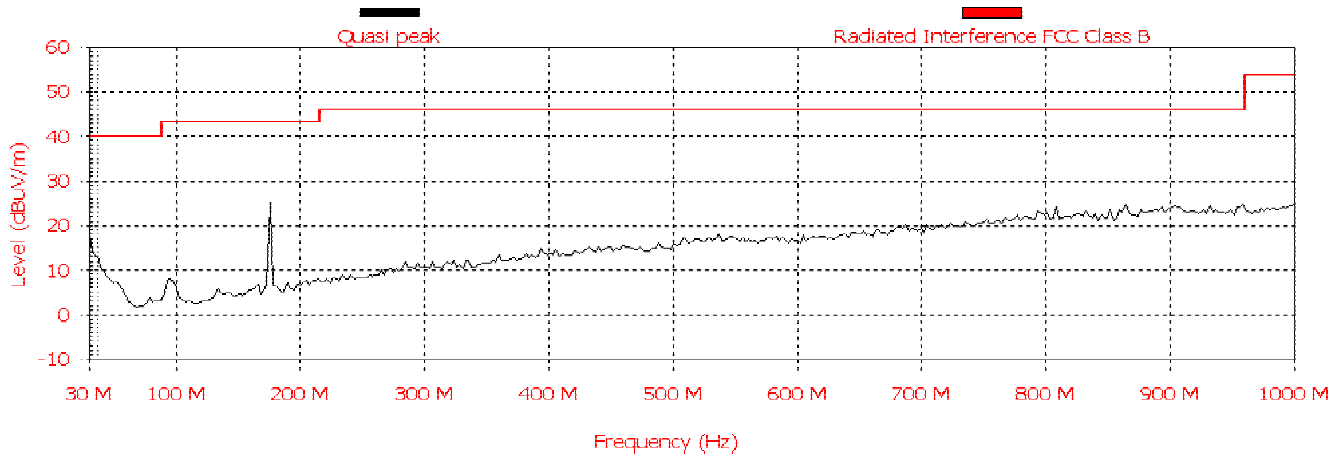

Plot 9-15.109 Radiated Emissions

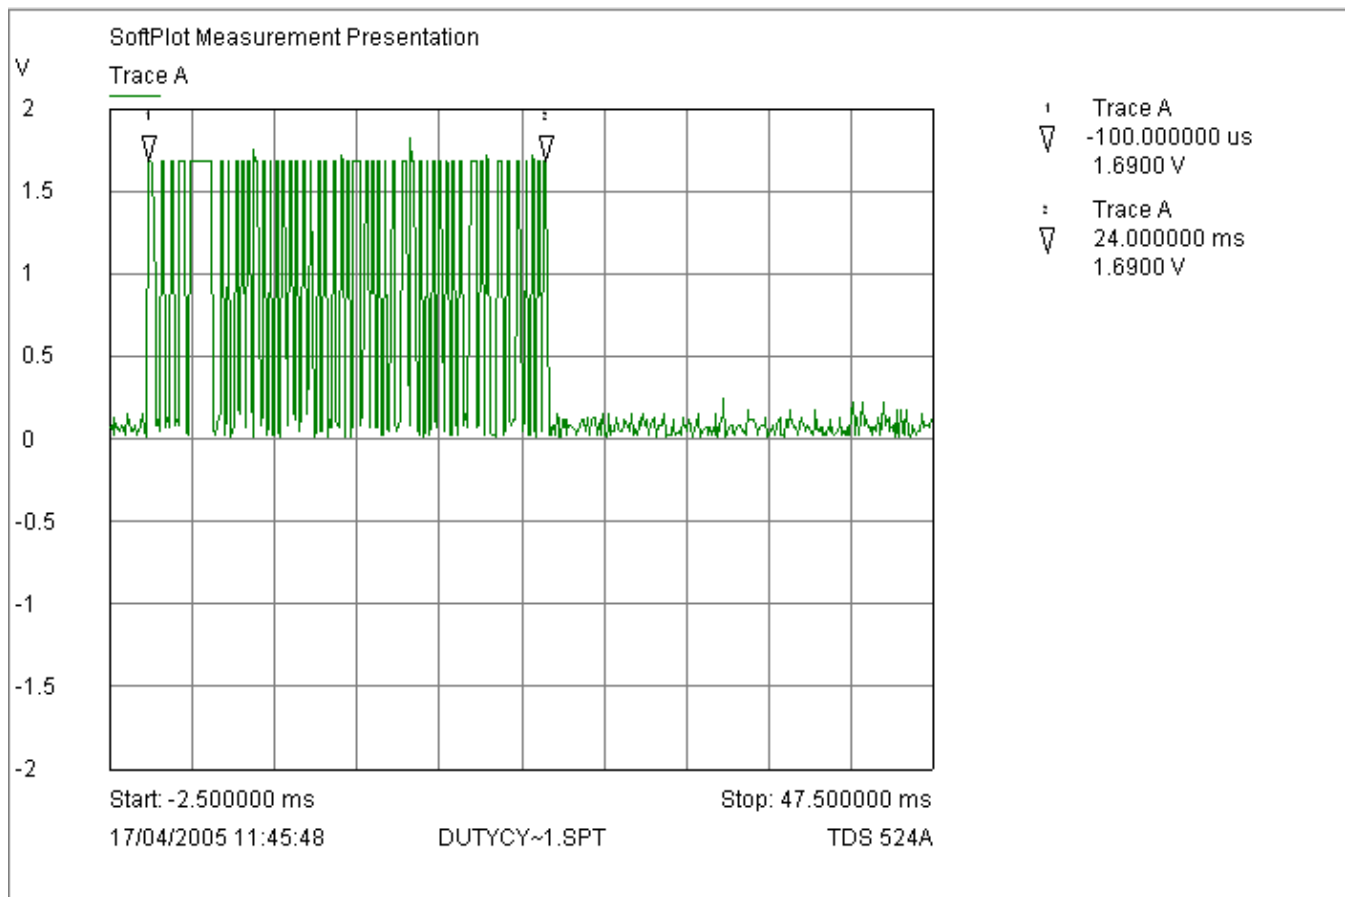

$$TX/ON = 4 \times 312 \mu s + 1248 \mu s + 38 \times 208 \mu s + 6 \times 400 \mu s = 12.80 \text{ msec}$$

$$\text{Average Factor} = 20 \log(TXON/100)$$

$$20 \log 12.80 / 100 = -17.85$$

