



FCC ID: GDDJF-86
Report No.: TMTN2109000334NR

Page: 1 / 78
Rev.: 00

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

Cherry Wireless Mouse

Model: JF-86

Brand: CHERRY

Issued for

Cherry Europe GmbH

Cherrystraße, 91275 Auerbach, Deutschland/Germany

Issued by:

Compliance Certification Services Inc.

Tainan Lab.

**No.8, Jiucengling, Xinhua Dist.,
Tainan City, Taiwan**

Issued Date: November 15, 2021

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMTN2109000334NR

Page: 2 / 78
Rev.: 00

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 15, 2021	Initial Issue	ALL	Gina Lin

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
2.1 DESCRIPTION OF EUT & POWER.....	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATIONS.....	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
5.3 LABORATORY ACCREDITATIONS LISTINGS.....	7
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	8
5.5 MEASUREMENT EQUIPMENT USED	9
6. CALIBRATION AND UNCERTAINTY.....	10
6.1 MEASURING INSTRUMENT CALIBRATION	10
6.2 MEASUREMENT UNCERTAINTY	10
7. SETUP OF EQUIPMENT UNDER TEST.....	11
7.1 SETUP CONFIGURATION OF EUT	11
7.2 SUPPORT EQUIPMENT	12
7.3 EUT OPERATING CONDITION	13
8. APPLICABLE LIMITS AND TEST RESULTS.....	14
8.1 6dB BANDWIDTH	14
8.2 MAXIMUM PEAK OUTPUT POWER	20
8.3 DUTY CYCLE.....	28
8.4 POWER SPECTRAL DENSITY	34
8.6 CONDUCTED SPURIOUS EMISSION	40
8.7 RADIATED EMISSIONS	51
8.8 POWERLINE CONDUCTED EMISSIONS	72
9. ANTENNA REQUIREMENT	74
9.1 STANDARD APPLICABLE.....	74
9.2 ANTENNA CONNECTED CONSTRUCTION.....	74
APPENDIX I SETUP PHOTOS	75
APPENDIX II PHOTOGRAPHS OF EUT.....	A1

1. TEST REPORT CERTIFICATION

Applicant : Cherry Europe GmbH
Cherrystraße, 91275 Auerbach, Deutschland/Germany

Manufacturer : Jing Mold Electronic Tech. (Shen Zhen) Co., Ltd
Xin Qiao 3rd Industrial Estate, Sha Jing, Bao An, Shenzhen,
Guangdong, P.R. China

Equipment Under Test : Cherry Wireless Mouse

Model Number : JF-86

Brand Name : CHERRY

Date of Test : October 05, 2021 ~ October 06, 2021

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C ANSI C63.10: 2013	No non-compliance noted

Statements of Conformity
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

FCC Standard Section	Report Section	Test Item	Result
15.247(a)	8.1	6dB BANDWIDTH	Pass
15.247(b)	8.2	MAXIMUM PEAK OUTPUT POWER	Pass
-	8.3	DUTY CYCLE	-
15.247(e)	8.4	POWER SPECTRAL DENSITY	Pass
15.247(d)	8.5	CONDUCTED SPURIOUS EMISSION	Pass
15.205(a)	8.6	RADIATED EMISSIONS	Pass
15.207(a)	8.7	POWERLINE CONDUCTED EMISSIONS	Pass
15.203	9	ANTENNA REQUIREMENT	Pass

Approved by:



Eric Huang
Section Manager

2. EUT DESCRIPTION

2.1 DESCRIPTION OF EUT & POWER

Product Name	Cherry Wireless Mouse
Model Number	JF-86
Brand Name	CHERRY
Received Date	September 28, 2021
Reported Date	October 21, 2021
Operating Frequency Range	2402MHz~2480MHz
Transmit Power	BT: -10.44dBm (0.090mW) RF: -10.43dBm (0.091mW)
Average Power	BT: -10.77dBm (0.084mW) RF: -11.98dBm (0.063mW)
Channel Spacing	2 MHz
Channel Number	BT: 39 Channels RF: 79 Channels
Transmit Data Rate	BT: 2 Mbps RF: 1 Mbps
Type of Modulation	GFSK
Antenna Type	Manufacturer: Sunrex Type: PCB Model: JD-85M Gain: 0.37 dBi
RF Module Model	nRF51802
Power Source	DC3.7V, 10mA
Temperature Range	0°C ~ +40°C
Firmware Version	1
Software Version	N/A

- REMARK:**
1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
 2. This submittal(s) (test report) is intended for FCC ID: **GDDJF-86** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
 3. For more details, please refer to the user manual.
 4. According to customer declaration Cherry Wireless Dongle (**JR-91 / FCC ID: GDDJR-91**) for sale.

3. DESCRIPTION OF TEST MODES

The EUT is a Cherry Wireless Mouse.

The RF Chip is manufactured by Nordic

The antenna peak gain 0.37 dBi (highest gain) were chosen for full testing.

GFSK mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2442
High	2480

GFSK mode: 1Mbps long data rates (worst case) were chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247 and KDB 558074.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7:1992, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

5.5 MEASUREMENT EQUIPMENT USED

For §8.6

Chamber 966 Room (Radiated Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	09/06/2021	09/05/2023
Bilog Antenna with 5dB Attenuator	TESEQ & EMC	CBL 6112D & N-6-05	35404 & ATN0563	09/15/2021	09/14/2022
Cable	Suhner	SUCOFLEX104PE A	20520/4PEA&O6	01/29/2021	01/28/2022
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/30/2021	03/29/2022
EMI Test Receiver	R&S	ESCI	100960	02/05/2021	02/04/2022
Horn Antenna	Com-Power	AH-118	071032	05/04/2021	05/03/2022
MXA Signal Analyzer	KEYSIGHT	N9020A	MY56060171	08/23/2021	08/22/2022
Pre-Amplifier	EMCI	EMC012645	980098	01/29/2021	01/28/2022
Pre-Amplifier	HP	8447F	2443A01683	01/19/2021	01/18/2022
Pre-Amplifier	Com-Power	PAM-840A	461378	07/05/2021	07/04/2022
Type N coaxial cable	Suhner	CHA9513	6	01/19/2021	01/18/2022
Notch Filter	MICRO-TRONICS	BRM50702-01	018	N.C.R	N.C.R
Software	Excel(ccs-o6-2020 v1.1) , e3(v6.101222)				

For §8.1~8.5

Chamber 966 Room (Conducted Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY56060171	08/23/2021	08/22/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2023
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2023
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/29/2021	01/28/2022
Software	Excel(ccs-o6-2020 v1.1)				

For §8.7

Conducted Emission room #1					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
Test S/W	-				

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : CB966	$\pm 3.1\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : CB966	$\pm 2.7\text{dB}$
Radiated Emission, 1 to 6 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 6 to 18 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.7\text{dB}$
Power Line Conducted Emission	$\pm 2.0\text{dB}$

This measurement uncertainty is confidence of approximately 95%, $k=2$


7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

【RF】



【EMC】

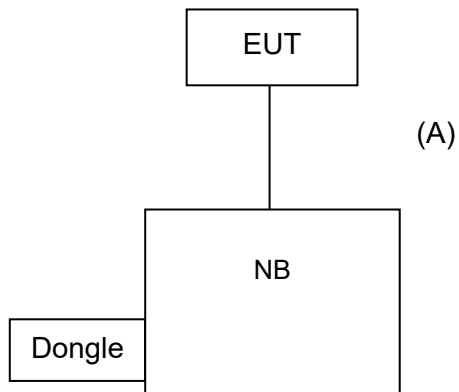

7.2 SUPPORT EQUIPMENT

【RF】

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Note Book	Acer	Z5WE1	DOC	DC: Unshd, 1.4m with 1 core. AC: Unshd, 1.0m with.

No.	Signal cable description	
A	USB	Shielded, 1.0m, 1pcs.

【EMC】

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Note Book	TOSHIBA	Satellite L730	Doc	N/A

No.	Signal cable description	
A	DC Power Cable	Unshielded, 1.0m, 1pcs.

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3) shd. = shielded; unshd. = unshielded

7.3 EUT OPERATING CONDITION

RF Setup

1. Make sure mouse power off
2. Press Left, Right, and Scroll Wheel buttons with BT(BT Mode) or RF(RF Mode) power on, continue for 3 seconds and release. (Red LED light keep on)
3. Press Scroll Wheel button into as below function. (Red LED off)
 - (1). Press Right button into Carrier Mode 2402MHz emission, one more time into Carrier Mode 2440MHz emission, one more time into Carrier Mode 2480MHz emission, going cycle.
 - (2). Press Left button into Modulation Mode 2402MHz emission, one more time into Modulation Mode 2440MHz emission, one more time into Modulation Mode 2480MHz emission, going cycle.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT

§ 15.207(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST SETUP



TEST PROCEDURE

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted.

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06

GFSK(BT) mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	649	500	PASS
Middle	2442	657	500	PASS
High	2480	642	500	PASS


GFSK(RF) mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	655	500	PASS
Middle	2442	657	500	PASS
High	2480	645	500	PASS

NOTE :


1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

6dB BANDWIDTH (GFSK(BT) MODE)

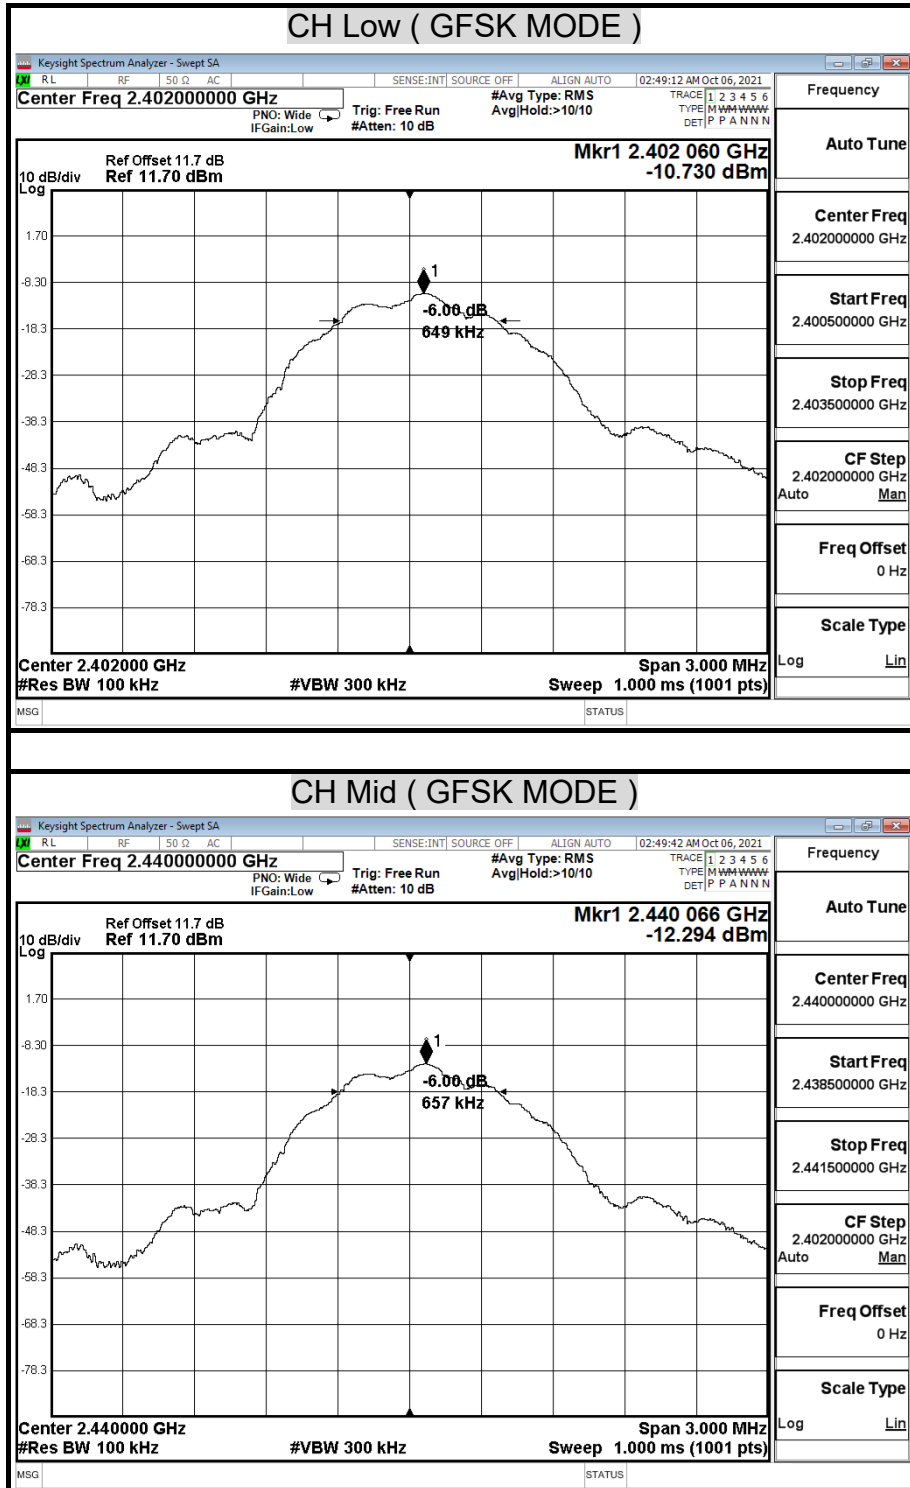

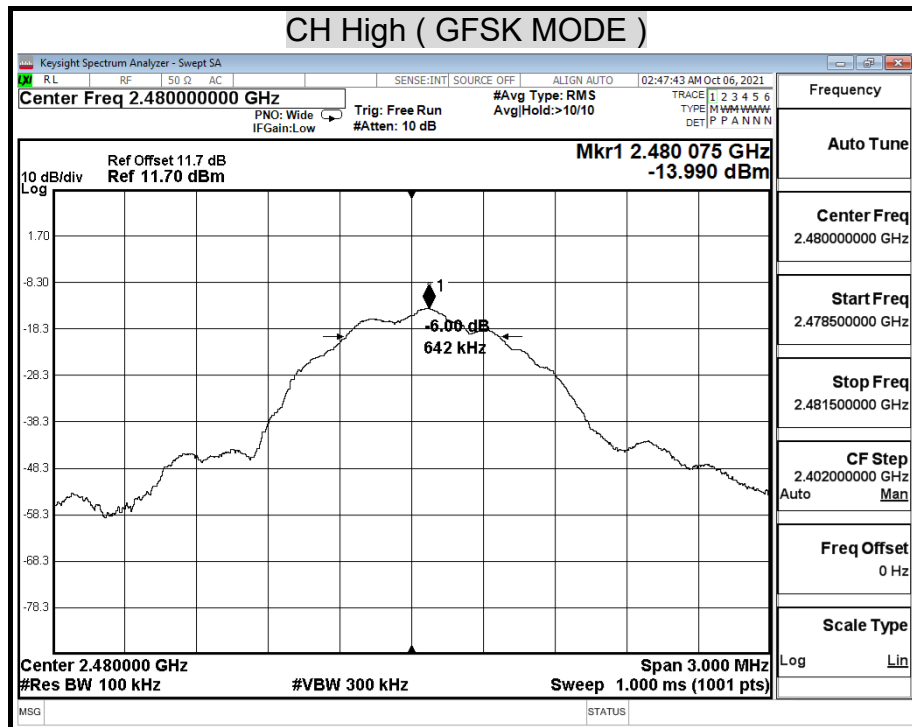


6dB BANDWIDTH (GFSK(RF) MODE)

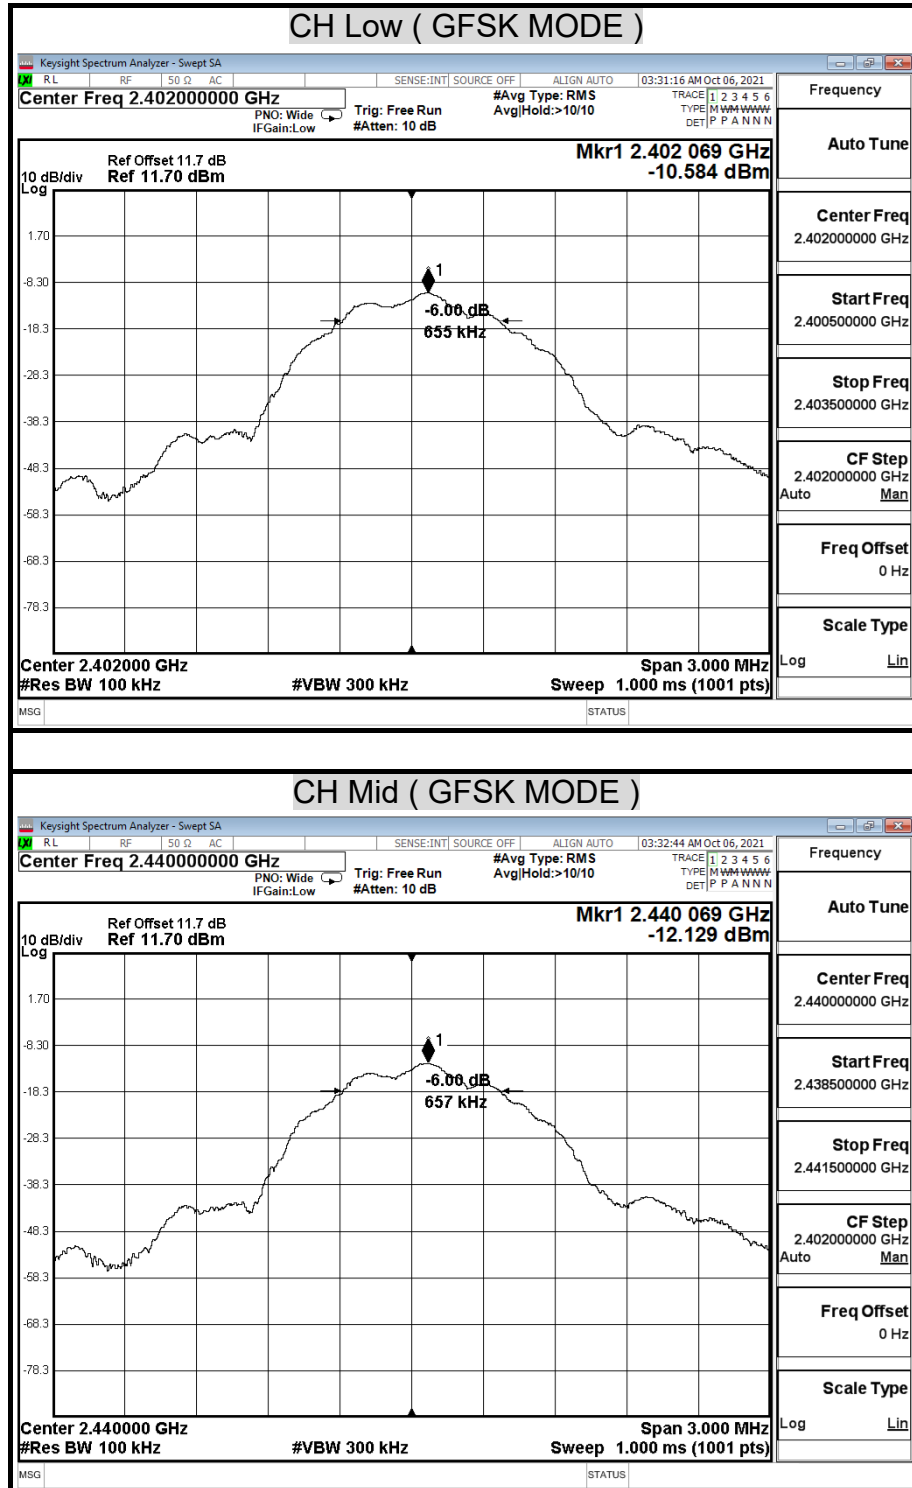

Report No.: TMTN2109000334NR

Page: 19 / 78
Rev.: 00

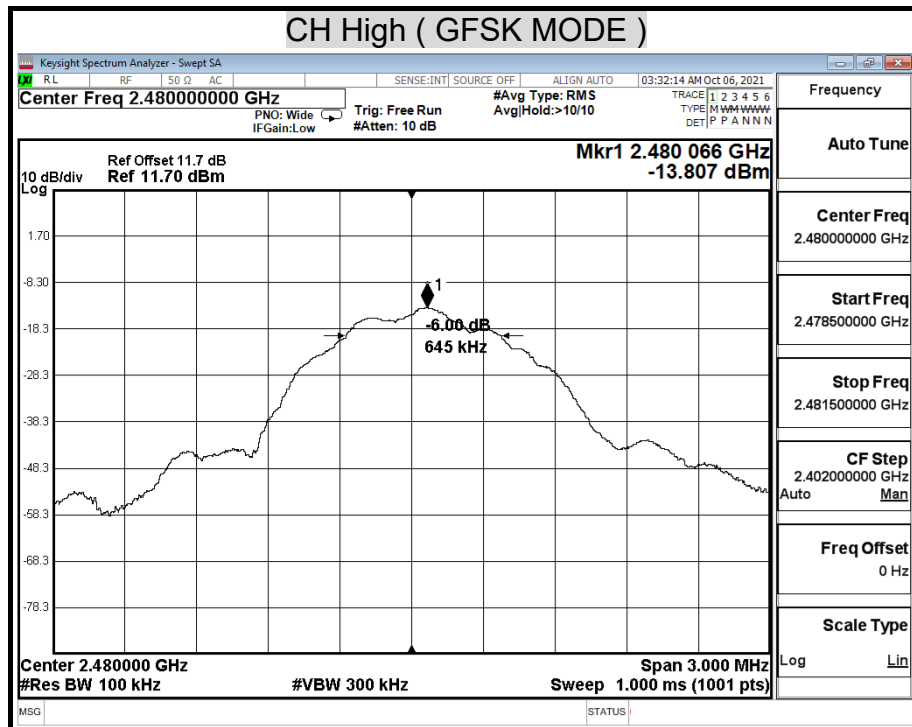

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP

For Peak Power



For Average Power



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 D01 v05r02 and ANSI C63.10-2013, 11.9.1.1.

9.1.1 Measurement Procedure PK2:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq$ 3 RBW.
- c) Set span $\geq$ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Average Power

The tests were performed in accordance with ANSI C63.10-2013, 11.9.2.3.1.

Connect the EUT to power meter, set the center frequency of the power meter to the channel center frequency.

TEST RESULTS

No non-compliance noted.

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06

GFSK(BT) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	-10.44	30.00	PASS
Middle	2442	-12.00	30.00	PASS
High	2480	-13.65	30.00	PASS

GFSK(RF) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	-10.43	30.00	PASS
Middle	2442	-11.99	30.00	PASS
High	2480	-13.67	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Average Power Data

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06


GFSK(BT) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	-10.77
Middle	2442	-12.38
High	2480	-13.98

GFSK(RF) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	-11.98
Middle	2442	-13.56
High	2480	-15.17

MAXIMUM PEAK OUTPUT POWER (GFSK(BT) MODE)

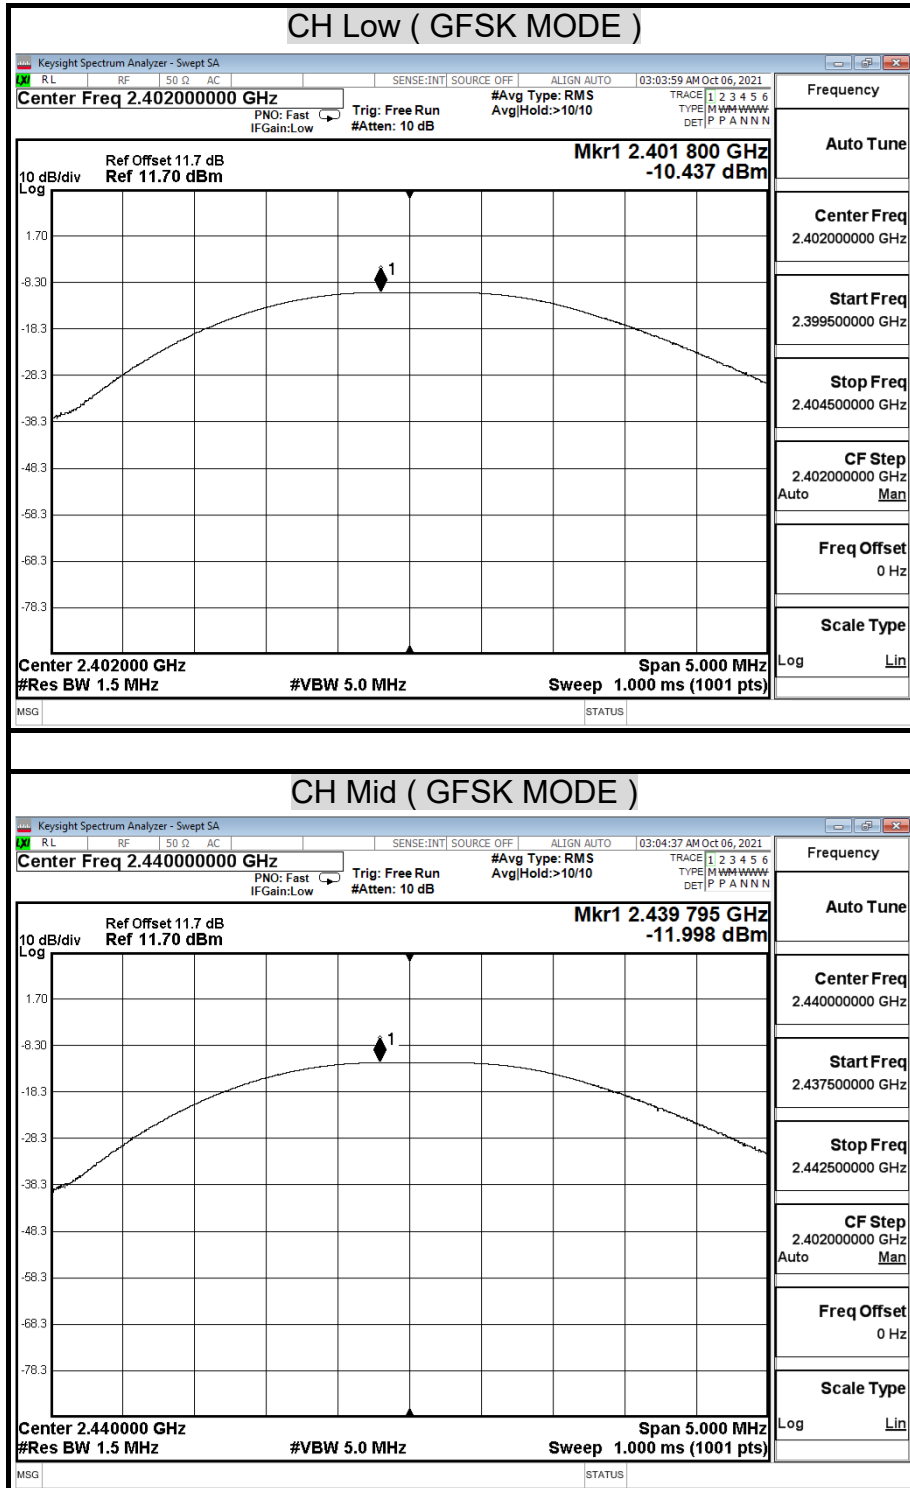

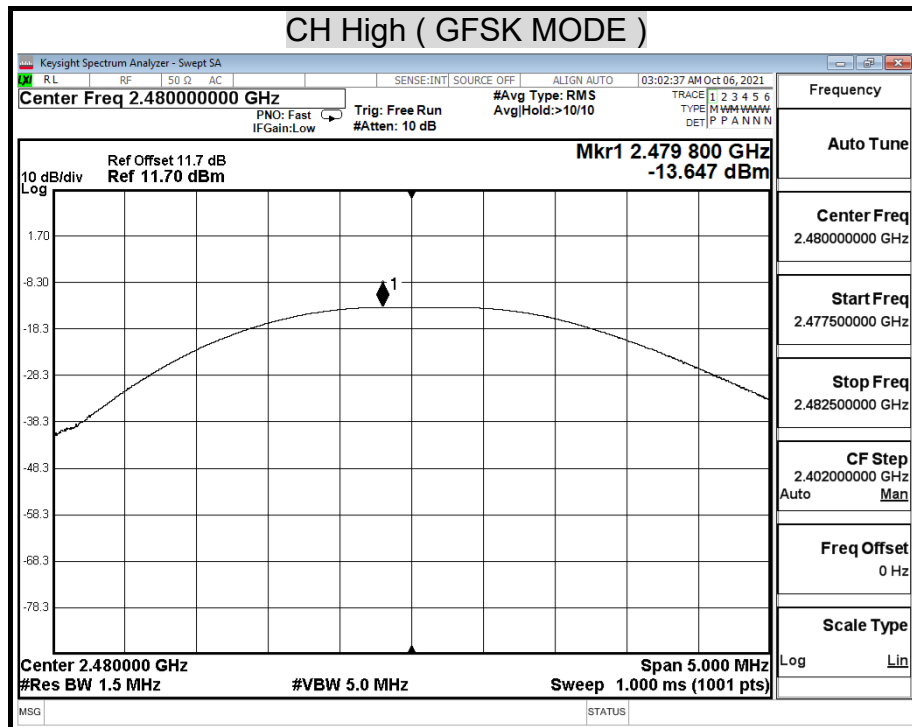


MAXIMUM PEAK OUTPUT POWER (GFSK(RF) MODE)

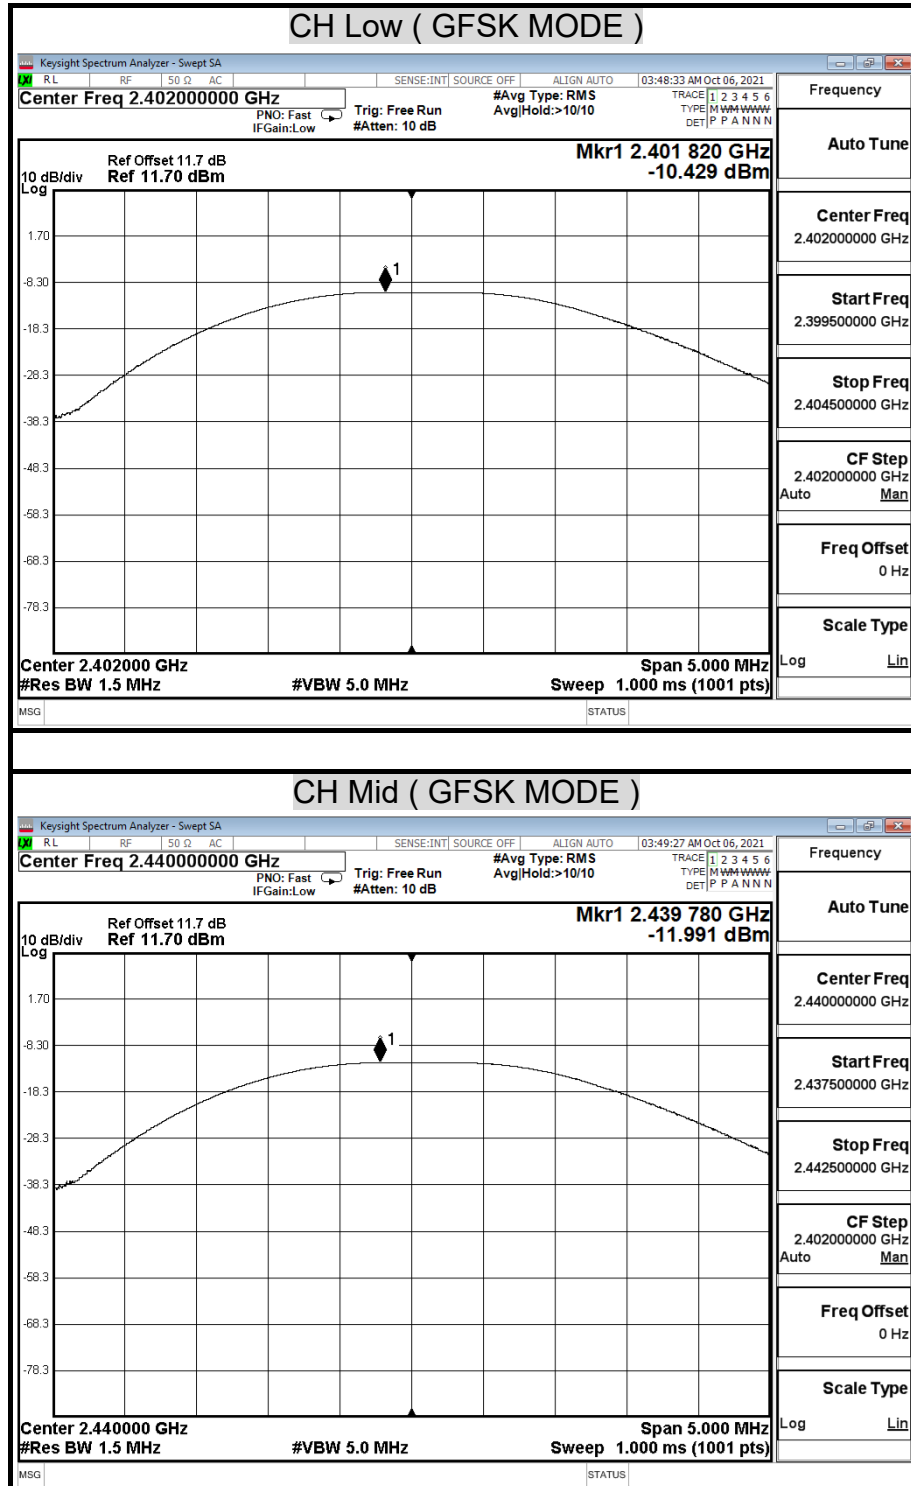



Report No.: TMTN2109000334NR

Page: 27 / 78
Rev.: 00

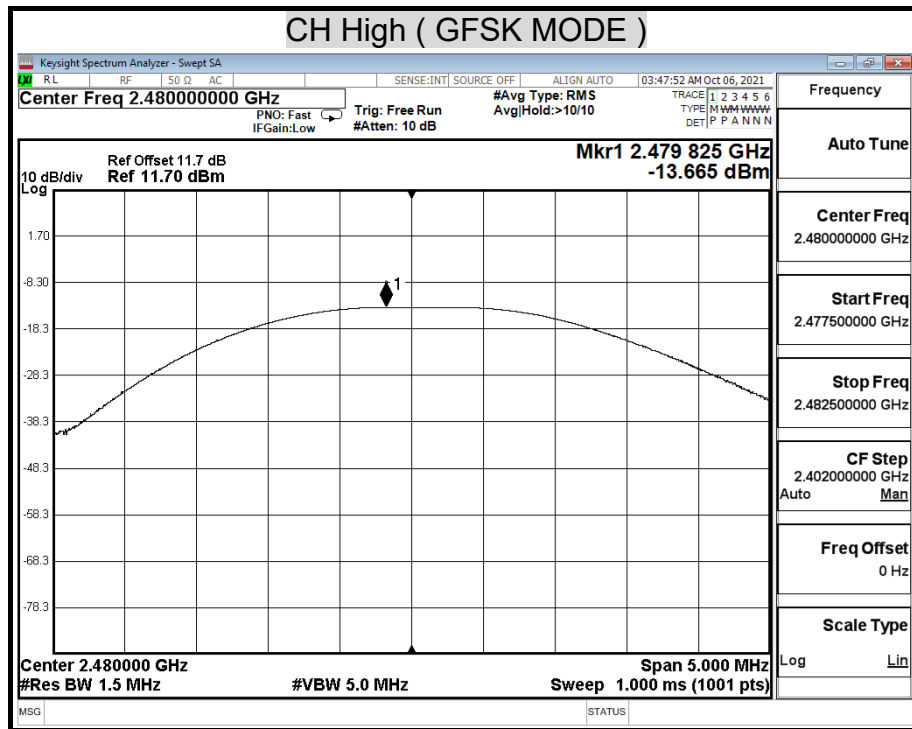


8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST SETUP

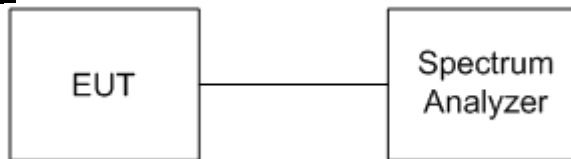

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06

GFSK(BT) Mode

	us	Times	Ton	Total Ton time(ms)
Ton1	430.000	1	430	
Ton2		0	0	
Ton3			0	0.43
Tp				0.625

Ton	0.43
Tp(Ton+Toff)	0.625
Duty Cycle	0.688
Duty Factor	1.624

GFSK(RF) Mode


	us	Times	Ton	Total Ton time(ms)
Ton1	430.000	1	430	
Ton2		0	0	
Ton3			0	0.43
Tp				0.625


Ton	0.43
Tp(Ton+Toff)	0.625
Duty Cycle	0.688
Duty Factor	1.624


TEST PLOT


Duty Cycle

GFSK(BT) Mode

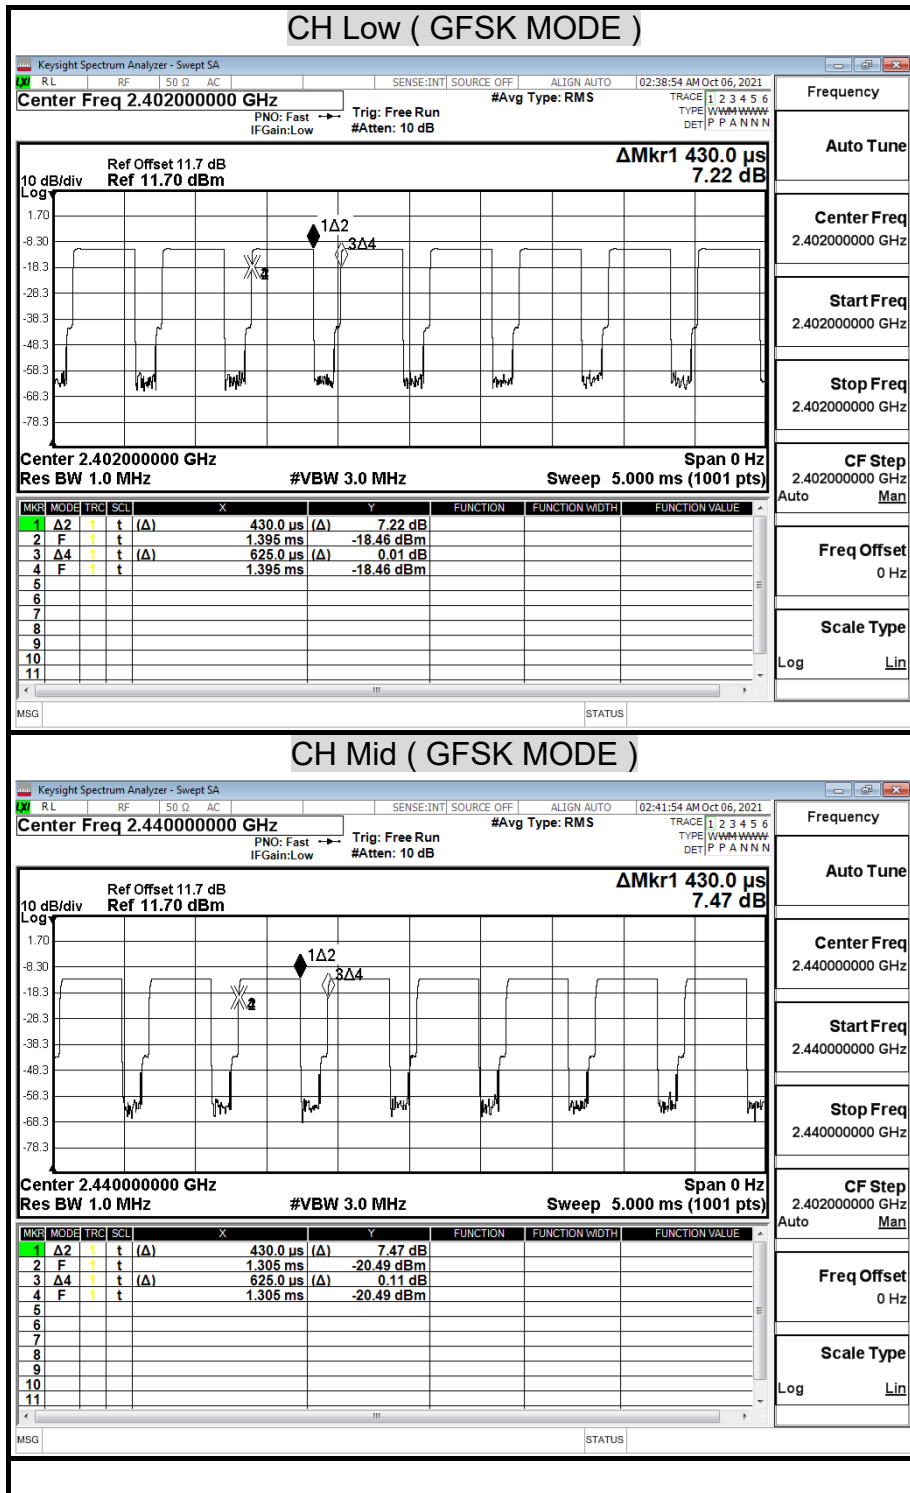

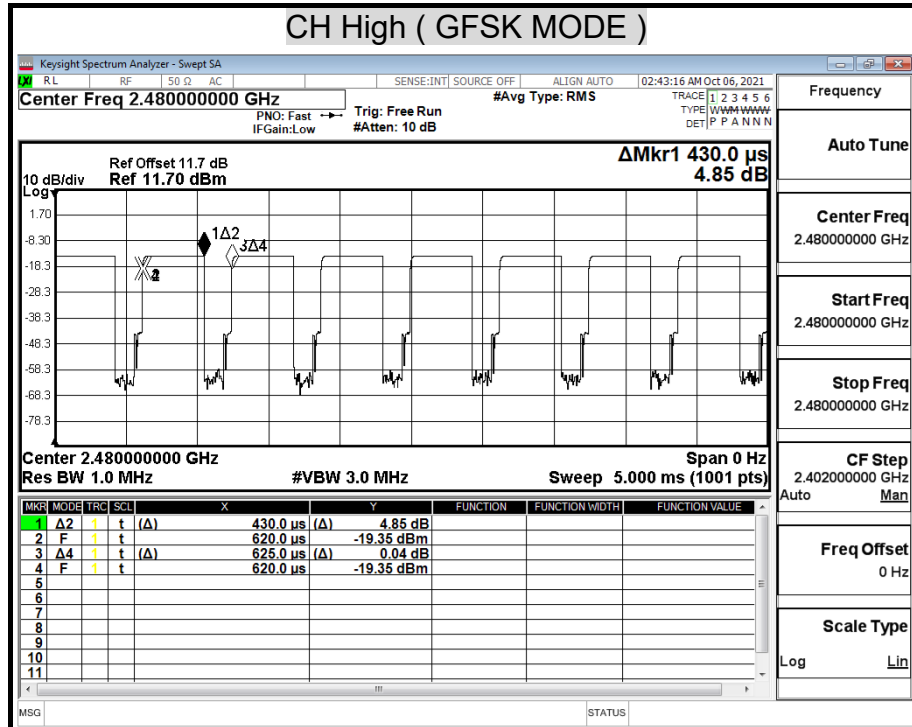

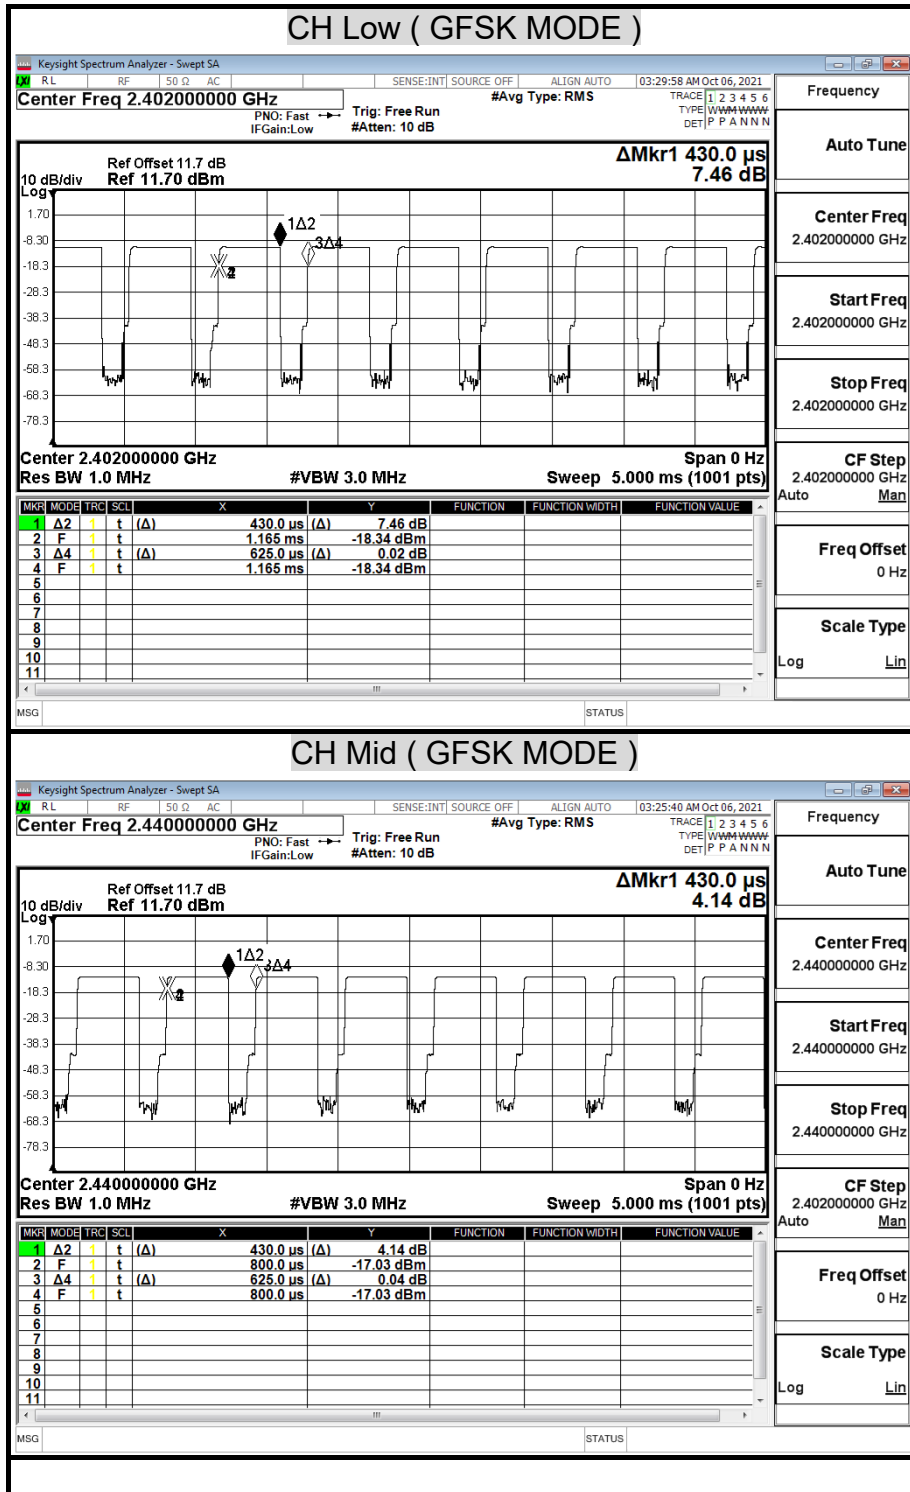GFSK(RF) Mode

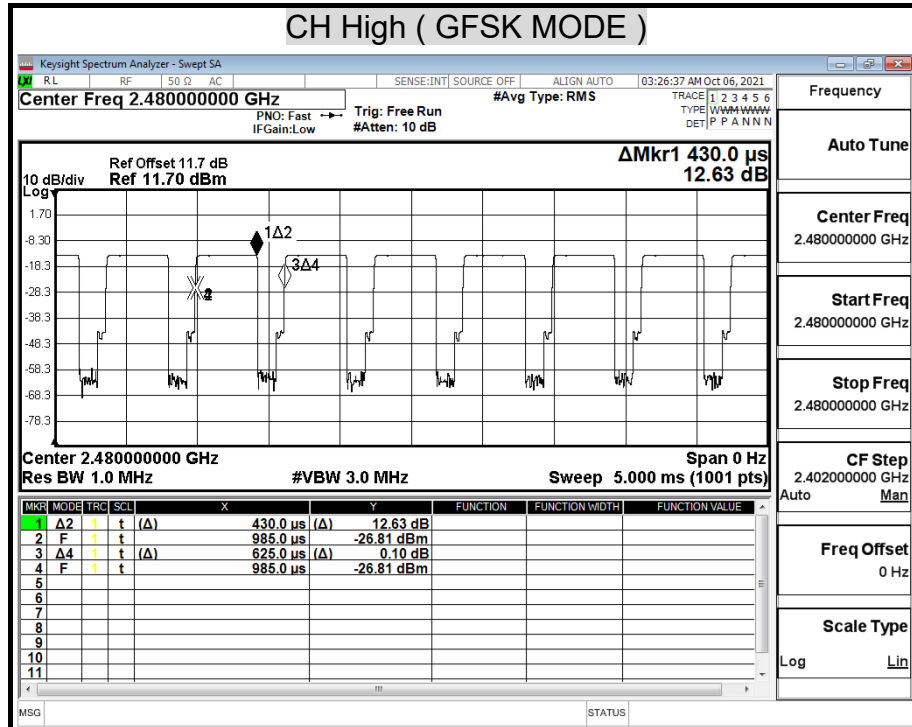


8.4 POWER SPECTRAL DENSITY

LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 D01 v05r02.

10.2 Method PKPSD (peak PSD):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Report No.: TMTN2109000334NR

TEST RESULTS

No non-compliance noted.

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06

GFSK(BT) mode



Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Result
Low	2402	-17.03	8.00	-25.03	PASS
Middle	2442	-18.75	8.00	-26.75	PASS
High	2480	-20.41	8.00	-28.41	PASS


GFSK(RF) mode


Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Result
Low	2402	-17.30	8.00	-25.30	PASS
Middle	2442	-18.88	8.00	-26.88	PASS
High	2480	-20.71	8.00	-28.71	PASS


NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

POWER SPECTRAL DENSITY (GFSK(BT) MODE)

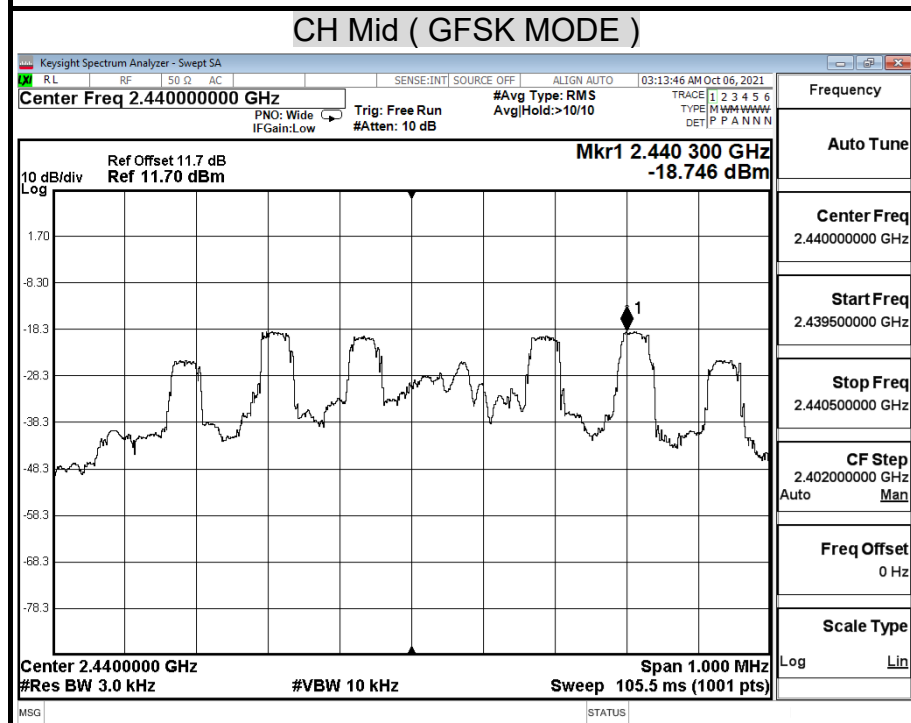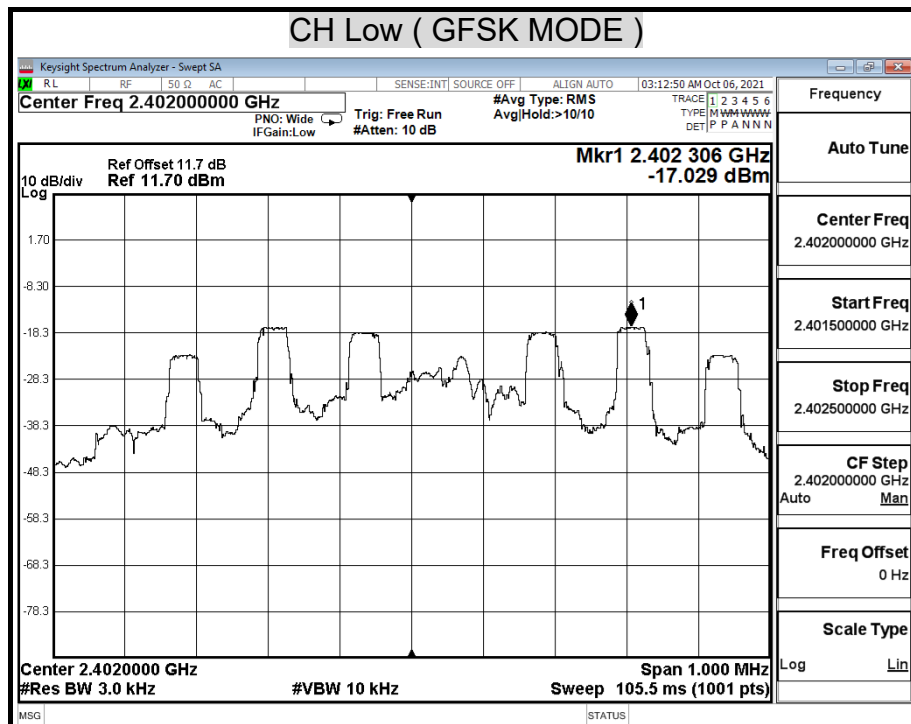

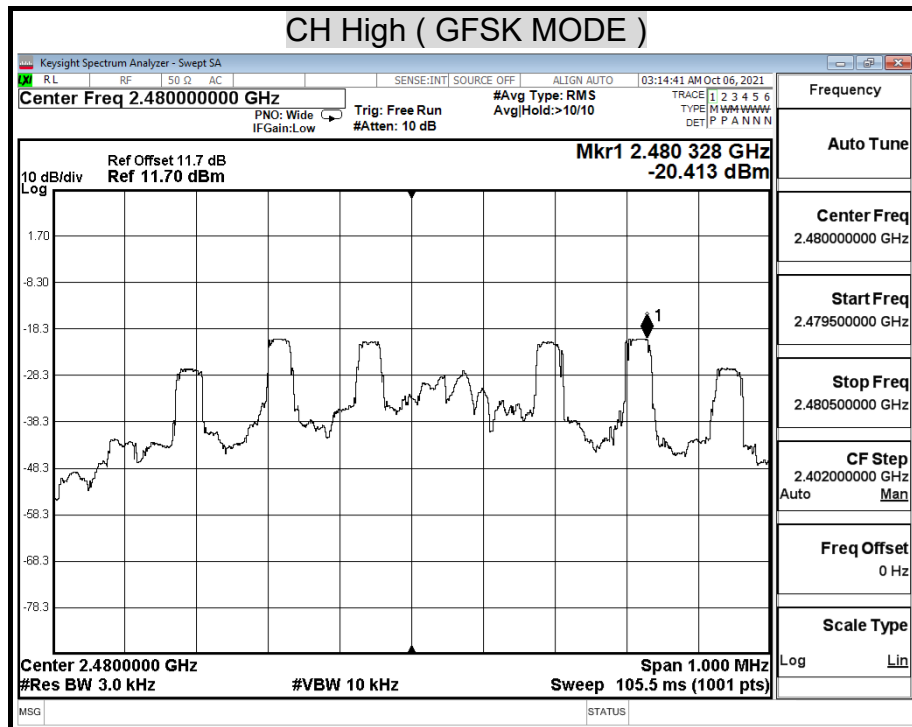

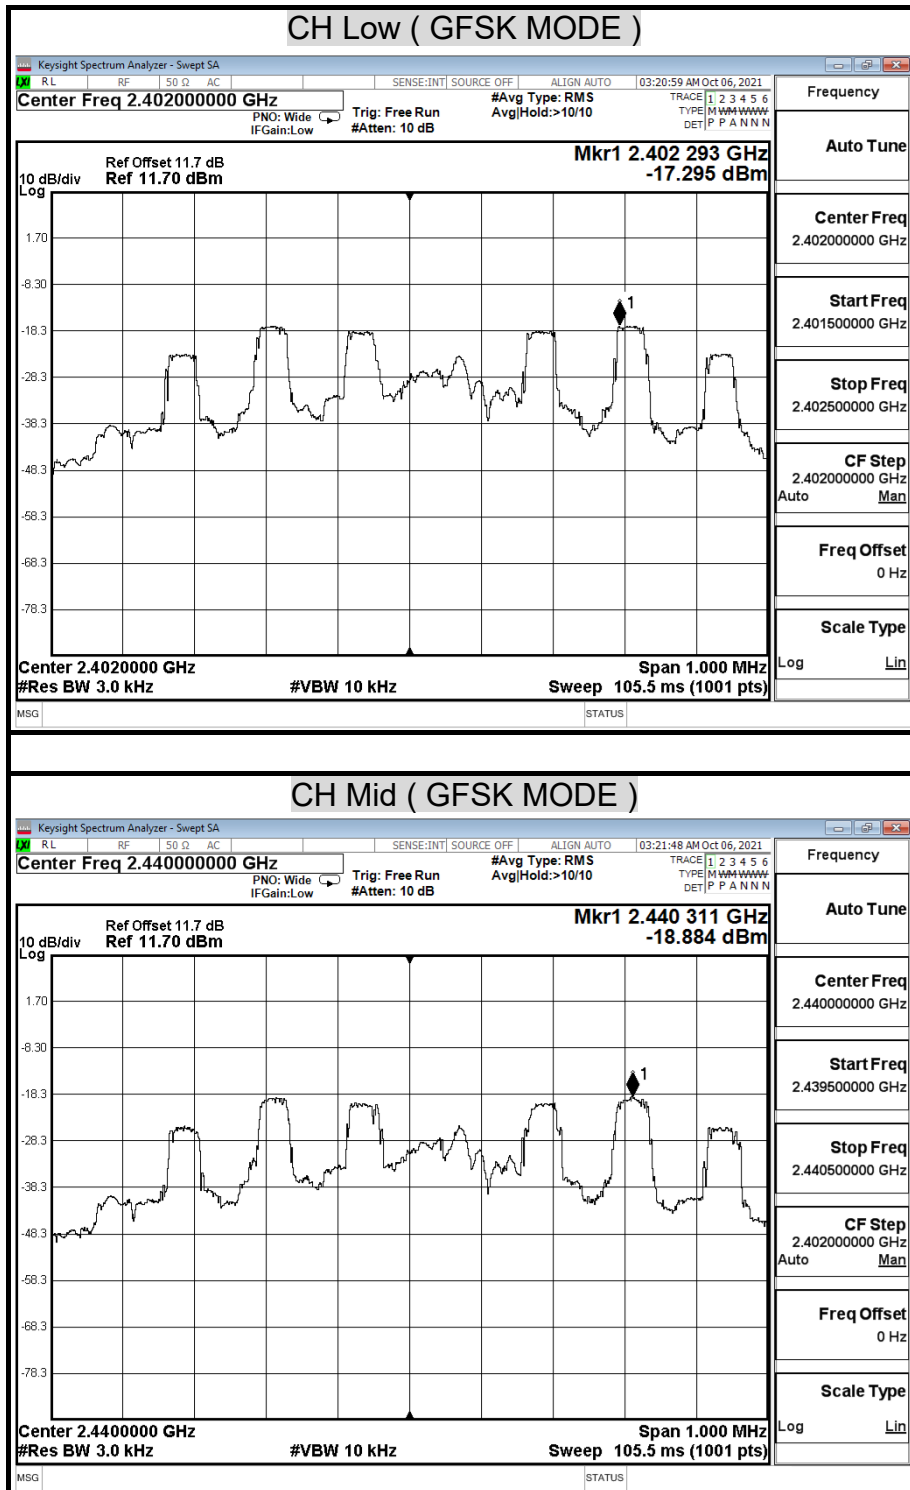POWER SPECTRAL DENSITY (GFSK(RF) MODE)

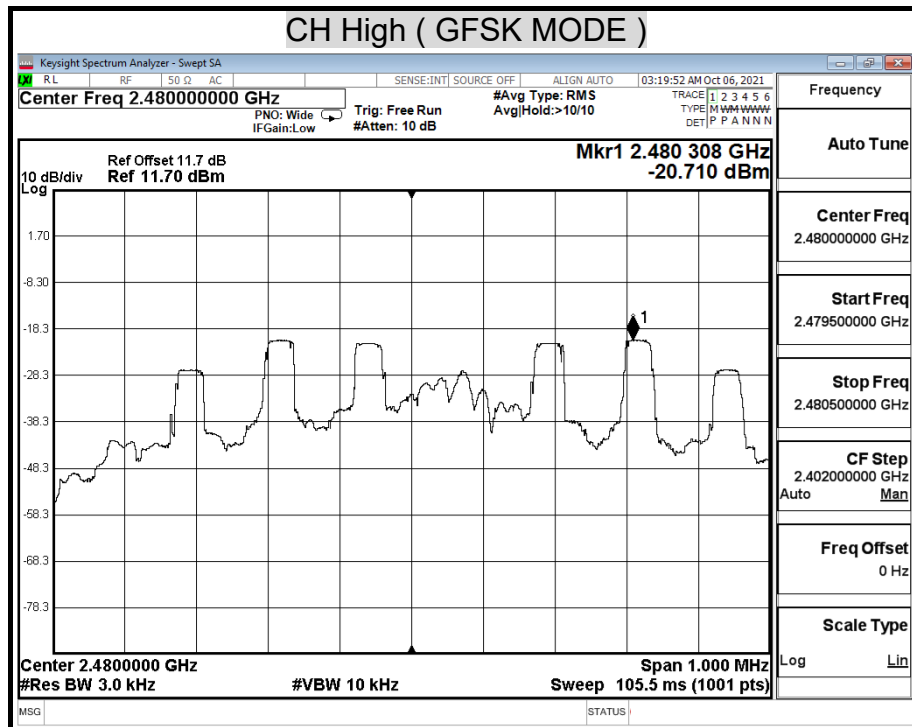

8.6 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

TEST RESULTS


No non-compliance noted.

TEST DATA

Model Name	JF-86	Test By	Ted Huang
Temp & Humidity	26.8°C, 54%	Test Date	2021/10/06


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


GFSK(BT) Mode

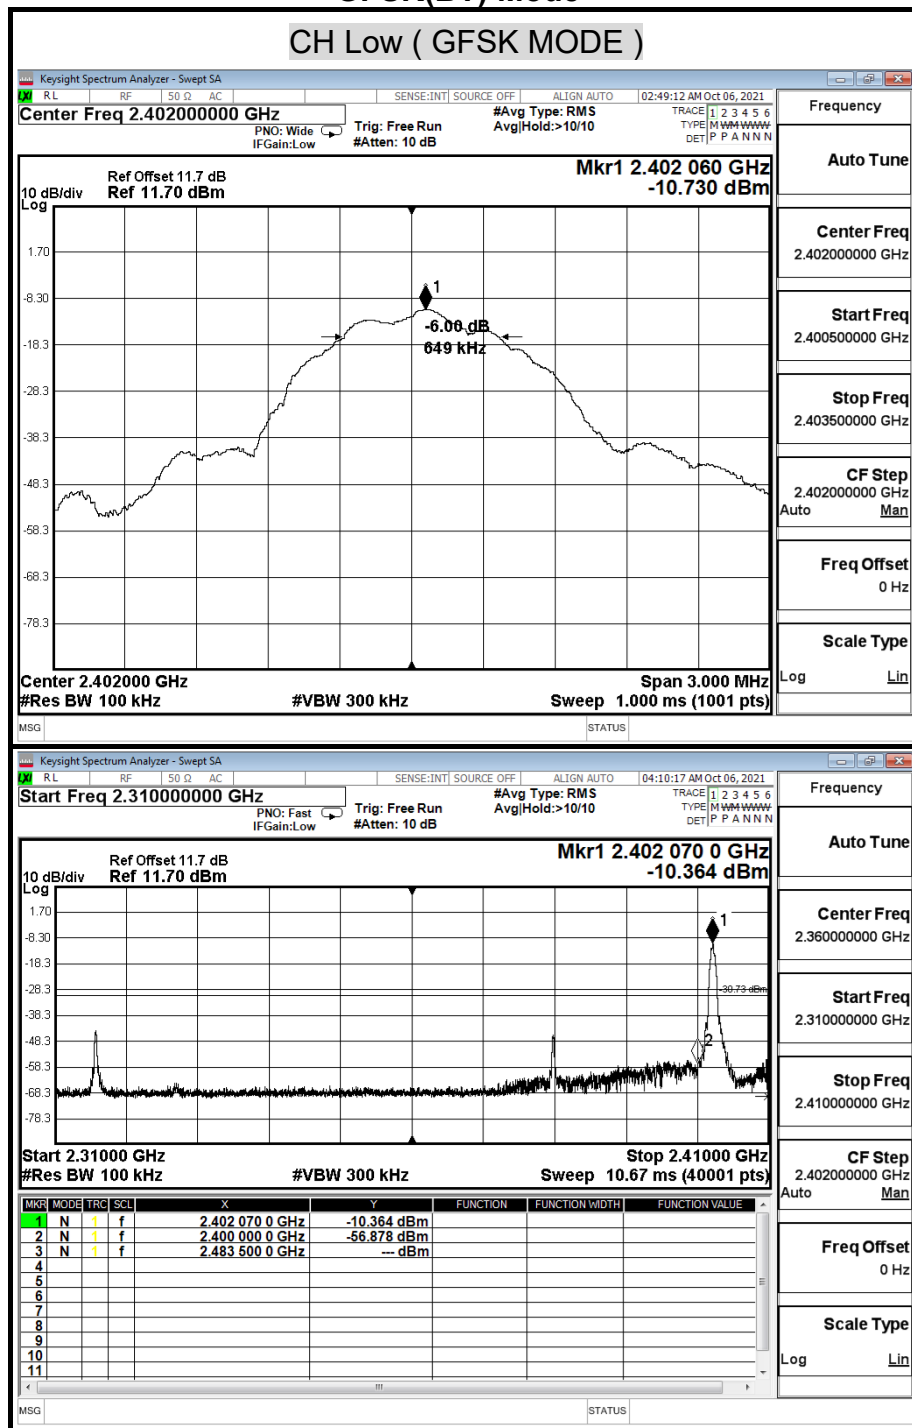


Report No.: TMTN2109000334NR


Page: 42 / 78
Rev.: 00

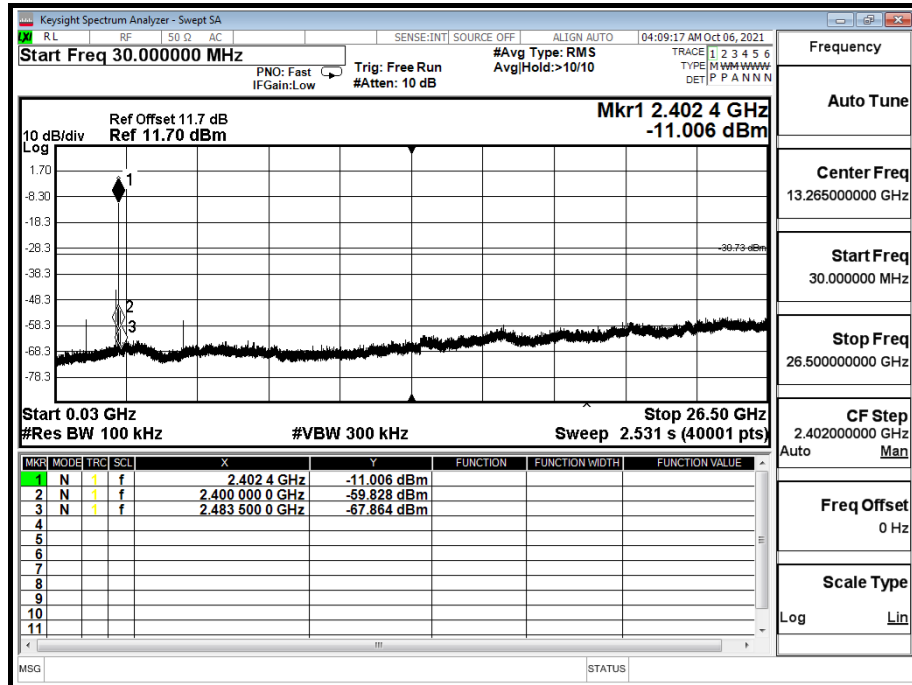

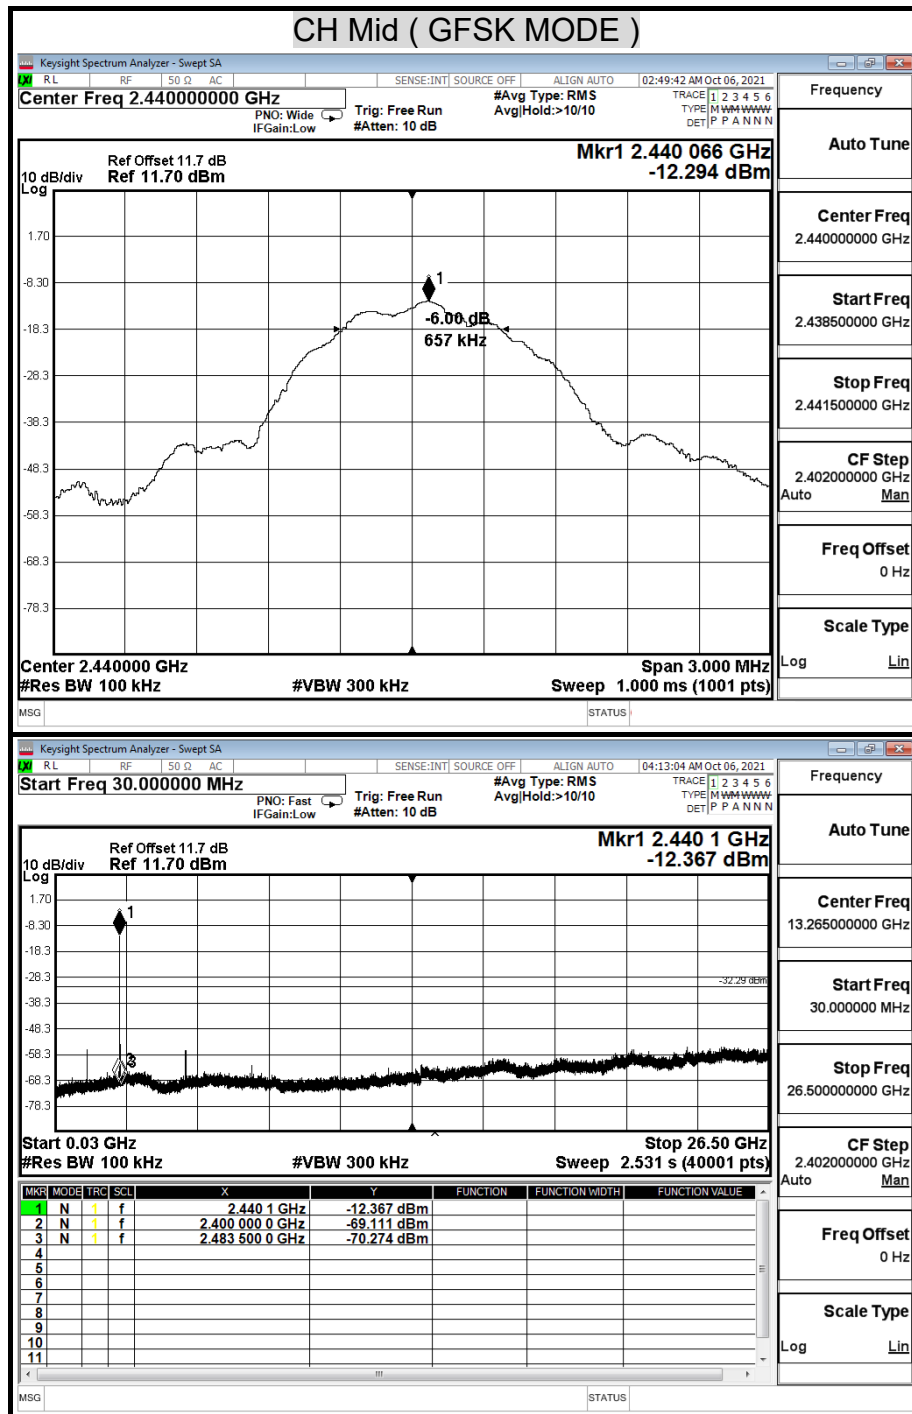

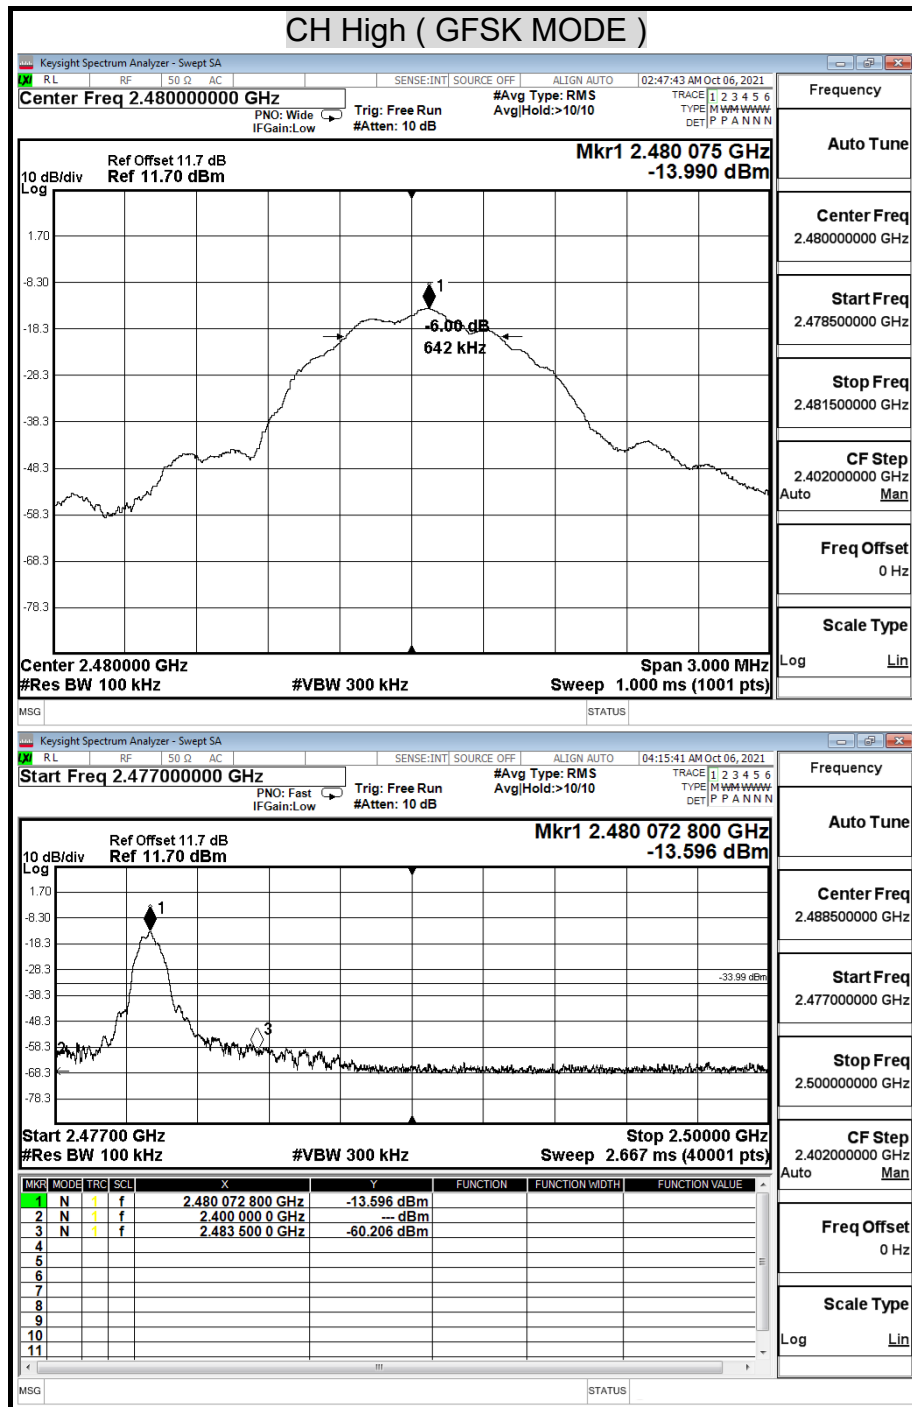

Report No.: TMTN2109000334NR

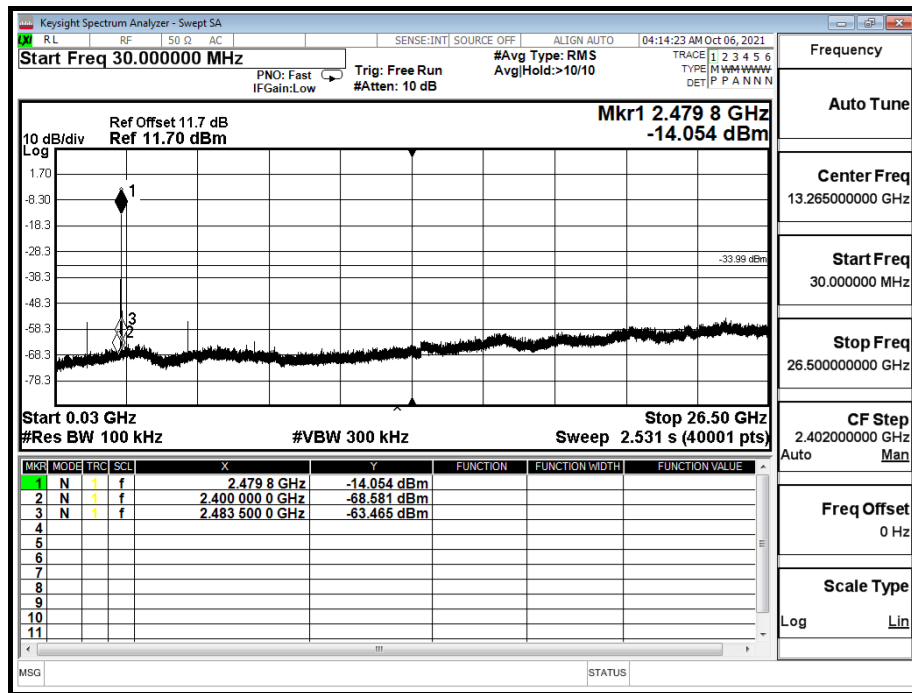Page: 45 / 78
Rev.: 00


Report No.: TMTN2109000334NR

Page: 46 / 78
Rev.: 00

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


GFSK(RF) Mode


CH Low (GFSK MODE)

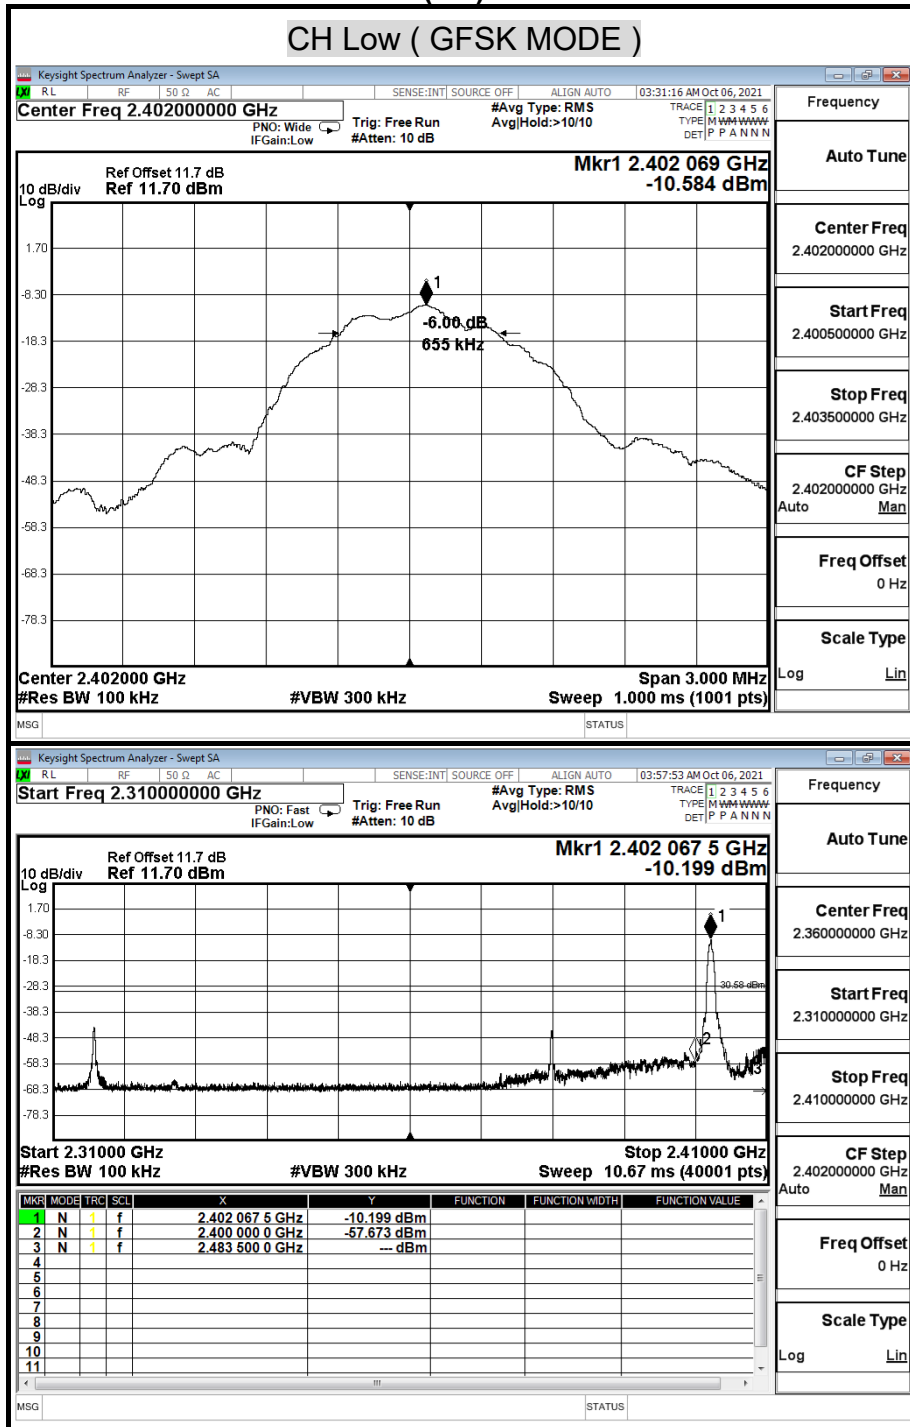

Report No.: TMTN2109000334NR


Page: 47 / 78
Rev.: 00

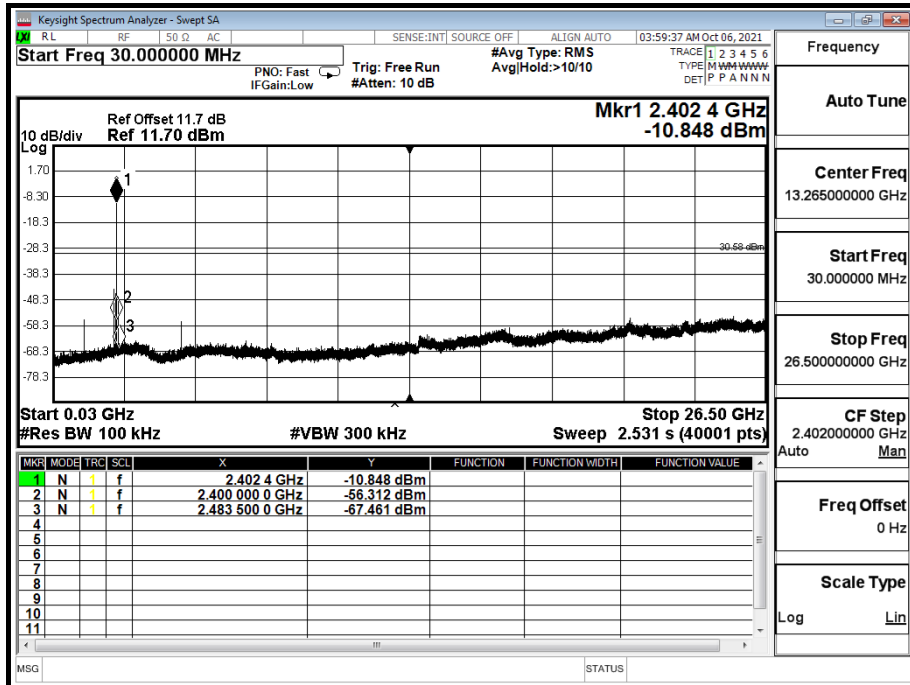

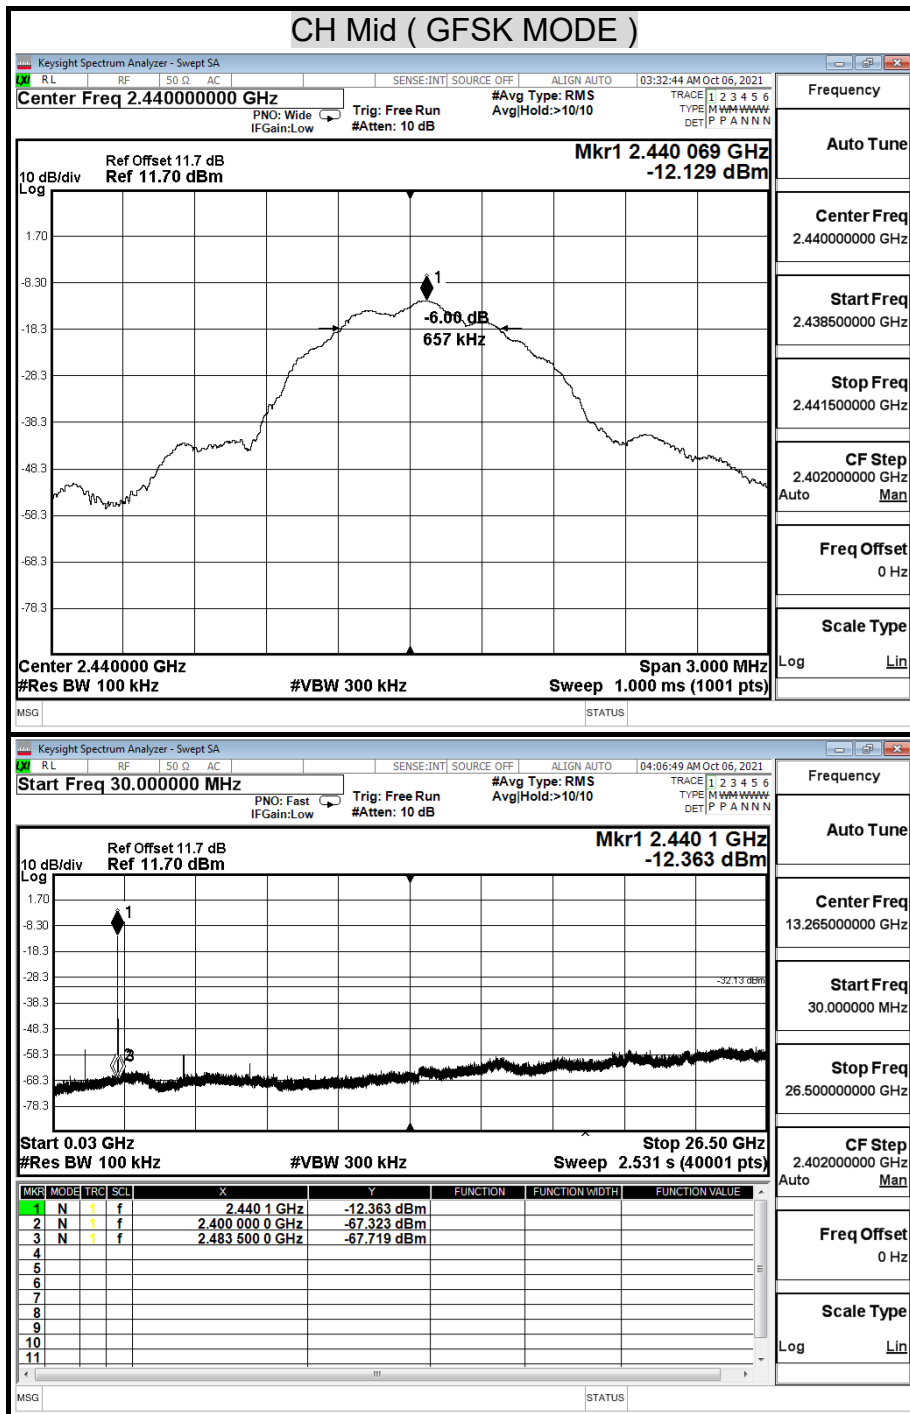


Report No.: TMTN2109000334NR

Page: 49 / 78
Rev.: 00

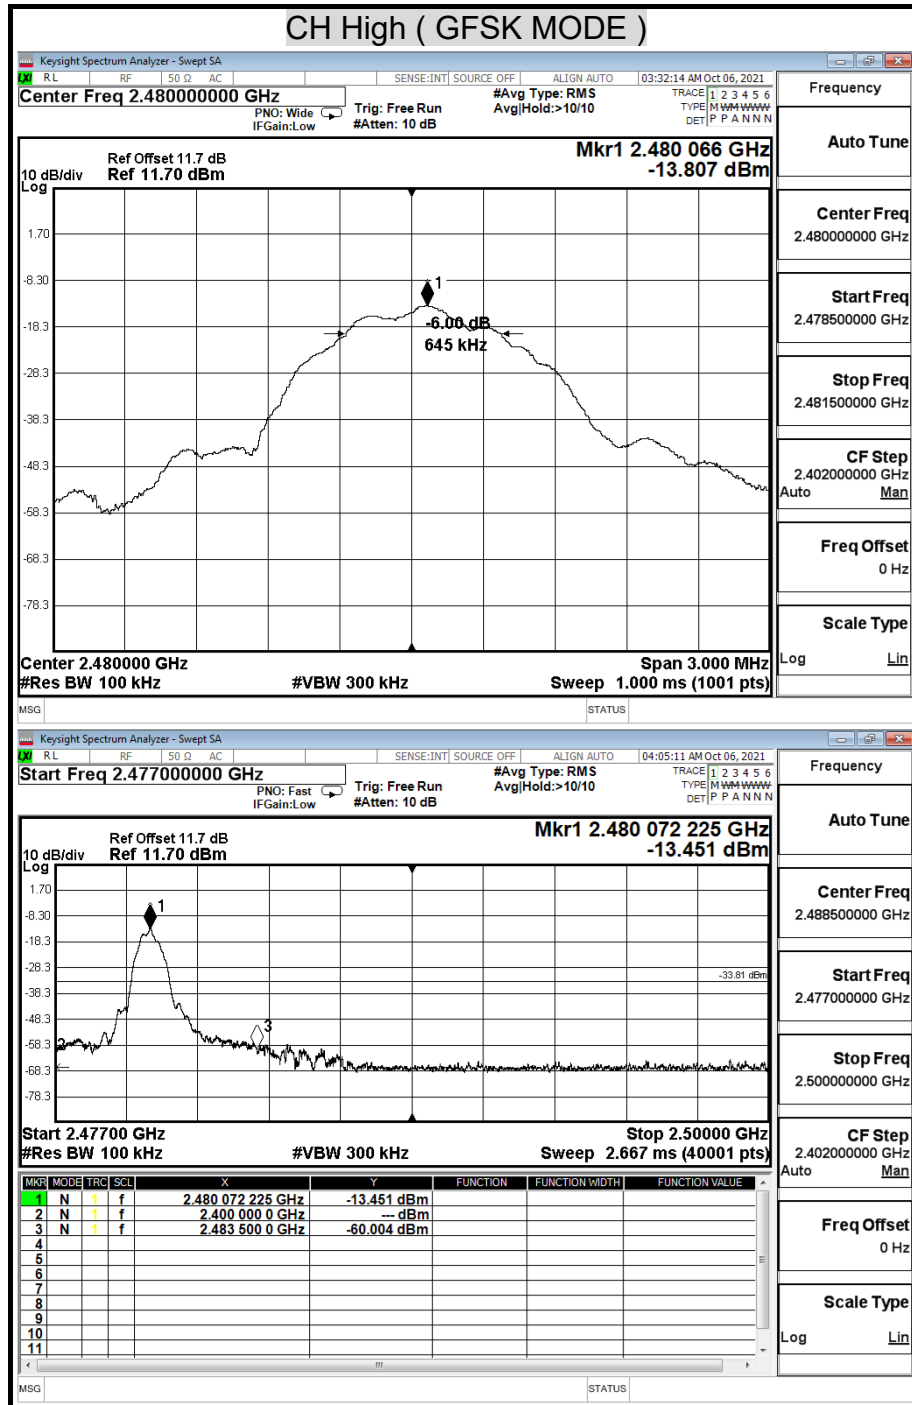

Report No.: TMTN2109000334NR

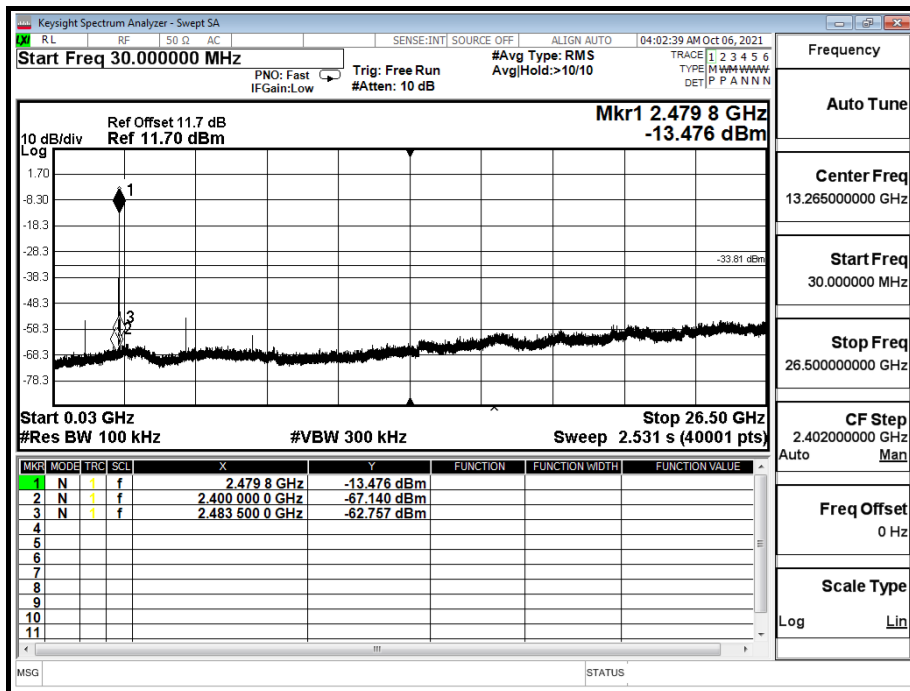Page: 50 / 78
Rev.: 00

8.7 RADIATED EMISSIONS

8.7.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Report No.: TMTN2109000334NR

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

9kHz ~ 30MHz

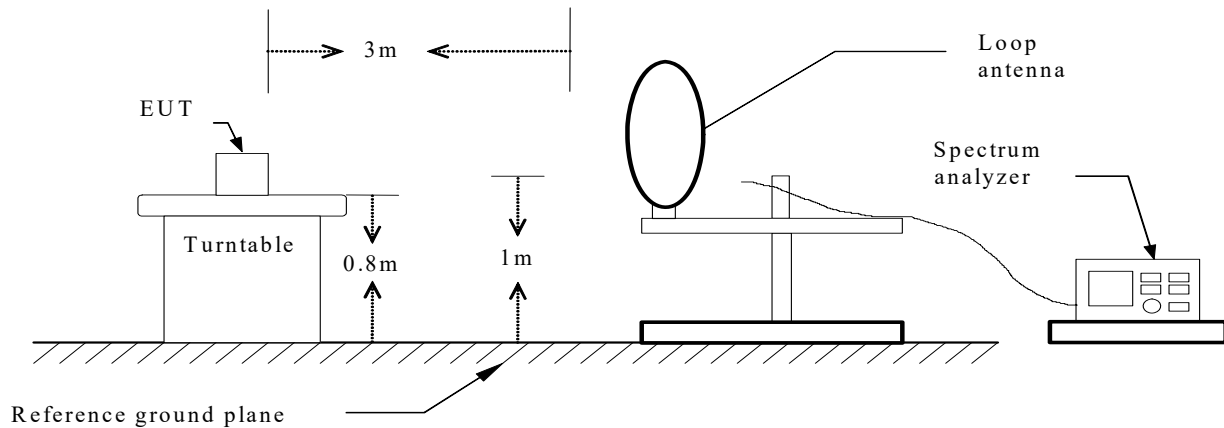


30MHz ~ 1GHz

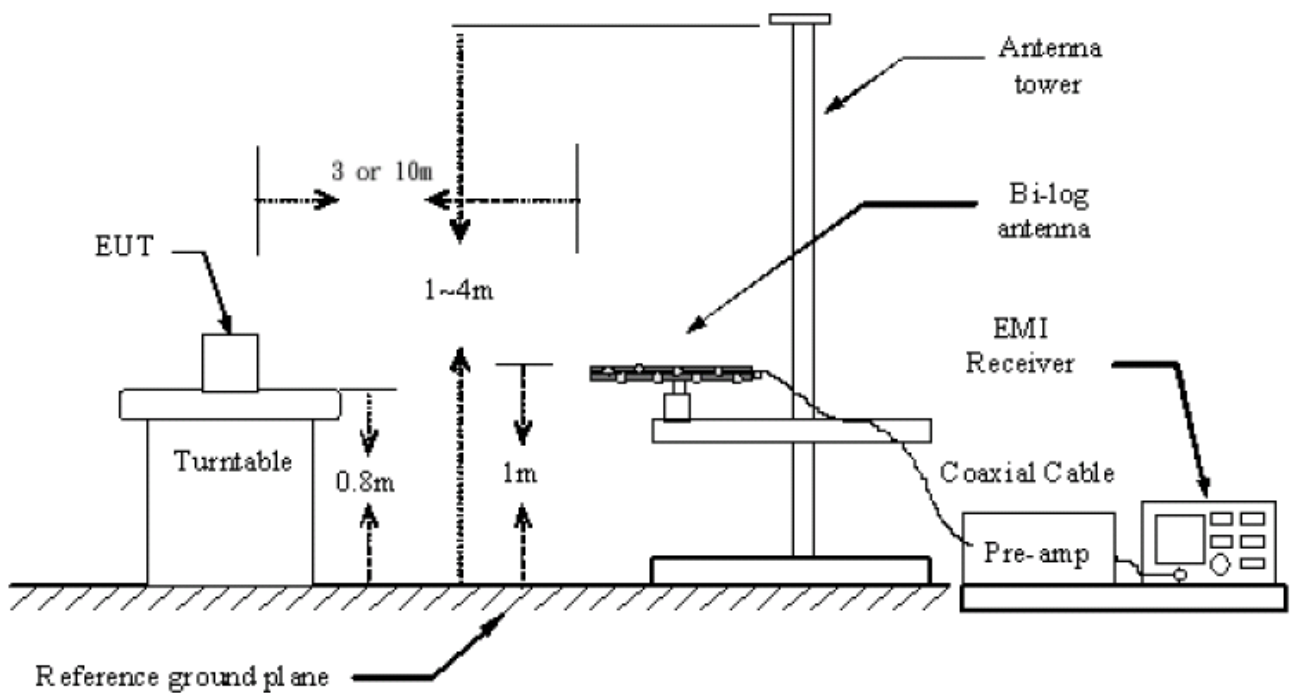

Report No.: TMTN2109000334NR

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

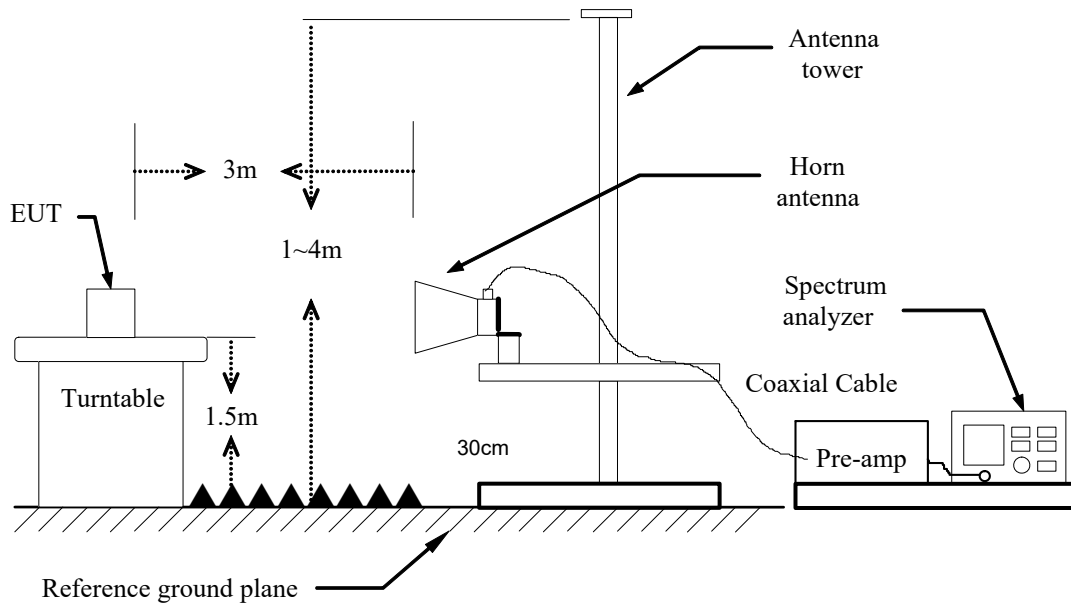

TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The tests were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05.

Report No.: TMTN2109000334NR

Page: 55 / 78
Rev.: 00

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.

Report No.: TMTN2109000334NR

8.7.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	Cherry Wireless Mouse	Test Date	2021/10/05
Model Name	JF-86	Test By	Ted Huang
Test Mode	TX	Temp & Humidity	26.4°C, 56%


Vertical

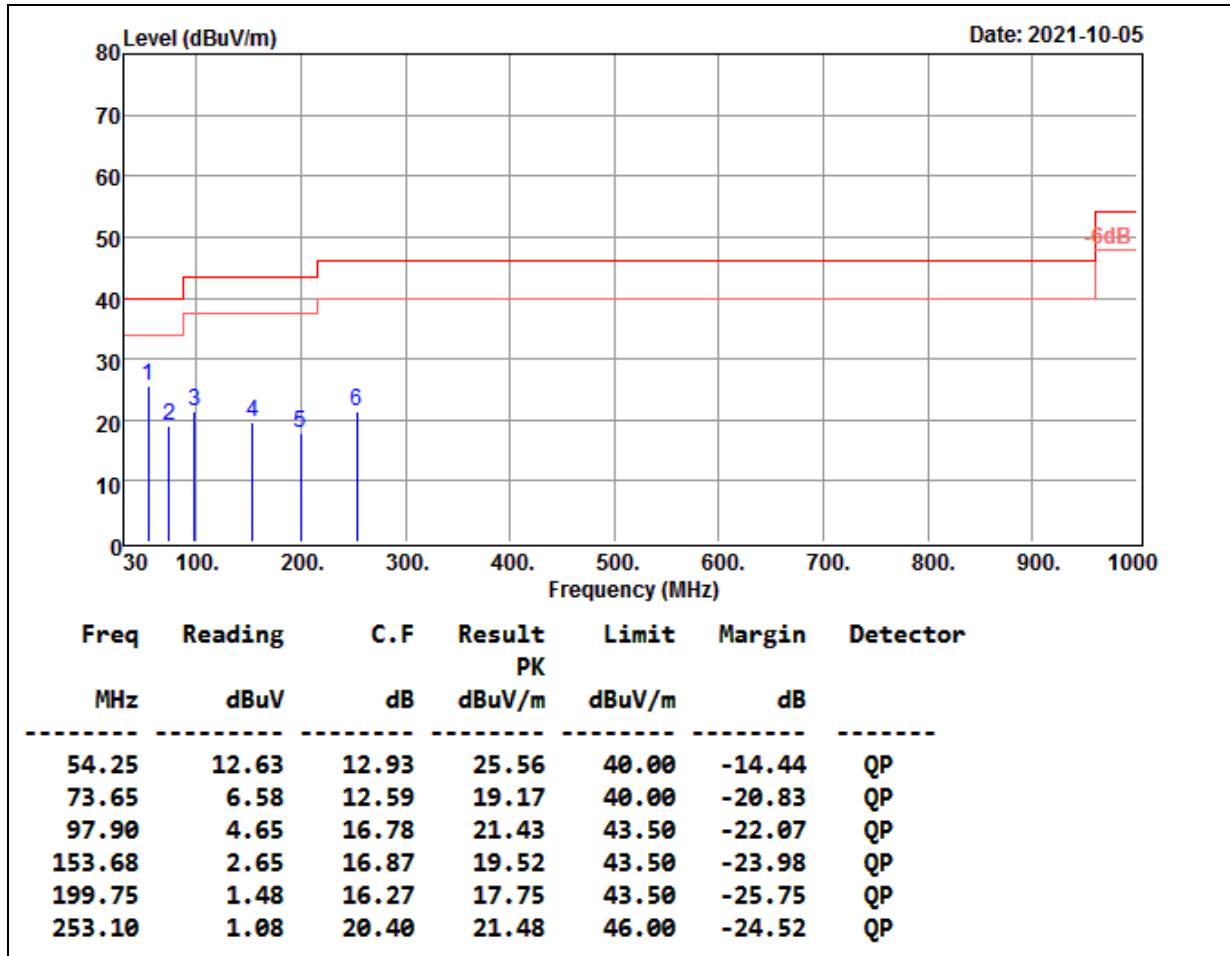**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Product Name	Cherry Wireless Mouse	Test Date	2021/10/05
Model Name	JF-86	Test By	Ted Huang
Test Mode	TX	Temp & Humidity	26.4°C, 56%

Horizontal

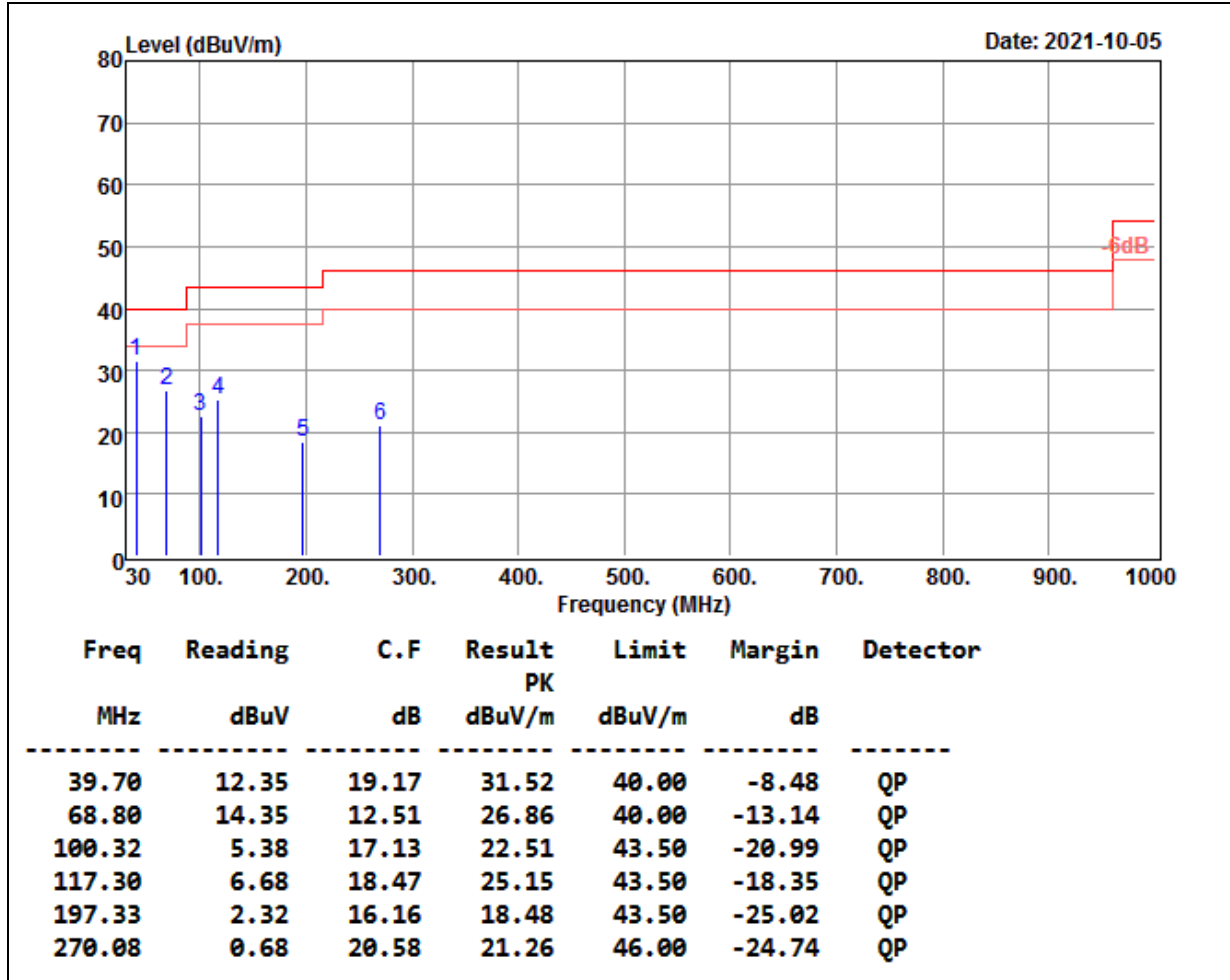

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Report No.: TMTN2109000334NR

8.7.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH Low)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH Low					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1524.63	58.45	26.80	3.20	44.70	0.48	44.24	74.00	-29.76	*
* 1524.63	47.99	26.80	3.20	44.70	0.48	33.78	54.00	-20.22	*
* 4804.76	58.99	33.08	5.46	42.61	0.22	55.13	74.00	-18.87	*
* 4804.76	51.91	33.08	5.46	42.61	0.22	48.05	54.00	-5.95	*
7206.48	55.79	38.68	6.57	42.44	0.27	58.87	74.00	-15.13	
7206.48	45.35	38.68	6.57	42.44	0.27	48.43	54.00	-5.57	

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH Low)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH Low					Measurement Distance at 3m			Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1523.56	57.28	26.79	3.20	44.70	0.48	43.06	74.00	-30.94	P
* 1523.56	47.22	26.79	3.20	44.70	0.48	33.00	54.00	-21.00	A
* 4803.82	57.70	33.07	5.45	42.61	0.22	53.84	74.00	-20.16	P
* 4803.82	48.35	33.07	5.45	42.61	0.22	44.49	54.00	-9.51	A
7205.60	55.75	38.68	6.57	42.44	0.27	58.83	74.00	-15.17	P
7205.60	44.51	38.68	6.57	42.44	0.27	47.59	54.00	-6.41	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH Middle)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1525.42	58.54	26.80	3.20	44.70	0.49	44.34	74.00	-29.66	P	
* 1525.42	49.64	26.80	3.20	44.70	0.49	35.44	54.00	-18.56	A	
* 4879.95	59.86	33.32	5.51	42.60	0.23	56.31	74.00	-17.69	P	
* 4879.95	51.76	33.32	5.51	42.60	0.23	48.21	54.00	-5.79	A	
* 7320.31	55.25	39.12	6.59	42.29	0.27	58.94	74.00	-15.06	P	
* 7320.31	46.20	39.12	6.59	42.29	0.27	49.89	54.00	-4.11	A	

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH Middle)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH Middle					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1522.56	58.51	26.78	3.20	44.70	0.48	44.27	74.00	-29.73	P	
* 1522.56	47.82	26.78	3.20	44.70	0.48	33.58	54.00	-20.42	A	
* 4879.87	58.92	33.32	5.51	42.60	0.23	55.37	74.00	-18.63	P	
* 4879.87	51.18	33.32	5.51	42.60	0.23	47.63	54.00	-6.37	A	
* 7319.55	55.34	39.11	6.59	42.29	0.27	59.03	74.00	-14.97	P	
* 7319.55	45.86	39.11	6.59	42.29	0.27	49.55	54.00	-4.45	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH High)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1538.56	58.56	26.91	3.22	44.68	0.50	44.51	74.00	-29.49	P
* 1538.56	48.20	26.91	3.22	44.68	0.50	34.15	54.00	-19.85	A
* 4960.57	60.86	33.57	5.57	42.59	0.24	57.65	74.00	-16.35	P
* 4960.57	54.46	33.57	5.57	42.59	0.24	51.25	54.00	-2.75	A
* 7440.95	56.36	39.58	6.62	42.13	0.27	60.69	74.00	-13.31	P
* 7440.95	45.30	39.58	6.62	42.13	0.27	49.63	54.00	-4.37	A

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(BT) TX (CH High)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1536.45	58.66	26.89	3.21	44.68	0.50	44.58	74.00	-29.42	P
* 1536.45	47.08	26.89	3.21	44.68	0.50	33.00	54.00	-21.00	A
* 4960.14	60.87	33.57	5.57	42.59	0.24	57.65	74.00	-16.35	P
* 4960.14	54.48	33.57	5.57	42.59	0.24	51.26	54.00	-2.74	A
* 7441.22	56.05	39.58	6.62	42.13	0.27	60.38	74.00	-13.62	P
* 7441.22	45.57	39.58	6.62	42.13	0.27	49.90	54.00	-4.10	A

REMARK:

- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
- The other emission levels were 20dB below the limit
- The test limit distance is 3M limit.
- *=Restricted bands of operation

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH Low)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH Low					Measurement Distance at 3m		Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1304.56	57.58	25.78	2.94	44.79	0.44	41.95	74.00	-32.05	P
* 1304.56	46.85	25.78	2.94	44.79	0.44	31.22	54.00	-22.78	A
* 4803.31	58.13	33.07	5.45	42.61	0.22	54.27	74.00	-19.73	P
* 4803.31	49.45	33.07	5.45	42.61	0.22	45.59	54.00	-8.41	A
7205.57	55.61	38.68	6.57	42.44	0.27	58.69	74.00	-15.31	P
7205.57	46.68	38.68	6.57	42.44	0.27	49.76	54.00	-4.24	A

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH Low)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH Low					Measurement Distance at 3m		Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1305.54	57.55	25.78	2.94	44.79	0.44	41.92	74.00	-32.08	P
* 1305.54	47.25	25.78	2.94	44.79	0.44	31.62	54.00	-22.38	A
* 4804.06	57.68	33.07	5.46	42.61	0.22	53.82	74.00	-20.18	P
* 4804.06	49.02	33.07	5.46	42.61	0.22	45.16	54.00	-8.84	A
7205.05	56.65	38.68	6.57	42.44	0.27	59.73	74.00	-14.27	P
7205.05	45.83	38.68	6.57	42.44	0.27	48.91	54.00	-5.09	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH Middle)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1304.11	57.63	25.78	2.94	44.79	0.44	42.00	74.00	-32.00	P	
* 1304.11	46.95	25.78	2.94	44.79	0.44	31.32	54.00	-22.68	A	
* 4880.07	59.09	33.32	5.51	42.60	0.23	55.54	74.00	-18.46	P	
* 4880.07	51.35	33.32	5.51	42.60	0.23	47.80	54.00	-6.20	A	
* 7319.10	55.45	39.11	6.59	42.29	0.27	59.13	74.00	-14.87	P	
* 7319.10	44.12	39.11	6.59	42.29	0.27	47.80	54.00	-6.20	A	

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH Middle)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH Middle					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1304.05	58.36	25.78	2.94	44.79	0.44	42.73	74.00	-31.27	P	
* 1304.05	47.58	25.78	2.94	44.79	0.44	31.95	54.00	-22.05	A	
* 4879.74	59.16	33.32	5.51	42.60	0.23	55.61	74.00	-18.39	P	
* 4879.74	51.21	33.32	5.51	42.60	0.23	47.66	54.00	-6.34	A	
* 7319.05	55.57	39.11	6.59	42.29	0.27	59.25	74.00	-14.75	P	
* 7319.05	45.34	39.11	6.59	42.29	0.27	49.02	54.00	-4.98	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH High)	TEMP& Humidity	26.8°C, 54%

Horizontal

TX / GFSK mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1305.02	53.59	25.78	2.94	44.79	0.44	37.96	74.00	-36.04	P
* 1305.02	45.92	25.78	2.94	44.79	0.44	30.29	54.00	-23.71	A
* 4960.02	60.47	33.57	5.57	42.59	0.24	57.25	74.00	-16.75	P
* 4960.02	54.55	33.57	5.57	42.59	0.24	51.33	54.00	-2.67	A
* 7440.99	55.84	39.58	6.62	42.13	0.27	60.17	74.00	-13.83	P
* 7440.99	45.61	39.58	6.62	42.13	0.27	49.94	54.00	-4.06	A

Product Name	Cherry Wireless Mouse	Test Date	2021/10/06
Model	JF-86	Test By	Ted Huang
Test Mode	GFSK(RF) TX (CH High)	TEMP& Humidity	26.8°C, 54%

Vertical

TX / GFSK mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1305.82	57.53	25.78	2.94	44.79	0.44	41.91	74.00	-32.09	P
* 1305.82	47.67	25.78	2.94	44.79	0.44	32.05	54.00	-21.95	A
* 4960.15	61.09	33.57	5.57	42.59	0.24	57.87	74.00	-16.13	P
* 4960.15	54.43	33.57	5.57	42.59	0.24	51.21	54.00	-2.79	A
* 7440.95	56.12	39.58	6.62	42.13	0.27	60.45	74.00	-13.55	P
* 7440.95	44.83	39.58	6.62	42.13	0.27	49.16	54.00	-4.84	A

REMARK:

- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
- The other emission levels were 20dB below the limit
- The test limit distance is 3M limit.
- *=Restricted bands of operation

Report No.: TMTN2109000334NR


Page: 64 / 78
Rev.: 00

8.7.4 RESTRICTED BAND EDGES

GFSK(BT) Mode


Detector mode : Peak

Polarity : Horizontal

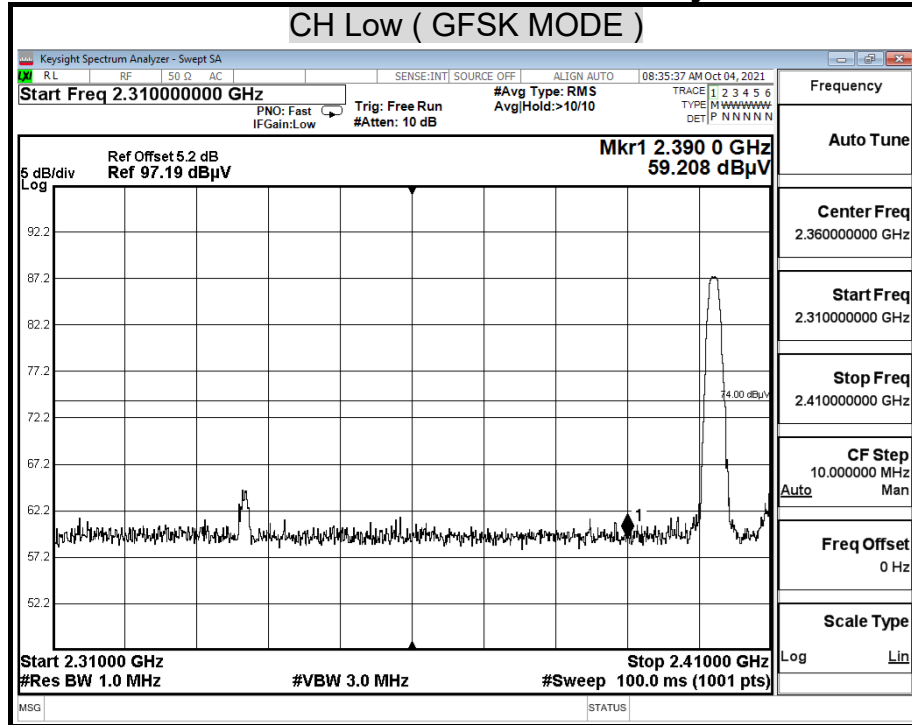


Detector mode : Average

Polarity : Horizontal

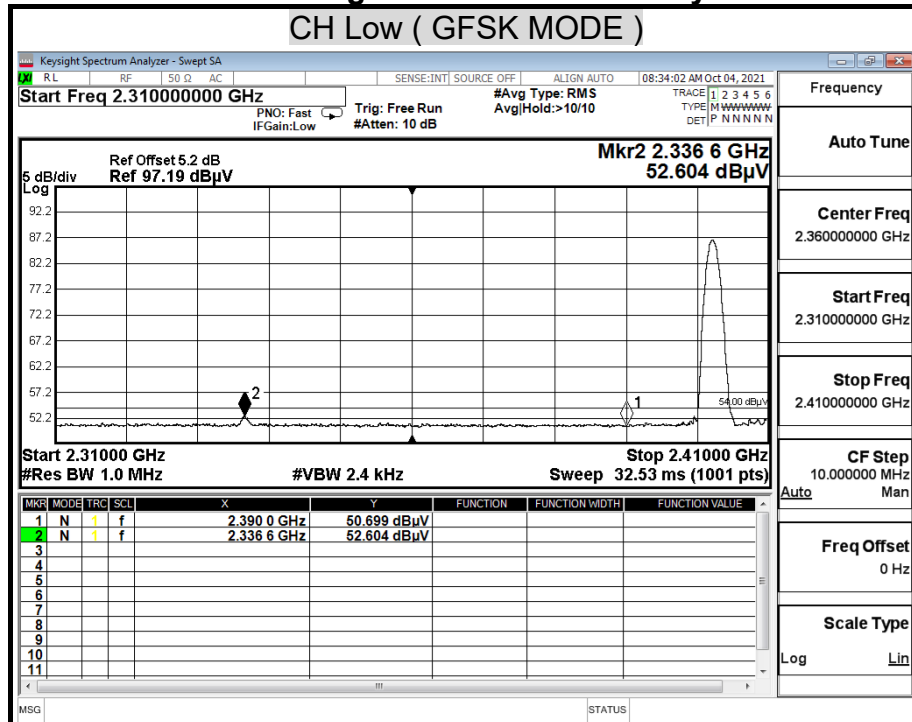


Detector mode : Peak

Polarity : Vertical

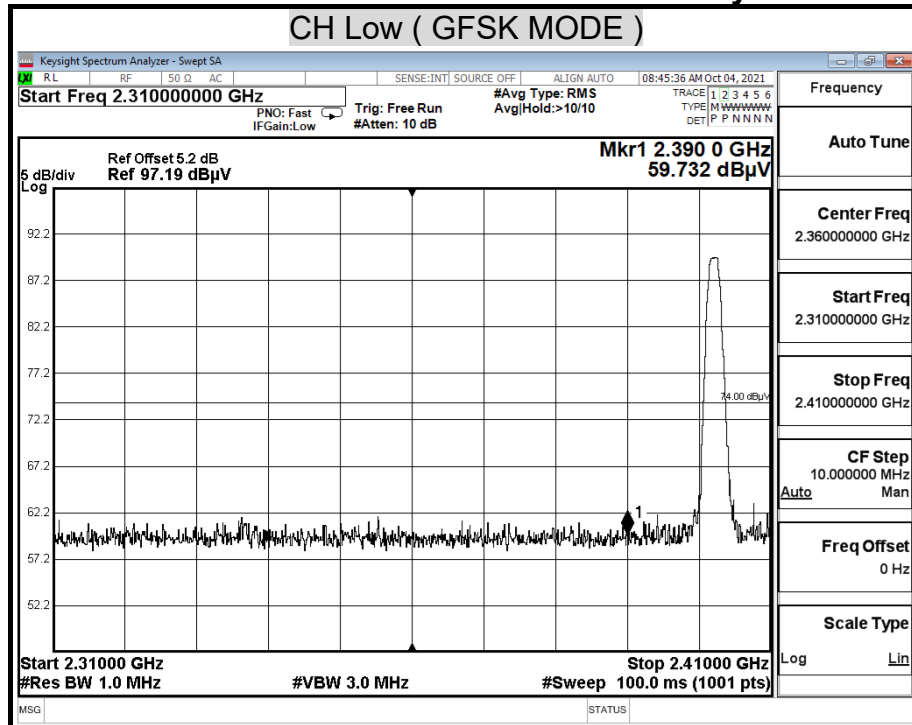


Detector mode : Average

Polarity : Vertical

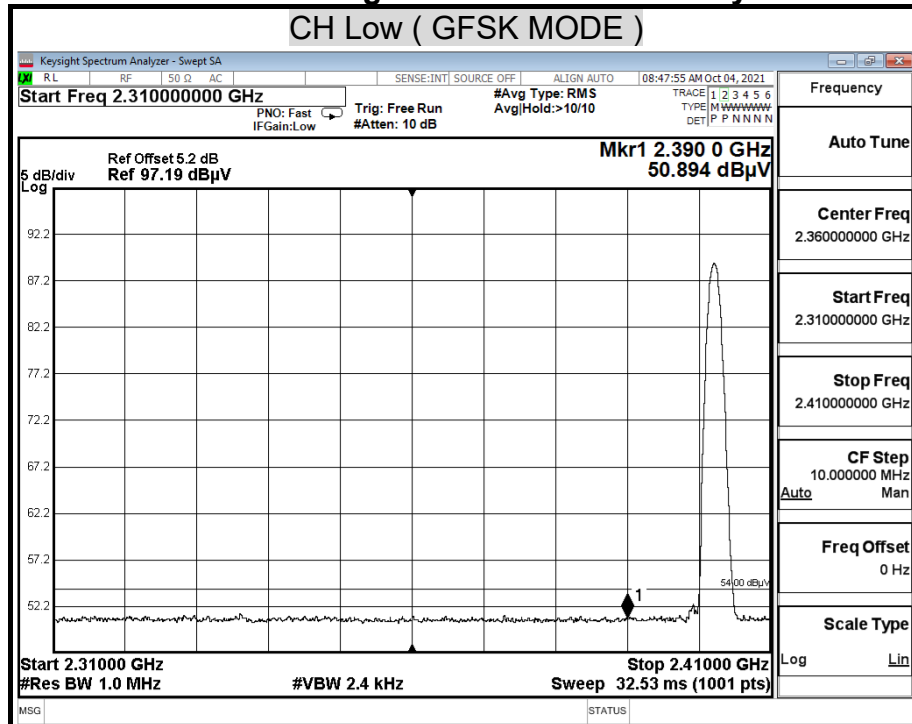


Detector mode : Peak

Polarity : Horizontal

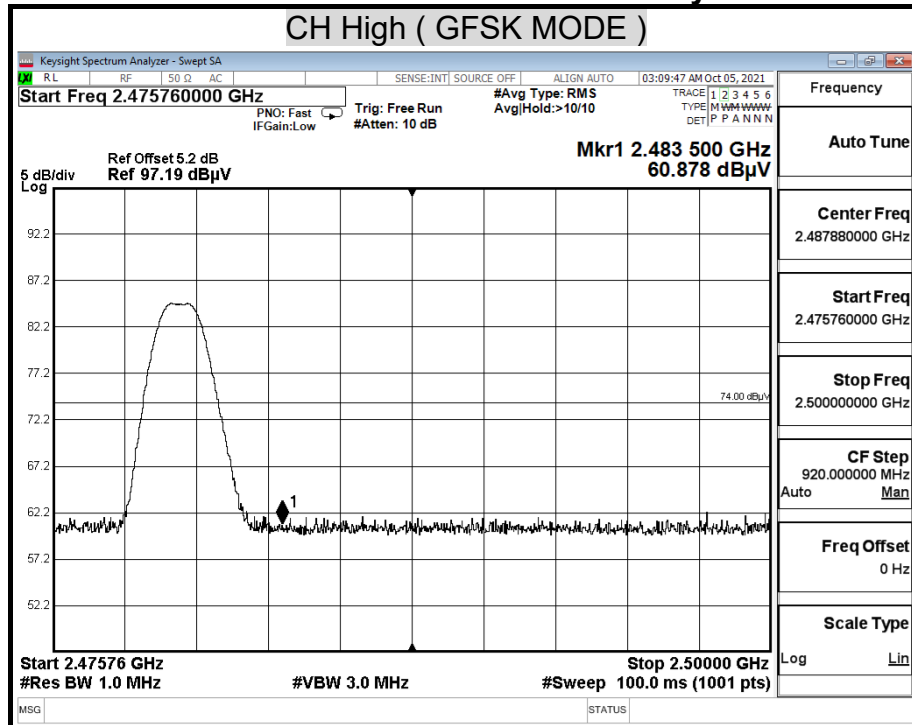

Detector mode : Average

Polarity : Horizontal

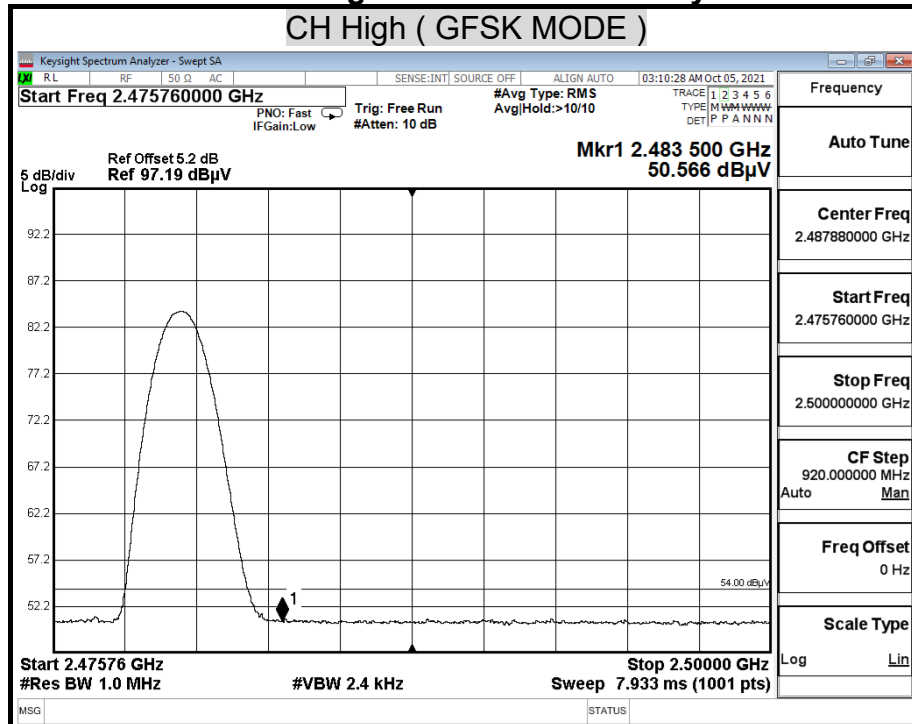


Report No.: TMTN2109000334NR

Page: 67 / 78
Rev.: 00


Detector mode : Peak

Polarity : Vertical

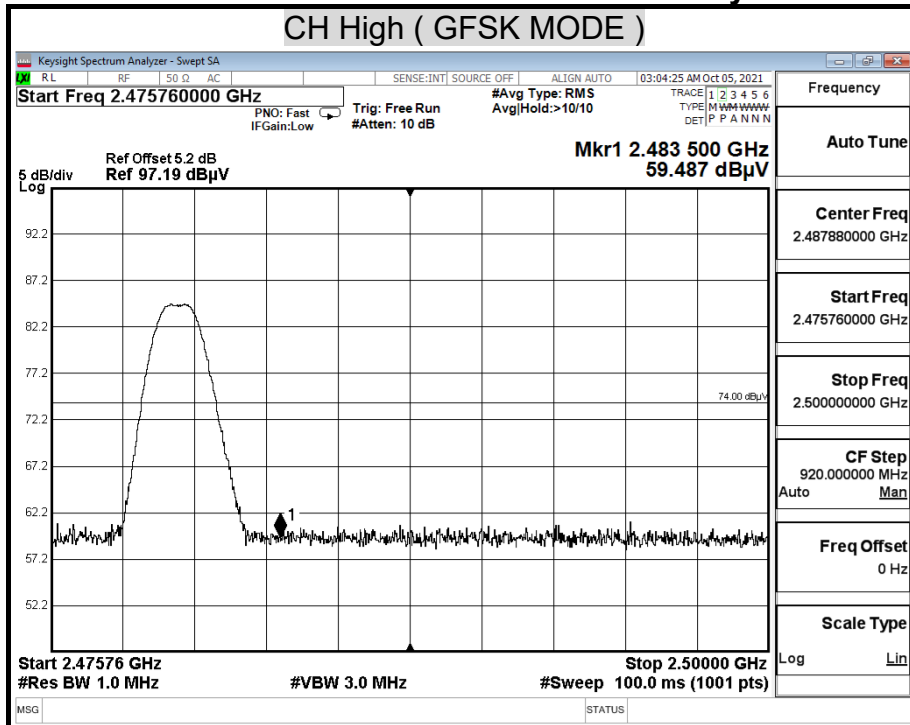

Detector mode : Average

Polarity : Vertical

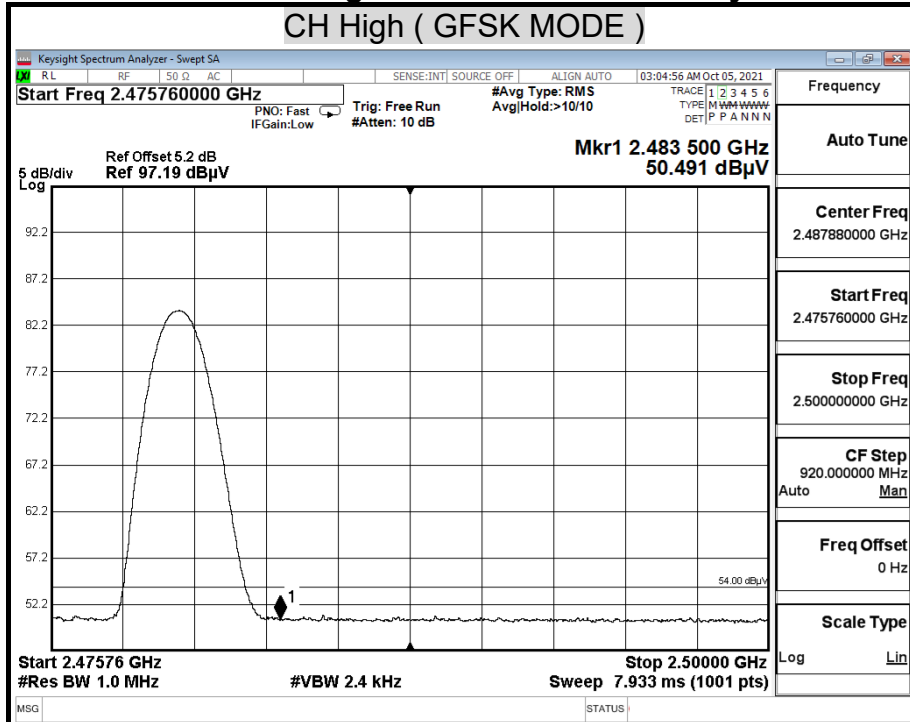

Report No.: TMTN2109000334NR


Page: 68 / 78
Rev.: 00

GFSK(RF) Mode

Detector mode : Peak

Polarity : Horizontal


CH Low (GFSK MODE)

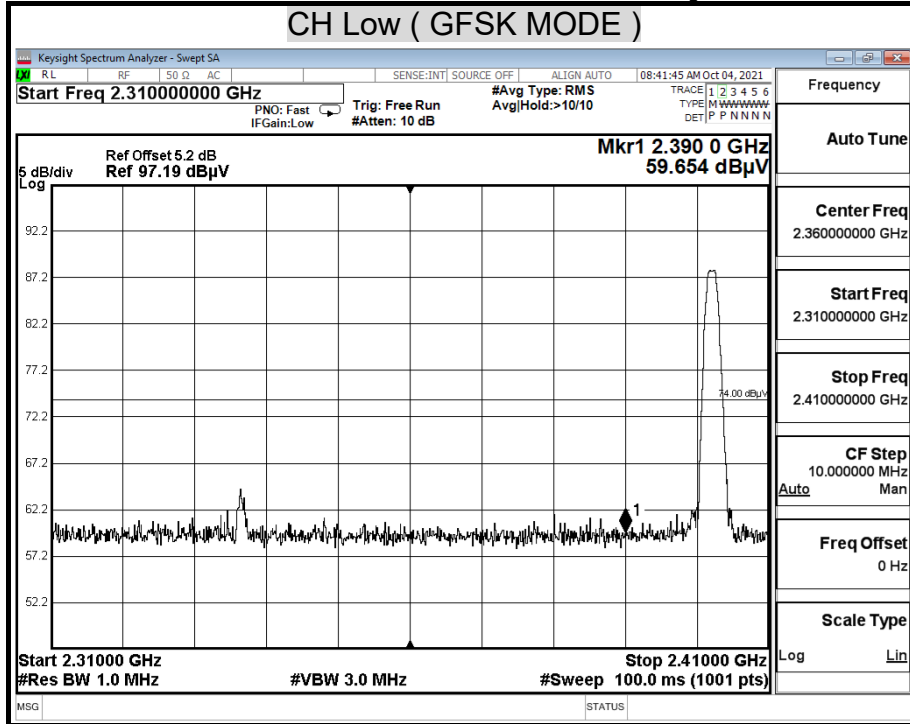

Detector mode : Average


Polarity : Horizontal

CH Low (GFSK MODE)

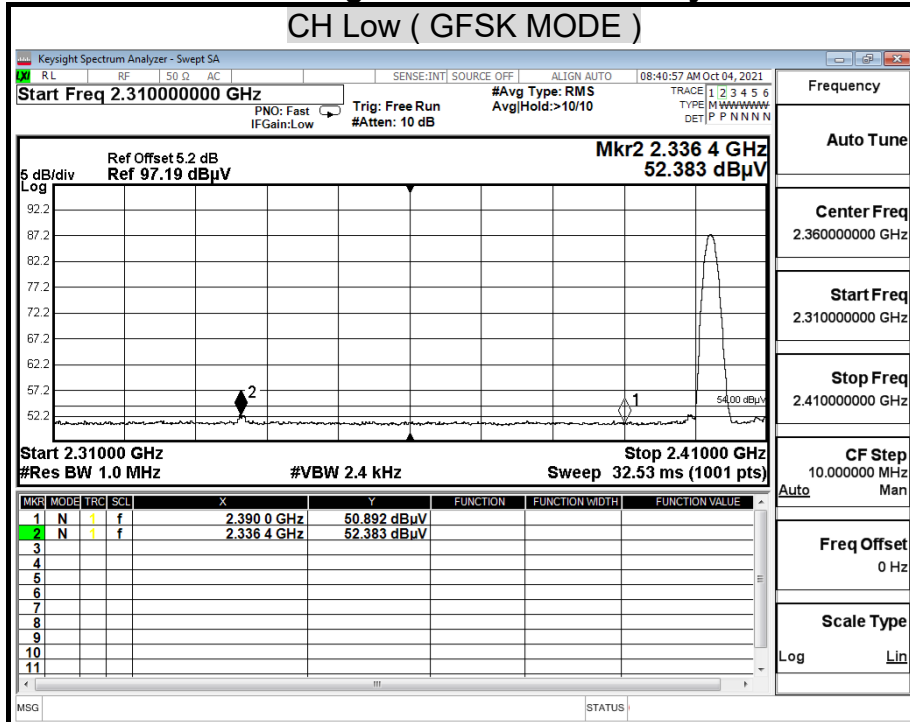


Detector mode : Peak

Polarity : Vertical

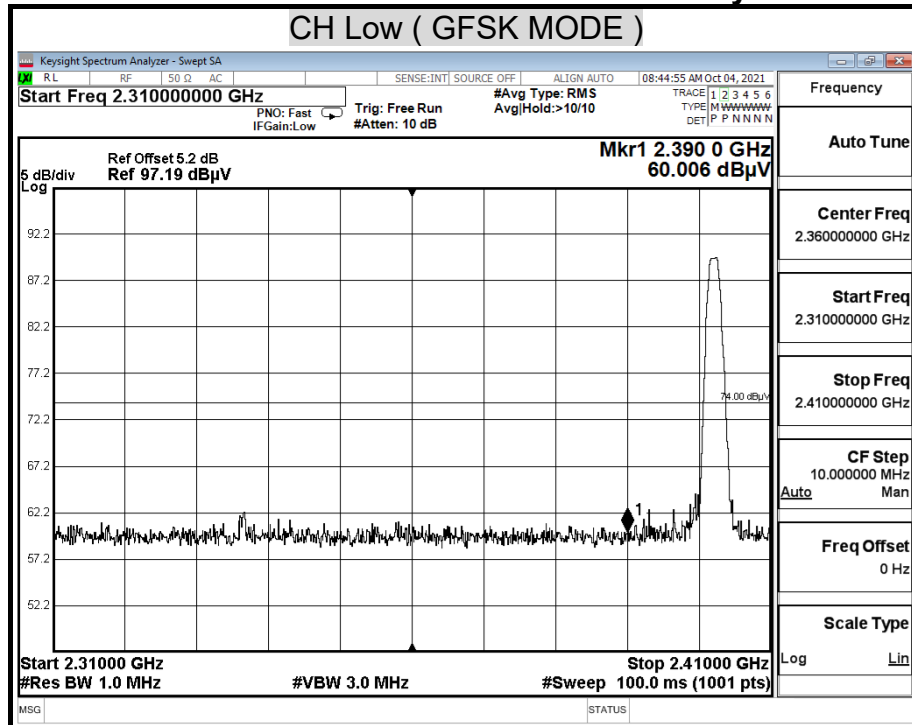

Detector mode : Average

Polarity : Vertical

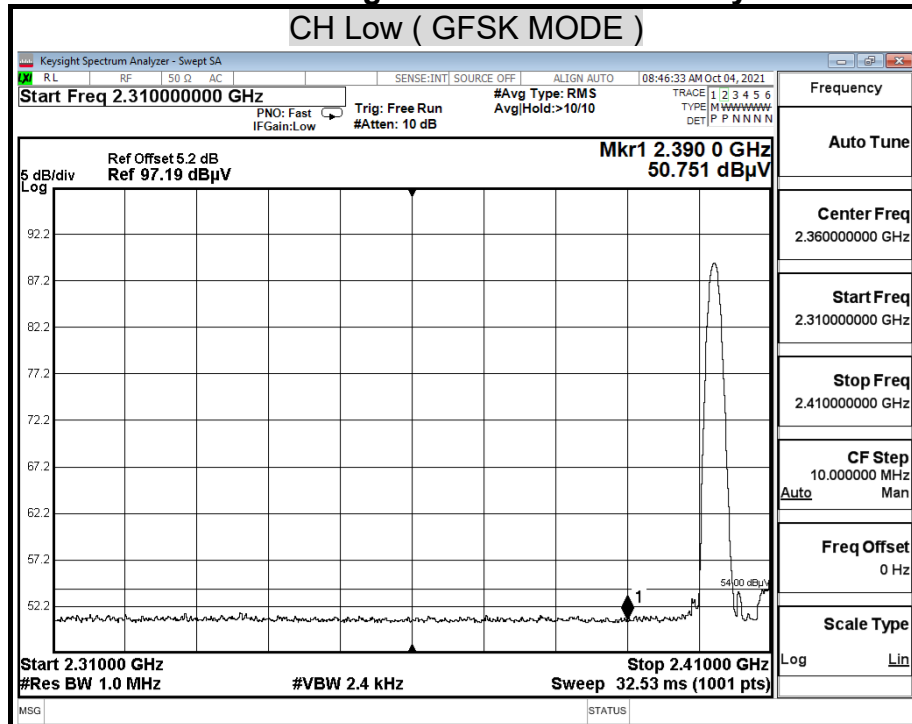


Report No.: TMTN2109000334NR

Page: 70 / 78
Rev.: 00


Detector mode : Peak

Polarity : Horizontal

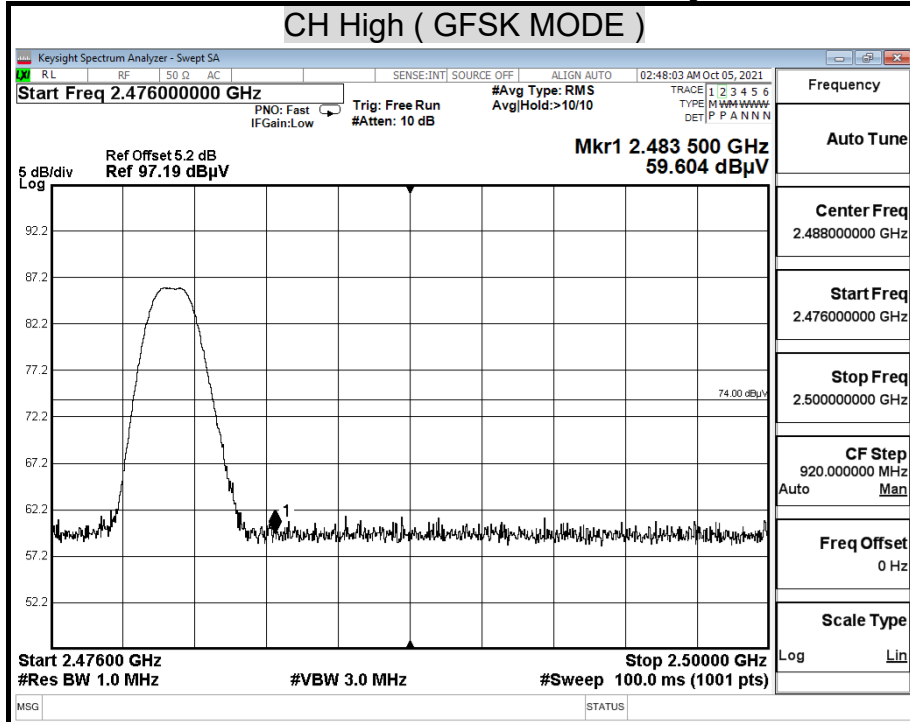


Detector mode : Average

Polarity : Horizontal

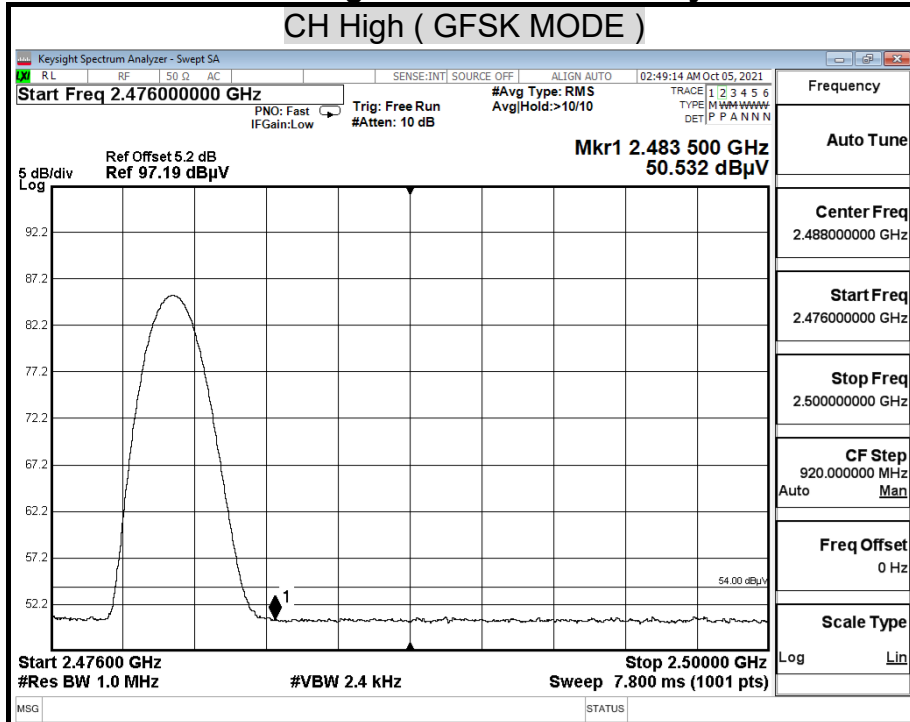


Detector mode : Peak

Polarity : Vertical

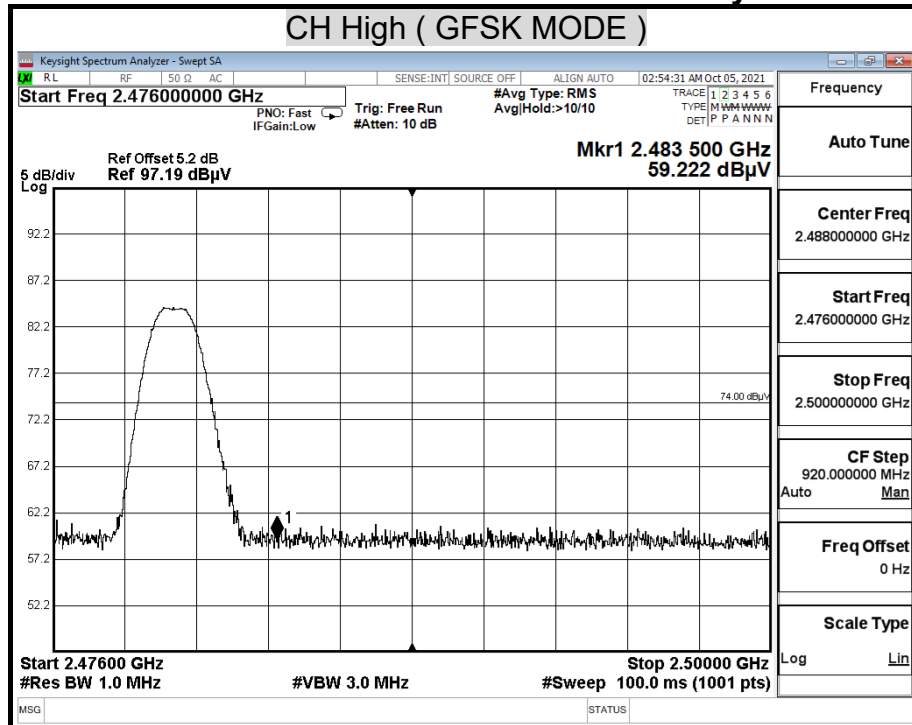

Detector mode : Average

Polarity : Vertical

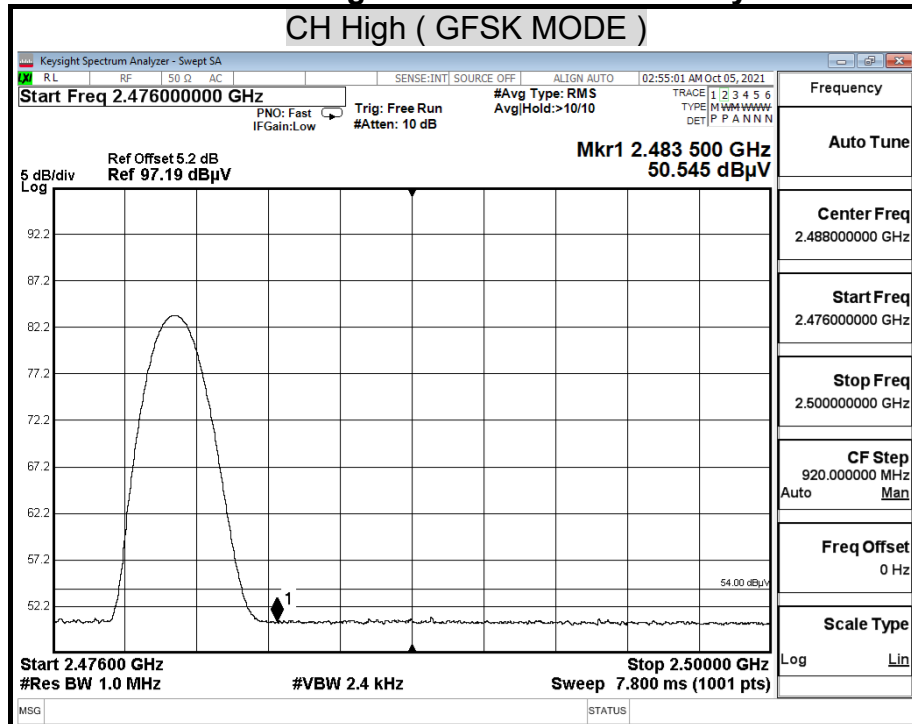


8.8 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

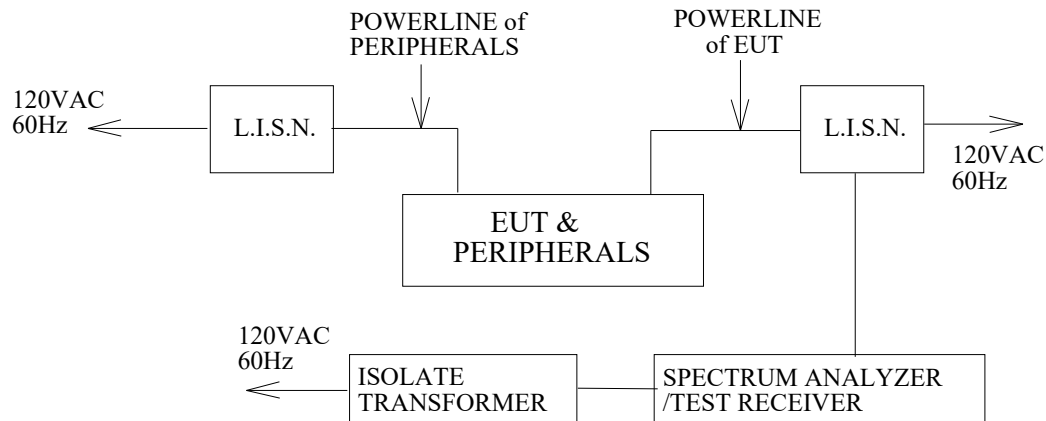TEST SETUP**TEST PROCEDURE**

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS

No non-compliance noted.

※ This EUT is not connected to AC Source directly. Not applicable for this test.

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Manufacturer: Sunrex
Type: PCB
Model: JD-85M
Gain: 0.37 dBi

===End of Test Report===