



FCC RADIO TEST REPORT

FCC ID : GKRCMMG3L
Equipment : 5G Module
Brand Name : COMPAL
Model Name : CMM-G3L
Marketing Name : CMM-G3L
Applicant : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District, Taipei city, (114) Taiwan
Manufacturer : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District, Taipei city, (114) Taiwan
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27D, Part 90(R), Part 90(S)

The product was received on Feb. 26, 2026 and testing was performed from Mar. 03, 2026 to Apr. 20, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	7
1.1 Product Feature of Equipment Under Test.....	7
1.2 Modification of EUT	8
1.3 Testing Location	9
1.4 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	12
3 Conducted Test Items	24
3.1 Measuring Instruments	24
3.2 Conducted Output Power and ERP/EIRP	25
3.3 Peak-to-Average Ratio	26
3.4 Occupied Bandwidth.....	27
3.5 Conducted Band Edge	28
3.6 Emission Mask.....	32
3.7 Conducted Spurious Emission	34
3.8 Frequency Stability	35
4 Radiated Test Items	36
4.1 Measuring Instruments	36
4.2 Radiated Spurious Emission Measurement	38
5 List of Measuring Equipment.....	40
6 Measurement Uncertainty	42
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG622601-02D	01	Initial issue of report	Apr. 30, 2026
FG622601-02D	02	Revised Frequency List of Low/Middle/High Channels and Description of the Conducted Output Power Measurement and ERP/EIRP Measurement and Appendix A1-1~4. This report is an updated version, replacing the report issued on Apr. 30, 2026.	May 08, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5) §90.635	Effective Radiated Power (n5) (n26)	Pass	
	§27.50 (b)(10) §27.50 (c)(10)	Effective Radiated Power (n12) (n13) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
	§27.50 (a)(3)	Equivalent Isotropic Radiated Power (n30)		
	§27.50 (j)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§90.542 (a)(7)	Effective Radiated Power (n14)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2)(4) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement (n30)		
	§2.1051 §90.543 (e)(2)	Conducted Band Edge Measuremen (n14)		
3.6	§2.1051 §90.210 (n)	Emission Mask (n14)	Pass	-
	§2.1051 §90.691	Emission masks (n26)		



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.7	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (g) §27.53 (h) §90.691	Conducted Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission (n30)		
	§2.1051 §27.53 (l)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §90.543 (e)(3)	Conducted Spurious Emission (n14)		
	§2.1055 §22.355 §24.235 §27.54 §90.539 (e)§90.213	Frequency Stability Temperature & Voltage	Pass	-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (f) §27.53 (g) §27.53 (h)§90.691	Radiated Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	-
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		
	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission (n30)		
	§2.1053 §27.53 (l)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (n14)		

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng**Report Producer: Julia Chang**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	LTE/5G NR Red Cap and GNSS.

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Support band and evaluated information	
5G NR/NR RedCap Supported band	n2,n5,n7,n12,n13,n14,n25,n26,n30,n38,n41,n66,n71,n77,n78
5G NR Supported band	n2,n5,n7,n12,n13,n14,n25,n26,n30,n38,n41,n66,n71,n77,n78
Evaluated and Tested band	RedCap :n7,n12,n13,n14,n25,n26,n30, n41,n66,n71,n77
Band covered information	Wider operating frequency band range covers narrower one when the power is worse as follows: ■ n25 cover n2 (Part 24) ■ n26 cover n5 (Part 22) ■ n41 cover n38 (Part 27) ■ n77 cover n78 (Part 27) ■ All Band 5G NR RedCap cover 5G NR (Part 22.24.27.90)

FDD/TDD band Power Class					
	SISO PC3				
NR/NR RedCap N2	V				
NR/NR RedCap N5	V				
NR/NR RedCap N7	V				
NR/NR RedCap N12	V				
NR/NR RedCap N13	V				
NR/NR RedCap N14	V				
NR/NR RedCap N25	V				
NR/NR RedCap N26	V				
NR/NR RedCap N30	V				
NR/NR RedCap N38	V				
NR/NR RedCap N41	V				
NR/NR RedCap N66	V				
NR/NR RedCap N71	V				
NR/NR RedCap N77	V				
NR/NR RedCap N78	V				





RF Exposure Max Antenna Gain(dBi)				
Band	Ant0			Main Ant. #
NR/NR RedCap N2	8.5			0
NR/NR RedCap N5	9.9			0
NR/NR RedCap N7	8.5			0
NR/NR RedCap N12	9.1			0
NR/NR RedCap N13	9.6			0
NR/NR RedCap N14	9.7			0
NR/NR RedCap N25	8.5			0
NR/NR RedCap N26	9.9			0
NR/NR RedCap N30	0.9			0
NR/NR RedCap N38	8.5			0
NR/NR RedCap N41	8.5			0
NR/NR RedCap N66	5.5			0
NR/NR RedCap N71	8.9			0
NR/NR RedCap N77	5.5			0
NR/NR RedCap N78	5.5			0

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH16-HY
Test Engineer	Jimmy Chang	Jerry Lan 、 Gary Guo 、 Steven Wu
Temperature (°C)	21.4~23.6	20~26
Relative Humidity (%)	45.4~49.8	40~65

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27D, Part 90(R), Part 90(S)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..


Modulation Type	Modulation
A	DFT-s-OFDM $\pi/2$ BPSK
B	DFT-s-OFDM QPSK
C	DFT-s-OFDM 16QAM
D	DFT-s-OFDM 64QAM
E	DFT-s-OFDM 256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D, E	All	1, Half, Full	L, M, H
EIRP	A, B, C, D, E	All	1, Half, Full	L, M, H
PAR	A, B, C, D, E	20 MHz or less	Outer_Full	M
Bandwidth	A, B, C, D, E	All	Outer_Full	M
CBE, Mask (Part 90)	A, B	All	Outer_1RB Outer_Full	L, H
CSE	B	Minimum	Inner_1RB	L, M, H
Frequency Stability	A	20 MHz or less	Outer_Full	M
RSE	A	Maximum or less	Inner_1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR& frequency stability.
4. For 5G NR/NR RedCap All Band SISO Mode support support CP-OFDM & DFT-s-OFDM, Therefore, the report only performed Higher Conducted power (DFT-s-OFDM) test results.
5. For 5G NR/NR RedCap All Band BW:10/15/20 support SCS15kHz&SCS30 kHz, after verified, the worst case is SCS15kHz. Therefore, only performed the SCS15kHz test results for Conducted test item in this report.

2.2 Connection Diagram of Test System

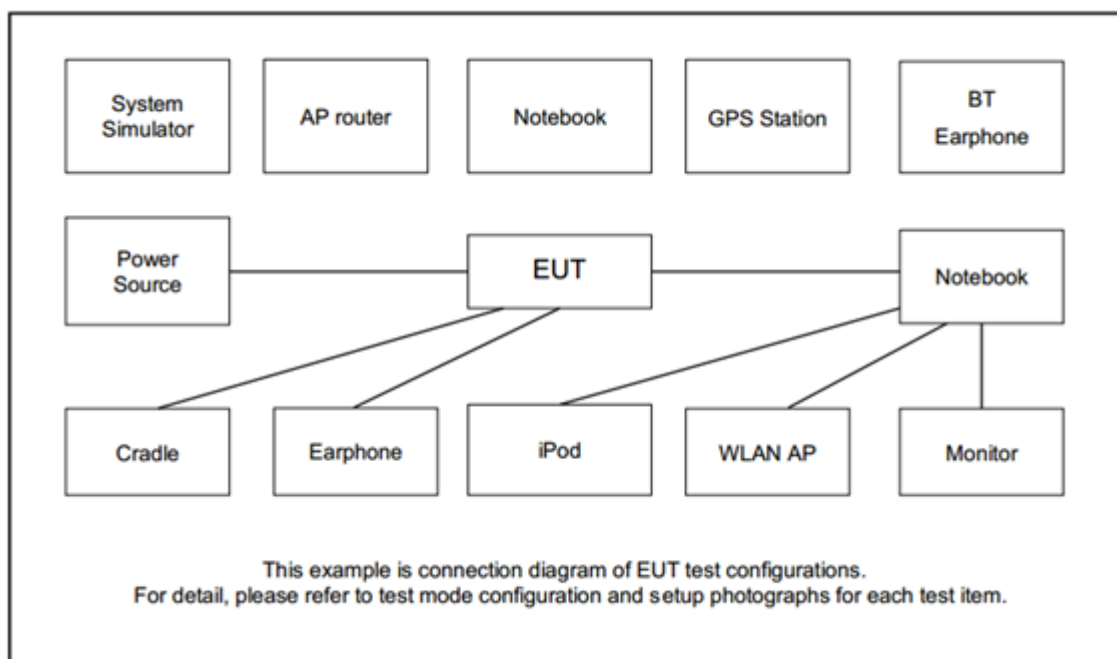

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	8821C	N/A	N/A	unshielded, 1.8m
2.	Base Station	Anritsu	8000A	N/A	N/A	unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR n13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	156400	-
	Frequency	-	782	-
5	Channel	155900	156400	156900
	Frequency	779.5	782	784.5

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5

5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5



5G NR n26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n26 Channel and Frequency List (Part90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

5G NR n26 Straddle Channel and Frequency List (Part 90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-
5	Channel	-	164800	-
	Frequency	-	824	-

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5



5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615
5	Channel	514500	519000	523500
	Frequency	2572.5	2595	2617.5

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5



5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5

5G NR n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975

5G NR n78 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795



5G NR n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98

5G NR n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR RedCap n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR RedCap n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR RedCap n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR RedCap n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR RedCap n13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	156400	-
	Frequency	-	782	-
5	Channel	155900	156400	156900
	Frequency	779.5	782	784.5

5G NR RedCap n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5

5G NR RedCap n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5



5G NR RedCap n26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR RedCap n26 Channel and Frequency List (Part90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

5G NR RedCap n26 Straddle Channel and Frequency List (Part 90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-
5	Channel	-	164800	-
	Frequency	-	824	-

5G NR RedCap n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5

5G NR RedCap n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615
5	Channel	514500	519000	523500
	Frequency	2572.5	2595	2617.5

5G NR RedCap n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685



5G NR RedCap n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR RedCap n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5

5G NR RedCap n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR RedCap n78 (Part27O) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795

5G NR RedCap n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98

5G NR RedCap n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge, Emission Mask and Conducted Spurious Emission

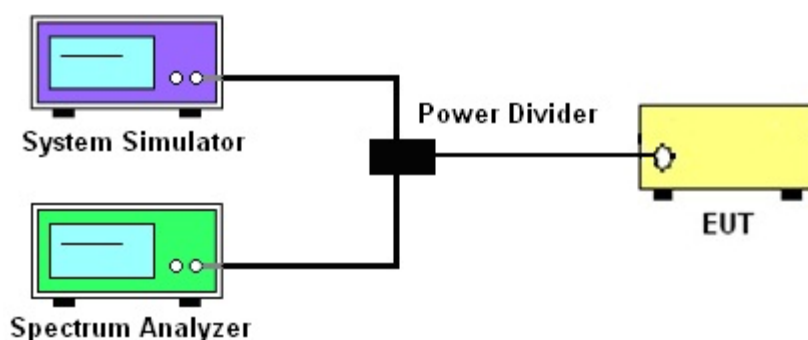

3.1.4 Frequency Stability

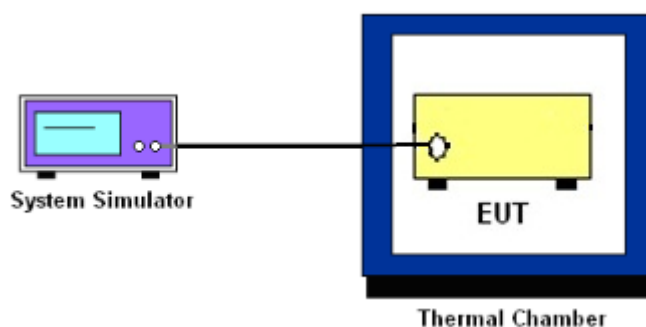

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26 (Part 22H)

The power of mobile transmitters must not exceed 100 Watts for 5G NR n26 (Part 90S)

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n13, n14, n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25, n7, n38, n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66,n77,n78

The EIRP of mobile transmitters must not exceed 250mW/5MHz for 5G NR n30

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz.
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz.
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

**27.53 (l)(2)**

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

27.53 (n)(2)

The following emission limits apply to stations transmitting in the 3450-3550 MHz band:

(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (2) <<https://www.ecfr.gov/current/title-47/section-27.53#p-27.53%28n%29%282%29>> is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.



3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7, n38, n41

The other 40 dB, and 55 dB have additionally applied same calculation above.

8. For MIMO mode, add additional MIMO factor $10\log(NTX=2) = 3.01$ dB into the spectrum analyzer offset.



3.6 Emission Mask

3.6.1 Description of Emissions Mask Measurement

For 5G NR n14

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

For 5G NR n26

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.



3.6.2 Test Procedures

For 5G NR n14

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For 5G NR n26

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge , RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. Make the measurement with the spectrum analyzer's RBW = 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GH, VBW = 3 * RBW.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n30
The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n7, n38, n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
9. For MIMO mode, add additional MIMO factor $10\log(NTX=2) = 3.01$ dB into the spectrum analyzer offset.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

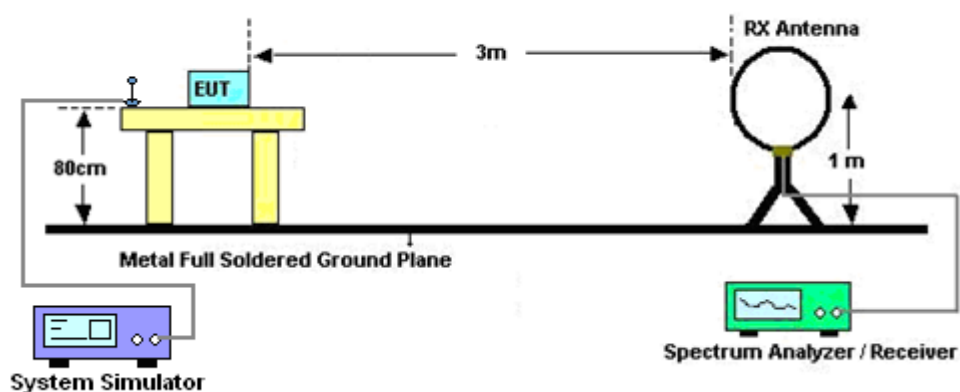


For radiated test from 30MHz to 1GHz

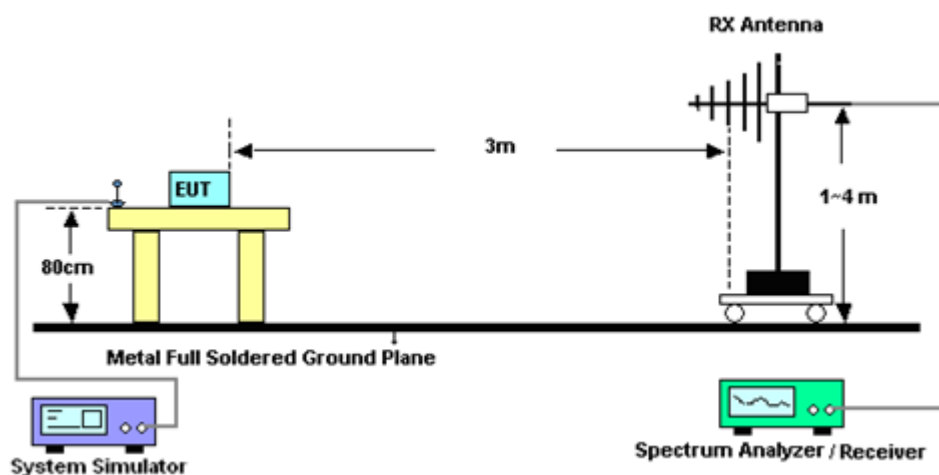

For radiated test from 1GHz to 18GHz

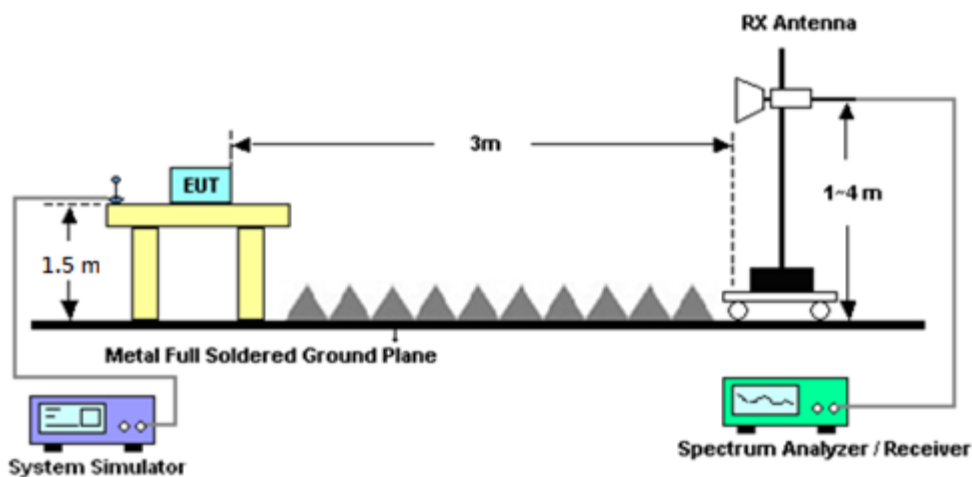

For radiated test above 18GHz

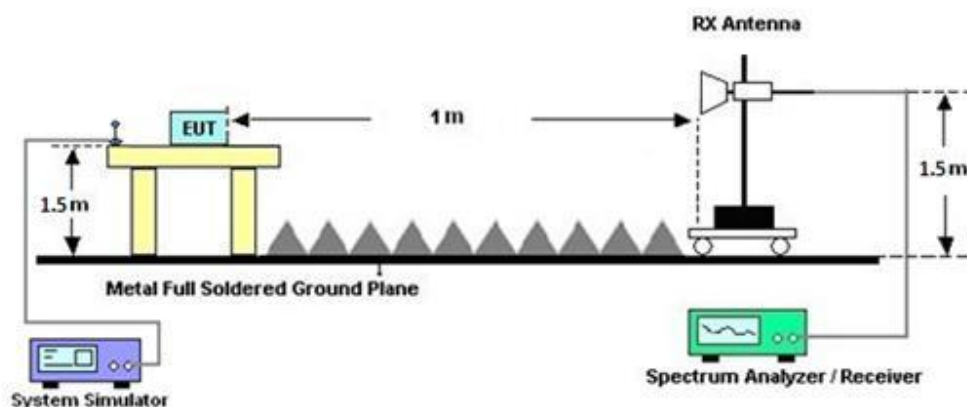

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For 5G NR n13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

For 5G NR n14

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)

$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$

where d is the distance at which field strength limit is specified in the rules

7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n30

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7, n38, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 11, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Dec. 10, 2026	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1224	18GHz~40GHz	Jul. 02, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Jul. 01, 2026	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Nov. 18, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Nov. 17, 2026	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 26, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Nov. 25, 2026	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 04, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Oct. 03, 2026	Radiation (03CH16-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Aug. 07, 2025	Mar. 20, 2026 ~ Apr. 13, 2026	Aug. 07, 2026	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01522	1GHz~18GHz	Mar. 26, 2026	Apr. 13, 2026 ~ Apr. 20, 2026	Mar. 25, 2027	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jun. 30, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Jun. 29, 2026	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Sep. 12, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Sep. 11, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 22, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 26, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	May 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 13, 2026	Mar. 20, 2026 ~ Apr. 20, 2026	Jan. 12, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 26, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Jun. 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN27	6.75GHz High Pass Filter	Dec. 22, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Apr. 22, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5757,805935/4,802434/4	30MHz~18GHz	Aug. 06, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Aug. 05, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40GHz	Dec. 18, 2025	Mar. 20, 2026 ~ Apr. 20, 2026	Dec. 17, 2026	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Mar. 20, 2026 ~ Apr. 20, 2026	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Mar. 20, 2026 ~ Apr. 20, 2026	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 20, 2026 ~ Apr. 20, 2026	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 20, 2026 ~ Apr. 20, 2026	N/A	Radiation (03CH16-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	NA	Nov. 04, 2025	Mar. 03, 2026 ~ Mar. 16, 2026	Nov. 03, 2026	Conducted (TH05-HY)
DC Power Supply	GW Instek	PSS-2005	EL890089	1V~20V 0.5A~5A	Jan. 24, 2026	Mar. 03, 2026 ~ Mar. 16, 2026	Jan. 23, 2027	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30°C ~95°C	May. 12, 2025	Mar. 03, 2026 ~ Mar. 16, 2026	May. 11, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101544	10Hz~44GHz	Jul. 15, 2025	Mar. 03, 2026 ~ Mar. 16, 2026	Jul. 14, 2026	Conducted (TH05-HY)
Base Station (Measure)	Anritsu	MT8000A	62619403 27	FR1	Jan. 02, 2026	Mar. 03, 2026 ~ Mar. 16, 2026	Jan. 01, 2027	Conducted (TH05-HY)
Power divider	Anritsu	K241C	2143398	9KHz~40GHz	Jun. 13, 2025	Mar. 03, 2026 ~ Mar. 16, 2026	Jun. 13, 2026	Conducted (TH05-HY)
RF Cable	MVE	MCBL-LL403P.50	E80002C	9KHz~40GHz	Aug. 01, 2025	Mar. 03, 2026 ~ Mar. 16, 2026	Jul. 31, 2026	Conducted (TH05-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
---	---------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERI/EIRP)

5G NR SCS 15KHz

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.42	24.34	24.41	32.96	1.9770		
5	1	23		24.42	24.39	24.42				
5	12	6		24.36	24.46	24.38				
5	1	0		24.01	23.85	24.04				
5	1	24		23.99	23.86	23.98				
5	25	0		24.09	23.95	24.13				
5	1	1	QPSK	24.38	24.32	24.37				
5	1	23		24.43	24.26	24.42				
5	12	6		24.44	24.41	24.38				
5	1	0		23.49	23.37	23.57				
5	1	24		23.50	23.38	23.48				
5	25	0		23.63	23.49	23.66				
5	1	1	16-QAM	23.65	23.52	23.70	32.20	1.6596		
5	1	1	64-QAM	22.31	22.08	22.26				
5	1	1	256-QAM	20.07	19.83	19.97				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.38	24.36	24.36	32.97	1.9815		
10	1	50		24.35	24.38	24.41				
10	25	12		24.38	24.47	24.42				
10	1	0		24.08	23.89	24.07				
10	1	51		24.02	23.90	24.05				
10	50	0		24.15	23.91	24.13				
10	1	1	QPSK	24.47	24.31	24.44				
10	1	50		24.45	24.26	24.40				
10	25	12		24.35	24.46	24.38				
10	1	0		23.51	23.37	22.99				
10	1	51		23.50	23.28	23.44				
10	50	0		23.66	23.45	23.59				
10	1	1	16-QAM	23.79	23.56	23.25	32.29	1.6943		
10	1	1	64-QAM	22.35	22.11	22.25				
10	1	1	256-QAM	20.12	19.87	20.06				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.41	24.35	24.43	32.97	1.9815		
15	1	77		24.47	24.40	24.43				
15	36	18		24.38	24.28	24.35				
15	1	0		24.09	23.92	23.93				
15	1	78		23.97	23.90	24.01				
15	75	0		24.12	23.92	24.08				
15	1	1	QPSK	24.45	24.29	24.00				
15	1	77		24.34	24.31	24.37				
15	36	18		24.41	24.44	24.42				
15	1	0		23.53	23.37	22.92				
15	1	78		23.42	23.37	23.42				
15	75	0		23.64	23.45	23.50				
15	1	1	16-QAM	23.82	23.52	23.12	32.32	1.7061		
15	1	1	64-QAM	22.39	22.15	22.19				
15	1	1	256-QAM	20.15	19.91	19.98				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.41	24.35	24.36	32.98	1.9861		
20	1	104		24.39	24.45	24.48				
20	50	25		24.38	24.42	24.38				
20	1	0		24.04	23.91	23.86				
20	1	105		23.91	23.93	24.01				
20	100	0		24.12	23.92	24.07				
20	1	1	QPSK	24.43	24.26	24.32				
20	1	104		24.40	24.26	24.40				
20	50	25		24.42	24.43	24.35				
20	1	0		23.51	23.31	23.35				
20	1	105		23.32	23.37	23.46				
20	100	0		23.55	23.43	23.52				
20	1	1	16-QAM	23.82	23.05	23.56	32.32	1.7061		
20	1	1	64-QAM	22.15	21.96	22.19				
20	1	1	256-QAM	20.08	19.95	19.95				
Limit	EIRP < 2W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.41	24.42	24.44	32.23	1.6711		
5	1	23		24.43	24.48	24.47				
5	12	6		24.39	24.37	24.38				
5	1	0		24.32	24.23	23.99				
5	1	24		24.32	24.11	23.98				
5	25	0		24.36	24.28	24.13				
5	1	1	QPSK	24.42	24.41	24.42				
5	1	23		24.41	24.42	24.43				
5	12	6		24.41	24.42	24.38				
5	1	0		23.84	23.74	23.53				
5	1	24		23.80	23.65	23.67				
5	25	0		23.96	23.89	23.78				
5	1	1	16-QAM	24.02	23.89	23.88	31.77	1.5031		
5	1	1	64-QAM	22.55	22.50	22.39				
5	1	1	256-QAM	20.37	20.27	20.15				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.35	24.41	24.38	32.24	1.6749		
10	1	50		24.36	24.44	24.39				
10	25	12		24.38	24.35	24.41				
10	1	0		24.35	24.32	24.11				
10	1	51		24.26	24.15	24.03				
10	50	0		24.38	24.27	24.08				
10	1	1	QPSK	24.38	24.41	24.38				
10	1	50		24.41	24.49	24.44				
10	25	12		24.38	24.35	24.34				
10	1	0		23.84	23.79	23.59				
10	1	51		23.74	23.57	23.59				
10	50	0		23.94	23.81	23.67				
10	1	1	16-QAM	24.01	24.01	23.78	31.76	1.4997		
10	1	1	64-QAM	22.56	22.51	22.27				
10	1	1	256-QAM	20.34	20.28	20.14				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.41	24.42	24.41	32.24	1.6749		
15	1	77		24.38	24.48	24.49				
15	36	18		24.39	24.41	24.38				
15	1	0		24.29	24.35	24.25				
15	1	78		24.11	23.96	23.97				
15	75	0		24.31	24.29	24.12				
15	1	1	QPSK	24.41	24.38	24.36				
15	1	77		24.40	24.38	24.38				
15	36	18		24.38	24.36	24.28				
15	1	0		23.79	23.77	23.68				
15	1	78		23.63	23.51	23.61				
15	75	0		23.86	23.80	23.74				
15	1	1	16-QAM	23.99	24.00	23.87	31.75	1.4962		
15	1	1	64-QAM	22.47	22.54	22.44				
15	1	1	256-QAM	20.32	20.38	20.24				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.28	24.39	24.38	32.21	1.6634		
20	1	104		24.42	24.38	24.34				
20	50	25		24.41	24.38	24.41				
20	1	0		24.29	24.31	24.31				
20	1	105		23.93	24.02	24.01				
20	100	0		24.28	24.29	24.22				
20	1	1	QPSK	24.38	24.42	24.38				
20	1	104		24.32	24.46	24.43				
20	50	25		24.44	24.42	24.38				
20	1	0		23.76	23.81	23.74				
20	1	105		23.46	23.55	23.57				
20	100	0		23.82	23.83	23.76				
20	1	1	16-QAM	23.96	23.99	24.00	31.75	1.4962		
20	1	1	64-QAM	22.49	22.56	22.50				
20	1	1	256-QAM	20.28	20.30	20.31				
Limit	ERP < 7W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.21	24.01	24.13	32.84	1.9231		
5	1	23		24.21	23.99	24.14				
5	12	6		24.31	24.13	24.26				
5	1	0		23.69	23.48	23.61				
5	1	24		23.72	23.50	23.61				
5	25	0		23.83	23.64	23.76				
5	1	1	QPSK	24.17	23.95	24.12				
5	1	23		24.19	23.95	24.09				
5	12	6		24.34	24.13	24.26				
5	1	0		23.20	22.99	23.18				
5	1	24		23.22	23.05	23.11				
5	25	0		23.36	23.16	23.29				
5	1	1	16-QAM	23.41	23.16	23.33	31.91	1.5524		
5	1	1	64-QAM	21.96	21.69	21.90				
5	1	1	256-QAM	19.64	19.36	19.57				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.11	24.03	24.19	32.73	1.8750		
10	1	50		24.11	24.06	24.12				
10	25	12		24.17	24.12	24.20				
10	1	0		24.04	23.55	23.70				
10	1	51		23.62	23.54	23.65				
10	50	0		24.13	24.14	24.18				
10	1	1	QPSK	24.08	23.93	24.11				
10	1	50		24.06	23.96	24.05				
10	25	12		24.21	24.14	24.23				
10	1	0		23.06	22.98	23.16				
10	1	51		23.09	22.96	23.06				
10	50	0		23.70	23.58	23.70				
10	1	1	16-QAM	23.32	23.07	23.34	31.84	1.5276		
10	1	1	64-QAM	21.80	21.67	21.92				
10	1	1	256-QAM	19.53	19.40	19.54				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.13	24.00	24.23	32.94	1.9679		
15	1	77		24.13	24.03	24.23				
15	36	18		24.35	24.44	24.34				
15	1	0		23.62	23.51	23.76				
15	1	78		23.65	23.52	23.76				
15	75	0		24.21	24.06	24.35				
15	1	1	QPSK	24.07	23.95	24.17				
15	1	77		24.07	23.98	24.14				
15	36	18		24.38	24.41	24.44				
15	1	0		23.09	22.99	23.20				
15	1	78		23.11	23.04	23.17				
15	75	0		23.75	23.58	23.83				
15	1	1	16-QAM	23.34	23.16	23.43	31.93	1.5596		
15	1	1	64-QAM	21.85	21.65	21.94				
15	1	1	256-QAM	19.56	19.35	19.61				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.17	23.97	24.18	32.95	1.9724		
20	1	104		24.15	24.05	24.15				
20	50	25		24.38	24.28	24.44				
20	1	0		24.11	23.49	23.68				
20	1	105		23.66	23.54	23.68				
20	100	0		24.27	24.06	24.29				
20	1	1	QPSK	24.11	23.96	24.09				
20	1	104		24.05	23.97	24.15				
20	50	25		24.45	24.32	24.41				
20	1	0		23.14	22.99	23.16				
20	1	105		23.12	23.03	23.18				
20	100	0		23.78	23.58	23.77				
20	1	1	16-QAM	23.35	23.16	23.33	31.85	1.5311		
20	1	1	64-QAM	21.89	21.72	21.78				
20	1	1	256-QAM	19.62	19.37	19.58				
Limit	EIRP < 2W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.32	24.35	24.34	31.39	1.3772		
5	1	23		24.41	24.43	24.38				
5	12	6		24.33	24.35	24.41				
5	1	0		24.13	24.23	24.34				
5	1	24		24.25	24.26	24.32				
5	25	0		24.27	24.39	24.42				
5	1	1	QPSK	24.34	24.38	24.42				
5	1	23		24.38	24.35	24.36				
5	12	6		24.44	24.42	24.42				
5	1	0		23.62	23.74	23.83				
5	1	24		23.68	23.84	23.77				
5	25	0		23.81	23.95	23.94				
5	1	1	16-QAM	23.87	24.05	23.92	31.00	1.2589		
5	1	1	64-QAM	22.37	22.59	22.53				
5	1	1	256-QAM	20.16	20.31	20.29				
Limit	ERP < 3W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.42	24.38	24.38	31.38	1.3740		
10	1	50		24.42	24.42	24.34				
10	25	12		24.35	24.35	24.36				
10	1	0		24.19	24.32	24.28				
10	1	51		24.32	24.38	24.38				
10	50	0		24.27	24.39	24.43				
10	1	1	QPSK	24.38	24.28	24.32				
10	1	50		24.35	24.42	24.35				
10	25	12		24.42	24.35	24.38				
10	1	0		23.63	23.70	23.69				
10	1	51		23.77	23.85	23.78				
10	50	0		23.82	23.89	23.95				
10	1	1	16-QAM	23.88	24.06	24.07	31.02	1.2647		
10	1	1	64-QAM	22.36	22.51	22.60				
10	1	1	256-QAM	20.16	20.31	20.31				
Limit	ERP < 3W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.35	24.33	24.36	31.37	1.3709		
15	1	77		24.36	24.35	24.42				
15	36	18		24.34	24.32	24.36				
15	1	0		24.20	24.22	24.23				
15	1	78		24.36	24.36	24.35				
15	75	0		24.35	24.37	24.37				
15	1	1	QPSK	24.39	24.34	24.33				
15	1	77		24.39	24.35	24.38				
15	36	18		24.35	24.31	24.31				
15	1	0		23.61	23.65	23.68				
15	1	78		23.84	23.83	23.79				
15	75	0		23.87	23.89	23.86				
15	1	1	16-QAM	23.90	23.87	23.99	30.94	1.2417		
15	1	1	64-QAM	22.42	22.48	22.50				
15	1	1	256-QAM	20.20	20.23	20.25				
Limit	ERP < 3W			Result			Pass			

NR n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.39	24.33	24.38	31.90	1.5488		
5	1	23		24.37	24.34	24.31				
5	12	6		24.38	24.35	24.40				
5	1	0		24.32	24.21	24.15				
5	1	24		24.17	24.14	24.10				
5	25	0		24.20	24.27	24.16				
5	1	1	QPSK	24.37	24.36	24.34				
5	1	23		24.37	24.38	24.33				
5	12	6		24.45	24.38	24.34				
5	1	0		23.69	23.62	23.63				
5	1	24		23.65	23.62	23.59				
5	25	0		23.80	23.78	23.69				
5	1	1	16-QAM	23.87	24.10	23.74	31.55	1.4289		
5	1	1	64-QAM	22.48	22.57	22.33				
5	1	1	256-QAM	20.29	20.32	20.10				
Limit	ERP < 3W			Result			Pass			

NR n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.41	-	31.89	1.5453		
10	1	50		-	24.38	-				
10	25	12		-	24.44	-				
10	1	0		-	24.31	-				
10	1	51		-	24.17	-				
10	50	0		-	24.37	-				
10	1	1	QPSK	-	24.42	-				
10	1	50		-	24.39	-				
10	25	12		-	24.38	-				
10	1	0		-	23.74	-				
10	1	51		-	23.59	-				
10	50	0		-	23.85	-				
10	1	1	16-QAM	-	23.95	-	31.40	1.3804		
10	1	1	64-QAM	-	22.46	-				
10	1	1	256-QAM	-	20.32	-				
Limit	ERP < 3W			Result			Pass			

NR n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.38	24.38	24.41	32.03	1.5959		
5	1	23		24.41	24.48	24.35				
5	12	6		24.38	24.41	24.42				
5	1	0		24.08	24.11	24.12				
5	1	24		24.09	24.03	24.10				
5	25	0		24.22	24.18	24.15				
5	1	1	QPSK	24.41	24.43	24.34				
5	1	23		24.47	24.48	24.41				
5	12	6		24.41	24.38	24.37				
5	1	0		23.49	23.52	23.58				
5	1	24		23.52	23.54	23.54				
5	25	0		23.77	23.71	23.68				
5	1	1	16-QAM	23.78	23.85	23.76	31.40	1.3804		
5	1	1	64-QAM	22.41	22.43	22.26				
5	1	1	256-QAM	20.12	20.18	20.12				
Limit	ERP < 3W			Result			Pass			

NR n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.35	-	32.02	1.5922		
10	1	50		-	24.41	-				
10	25	12		-	24.38	-				
10	1	0		-	24.11	-				
10	1	51		-	24.09	-				
10	50	0		-	24.23	-				
10	1	1	QPSK	-	24.38	-				
10	1	50		-	24.47	-				
10	25	12		-	24.35	-				
10	1	0		-	23.66	-				
10	1	51		-	23.52	-				
10	50	0		-	23.71	-				
10	1	1	16-QAM	-	23.88	-	31.43	1.3900		
10	1	1	64-QAM	-	22.41	-				
10	1	1	256-QAM	-	20.10	-				
Limit	ERP < 3W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.42	24.38	24.41	32.96	1.9770		
5	1	23		24.42	24.36	24.44				
5	12	6		24.42	24.38	24.44				
5	1	0		24.08	23.93	24.01				
5	1	24		24.05	23.90	24.00				
5	25	0		24.17	23.99	24.17				
5	1	1	QPSK	24.46	24.36	24.42				
5	1	23		24.38	24.30	24.40				
5	12	6		24.38	24.37	24.42				
5	1	0		23.55	23.40	23.51				
5	1	24		23.56	23.34	23.49				
5	25	0		23.70	23.55	23.66				
5	1	1	16-QAM	23.84	23.63	23.79	32.34	1.7140		
5	1	1	64-QAM	22.42	22.16	22.37				
5	1	1	256-QAM	20.09	19.89	20.01				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.41	24.38	32.96	1.9770		
10	1	50		24.43	24.46	24.41				
10	25	12		24.44	24.43	24.44				
10	1	0		24.16	23.92	24.11				
10	1	51		24.09	23.97	24.03				
10	50	0		24.16	23.97	24.10				
10	1	1	QPSK	24.44	24.36	24.38				
10	1	50		24.44	24.32	24.36				
10	25	12		24.42	24.38	24.44				
10	1	0		23.57	23.39	23.60				
10	1	51		23.57	23.40	23.49				
10	50	0		23.70	23.48	23.64				
10	1	1	16-QAM	23.69	23.60	23.78	32.28	1.6904		
10	1	1	64-QAM	22.45	22.12	22.33				
10	1	1	256-QAM	20.18	19.84	20.02				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.41	24.46	24.13	32.98	1.9861		
15	1	77		24.39	24.38	24.07				
15	36	18		24.41	24.48	24.40				
15	1	0		24.13	23.96	24.12				
15	1	78		24.07	24.01	24.09				
15	75	0		24.15	23.97	24.15				
15	1	1	QPSK	24.43	24.36	24.06				
15	1	77		24.41	24.41	24.02				
15	36	18		24.38	24.44	24.42				
15	1	0		23.54	23.41	23.09				
15	1	78		23.53	23.47	23.07				
15	75	0		23.67	23.49	23.63				
15	1	1	16-QAM	23.89	23.61	23.27	32.39	1.7338		
15	1	1	64-QAM	22.43	22.15	21.92				
15	1	1	256-QAM	20.15	19.85	20.10				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.42	24.42	24.10	32.99	1.9907		
20	1	104		24.40	24.46	24.08				
20	50	25		24.40	24.45	24.38				
20	1	0		24.08	23.96	24.11				
20	1	105		23.97	23.98	24.07				
20	100	0		24.16	23.95	24.14				
20	1	1	QPSK	24.46	24.33	24.05				
20	1	104		24.37	24.44	23.97				
20	50	25		24.42	24.49	24.48				
20	1	0		23.54	23.46	23.08				
20	1	105		23.46	23.46	23.04				
20	100	0		23.68	23.53	23.64				
20	1	1	16-QAM	23.89	23.60	23.30	32.39	1.7338		
20	1	1	64-QAM	22.38	22.20	22.36				
20	1	1	256-QAM	20.12	19.92	20.07				
Limit	EIRP < 2W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.41	24.32	24.08	32.25	1.6788		
5	1	23		24.40	24.24	24.11				
5	12	6		24.50	24.43	24.23				
5	1	0		23.95	23.83	23.62				
5	1	24		23.92	23.74	23.64				
5	25	0		24.01	23.91	23.71				
5	1	1	QPSK	24.38	24.34	24.02				
5	1	23		24.36	24.22	24.11				
5	12	6		24.47	24.44	24.28				
5	1	0		23.49	23.37	23.16				
5	1	24		23.44	23.23	23.19				
5	25	0		23.61	23.46	23.39				
5	1	1	16-QAM	23.64	23.55	23.46	31.39	1.3772		
5	1	1	64-QAM	22.22	22.12	22.01				
5	1	1	256-QAM	19.99	19.91	19.74				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.41	24.41	24.19	32.25	1.6788		
10	1	50		24.35	24.21	24.10				
10	25	12		24.48	24.40	24.20				
10	1	0		23.92	23.89	23.72				
10	1	51		23.85	23.74	23.66				
10	50	0		23.98	23.94	23.68				
10	1	1	QPSK	24.36	24.32	24.13				
10	1	50		24.30	24.10	24.05				
10	25	12		24.50	24.41	24.23				
10	1	0		23.47	23.42	23.17				
10	1	51		23.37	23.15	23.19				
10	50	0		23.53	23.44	23.25				
10	1	1	16-QAM	23.62	23.63	23.34	31.38	1.3740		
10	1	1	64-QAM	22.15	22.08	21.88				
10	1	1	256-QAM	19.97	19.89	19.68				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.40	24.40	24.31	32.17	1.6482		
15	1	77		24.23	24.12	24.10				
15	36	18		24.40	24.36	24.22				
15	1	0		23.94	23.95	23.84				
15	1	78		23.71	23.63	23.62				
15	75	0		23.92	23.90	23.69				
15	1	1	QPSK	24.37	24.34	24.26				
15	1	77		24.20	24.03	24.07				
15	36	18		24.42	24.37	24.24				
15	1	0		23.42	23.40	23.33				
15	1	78		23.18	23.13	23.15				
15	75	0		23.48	23.39	23.29				
15	1	1	16-QAM	23.62	23.67	23.51	31.42	1.3868		
15	1	1	64-QAM	22.17	22.16	22.03				
15	1	1	256-QAM	19.96	19.97	19.87				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.35	24.41	24.38	32.16	1.6444		
20	1	104		24.06	24.08	24.09				
20	50	25		24.39	24.38	24.35				
20	1	0		23.92	23.93	23.92				
20	1	105		23.56	23.58	23.61				
20	100	0		23.87	23.87	23.82				
20	1	1	QPSK	24.34	24.37	24.31				
20	1	104		23.99	24.00	24.06				
20	50	25		24.41	24.40	24.35				
20	1	0		23.41	23.40	23.40				
20	1	105		23.04	23.16	23.16				
20	100	0		23.40	23.45	23.37				
20	1	1	16-QAM	23.59	23.61	23.60	31.36	1.3677		
20	1	1	64-QAM	22.13	22.14	22.05				
20	1	1	256-QAM	19.91	19.96	19.98				
Limit	ERP < 7W			Result			Pass			

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	24.31	24.41	24.23	32.24	1.6749		
5	1	23		24.43	24.41	24.38				
5	12	6		24.36	24.45	24.45				
5	1	0		23.82	23.80	23.81				
5	1	24		23.85	23.92	23.90				
5	25	0		24.10	24.01	24.03				
5	1	1	QPSK	24.11	24.27	24.30				
5	1	23		24.33	24.31	24.37				
5	12	6		24.45	24.48	24.49				
5	1	0		23.13	23.26	23.39				
5	1	24		23.39	23.42	23.48				
5	25	0		23.55	23.52	23.60				
5	1	1	16-QAM	23.51	23.44	23.46	31.26	1.3366		
5	1	1	64-QAM	22.05	22.10	22.07				
5	1	1	256-QAM	19.77	19.84	19.90				
Limit	Power < 100W			Result			Pass			

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.31	-	32.25	1.6788		
10	1	50		-	24.45	-				
10	25	12		-	24.46	-				
10	1	0		-	23.90	-				
10	1	51		-	23.99	-				
10	50	0		-	23.98	-				
10	1	1	QPSK	-	24.05	-				
10	1	50		-	24.45	-				
10	25	12		-	24.50	-				
10	1	0		-	23.41	-				
10	1	51		-	23.48	-				
10	50	0		-	23.50	-				
10	1	1	16-QAM	-	23.51	-	31.26	1.3366		
10	1	1	64-QAM	-	22.01	-				
10	1	1	256-QAM	-	19.80	-				
Limit	Power < 100W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	-	24.45	-	32.25	1.6788		
5	1	23		-	24.50	-				
5	12	6		-	24.49	-				
5	1	0		-	23.93	-				
5	1	24		-	24.01	-				
5	25	0		-	24.10	-				
5	1	1	QPSK	-	24.22	-				
5	1	23		-	24.49	-				
5	12	6		-	24.45	-				
5	1	0		-	23.51	-				
5	1	24		-	23.51	-				
5	25	0		-	23.69	-				
5	1	1	16-QAM	-	23.68	-	31.43	1.3900		
5	1	1	64-QAM	-	22.23	-				
5	1	1	256-QAM	-	20.03	-				
Limit	EIRP < 7W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.40	-	32.24	1.6749		
10	1	50		-	24.42	-				
10	25	12		-	24.49	-				
10	1	0		-	23.97	-				
10	1	51		-	24.01	-				
10	50	0		-	24.06	-				
10	1	1	QPSK	-	24.41	-				
10	1	50		-	24.45	-				
10	25	12		-	24.48	-				
10	1	0		-	23.49	-				
10	1	51		-	23.54	-				
10	50	0		-	23.68	-				
10	1	1	16-QAM	-	23.56	-	31.31	1.3521		
10	1	1	64-QAM	-	22.19	-				
10	1	1	256-QAM	-	20.01	-				
Limit	EIRP < 7W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	24.41	-	32.24	1.6749		
15	1	77		-	24.49	-				
15	36	18		-	24.43	-				
15	1	0		-	23.86	-				
15	1	78		-	23.97	-				
15	75	0		-	24.16	-				
15	1	1	QPSK	-	24.44	-				
15	1	77		-	24.45	-				
15	36	18		-	24.49	-				
15	1	0		-	23.37	-				
15	1	78		-	23.52	-				
15	75	0		-	23.64	-				
15	1	1	16-QAM	-	23.60	-	31.35	1.3646		
15	1	1	64-QAM	-	22.12	-				
15	1	1	256-QAM	-	19.95	-				
Limit	EIRP < 7W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.01	-	32.02	1.5922		
20	1	104		-	24.27	-				
20	50	25		-	24.24	-				
20	1	0		-	23.50	-				
20	1	105		-	23.81	-				
20	100	0		-	23.88	-				
20	1	1	QPSK	-	23.89	-				
20	1	104		-	24.23	-				
20	50	25		-	24.26	-				
20	1	0		-	23.01	-				
20	1	105		-	23.28	-				
20	100	0		-	23.22	-				
20	1	1	16-QAM	-	23.19	-	30.94	1.2417		
20	1	1	64-QAM	-	21.77	-				
20	1	1	256-QAM	-	19.53	-				
Limit	EIRP < 7W			Result			Pass			

NR n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	22.22	22.24	22.31	23.34	0.2158		
5	1	23		22.25	22.29	22.28				
5	12	6		22.28	22.41	22.40				
5	1	0		21.71	21.74	21.81				
5	1	24		21.74	21.77	21.78				
5	25	0		21.83	21.89	21.92				
5	1	1	QPSK	22.20	22.30	22.27				
5	1	23		22.28	22.26	22.24				
5	12	6		22.35	22.44	22.40				
5	1	0		21.22	21.24	21.32				
5	1	24		21.30	21.30	21.28				
5	25	0		21.38	21.49	21.46				
5	1	1	16-QAM	21.32	21.40	21.42	22.32	0.1706		
5	1	1	64-QAM	19.91	19.94	20.00				
5	1	1	256-QAM	17.73	17.78	17.83				
Limit	EIRP < 250 W/5MHz			Result			Pass			

NR n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	22.29	-	23.32	0.2148		
10	1	50		-	22.29	-				
10	25	12		-	22.41	-				
10	1	0		-	21.76	-				
10	1	51		-	21.81	-				
10	50	0		-	21.84	-				
10	1	1	QPSK	-	22.25	-				
10	1	50		-	22.20	-				
10	25	12		-	22.42	-				
10	1	0		-	21.26	-				
10	1	51		-	21.27	-				
10	50	0		-	21.36	-				
10	1	1	16-QAM	-	21.36	-	22.26	0.1683		
10	1	1	64-QAM	-	19.88	-				
10	1	1	256-QAM	-	17.78	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.31	24.13	24.28	32.93	1.9634		
5	1	23		24.33	24.16	24.27				
5	12	6		24.42	24.21	24.33				
5	1	0		23.86	23.64	23.77				
5	1	24		23.81	23.65	23.77				
5	25	0		23.91	23.74	23.86				
5	1	1	QPSK	24.36	24.16	24.28				
5	1	23		24.37	24.16	24.30				
5	12	6		24.43	24.27	24.41				
5	1	0		23.38	23.15	23.29				
5	1	24		23.36	23.18	23.29				
5	25	0		23.45	23.30	23.42				
5	1	1	16-QAM	23.27	23.17	23.30	31.80	1.5136		
5	1	1	64-QAM	22.14	21.87	21.99				
5	1	1	256-QAM	19.80	19.62	19.67				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.22	24.17	24.23	32.83	1.9187		
10	1	50		24.19	24.20	24.27				
10	25	12		24.26	24.23	24.31				
10	1	0		23.71	23.66	23.71				
10	1	51		23.69	23.71	23.79				
10	50	0		23.76	23.73	23.80				
10	1	1	QPSK	24.18	24.13	24.21				
10	1	50		24.16	24.16	24.27				
10	25	12		24.28	24.24	24.33				
10	1	0		23.19	23.15	23.25				
10	1	51		23.16	23.19	23.28				
10	50	0		23.27	23.21	23.30				
10	1	1	16-QAM	23.15	23.06	23.10	31.65	1.4622		
10	1	1	64-QAM	21.91	21.95	22.05				
10	1	1	256-QAM	19.59	19.59	19.68				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.26	24.18	24.35	32.92	1.9588		
15	1	77		24.23	24.20	24.40				
15	36	18		24.29	24.21	24.42				
15	1	0		23.77	23.65	23.87				
15	1	78		23.75	23.72	23.90				
15	75	0		23.80	23.74	23.93				
15	1	1	QPSK	24.27	24.16	24.39				
15	1	77		24.23	24.18	24.42				
15	36	18		24.30	24.25	24.41				
15	1	0		23.25	23.17	23.40				
15	1	78		23.22	23.21	23.43				
15	75	0		23.31	23.22	23.43				
15	1	1	16-QAM	23.15	23.05	23.24	31.74	1.4928		
15	1	1	64-QAM	22.10	21.97	22.20				
15	1	1	256-QAM	19.65	19.56	19.79				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.30	24.11	24.27	32.91	1.9543		
20	1	104		24.28	24.19	24.34				
20	50	25		24.34	24.21	24.41				
20	1	0		23.77	23.65	23.76				
20	1	105		23.73	23.71	23.86				
20	100	0		23.82	23.73	23.89				
20	1	1	QPSK	24.29	24.08	24.27				
20	1	104		24.27	24.17	24.34				
20	50	25		24.33	24.23	24.41				
20	1	0		23.29	23.13	23.31				
20	1	105		23.26	23.19	23.37				
20	100	0		23.32	23.25	23.40				
20	1	1	16-QAM	23.17	23.14	23.17	31.67	1.4689		
20	1	1	64-QAM	22.06	21.85	22.08				
20	1	1	256-QAM	19.70	19.59	19.72				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.31	24.29	24.11	32.97	1.9815		
10	1	50		24.35	24.30	24.10				
10	25	12		24.43	24.35	24.21				
10	1	0		23.84	23.81	23.63				
10	1	51		23.89	23.81	23.61				
10	50	0		23.92	23.84	23.68				
10	1	1	QPSK	24.25	24.26	24.07				
10	1	50		24.29	24.29	24.07				
10	25	12		24.47	24.39	24.17				
10	1	0		23.34	23.33	23.14				
10	1	51		23.38	23.32	23.13				
10	50	0		23.46	23.34	23.18				
10	1	1	16-QAM	23.32	23.23	23.03	31.82	1.5205		
10	1	1	64-QAM	22.09	22.09	21.93				
10	1	1	256-QAM	19.78	19.58	19.53				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.41	24.32	24.31	33.00	1.9953		
15	1	77		24.42	24.35	24.25				
15	36	18		24.49	24.35	24.30				
15	1	0		23.94	23.82	23.82				
15	1	78		23.98	23.82	23.76				
15	75	0		23.99	23.86	23.84				
15	1	1	QPSK	24.45	24.31	24.28				
15	1	77		24.45	24.36	24.25				
15	36	18		24.50	24.36	24.34				
15	1	0		23.43	23.33	23.32				
15	1	78		23.42	23.34	23.28				
15	75	0		23.52	23.37	23.33				
15	1	1	16-QAM	23.32	23.21	23.24	31.82	1.5205		
15	1	1	64-QAM	22.37	22.10	22.10				
15	1	1	256-QAM	19.81	19.64	19.66				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.23	24.30	24.23	32.88	1.9409		
20	1	104		24.26	24.32	24.21				
20	50	25		24.36	24.36	24.31				
20	1	0		23.76	23.81	23.72				
20	1	105		23.76	23.81	23.68				
20	100	0		23.88	23.86	23.81				
20	1	1	QPSK	24.16	24.26	24.24				
20	1	104		24.19	24.32	24.21				
20	50	25		24.38	24.38	24.32				
20	1	0		23.23	23.31	23.25				
20	1	105		23.23	23.32	23.25				
20	100	0		23.39	23.35	23.33				
20	1	1	16-QAM	23.16	23.16	23.19	31.69	1.4757		
20	1	1	64-QAM	22.05	22.06	22.07				
20	1	1	256-QAM	19.70	19.60	19.63				
Limit	EIRP < 2W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.31	24.37	24.45	29.99	0.9977		
5	1	23		24.32	24.39	24.49				
5	12	6		24.39	24.40	24.38				
5	1	0		23.82	24.04	23.96				
5	1	24		23.85	24.03	24.02				
5	25	0		23.92	24.11	24.10				
5	1	1	QPSK	24.28	24.48	24.43				
5	1	23		24.25	24.42	24.41				
5	12	6		24.46	24.38	24.39				
5	1	0		23.32	23.53	23.48				
5	1	24		23.32	23.49	23.50				
5	25	0		23.45	23.65	23.58				
5	1	1	16-QAM	23.42	23.65	23.55	29.15	0.8222		
5	1	1	64-QAM	22.00	22.26	22.13				
5	1	1	256-QAM	19.77	20.05	19.89				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.40	24.38	24.41	29.97	0.9931		
10	1	50		24.38	24.44	24.34				
10	25	12		24.38	24.38	24.34				
10	1	0		23.94	24.09	23.95				
10	1	51		23.93	24.02	24.10				
10	50	0		24.00	24.09	24.09				
10	1	1	QPSK	24.35	24.39	24.36				
10	1	50		24.32	24.41	24.45				
10	25	12		24.47	24.38	24.40				
10	1	0		23.42	23.55	23.41				
10	1	51		23.43	23.48	23.48				
10	50	0		23.50	23.62	23.57				
10	1	1	16-QAM	23.52	23.71	23.52	29.21	0.8337		
10	1	1	64-QAM	22.11	22.21	22.10				
10	1	1	256-QAM	19.92	20.05	19.90				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.38	24.38	24.32	29.96	0.9908		
15	1	77		24.43	24.39	24.46				
15	36	18		24.38	24.34	24.42				
15	1	0		23.88	24.08	23.83				
15	1	78		24.00	24.01	24.01				
15	75	0		23.95	24.10	23.97				
15	1	1	QPSK	24.31	24.39	24.24				
15	1	77		24.43	24.38	24.41				
15	36	18		24.40	24.34	24.44				
15	1	0		23.40	23.54	23.31				
15	1	78		23.45	23.47	23.49				
15	75	0		23.45	23.61	23.44				
15	1	1	16-QAM	23.46	23.65	23.46	29.15	0.8222		
15	1	1	64-QAM	22.03	22.21	22.02				
15	1	1	256-QAM	19.90	20.01	19.80				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.35	24.41	24.31	29.98	0.9954		
20	1	104		24.38	24.44	24.48				
20	50	25		24.41	24.35	24.41				
20	1	0		23.88	24.04	23.88				
20	1	105		24.05	23.95	24.04				
20	100	0		23.97	24.11	24.02				
20	1	1	QPSK	24.28	24.44	24.26				
20	1	104		24.43	24.37	24.42				
20	50	25		24.40	24.36	24.41				
20	1	0		23.36	23.56	23.33				
20	1	105		23.48	23.48	23.45				
20	100	0		23.42	23.58	23.45				
20	1	1	16-QAM	23.44	23.59	23.45	29.09	0.8110		
20	1	1	64-QAM	22.00	22.21	21.96				
20	1	1	256-QAM	19.85	19.99	19.83				
Limit	EIRP < 1W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.46	24.45	24.49	31.24	1.3305		
5	1	23		24.45	24.41	24.46				
5	12	6		24.47	24.41	24.38				
5	1	0		24.39	24.21	23.98				
5	1	24		24.36	24.14	23.97				
5	25	0		24.45	24.30	24.08				
5	1	1	QPSK	24.42	24.43	24.44				
5	1	23		24.43	24.41	24.28				
5	12	6		24.35	24.44	24.32				
5	1	0		23.89	23.70	23.49				
5	1	24		23.82	23.67	23.51				
5	25	0		23.96	23.84	23.61				
5	1	1	16-QAM	23.92	23.76	23.63	30.67	1.1668		
5	1	1	64-QAM	22.49	22.34	22.19				
5	1	1	256-QAM	20.37	20.18	19.99				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.44	24.43	24.49	31.24	1.3305		
10	1	50		24.44	24.46	24.45				
10	25	12		24.38	24.41	24.38				
10	1	0		24.39	24.27	24.01				
10	1	51		24.34	24.08	23.99				
10	50	0		24.39	24.30	24.01				
10	1	1	QPSK	24.45	24.44	24.45				
10	1	50		24.48	24.34	24.46				
10	25	12		24.44	24.46	24.38				
10	1	0		23.87	23.72	23.49				
10	1	51		23.75	23.53	23.47				
10	50	0		23.91	23.79	23.53				
10	1	1	16-QAM	23.98	23.82	23.62	30.73	1.1830		
10	1	1	64-QAM	22.53	22.35	22.13				
10	1	1	256-QAM	20.34	20.22	19.90				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.42	24.41	24.34	31.23	1.3274		
15	1	77		24.46	24.38	24.46				
15	36	18		24.45	24.46	24.38				
15	1	0		24.36	24.26	24.12				
15	1	78		24.23	24.04	23.94				
15	75	0		24.34	24.24	23.96				
15	1	1	QPSK	24.42	24.44	24.38				
15	1	77		24.34	24.48	24.44				
15	36	18		24.46	24.31	24.32				
15	1	0		23.82	23.74	23.57				
15	1	78		23.72	23.48	23.47				
15	75	0		23.83	23.73	23.50				
15	1	1	16-QAM	23.98	23.88	23.66	30.73	1.1830		
15	1	1	64-QAM	22.48	22.43	22.19				
15	1	1	256-QAM	20.32	20.24	20.02				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.41	24.42	24.44	31.20	1.3183		
20	1	104		24.35	24.44	24.45				
20	50	25		24.42	24.43	24.38				
20	1	0		24.30	24.24	24.19				
20	1	105		24.11	23.94	23.95				
20	100	0		24.20	24.31	24.09				
20	1	1	QPSK	24.42	24.42	24.44				
20	1	104		24.42	24.40	24.44				
20	50	25		24.42	24.38	24.34				
20	1	0		23.79	23.66	23.66				
20	1	105		23.63	23.43	23.48				
20	100	0		23.78	23.79	23.55				
20	1	1	16-QAM	23.89	23.92	23.77	30.67	1.1668		
20	1	1	64-QAM	22.42	22.48	22.25				
20	1	1	256-QAM	20.28	20.21	20.11				
Limit	ERP < 3W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.06	24.11	24.44	29.99	0.9977		
10	1	50		24.15	24.12	24.32				
10	25	12		24.22	24.17	24.46				
10	1	0		23.54	23.66	24.49				
10	1	51		23.69	23.65	23.89				
10	50	0		23.68	23.72	24.01				
10	1	1	QPSK	23.99	24.07	24.44				
10	1	50		24.11	24.09	24.35				
10	25	12		24.20	24.17	24.46				
10	1	0		23.05	23.12	23.51				
10	1	51		23.15	23.16	23.36				
10	50	0		23.19	23.17	23.51				
10	1	1	16-QAM	23.05	23.05	23.39	28.89	0.7745		
10	1	1	64-QAM	21.76	21.84	22.32				
10	1	1	256-QAM	19.45	19.40	19.77				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.05	24.30	24.41	30.00	1.0000		
15	1	77		24.12	24.16	24.35				
15	36	18		24.18	24.12	24.44				
15	1	0		23.60	23.67	24.04				
15	1	78		23.69	23.71	23.90				
15	75	0		23.74	23.75	24.09				
15	1	1	QPSK	24.04	24.10	24.50				
15	1	77		24.12	24.14	24.33				
15	36	18		24.20	24.14	24.46				
15	1	0		23.09	23.16	23.57				
15	1	78		23.17	23.22	23.39				
15	75	0		23.26	23.26	23.60				
15	1	1	16-QAM	23.05	23.07	23.44	28.94	0.7834		
15	1	1	64-QAM	21.76	21.81	22.34				
15	1	1	256-QAM	19.50	19.47	19.84				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.08	24.14	24.44	29.95	0.9886		
20	1	104		24.03	24.18	24.35				
20	50	25		24.24	24.16	24.42				
20	1	0		23.59	23.69	23.96				
20	1	105		23.56	23.71	23.90				
20	100	0		23.74	23.80	24.08				
20	1	1	QPSK	23.99	24.12	24.42				
20	1	104		23.99	24.14	24.33				
20	50	25		24.23	24.17	24.45				
20	1	0		23.07	23.19	23.48				
20	1	105		23.09	23.22	23.40				
20	100	0		23.27	23.29	23.60				
20	1	1	16-QAM	23.01	23.10	23.42	28.92	0.7798		
20	1	1	64-QAM	21.70	21.85	22.32				
20	1	1	256-QAM	19.52	19.48	19.75				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.35	23.39	23.67	29.19	0.8299		
10	1	50		23.47	23.25	23.53				
10	25	12		23.44	23.34	23.69				
10	1	0		22.87	22.92	23.20				
10	1	51		23.03	22.76	23.00				
10	50	0		22.95	22.88	23.13				
10	1	1	QPSK	23.34	23.36	23.66				
10	1	50		23.46	23.22	23.48				
10	25	12		23.50	23.38	23.69				
10	1	0		22.38	22.40	22.70				
10	1	51		22.49	22.22	22.50				
10	50	0		22.46	22.37	22.65				
10	1	1	16-QAM	22.21	22.29	22.45	27.95	0.6237		
10	1	1	64-QAM	21.12	21.01	21.37				
10	1	1	256-QAM	18.69	18.63	18.94				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.42	23.49	23.81	29.33	0.8570		
15	1	77		23.58	23.27	23.52				
15	36	18		23.48	23.36	23.79				
15	1	0		22.90	23.02	23.32				
15	1	78		23.11	22.79	23.01				
15	75	0		23.00	22.90	23.27				
15	1	1	QPSK	23.38	23.47	23.83				
15	1	77		23.63	23.29	23.51				
15	36	18		23.46	23.32	23.76				
15	1	0		22.37	22.47	22.84				
15	1	78		22.56	22.29	22.53				
15	75	0		22.52	22.39	22.77				
15	1	1	16-QAM	22.27	22.37	22.70	28.20	0.6607		
15	1	1	64-QAM	21.06	21.18	21.39				
15	1	1	256-QAM	18.70	18.72	19.12				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.39	23.52	23.72	29.33	0.8570		
20	1	104		23.63	23.30	23.53				
20	50	25		23.56	23.38	23.83				
20	1	0		22.90	23.01	23.26				
20	1	105		23.15	22.78	23.01				
20	100	0		23.07	22.90	23.30				
20	1	1	QPSK	23.34	23.46	23.73				
20	1	104		23.67	23.22	23.49				
20	50	25		23.56	23.37	23.81				
20	1	0		22.37	22.50	22.74				
20	1	105		22.69	22.23	22.50				
20	100	0		22.56	22.41	22.79				
20	1	1	16-QAM	22.33	22.49	22.67	28.17	0.6561		
20	1	1	64-QAM	21.02	21.17	21.35				
20	1	1	256-QAM	18.72	18.81	19.07				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.16	24.38	24.41	29.96	0.9908		
10	1	50		24.13	24.46	24.41				
10	25	12		24.22	24.36	24.46				
10	1	0		23.74	24.10	24.30				
10	1	51		23.69	24.01	24.27				
10	50	0		23.77	24.10	24.35				
10	1	1	QPSK	24.12	24.38	24.39				
10	1	50		24.05	24.41	24.38				
10	25	12		24.22	24.38	24.41				
10	1	0		23.25	23.56	23.75				
10	1	51		23.17	23.47	23.72				
10	50	0		23.26	23.63	23.87				
10	1	1	16-QAM	23.19	23.61	23.73	29.23	0.8375		
10	1	1	64-QAM	21.84	22.30	22.45				
10	1	1	256-QAM	19.59	20.13	20.31				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.22	24.38	24.39	29.94	0.9863		
15	1	77		24.23	24.42	24.40				
15	36	18		24.25	24.39	24.43				
15	1	0		23.83	24.15	24.18				
15	1	78		23.81	23.99	24.26				
15	75	0		23.82	24.12	24.27				
15	1	1	QPSK	24.21	24.33	24.39				
15	1	77		24.19	24.42	24.44				
15	36	18		24.27	24.39	24.43				
15	1	0		23.29	23.59	23.64				
15	1	78		23.29	23.48	23.69				
15	75	0		23.37	23.67	23.81				
15	1	1	16-QAM	23.31	23.62	23.66	29.16	0.8241		
15	1	1	64-QAM	21.96	22.31	22.36				
15	1	1	256-QAM	19.73	20.16	20.23				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.25	24.34	24.49	29.99	0.9977		
20	1	104		24.32	24.39	24.35				
20	50	25		24.32	24.33	24.35				
20	1	0		23.83	24.10	24.06				
20	1	105		23.86	23.96	24.20				
20	100	0		23.86	24.13	24.23				
20	1	1	QPSK	24.21	24.48	24.48				
20	1	104		24.29	24.39	24.35				
20	50	25		24.35	24.36	24.43				
20	1	0		23.30	23.55	23.55				
20	1	105		23.36	23.45	23.68				
20	100	0		23.40	23.68	23.75				
20	1	1	16-QAM	23.31	23.61	23.43	29.11	0.8147		
20	1	1	64-QAM	22.00	22.31	22.35				
20	1	1	256-QAM	19.76	20.08	20.09				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.12	24.16	24.10	29.81	0.9572		
10	1	50		24.16	24.27	24.17				
10	25	12		24.20	24.29	24.21				
10	1	0		23.64	23.66	23.66				
10	1	51		23.68	23.80	23.76				
10	50	0		23.70	23.80	23.70				
10	1	1	QPSK	24.11	24.14	24.02				
10	1	50		24.13	24.26	24.12				
10	25	12		24.24	24.31	24.24				
10	1	0		23.11	23.19	23.10				
10	1	51		23.15	23.29	23.19				
10	50	0		23.22	23.32	23.26				
10	1	1	16-QAM	23.17	23.05	23.06	28.67	0.7362		
10	1	1	64-QAM	21.82	21.97	21.79				
10	1	1	256-QAM	19.69	19.79	19.74				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.17	24.13	24.10	29.80	0.9550		
15	1	77		24.17	24.30	24.21				
15	36	18		24.24	24.28	24.13				
15	1	0		23.72	23.65	23.66				
15	1	78		23.66	23.79	23.74				
15	75	0		23.77	23.80	23.67				
15	1	1	QPSK	24.13	24.11	24.03				
15	1	77		24.10	24.26	24.11				
15	36	18		24.26	24.30	24.16				
15	1	0		23.18	23.13	23.05				
15	1	78		23.15	23.27	23.19				
15	75	0		23.30	23.34	23.20				
15	1	1	16-QAM	23.17	23.05	23.04	28.67	0.7362		
15	1	1	64-QAM	21.88	22.01	21.76				
15	1	1	256-QAM	19.78	19.79	19.72				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.26	24.10	24.07	29.86	0.9683		
20	1	104		24.16	24.28	24.13				
20	50	25		24.34	24.31	24.11				
20	1	0		23.76	23.64	23.60				
20	1	105		23.68	23.81	23.67				
20	100	0		23.83	23.82	23.62				
20	1	1	QPSK	24.24	24.04	23.99				
20	1	104		24.15	24.21	24.07				
20	50	25		24.36	24.33	24.13				
20	1	0		23.26	23.09	23.03				
20	1	105		23.19	23.24	23.07				
20	100	0		23.38	23.35	23.13				
20	1	1	16-QAM	23.16	23.10	23.05	28.66	0.7345		
20	1	1	64-QAM	22.08	21.78	21.77				
20	1	1	256-QAM	19.78	19.72	19.69				
Limit	EIRP < 1W			Result			Pass			

5G NR Redcap SCS 15KHz

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.12	24.11	23.69	32.89	1.9454		
5	1	23		24.04	24.03	23.74				
5	12	6		24.26	24.19	24.33				
5	1	0		23.65	23.60	23.72				
5	1	24		23.66	23.55	23.79				
5	25	0		23.77	23.69	23.85				
5	1	1	QPSK	24.02	24.07	23.76				
5	1	23		24.10	23.94	23.72				
5	12	6		24.34	24.23	24.39				
5	1	0		23.20	23.14	22.76				
5	1	24		23.18	23.04	23.24				
5	25	0		23.32	23.25	23.36				
5	1	1	16-QAM	23.47	23.23	22.81	31.97	1.5740		
5	1	1	64-QAM	22.00	21.77	21.99				
5	1	1	256-QAM	19.67	19.54	19.62				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.25	23.73	23.68	32.91	1.9543		
10	1	50		24.34	24.01	23.86				
10	25	12		24.40	24.19	24.33				
10	1	0		23.76	23.71	23.19				
10	1	51		23.85	23.58	23.35				
10	50	0		23.90	23.67	23.80				
10	1	1	QPSK	24.10	23.68	23.71				
10	1	50		24.23	23.88	23.73				
10	25	12		24.41	24.18	24.33				
10	1	0		23.23	22.71	22.69				
10	1	51		23.35	22.97	22.79				
10	50	0		23.45	23.20	23.32				
10	1	1	16-QAM	23.60	22.79	22.82	32.10	1.6218		
10	1	1	64-QAM	22.09	21.31	21.39				
10	1	1	256-QAM	19.83	19.60	19.09				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.27	23.73	23.62	32.92	1.9588		
15	1	77		24.32	23.56	23.81				
15	36	18		24.40	24.20	24.20				
15	1	0		23.77	23.26	23.13				
15	1	78		23.87	23.55	23.28				
15	75	0		23.92	23.72	23.75				
15	1	1	QPSK	24.10	23.71	23.53				
15	1	77		23.76	23.49	23.62				
15	36	18		24.42	24.20	24.22				
15	1	0		23.16	22.73	22.62				
15	1	78		23.32	22.51	22.74				
15	75	0		23.38	23.22	23.20				
15	1	1	16-QAM	23.55	22.86	22.81	32.05	1.6032		
15	1	1	64-QAM	21.88	21.40	21.29				
15	1	1	256-QAM	19.80	19.16	19.02				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.23	23.78	23.55	32.92	1.9588		
20	1	104		23.78	23.60	23.75				
20	50	25		24.42	24.27	24.23				
20	1	0		23.74	23.26	23.07				
20	1	105		23.79	23.10	23.27				
20	100	0		23.91	23.68	23.77				
20	1	1	QPSK	24.09	23.72	23.49				
20	1	104		23.70	23.51	23.65				
20	50	25		24.42	24.22	24.24				
20	1	0		22.72	22.78	22.55				
20	1	105		22.75	22.55	22.72				
20	100	0		23.41	23.21	23.23				
20	1	1	16-QAM	23.00	22.90	22.70	31.50	1.4125		
20	1	1	64-QAM	21.89	21.48	21.21				
20	1	1	256-QAM	19.77	19.18	18.99				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.03	24.39	24.37	32.23	1.6711		
5	1	23		24.05	24.31	23.92				
5	12	6		24.41	24.41	24.33				
5	1	0		23.68	24.07	23.93				
5	1	24		23.69	24.02	23.98				
5	25	0		24.14	24.15	24.03				
5	1	1	QPSK	23.99	24.15	23.86				
5	1	23		24.03	24.06	23.95				
5	12	6		24.41	24.48	24.40				
5	1	0		23.09	23.10	22.96				
5	1	24		23.19	23.59	23.15				
5	25	0		23.77	23.74	23.71				
5	1	1	16-QAM	23.26	23.72	23.21	31.47	1.4028		
5	1	1	64-QAM	22.31	22.31	22.29				
5	1	1	256-QAM	20.11	20.11	20.06				
Limit	ERP < 7W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.31	24.41	24.49	32.24	1.6749		
10	1	50		24.39	24.04	23.91				
10	25	12		24.40	24.42	24.44				
10	1	0		24.09	24.14	24.00				
10	1	51		24.13	24.05	23.83				
10	50	0		24.14	24.14	23.93				
10	1	1	QPSK	24.00	24.11	23.96				
10	1	50		24.04	23.97	23.85				
10	25	12		24.40	24.42	24.48				
10	1	0		23.08	23.16	22.97				
10	1	51		23.60	23.47	23.01				
10	50	0		23.70	23.69	23.54				
10	1	1	16-QAM	23.23	23.82	23.09	31.57	1.4355		
10	1	1	64-QAM	22.28	22.34	22.18				
10	1	1	256-QAM	20.09	20.16	19.97				
Limit	ERP < 7W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.47	24.33	24.36	32.22	1.6672		
15	1	77		24.43	24.44	24.38				
15	36	18		24.36	24.43	24.33				
15	1	0		23.97	24.03	24.06				
15	1	78		23.98	23.92	23.93				
15	75	0		24.06	24.13	24.04				
15	1	1	QPSK	23.92	24.33	23.98				
15	1	77		23.92	24.34	23.91				
15	36	18		24.33	24.40	24.33				
15	1	0		23.56	23.61	23.56				
15	1	78		23.47	23.44	23.56				
15	75	0		23.64	23.67	23.60				
15	1	1	16-QAM	23.21	23.78	23.68	31.53	1.4223		
15	1	1	64-QAM	22.21	22.32	22.21				
15	1	1	256-QAM	20.07	20.19	20.07				
Limit	ERP < 7W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.39	24.32	23.99	32.23	1.6711		
20	1	104		24.31	23.85	23.88				
20	50	25		24.39	24.41	24.40				
20	1	0		23.95	24.02	23.96				
20	1	105		23.85	23.89	23.60				
20	100	0		24.08	24.12	24.06				
20	1	1	QPSK	24.40	24.48	23.96				
20	1	104		24.26	24.43	23.92				
20	50	25		24.39	24.41	24.40				
20	1	0		23.53	23.63	23.05				
20	1	105		23.37	23.50	23.03				
20	100	0		23.60	23.68	23.62				
20	1	1	16-QAM	23.69	23.40	23.23	31.44	1.3932		
20	1	1	64-QAM	22.16	22.34	21.76				
20	1	1	256-QAM	20.03	20.15	20.11				
Limit	ERP < 7W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	23.73	23.86	23.81	32.52	1.7865		
5	1	23		23.72	23.86	23.87				
5	12	6		23.83	23.98	23.98				
5	1	0		23.22	23.37	23.33				
5	1	24		23.24	23.36	23.40				
5	25	0		23.33	23.47	23.48				
5	1	1	QPSK	23.68	23.82	23.80				
5	1	23		23.66	23.84	23.83				
5	12	6		23.90	23.99	24.02				
5	1	0		22.77	22.95	22.86				
5	1	24		22.79	22.88	22.90				
5	25	0		22.90	23.05	23.03				
5	1	1	16-QAM	22.88	23.07	23.03	31.57	1.4355		
5	1	1	64-QAM	21.50	21.58	21.56				
5	1	1	256-QAM	19.28	19.29	19.32				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.68	23.90	23.75	32.46	1.7620		
10	1	50		23.74	23.85	23.86				
10	25	12		23.74	23.94	23.91				
10	1	0		23.58	23.42	23.29				
10	1	51		23.23	23.37	23.40				
10	50	0		23.70	23.92	23.89				
10	1	1	QPSK	23.61	23.84	23.72				
10	1	50		23.66	23.75	23.80				
10	25	12		23.75	23.96	23.93				
10	1	0		22.68	22.88	22.80				
10	1	51		22.72	22.79	22.85				
10	50	0		23.30	23.46	23.43				
10	1	1	16-QAM	22.96	23.09	23.00	31.59	1.4421		
10	1	1	64-QAM	21.49	21.55	21.49				
10	1	1	256-QAM	19.24	19.39	19.25				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.70	23.90	23.77	32.95	1.9724		
15	1	77		23.83	23.80	23.96				
15	36	18		24.25	24.43	24.40				
15	1	0		23.59	23.37	23.31				
15	1	78		23.29	23.28	23.46				
15	75	0		23.76	23.90	23.90				
15	1	1	QPSK	23.70	23.85	23.75				
15	1	77		23.75	23.77	23.90				
15	36	18		24.33	24.45	24.39				
15	1	0		22.71	22.92	22.75				
15	1	78		22.83	22.82	22.92				
15	75	0		23.35	23.46	23.44				
15	1	1	16-QAM	22.92	23.09	22.96	31.59	1.4421		
15	1	1	64-QAM	21.47	21.58	21.52				
15	1	1	256-QAM	19.21	19.43	19.24				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.70	23.91	23.75	32.95	1.9724		
20	1	104		23.89	23.80	23.93				
20	50	25		24.36	24.43	24.44				
20	1	0		23.18	23.39	23.25				
20	1	105		23.39	23.29	23.42				
20	100	0		23.84	23.95	23.90				
20	1	1	QPSK	23.66	23.89	23.69				
20	1	104		23.83	23.75	23.90				
20	50	25		24.34	24.45	24.41				
20	1	0		22.72	22.91	22.72				
20	1	105		22.90	22.82	22.95				
20	100	0		23.40	23.48	23.42				
20	1	1	16-QAM	22.93	23.11	22.94	31.61	1.4488		
20	1	1	64-QAM	21.45	21.51	21.41				
20	1	1	256-QAM	19.21	19.39	19.21				
Limit	EIRP < 2W			Result			Pass			
NR Redcap n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.18	24.28	24.32	31.45	1.3964		
5	1	23		24.21	24.33	24.29				
5	12	6		24.28	24.41	24.44				
5	1	0		23.65	23.84	23.78				
5	1	24		23.72	23.84	23.81				
5	25	0		23.83	23.91	23.90				
5	1	1	QPSK	24.12	24.19	24.31				
5	1	23		24.11	24.28	24.22				
5	12	6		24.38	24.50	24.49				
5	1	0		23.15	23.24	23.35				
5	1	24		23.16	23.34	23.31				
5	25	0		23.34	23.46	23.46				
5	1	1	16-QAM	23.36	23.55	23.41	30.50	1.1220		
5	1	1	64-QAM	21.96	22.14	21.98				
5	1	1	256-QAM	19.72	19.88	19.75				
Limit	ERP < 3W			Result			Pass			

NR Redcap n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.14	24.26	24.28	31.39	1.3772		
10	1	50		24.26	24.40	24.34				
10	25	12		24.32	24.42	24.41				
10	1	0		23.66	23.78	23.82				
10	1	51		23.80	23.96	23.87				
10	50	0		23.78	23.92	23.93				
10	1	1	QPSK	24.05	24.17	24.17				
10	1	50		24.17	24.39	24.27				
10	25	12		24.33	24.44	24.40				
10	1	0		23.11	23.21	23.28				
10	1	51		23.24	23.43	23.28				
10	50	0		23.31	23.44	23.42				
10	1	1	16-QAM	23.34	23.57	23.53	30.52	1.1272		
10	1	1	64-QAM	21.82	22.04	22.06				
10	1	1	256-QAM	19.70	19.89	19.85				
Limit	ERP < 3W			Result			Pass			

NR Redcap n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.24	24.23	24.22	31.36	1.3677		
15	1	77		24.35	24.40	24.35				
15	36	18		24.41	24.35	24.37				
15	1	0		23.74	23.76	23.74				
15	1	78		23.86	23.87	23.85				
15	75	0		23.89	23.90	23.88				
15	1	1	QPSK	24.14	24.16	24.14				
15	1	77		24.34	24.32	24.29				
15	36	18		24.39	24.40	24.40				
15	1	0		23.19	23.16	23.17				
15	1	78		23.37	23.35	23.33				
15	75	0		23.40	23.42	23.38				
15	1	1	16-QAM	23.43	23.46	23.49	30.44	1.1066		
15	1	1	64-QAM	21.98	21.96	21.98				
15	1	1	256-QAM	19.74	19.74	19.76				
Limit	ERP < 3W			Result			Pass			

NR Redcap n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.28	24.24	24.29	31.95	1.5668		
5	1	23		24.27	24.30	24.22				
5	12	6		24.42	24.42	24.40				
5	1	0		23.81	23.78	23.77				
5	1	24		23.80	23.82	23.69				
5	25	0		23.79	23.93	23.81				
5	1	1	QPSK	24.15	24.14	24.29				
5	1	23		24.21	24.30	24.21				
5	12	6		24.50	24.50	24.42				
5	1	0		23.25	23.19	23.32				
5	1	24		23.26	23.31	23.12				
5	25	0		23.35	23.43	23.27				
5	1	1	16-QAM	23.46	23.65	23.33	31.10	1.2882		
5	1	1	64-QAM	22.05	22.16	21.94				
5	1	1	256-QAM	19.81	19.88	19.67				
Limit	ERP < 3W			Result			Pass			

NR Redcap n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.29	-	31.89	1.5453		
10	1	50		-	24.26	-				
10	25	12		-	24.44	-				
10	1	0		-	23.84	-				
10	1	51		-	23.73	-				
10	50	0		-	23.94	-				
10	1	1	QPSK	-	24.13	-				
10	1	50		-	24.21	-				
10	25	12		-	24.44	-				
10	1	0		-	23.23	-				
10	1	51		-	23.18	-				
10	50	0		-	23.37	-				
10	1	1	16-QAM	-	23.46	-	30.91	1.2331		
10	1	1	64-QAM	-	21.98	-				
10	1	1	256-QAM	-	19.83	-				
Limit	ERP < 3W			Result			Pass			

NR Redcap n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.50	24.40	24.43	32.05	1.6032		
5	1	23		24.41	24.36	24.38				
5	12	6		24.49	24.46	24.46				
5	1	0		24.01	23.92	23.97				
5	1	24		23.90	23.86	23.88				
5	25	0		24.08	23.98	23.98				
5	1	1	QPSK	24.39	24.28	24.41				
5	1	23		24.36	24.37	24.42				
5	12	6		24.49	24.43	24.49				
5	1	0		23.40	23.34	23.51				
5	1	24		23.49	23.47	23.43				
5	25	0		23.68	23.62	23.62				
5	1	1	16-QAM	23.77	23.80	23.68	31.35	1.3646		
5	1	1	64-QAM	22.14	22.22	22.23				
5	1	1	256-QAM	19.98	20.02	20.03				
Limit	ERP < 3W			Result			Pass			

NR Redcap n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.45	-	32.04	1.5996		
10	1	50		-	24.35	-				
10	25	12		-	24.49	-				
10	1	0		-	24.00	-				
10	1	51		-	23.84	-				
10	50	0		-	24.07	-				
10	1	1	QPSK	-	24.30	-				
10	1	50		-	24.32	-				
10	25	12		-	24.49	-				
10	1	0		-	23.39	-				
10	1	51		-	23.39	-				
10	50	0		-	23.59	-				
10	1	1	16-QAM	-	23.69	-	31.24	1.3305		
10	1	1	64-QAM	-	22.24	-				
10	1	1	256-QAM	-	19.94	-				
Limit	ERP < 3W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.35	24.24	23.83	32.99	1.9907		
5	1	23		24.38	24.14	23.87				
5	12	6		24.49	24.32	24.46				
5	1	0		23.87	23.79	23.85				
5	1	24		23.93	23.73	23.41				
5	25	0		24.01	23.84	24.02				
5	1	1	QPSK	24.23	23.75	23.80				
5	1	23		24.28	24.05	23.87				
5	12	6		24.49	24.43	24.49				
5	1	0		23.34	23.28	22.88				
5	1	24		23.41	23.15	22.92				
5	25	0		23.56	23.40	23.54				
5	1	1	16-QAM	23.72	22.92	23.02	32.22	1.6672		
5	1	1	64-QAM	22.23	22.08	21.54				
5	1	1	256-QAM	19.95	19.78	19.32				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.47	24.28	24.41	33.00	1.9953		
10	1	50		24.48	24.18	24.40				
10	25	12		24.49	24.32	24.47				
10	1	0		24.01	23.80	23.91				
10	1	51		24.03	23.72	23.95				
10	50	0		24.09	23.80	24.00				
10	1	1	QPSK	24.31	24.24	24.34				
10	1	50		24.40	24.06	24.26				
10	25	12		24.50	24.34	24.47				
10	1	0		23.37	23.36	23.47				
10	1	51		23.52	23.21	23.39				
10	50	0		23.59	23.35	23.50				
10	1	1	16-QAM	23.80	23.47	23.53	32.30	1.6982		
10	1	1	64-QAM	22.27	22.01	22.09				
10	1	1	256-QAM	20.00	19.74	19.83				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.42	24.34	24.31	32.99	1.9907		
15	1	77		24.44	24.17	24.43				
15	36	18		24.49	24.30	24.45				
15	1	0		23.93	23.85	23.84				
15	1	78		24.00	23.71	23.92				
15	75	0		24.04	23.80	23.95				
15	1	1	QPSK	24.29	24.25	24.23				
15	1	77		24.37	24.06	24.31				
15	36	18		24.49	24.31	24.46				
15	1	0		23.37	23.34	23.31				
15	1	78		23.47	23.16	23.42				
15	75	0		23.54	23.35	23.46				
15	1	1	16-QAM	23.64	23.47	23.53	32.14	1.6368		
15	1	1	64-QAM	22.21	21.98	22.09				
15	1	1	256-QAM	20.02	19.70	19.76				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.32	24.22	24.25	33.00	1.9953		
20	1	104		24.33	24.14	24.42				
20	50	25		24.50	24.29	24.48				
20	1	0		23.88	23.81	23.79				
20	1	105		23.87	23.70	23.94				
20	100	0		24.06	23.80	23.94				
20	1	1	QPSK	24.24	24.19	24.13				
20	1	104		24.25	24.07	24.31				
20	50	25		24.48	24.31	24.49				
20	1	0		23.31	23.32	23.27				
20	1	105		23.36	23.18	23.41				
20	100	0		23.54	23.29	23.44				
20	1	1	16-QAM	23.72	23.43	23.41	32.22	1.6672		
20	1	1	64-QAM	22.06	21.87	22.12				
20	1	1	256-QAM	19.92	19.68	19.72				
Limit	EIRP < 2W			Result			Pass			
NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.40	24.47	24.40	32.25	1.6788		
5	1	23		24.39	24.50	24.37				
5	12	6		24.47	24.48	24.49				
5	1	0		24.04	24.10	23.91				
5	1	24		24.04	24.06	23.89				
5	25	0		24.11	24.19	24.00				
5	1	1	QPSK	24.46	24.46	24.32				
5	1	23		24.40	24.42	23.87				
5	12	6		24.50	24.49	24.42				
5	1	0		23.50	23.59	23.34				
5	1	24		23.54	23.56	23.40				
5	25	0		23.66	23.73	23.53				
5	1	1	16-QAM	23.67	23.65	23.63	31.42	1.3868		
5	1	1	64-QAM	22.31	22.28	22.16				
5	1	1	256-QAM	20.06	20.08	19.94				
Limit	ERP < 7W			Result			Pass			

NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.40	24.47	24.49	32.24	1.6749		
10	1	50		24.47	24.48	23.76				
10	25	12		24.46	24.48	24.42				
10	1	0		24.04	24.15	24.02				
10	1	51		24.09	24.03	23.82				
10	50	0		24.12	24.13	23.89				
10	1	1	QPSK	24.45	24.46	23.92				
10	1	50		24.39	24.42	23.79				
10	25	12		24.47	24.48	24.42				
10	1	0		23.45	23.54	23.46				
10	1	51		23.52	23.43	22.92				
10	50	0		23.64	23.61	23.41				
10	1	1	16-QAM	23.60	23.70	23.60	31.45	1.3964		
10	1	1	64-QAM	22.19	22.28	22.02				
10	1	1	256-QAM	20.02	20.09	19.86				
Limit	ERP < 7W			Result			Pass			

NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.44	24.42	24.40	32.25	1.6788		
15	1	77		24.50	24.39	23.83				
15	36	18		24.42	24.48	24.48				
15	1	0		23.99	24.06	24.06				
15	1	78		23.98	23.92	23.86				
15	75	0		24.10	24.13	23.95				
15	1	1	QPSK	24.43	24.42	24.00				
15	1	77		23.98	24.35	23.82				
15	36	18		24.46	24.48	24.42				
15	1	0		23.42	23.54	23.51				
15	1	78		23.48	23.41	22.93				
15	75	0		23.57	23.63	23.45				
15	1	1	16-QAM	23.58	23.70	23.67	31.45	1.3964		
15	1	1	64-QAM	22.16	22.27	22.18				
15	1	1	256-QAM	20.01	20.13	20.05				
Limit	ERP < 7W			Result			Pass			

NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.44	24.40	24.49	32.24	1.6749		
20	1	104		24.30	24.35	23.82				
20	50	25		24.47	24.47	24.47				
20	1	0		23.92	24.06	24.04				
20	1	105		23.80	23.88	23.31				
20	100	0		24.07	24.10	24.06				
20	1	1	QPSK	24.39	24.48	23.97				
20	1	104		24.26	24.34	23.80				
20	50	25		24.42	24.48	24.48				
20	1	0		23.40	23.52	23.05				
20	1	105		23.25	23.33	22.94				
20	100	0		23.58	23.57	23.58				
20	1	1	16-QAM	23.53	23.66	23.20	31.41	1.3836		
20	1	1	64-QAM	22.12	22.20	22.22				
20	1	1	256-QAM	19.95	20.09	20.07				
Limit	ERP < 7W			Result			Pass			
Part90s NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	24.29	23.78	23.92	32.25	1.6788		
5	1	23		24.46	23.95	23.91				
5	12	6		24.45	24.48	24.49				
5	1	0		23.81	23.84	23.39				
5	1	24		23.96	23.94	23.42				
5	25	0		23.98	24.00	23.99				
5	1	1	QPSK	24.25	23.82	23.90				
5	1	23		23.97	23.94	23.94				
5	12	6		24.48	24.50	24.50				
5	1	0		23.23	22.89	22.99				
5	1	24		23.03	22.97	23.07				
5	25	0		23.51	23.56	23.50				
5	1	1	16-QAM	23.59	22.99	23.06	31.34	1.3614		
5	1	1	64-QAM	22.10	21.57	21.60				
5	1	1	256-QAM	19.86	19.87	19.92				
Limit	Power < 100W			Result			Pass			

Part90s NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.28	-	32.22	1.6672		
10	1	50		-	23.95	-				
10	25	12		-	24.47	-				
10	1	0		-	23.81	-				
10	1	51		-	23.48	-				
10	50	0		-	24.06	-				
10	1	1	QPSK	-	24.18	-				
10	1	50		-	23.97	-				
10	25	12		-	24.47	-				
10	1	0		-	23.22	-				
10	1	51		-	23.06	-				
10	50	0		-	23.52	-				
10	1	1	16-QAM	-	23.57	-	31.32	1.3552		
10	1	1	64-QAM	-	22.06	-				
10	1	1	256-QAM	-	19.83	-				
Limit	Power < 100W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	-	23.88	-	32.25	1.6788		
5	1	23		-	24.46	-				
5	12	6		-	24.49	-				
5	1	0		-	23.88	-				
5	1	24		-	23.99	-				
5	25	0		-	24.03	-				
5	1	1	QPSK	-	23.90	-				
5	1	23		-	23.97	-				
5	12	6		-	24.50	-				
5	1	0		-	22.98	-				
5	1	24		-	23.00	-				
5	25	0		-	23.53	-				
5	1	1	16-QAM	-	23.02	-	30.77	1.1940		
5	1	1	64-QAM	-	21.64	-				
5	1	1	256-QAM	-	19.94	-				
Limit	EIRP < 7W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	23.93	-	32.25	1.6788		
10	1	50		-	23.93	-				
10	25	12		-	24.48	-				
10	1	0		-	23.41	-				
10	1	51		-	23.98	-				
10	50	0		-	23.99	-				
10	1	1	QPSK	-	23.89	-				
10	1	50		-	23.91	-				
10	25	12		-	24.50	-				
10	1	0		-	22.92	-				
10	1	51		-	23.01	-				
10	50	0		-	23.54	-				
10	1	1	16-QAM	-	22.97	-	30.72	1.1803		
10	1	1	64-QAM	-	21.53	-				
10	1	1	256-QAM	-	19.91	-				
Limit	EIRP < 7W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	23.76	-	32.25	1.6788		
15	1	77		-	24.01	-				
15	36	18		-	24.48	-				
15	1	0		-	23.79	-				
15	1	78		-	24.02	-				
15	75	0		-	23.99	-				
15	1	1	QPSK	-	23.75	-				
15	1	77		-	24.48	-				
15	36	18		-	24.50	-				
15	1	0		-	22.85	-				
15	1	78		-	23.48	-				
15	75	0		-	23.45	-				
15	1	1	16-QAM	-	22.93	-	30.68	1.1695		
15	1	1	64-QAM	-	21.95	-				
15	1	1	256-QAM	-	19.82	-				
Limit	EIRP < 7W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.23	-	32.24	1.6749		
20	1	104		-	24.49	-				
20	50	25		-	24.46	-				
20	1	0		-	23.72	-				
20	1	105		-	24.02	-				
20	100	0		-	23.99	-				
20	1	1	QPSK	-	24.11	-				
20	1	104		-	24.45	-				
20	50	25		-	24.48	-				
20	1	0		-	23.13	-				
20	1	105		-	23.44	-				
20	100	0		-	23.48	-				
20	1	1	16-QAM	-	23.41	-	31.16	1.3062		
20	1	1	64-QAM	-	21.99	-				
20	1	1	256-QAM	-	19.75	-				
Limit	EIRP < 7W			Result			Pass			
NR Redcap n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	22.25	22.24	22.31	23.35	0.2163		
5	1	23		22.30	22.28	22.29				
5	12	6		22.32	22.39	22.42				
5	1	0		21.75	21.71	21.81				
5	1	24		21.77	21.77	21.80				
5	25	0		21.83	21.88	21.94				
5	1	1	QPSK	22.28	22.27	22.33				
5	1	23		22.31	22.28	22.25				
5	12	6		22.35	22.45	22.45				
5	1	0		21.29	21.24	21.35				
5	1	24		21.29	21.30	21.28				
5	25	0		21.33	21.44	21.50				
5	1	1	16-QAM	21.13	21.38	21.45	22.35	0.1718		
5	1	1	64-QAM	19.65	19.95	19.97				
5	1	1	256-QAM	17.77	17.75	17.85				
Limit	EIRP < 250 W/5MHz			Result			Pass			

NR Redcap n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	22.27	-	23.32	0.2148		
10	1	50		-	22.30	-				
10	25	12		-	22.42	-				
10	1	0		-	21.76	-				
10	1	51		-	21.79	-				
10	50	0		-	21.84	-				
10	1	1	QPSK	-	22.25	-				
10	1	50		-	22.23	-				
10	25	12		-	22.41	-				
10	1	0		-	21.26	-				
10	1	51		-	21.27	-				
10	50	0		-	21.36	-				
10	1	1	16-QAM	-	21.40	-	22.30	0.1698		
10	1	1	64-QAM	-	19.95	-				
10	1	1	256-QAM	-	17.80	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.22	24.13	24.05	32.81	1.9099		
5	1	23		24.16	24.08	24.08				
5	12	6		24.26	24.19	24.19				
5	1	0		23.61	23.66	23.63				
5	1	24		23.71	23.62	23.64				
5	25	0		23.75	23.71	23.69				
5	1	1	QPSK	24.18	24.25	24.14				
5	1	23		24.29	24.23	24.19				
5	12	6		24.31	24.26	24.27				
5	1	0		23.29	23.23	23.18				
5	1	24		23.36	23.19	23.20				
5	25	0		23.37	23.31	23.29				
5	1	1	16-QAM	23.20	23.18	23.17	31.70	1.4791		
5	1	1	64-QAM	21.98	21.96	21.84				
5	1	1	256-QAM	19.47	19.44	19.44				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.10	24.13	24.05	32.75	1.8836		
10	1	50		24.14	24.06	24.08				
10	25	12		24.19	24.19	24.16				
10	1	0		23.47	23.62	23.56				
10	1	51		23.63	23.57	23.61				
10	50	0		23.71	23.69	23.65				
10	1	1	QPSK	24.16	24.25	24.03				
10	1	50		24.24	24.05	24.14				
10	25	12		24.23	24.20	24.20				
10	1	0		23.11	23.22	23.08				
10	1	51		23.27	23.12	23.19				
10	50	0		23.25	23.25	23.21				
10	1	1	16-QAM	23.15	23.25	23.15	31.75	1.4962		
10	1	1	64-QAM	21.82	21.84	21.72				
10	1	1	256-QAM	19.34	19.41	19.44				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.10	24.17	24.12	32.82	1.9143		
15	1	77		24.18	24.08	24.18				
15	36	18		24.22	24.17	24.20				
15	1	0		23.63	23.66	23.62				
15	1	78		23.71	23.58	23.65				
15	75	0		23.73	23.70	23.68				
15	1	1	QPSK	24.12	24.32	24.19				
15	1	77		24.16	24.15	24.24				
15	36	18		24.23	24.22	24.20				
15	1	0		23.19	23.27	23.20				
15	1	78		23.30	23.13	23.28				
15	75	0		23.27	23.25	23.27				
15	1	1	16-QAM	23.28	23.22	23.18	31.78	1.5066		
15	1	1	64-QAM	21.76	21.92	21.84				
15	1	1	256-QAM	19.48	19.44	19.46				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.13	24.18	24.11	32.79	1.9011		
20	1	104		24.15	24.02	24.11				
20	50	25		24.27	24.23	24.19				
20	1	0		23.56	23.71	23.59				
20	1	105		23.70	23.55	23.60				
20	100	0		23.78	23.72	23.69				
20	1	1	QPSK	24.16	24.22	24.24				
20	1	104		24.28	24.08	24.19				
20	50	25		24.29	24.23	24.21				
20	1	0		23.18	23.25	23.22				
20	1	105		23.26	23.17	23.19				
20	100	0		23.31	23.26	23.26				
20	1	1	16-QAM	23.15	23.23	23.16	31.73	1.4894		
20	1	1	64-QAM	21.86	21.88	21.77				
20	1	1	256-QAM	19.35	19.53	19.45				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.96	24.23	23.97	32.84	1.9231		
10	1	50		24.08	24.20	24.09				
10	25	12		24.11	24.29	24.16				
10	1	0		23.49	23.71	23.53				
10	1	51		23.61	23.71	23.59				
10	50	0		23.60	23.79	23.65				
10	1	1	QPSK	24.10	24.34	24.02				
10	1	50		24.21	24.32	24.16				
10	25	12		24.11	24.33	24.16				
10	1	0		23.03	23.31	23.10				
10	1	51		23.19	23.26	23.17				
10	50	0		23.15	23.35	23.17				
10	1	1	16-QAM	23.09	23.31	23.09	31.81	1.5171		
10	1	1	64-QAM	21.66	21.91	21.75				
10	1	1	256-QAM	19.36	19.51	19.36				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.00	24.22	23.99	32.90	1.9498		
15	1	77		24.18	24.18	24.22				
15	36	18		24.15	24.29	24.13				
15	1	0		23.55	23.73	23.52				
15	1	78		23.71	23.70	23.71				
15	75	0		23.66	23.80	23.72				
15	1	1	QPSK	24.20	24.29	24.13				
15	1	77		24.40	24.24	24.35				
15	36	18		24.17	24.31	24.14				
15	1	0		23.16	23.35	23.10				
15	1	78		23.35	23.24	23.32				
15	75	0		23.21	23.31	23.20				
15	1	1	16-QAM	23.03	23.33	23.10	31.83	1.5241		
15	1	1	64-QAM	21.67	21.85	21.77				
15	1	1	256-QAM	19.34	19.59	19.30				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.94	24.18	23.98	32.83	1.9187		
20	1	104		24.16	24.11	24.15				
20	50	25		24.12	24.33	24.13				
20	1	0		23.49	23.73	23.52				
20	1	105		23.64	23.65	23.71				
20	100	0		23.62	23.80	23.66				
20	1	1	QPSK	24.09	24.24	24.01				
20	1	104		24.29	24.16	24.26				
20	50	25		24.19	24.33	24.17				
20	1	0		23.17	23.32	23.03				
20	1	105		23.16	23.19	23.25				
20	100	0		23.20	23.34	23.21				
20	1	1	16-QAM	23.01	23.36	23.07	31.86	1.5346		
20	1	1	64-QAM	21.55	21.93	21.67				
20	1	1	256-QAM	19.28	19.54	19.26				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	23.67	24.29	24.11	29.99	0.9977		
5	1	23		23.67	24.32	24.13				
5	12	6		24.22	24.39	24.23				
5	1	0		23.21	23.83	23.66				
5	1	24		23.15	23.89	23.70				
5	25	0		23.76	23.93	23.76				
5	1	1	QPSK	23.70	24.26	24.09				
5	1	23		23.61	24.28	24.03				
5	12	6		24.27	24.49	24.25				
5	1	0		22.70	23.35	23.18				
5	1	24		22.67	23.36	23.12				
5	25	0		23.29	23.51	23.27				
5	1	1	16-QAM	22.76	23.50	23.26	29.00	0.7943		
5	1	1	64-QAM	21.27	22.04	21.88				
5	1	1	256-QAM	19.60	19.84	19.62				
Limit	EIRP < 1W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.24	24.30	23.64	29.91	0.9795		
10	1	50		24.19	24.34	24.15				
10	25	12		24.32	24.39	24.23				
10	1	0		23.76	23.82	23.67				
10	1	51		23.72	23.88	23.71				
10	50	0		23.83	23.91	23.76				
10	1	1	QPSK	24.22	24.21	23.61				
10	1	50		24.15	24.25	24.02				
10	25	12		24.32	24.41	24.21				
10	1	0		23.32	23.27	23.16				
10	1	51		23.24	23.34	23.12				
10	50	0		23.32	23.43	23.28				
10	1	1	16-QAM	22.86	23.41	22.71	28.91	0.7780		
10	1	1	64-QAM	21.96	21.97	21.83				
10	1	1	256-QAM	19.74	19.74	19.56				
Limit	EIRP < 1W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.20	24.25	24.13	29.88	0.9727		
15	1	77		24.13	24.34	24.06				
15	36	18		24.23	24.38	24.11				
15	1	0		23.74	23.81	23.65				
15	1	78		23.67	23.87	23.61				
15	75	0		23.78	23.92	23.70				
15	1	1	QPSK	24.18	24.21	23.57				
15	1	77		23.62	24.28	23.97				
15	36	18		24.23	24.38	24.13				
15	1	0		23.25	23.25	22.59				
15	1	78		23.14	23.37	23.12				
15	75	0		23.24	23.43	23.19				
15	1	1	16-QAM	22.79	23.41	22.71	28.91	0.7780		
15	1	1	64-QAM	21.90	21.90	21.86				
15	1	1	256-QAM	19.73	19.76	19.56				
Limit	EIRP < 1W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.12	24.19	24.16	29.91	0.9795		
20	1	104		24.07	24.29	24.07				
20	50	25		24.24	24.41	24.18				
20	1	0		23.72	23.75	23.69				
20	1	105		23.67	23.86	23.62				
20	100	0		23.79	23.89	23.79				
20	1	1	QPSK	24.16	24.16	24.11				
20	1	104		23.60	24.22	23.97				
20	50	25		24.21	24.40	24.18				
20	1	0		23.17	23.22	23.18				
20	1	105		23.12	23.33	23.08				
20	100	0		23.26	23.40	23.19				
20	1	1	16-QAM	23.31	23.32	22.79	28.82	0.7621		
20	1	1	64-QAM	21.83	21.83	21.82				
20	1	1	256-QAM	19.66	19.68	19.65				
Limit	EIRP < 1W			Result			Pass			
NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	23.91	23.84	24.09	31.25	1.3335		
5	1	23		23.94	23.74	23.62				
5	12	6		24.46	24.45	24.19				
5	1	0		23.45	23.83	23.65				
5	1	24		23.91	23.29	23.62				
5	25	0		23.98	23.92	23.75				
5	1	1	QPSK	23.94	23.89	24.08				
5	1	23		23.92	23.82	23.68				
5	12	6		24.50	24.47	24.19				
5	1	0		22.95	22.87	23.11				
5	1	24		22.91	22.78	22.69				
5	25	0		23.49	23.47	23.32				
5	1	1	16-QAM	22.95	22.85	23.20	29.95	0.9886		
5	1	1	64-QAM	21.47	21.88	21.79				
5	1	1	256-QAM	19.89	19.76	19.58				
Limit	ERP < 3W			Result			Pass			

NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	23.90	23.83	24.08	31.19	1.3152		
10	1	50		23.94	23.73	23.57				
10	25	12		24.44	24.40	24.10				
10	1	0		23.45	23.87	23.58				
10	1	51		23.47	23.74	23.56				
10	50	0		23.97	23.92	23.58				
10	1	1	QPSK	23.90	23.85	24.04				
10	1	50		23.86	23.69	23.57				
10	25	12		24.41	24.35	24.10				
10	1	0		22.96	22.82	23.08				
10	1	51		22.91	22.70	23.07				
10	50	0		23.47	23.43	23.08				
10	1	1	16-QAM	22.95	22.91	23.18	29.93	0.9840		
10	1	1	64-QAM	21.52	21.91	21.75				
10	1	1	256-QAM	19.86	19.83	19.54				
Limit	ERP < 3W			Result			Pass			

NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.32	24.34	23.78	31.20	1.3183		
15	1	77		24.32	24.11	23.59				
15	36	18		24.39	24.36	24.12				
15	1	0		23.84	23.84	23.75				
15	1	78		23.78	23.62	23.56				
15	75	0		23.83	23.89	23.63				
15	1	1	QPSK	23.85	24.33	23.71				
15	1	77		23.85	23.59	23.60				
15	36	18		24.45	24.35	24.13				
15	1	0		23.36	23.34	22.73				
15	1	78		23.39	23.09	22.60				
15	75	0		23.38	23.35	23.17				
15	1	1	16-QAM	22.90	23.46	22.80	30.21	1.0495		
15	1	1	64-QAM	21.39	21.97	21.83				
15	1	1	256-QAM	19.81	19.84	19.71				
Limit	ERP < 3W			Result			Pass			

NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.30	24.30	23.83	31.15	1.3032		
20	1	104		23.71	24.01	23.55				
20	50	25		24.40	24.38	24.21				
20	1	0		23.80	23.81	23.80				
20	1	105		23.71	23.50	23.54				
20	100	0		23.80	23.92	23.69				
20	1	1	QPSK	23.78	24.27	23.82				
20	1	104		23.75	23.97	23.57				
20	50	25		24.40	24.36	24.24				
20	1	0		22.83	23.28	22.86				
20	1	105		22.72	23.02	22.59				
20	100	0		23.35	23.35	23.18				
20	1	1	16-QAM	22.85	23.44	22.94	30.19	1.0447		
20	1	1	64-QAM	21.39	21.99	21.43				
20	1	1	256-QAM	19.73	19.80	19.79				
Limit	ERP < 3W			Result			Pass			
Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.90	24.28	24.40	29.99	0.9977		
10	1	50		23.70	24.41	24.49				
10	25	12		23.88	24.43	24.38				
10	1	0		23.42	23.82	23.93				
10	1	51		23.21	23.97	24.06				
10	50	0		23.37	23.93	24.05				
10	1	1	QPSK	23.98	24.41	24.41				
10	1	50		23.83	24.31	24.35				
10	25	12		23.91	24.41	24.48				
10	1	0		22.99	23.40	23.44				
10	1	51		22.77	23.50	23.58				
10	50	0		22.91	23.43	23.57				
10	1	1	16-QAM	22.95	23.37	23.40	28.90	0.7762		
10	1	1	64-QAM	21.60	22.10	22.10				
10	1	1	256-QAM	19.29	19.55	19.69				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.96	24.30	24.46	29.99	0.9977		
15	1	77		23.77	24.49	24.41				
15	36	18		23.85	24.39	24.38				
15	1	0		23.47	23.84	23.98				
15	1	78		23.25	24.02	24.12				
15	75	0		23.43	23.99	24.09				
15	1	1	QPSK	24.05	24.36	24.49				
15	1	77		23.83	24.38	24.39				
15	36	18		23.87	24.42	24.44				
15	1	0		23.05	23.38	23.46				
15	1	78		22.84	23.58	23.67				
15	75	0		22.98	23.48	23.61				
15	1	1	16-QAM	23.00	23.37	23.47	28.97	0.7889		
15	1	1	64-QAM	21.59	22.07	22.18				
15	1	1	256-QAM	19.26	19.53	19.67				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.95	24.24	24.44	29.99	0.9977		
20	1	104		23.83	24.39	24.34				
20	50	25		23.85	24.40	24.38				
20	1	0		23.49	23.78	23.96				
20	1	105		23.29	23.97	24.07				
20	100	0		23.41	23.95	24.09				
20	1	1	QPSK	23.99	24.29	24.49				
20	1	104		23.86	24.38	24.41				
20	50	25		23.85	24.40	24.41				
20	1	0		22.98	23.34	23.51				
20	1	105		22.92	23.53	23.62				
20	100	0		22.95	23.49	23.65				
20	1	1	16-QAM	23.01	23.24	23.44	28.94	0.7834		
20	1	1	64-QAM	21.65	21.93	22.19				
20	1	1	256-QAM	19.26	19.49	19.68				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.78	24.05	23.99	29.69	0.9311		
10	1	50		23.62	23.86	24.11				
10	25	12		23.81	24.10	24.18				
10	1	0		23.34	23.59	23.53				
10	1	51		23.11	23.42	23.62				
10	50	0		23.30	23.58	23.70				
10	1	1	QPSK	23.84	24.07	24.02				
10	1	50		23.67	23.90	24.16				
10	25	12		23.81	24.08	24.19				
10	1	0		22.87	23.13	23.05				
10	1	51		22.67	22.96	23.14				
10	50	0		22.80	23.11	23.20				
10	1	1	16-QAM	22.94	23.11	23.01	28.61	0.7261		
10	1	1	64-QAM	21.59	21.80	21.63				
10	1	1	256-QAM	19.08	19.27	19.25				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.86	24.08	23.95	29.75	0.9441		
15	1	77		23.68	23.85	24.22				
15	36	18		23.79	24.03	24.18				
15	1	0		23.41	23.63	23.50				
15	1	78		23.21	23.37	23.73				
15	75	0		23.33	23.60	23.71				
15	1	1	QPSK	23.95	24.13	24.03				
15	1	77		23.72	23.84	24.25				
15	36	18		23.79	24.07	24.21				
15	1	0		22.97	23.18	23.02				
15	1	78		22.72	22.89	23.23				
15	75	0		22.83	23.12	23.19				
15	1	1	16-QAM	22.88	23.12	23.04	28.62	0.7278		
15	1	1	64-QAM	21.63	21.85	21.61				
15	1	1	256-QAM	19.12	19.30	19.21				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.85	24.02	23.81	29.72	0.9376		
20	1	104		23.69	23.73	24.19				
20	50	25		23.80	24.05	24.18				
20	1	0		23.38	23.70	23.30				
20	1	105		23.23	23.28	23.66				
20	100	0		23.33	23.59	23.61				
20	1	1	QPSK	23.97	24.08	23.85				
20	1	104		23.76	23.71	24.22				
20	50	25		23.80	24.04	24.10				
20	1	0		22.89	23.12	22.82				
20	1	105		22.74	22.76	23.21				
20	100	0		22.85	23.06	23.12				
20	1	1	16-QAM	22.85	23.09	22.86	28.59	0.7228		
20	1	1	64-QAM	21.60	21.77	21.64				
20	1	1	256-QAM	19.11	19.33	19.01				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.40	24.41	24.35	30.00	1.0000		
10	1	50		24.33	24.41	24.39				
10	25	12		24.41	24.40	24.44				
10	1	0		24.11	24.05	23.89				
10	1	51		24.16	24.23	23.92				
10	50	0		24.25	24.19	23.96				
10	1	1	QPSK	24.38	24.31	24.42				
10	1	50		24.38	24.40	24.45				
10	25	12		24.50	24.43	24.47				
10	1	0		23.64	23.57	23.44				
10	1	51		23.66	23.74	23.49				
10	50	0		23.79	23.74	23.49				
10	1	1	16-QAM	23.76	23.55	23.55	29.26	0.8433		
10	1	1	64-QAM	22.32	22.21	21.99				
10	1	1	256-QAM	19.93	20.04	19.99				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.48	24.47	24.41	30.00	1.0000		
15	1	77		24.47	24.49	24.42				
15	36	18		24.44	24.41	24.41				
15	1	0		24.18	24.10	24.02				
15	1	78		24.18	24.33	23.91				
15	75	0		24.29	24.21	23.99				
15	1	1	QPSK	24.42	24.42	24.47				
15	1	77		24.41	24.43	24.42				
15	36	18		24.48	24.44	24.50				
15	1	0		23.74	23.60	23.51				
15	1	78		23.75	23.81	23.50				
15	75	0		23.80	23.80	23.53				
15	1	1	16-QAM	23.81	23.60	23.67	29.31	0.8531		
15	1	1	64-QAM	22.35	22.06	22.11				
15	1	1	256-QAM	20.01	20.05	19.98				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.42	24.42	24.42	30.00	1.0000		
20	1	104		24.40	24.48	24.31				
20	50	25		24.44	24.47	24.43				
20	1	0		24.16	23.97	24.06				
20	1	105		24.14	24.24	23.87				
20	100	0		24.27	24.22	23.97				
20	1	1	QPSK	24.44	24.45	24.50				
20	1	104		24.45	24.50	24.31				
20	50	25		24.48	24.46	24.44				
20	1	0		23.71	23.51	23.59				
20	1	105		23.62	23.82	23.39				
20	100	0		23.80	23.74	23.55				
20	1	1	16-QAM	23.66	23.46	23.58	29.16	0.8241		
20	1	1	64-QAM	21.96	21.96	22.06				
20	1	1	256-QAM	19.94	19.94	20.00				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.40	24.26	29.96	0.9908		
10	1	50		24.38	24.34	24.24				
10	25	12		24.41	24.31	24.33				
10	1	0		24.11	23.95	23.78				
10	1	51		24.11	24.13	23.80				
10	50	0		24.21	24.05	23.83				
10	1	1	QPSK	24.44	24.45	24.27				
10	1	50		24.38	24.46	24.34				
10	25	12		24.42	24.41	24.31				
10	1	0		23.72	23.45	23.36				
10	1	51		23.61	23.66	23.40				
10	50	0		23.73	23.63	23.41				
10	1	1	16-QAM	23.67	23.58	23.31	29.17	0.8260		
10	1	1	64-QAM	22.26	22.10	21.96				
10	1	1	256-QAM	20.04	19.92	19.77				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.42	24.43	24.30	29.99	0.9977		
15	1	77		24.49	24.43	24.25				
15	36	18		24.42	24.38	24.32				
15	1	0		24.13	23.91	23.82				
15	1	78		24.07	24.12	23.80				
15	75	0		24.26	24.10	23.84				
15	1	1	QPSK	24.38	24.43	24.37				
15	1	77		24.35	24.34	24.27				
15	36	18		24.42	24.38	24.34				
15	1	0		23.63	23.51	23.42				
15	1	78		23.66	23.67	23.33				
15	75	0		23.77	23.61	23.39				
15	1	1	16-QAM	23.72	23.48	23.40	29.22	0.8356		
15	1	1	64-QAM	22.22	21.94	21.91				
15	1	1	256-QAM	20.08	19.92	19.83				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.38	24.31	24.45	29.98	0.9954		
20	1	104		24.48	24.35	24.21				
20	50	25		24.38	24.31	24.37				
20	1	0		24.08	23.86	23.91				
20	1	105		24.02	24.13	23.73				
20	100	0		24.22	24.07	23.89				
20	1	1	QPSK	24.33	24.39	24.41				
20	1	104		24.42	24.43	24.31				
20	50	25		24.28	24.38	24.36				
20	1	0		24.38	23.36	23.42				
20	1	105		23.69	23.65	23.32				
20	100	0		23.76	23.62	23.43				
20	1	1	16-QAM	23.66	23.46	23.56	29.16	0.8241		
20	1	1	64-QAM	22.19	21.96	21.97				
20	1	1	256-QAM	20.04	19.82	19.85				
Limit	EIRP < 1W			Result			Pass			

5G NR SCS 30KHz

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.35	24.43	24.38	32.93	1.9634		
10	1	22		24.36	24.35	24.38				
10	12	6		24.38	24.38	24.39				
10	1	0		24.06	23.93	24.08				
10	1	23		24.05	23.86	24.04				
10	24	0		24.14	23.95	24.13				
10	1	1	QPSK	24.37	24.38	24.36				
10	1	22		24.37	24.35	24.39				
10	12	6		24.39	24.38	24.37				
10	1	0		23.57	23.44	23.53				
10	1	23		23.56	23.37	23.54				
10	24	0		23.69	23.48	23.64				
10	1	1	16-QAM	23.92	23.61	23.84	32.42	1.7458		
10	1	1	64-QAM	22.37	22.00	22.30				
10	1	1	256-QAM	20.19	19.93	20.14				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.38	24.37	24.39	32.95	1.9724		
15	1	36		24.45	24.38	24.39				
15	18	9		24.39	24.38	24.39				
15	1	0		24.06	23.96	23.98				
15	1	37		23.98	23.91	24.02				
15	36	0		24.13	23.96	24.09				
15	1	1	QPSK	24.39	24.35	24.38				
15	1	36		24.42	24.33	24.39				
15	18	9		24.38	24.39	24.37				
15	1	0		23.52	23.39	23.47				
15	1	37		23.48	23.40	23.48				
15	36	0		23.64	23.47	23.62				
15	1	1	16-QAM	23.88	23.63	23.69	32.38	1.7298		
15	1	1	64-QAM	22.28	22.04	22.16				
15	1	1	256-QAM	20.20	19.97	20.06				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.38	24.38	24.37	32.91	1.9543		
20	1	49		24.35	24.38	24.38				
20	25	12		24.38	24.37	24.35				
20	1	0		24.04	23.88	23.92				
20	1	50		23.88	23.91	23.97				
20	50	0		24.12	23.94	24.15				
20	1	1	QPSK	24.41	24.30	24.40				
20	1	49		24.32	24.34	24.36				
20	25	12		24.38	24.38	24.40				
20	1	0		23.46	23.38	23.41				
20	1	50		23.39	23.40	23.48				
20	50	0		23.64	23.47	23.64				
20	1	1	16-QAM	23.89	23.66	23.58	32.39	1.7338		
20	1	1	64-QAM	22.24	22.09	22.08				
20	1	1	256-QAM	20.11	19.93	19.97				
Limit	EIRP < 2W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.41	24.38	24.30	32.19	1.6558		
10	1	22		24.41	24.34	24.35				
10	12	6		24.41	24.40	24.38				
10	1	0		24.26	24.29	24.03				
10	1	23		24.26	24.07	23.98				
10	24	0		24.37	24.26	24.07				
10	1	1	QPSK	24.43	24.28	24.31				
10	1	22		24.44	24.28	24.30				
10	12	6		24.42	24.40	24.35				
10	1	0		23.87	23.78	23.60				
10	1	23		23.75	23.60	23.63				
10	24	0		23.91	23.84	23.69				
10	1	1	16-QAM	24.06	24.05	23.82	31.81	1.5171		
10	1	1	64-QAM	22.51	22.47	22.32				
10	1	1	256-QAM	20.46	20.39	20.16				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.32	24.41	24.38	32.22	1.6672		
15	1	36		24.28	24.46	24.47				
15	18	9		24.35	24.38	24.30				
15	1	0		24.29	24.32	24.20				
15	1	37		24.18	23.97	23.96				
15	36	0		24.35	24.29	24.10				
15	1	1	QPSK	24.41	24.40	24.34				
15	1	36		24.34	24.43	24.38				
15	18	9		24.40	24.38	24.31				
15	1	0		23.81	23.75	23.71				
15	1	37		23.63	23.53	23.62				
15	36	0		23.82	23.78	23.68				
15	1	1	16-QAM	24.01	24.04	23.90	31.79	1.5101		
15	1	1	64-QAM	22.44	22.45	22.33				
15	1	1	256-QAM	20.36	20.40	20.30				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.32	24.30	24.28	32.22	1.6672		
20	1	49		24.43	24.47	24.30				
20	25	12		24.31	24.33	24.28				
20	1	0		24.23	24.27	24.27				
20	1	50		23.94	23.96	23.97				
20	50	0		24.27	24.25	24.17				
20	1	1	QPSK	24.41	24.38	24.35				
20	1	49		24.40	24.41	24.42				
20	25	12		24.41	24.42	24.38				
20	1	0		23.76	23.82	23.82				
20	1	50		23.54	23.55	23.61				
20	50	0		23.81	23.81	23.74				
20	1	1	16-QAM	23.97	24.02	24.05	31.80	1.5136		
20	1	1	64-QAM	22.39	22.40	22.46				
20	1	1	256-QAM	20.32	20.32	20.34				
Limit	ERP < 7W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.15	23.99	24.16	32.77	1.8923		
10	1	22		24.15	24.05	24.13				
10	12	6		24.23	24.14	24.23				
10	1	0		23.63	23.50	23.71				
10	1	23		23.63	23.54	23.65				
10	24	0		24.20	24.11	24.23				
10	1	1	QPSK	24.14	23.99	24.18				
10	1	22		24.16	23.98	24.11				
10	12	6		24.26	24.16	24.27				
10	1	0		23.10	23.04	23.20				
10	1	23		23.12	23.00	23.11				
10	24	0		23.73	23.64	23.73				
10	1	1	16-QAM	23.37	23.23	23.41	31.91	1.5524		
10	1	1	64-QAM	21.78	21.70	21.86				
10	1	1	256-QAM	19.63	19.49	19.64				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.13	23.99	24.19	32.92	1.9588		
15	1	36		24.13	24.04	24.22				
15	18	9		24.41	24.35	24.40				
15	1	0		24.07	23.49	24.19				
15	1	37		23.62	23.55	24.22				
15	36	0		24.20	24.07	24.35				
15	1	1	QPSK	24.09	23.96	24.21				
15	1	36		24.10	23.97	24.18				
15	18	9		24.42	24.33	24.41				
15	1	0		23.17	23.02	23.24				
15	1	37		23.14	23.06	23.23				
15	36	0		23.74	23.58	23.84				
15	1	1	16-QAM	23.39	23.17	23.43	31.93	1.5596		
15	1	1	64-QAM	21.79	21.64	21.83				
15	1	1	256-QAM	19.64	19.46	19.72				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.16	23.97	24.14	32.96	1.9770		
20	1	49		24.11	23.99	24.15				
20	25	12		24.46	24.38	24.43				
20	1	0		24.12	23.52	23.71				
20	1	50		23.62	23.54	23.68				
20	50	0		24.25	24.06	24.28				
20	1	1	QPSK	24.09	23.91	24.12				
20	1	49		24.11	24.00	24.15				
20	25	12		24.42	24.40	24.44				
20	1	0		23.15	22.95	23.17				
20	1	50		23.12	23.04	23.18				
20	50	0		23.78	23.61	23.79				
20	1	1	16-QAM	23.40	23.14	23.37	31.90	1.5488		
20	1	1	64-QAM	21.80	21.61	21.73				
20	1	1	256-QAM	19.69	19.41	19.60				
Limit	EIRP < 2W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.38	24.39	24.41	31.43	1.3900		
10	1	22		24.38	24.45	24.40				
10	12	6		24.39	24.46	24.47				
10	1	0		24.17	24.25	24.27				
10	1	23		24.34	24.43	24.37				
10	24	0		24.28	24.39	24.43				
10	1	1	QPSK	24.45	24.41	24.42				
10	1	22		24.38	24.44	24.43				
10	12	6		24.41	24.45	24.48				
10	1	0		23.76	23.74	23.76				
10	1	23		23.74	23.89	23.85				
10	24	0		23.81	23.93	23.92				
10	1	1	16-QAM	23.94	24.14	24.10	31.09	1.2853		
10	1	1	64-QAM	22.43	22.56	22.57				
10	1	1	256-QAM	20.24	20.36	20.46				
Limit	ERP < 3W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.38	24.37	24.34	31.40	1.3804		
15	1	36		24.39	24.39	24.33				
15	18	9		24.41	24.40	24.40				
15	1	0		24.22	24.21	24.22				
15	1	37		24.35	24.32	24.29				
15	36	0		24.33	24.34	24.34				
15	1	1	QPSK	24.38	24.36	24.34				
15	1	36		24.34	24.38	24.39				
15	18	9		24.37	24.38	24.45				
15	1	0		23.60	23.65	23.65				
15	1	37		23.83	23.81	23.84				
15	36	0		23.86	23.87	23.87				
15	1	1	16-QAM	23.96	24.05	24.06	31.01	1.2618		
15	1	1	64-QAM	22.39	22.44	22.46				
15	1	1	256-QAM	20.27	20.35	20.35				
Limit	ERP < 3W			Result			Pass			

NR n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.38	-	31.86	1.5346		
10	1	22		-	24.34	-				
10	12	6		-	24.40	-				
10	1	0		-	24.31	-				
10	1	23		-	24.12	-				
10	24	0		-	24.35	-				
10	1	1	QPSK	-	24.34	-				
10	1	22		-	24.36	-				
10	12	6		-	24.41	-				
10	1	0		-	23.70	-				
10	1	23		-	23.59	-				
10	24	0		-	23.83	-				
10	1	1	16-QAM	-	24.04	-	31.49	1.4093		
10	1	1	64-QAM	-	22.55	-				
10	1	1	256-QAM	-	20.42	-				
Limit	ERP < 3W			Result			Pass			

NR n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.33	-	32.03	1.5959		
10	1	22		-	24.46	-				
10	12	6		-	24.37	-				
10	1	0		-	24.08	-				
10	1	23		-	24.04	-				
10	24	0		-	24.21	-				
10	1	1	QPSK	-	24.31	-				
10	1	22		-	24.48	-				
10	12	6		-	24.38	-				
10	1	0		-	23.53	-				
10	1	23		-	23.56	-				
10	24	0		-	23.73	-				
10	1	1	16-QAM	-	23.96	-	31.51	1.4158		
10	1	1	64-QAM	-	22.44	-				
10	1	1	256-QAM	-	20.22	-				
Limit	ERP < 3W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.41	24.37	32.95	1.9724		
10	1	22		24.45	24.41	24.38				
10	12	6		24.38	24.35	24.36				
10	1	0		24.14	23.92	24.09				
10	1	23		24.10	23.90	24.02				
10	24	0		24.19	24.03	24.10				
10	1	1	QPSK	24.35	24.38	24.36				
10	1	22		24.34	24.34	24.44				
10	12	6		24.41	24.34	24.33				
10	1	0		23.56	23.40	23.60				
10	1	23		23.61	23.40	23.53				
10	24	0		23.72	23.51	23.66				
10	1	1	16-QAM	23.96	23.65	23.77	32.46	1.7620		
10	1	1	64-QAM	22.40	22.04	22.30				
10	1	1	256-QAM	20.21	19.90	20.07				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.38	24.42	24.40	32.98	1.9861		
15	1	36		24.38	24.40	24.48				
15	18	9		24.35	24.48	24.36				
15	1	0		24.08	23.94	24.09				
15	1	37		24.04	23.93	24.03				
15	36	0		24.14	23.98	24.13				
15	1	1	QPSK	24.34	24.38	24.42				
15	1	36		24.44	24.45	24.46				
15	18	9		24.38	24.46	24.37				
15	1	0		23.63	23.44	23.57				
15	1	37		23.56	23.49	23.54				
15	36	0		23.67	23.46	23.64				
15	1	1	16-QAM	23.95	23.62	23.86	32.45	1.7579		
15	1	1	64-QAM	22.34	22.04	22.27				
15	1	1	256-QAM	20.21	19.93	20.14				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.38	24.37	24.36	32.98	1.9861		
20	1	49		24.45	24.44	24.33				
20	25	12		24.44	24.44	24.40				
20	1	0		24.06	23.91	24.08				
20	1	50		23.93	23.98	24.04				
20	50	0		24.16	23.97	24.10				
20	1	1	QPSK	24.48	24.34	24.40				
20	1	49		24.37	24.44	24.44				
20	25	12		24.42	24.44	24.38				
20	1	0		23.48	23.41	23.59				
20	1	50		23.51	23.47	23.57				
20	50	0		23.63	23.50	23.64				
20	1	1	16-QAM	23.91	23.61	23.84	32.41	1.7418		
20	1	1	64-QAM	22.34	22.06	22.30				
20	1	1	256-QAM	20.19	19.94	20.12				
Limit	EIRP < 2W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.42	24.41	24.37	32.21	1.6634		
10	1	22		24.34	24.38	24.46				
10	12	6		24.41	24.38	24.33				
10	1	0		24.26	24.25	23.99				
10	1	23		24.19	24.02	23.97				
10	24	0		24.33	24.24	24.01				
10	1	1	QPSK	24.37	24.33	24.42				
10	1	22		24.38	24.33	24.43				
10	12	6		24.45	24.44	24.38				
10	1	0		23.80	23.79	23.51				
10	1	23		23.75	23.55	23.58				
10	24	0		23.90	23.80	23.60				
10	1	1	16-QAM	24.03	24.01	23.77	31.78	1.5066		
10	1	1	64-QAM	22.49	22.50	22.20				
10	1	1	256-QAM	20.39	20.36	20.12				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.38	24.39	24.33	32.20	1.6596		
15	1	36		24.34	24.42	24.44				
15	18	9		24.40	24.41	24.37				
15	1	0		24.24	24.27	24.13				
15	1	37		24.07	23.96	23.95				
15	36	0		24.24	24.21	24.04				
15	1	1	QPSK	24.41	24.37	24.36				
15	1	36		24.33	24.39	24.45				
15	18	9		24.42	24.38	24.35				
15	1	0		23.77	23.73	23.66				
15	1	37		23.52	23.48	23.57				
15	36	0		23.81	23.75	23.56				
15	1	1	16-QAM	23.97	24.05	23.87	31.80	1.5136		
15	1	1	64-QAM	22.41	22.43	22.30				
15	1	1	256-QAM	20.31	20.36	20.25				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.38	24.39	24.34	32.19	1.6558		
20	1	49		24.38	24.37	24.42				
20	25	12		24.41	24.38	24.38				
20	1	0		24.17	24.19	24.21				
20	1	50		23.90	23.85	23.90				
20	50	0		24.19	24.18	24.13				
20	1	1	QPSK	24.38	24.39	24.38				
20	1	49		24.35	24.35	24.44				
20	25	12		24.41	24.40	24.38				
20	1	0		23.71	23.82	23.71				
20	1	50		23.42	23.51	23.51				
20	50	0		23.77	23.75	23.66				
20	1	1	16-QAM	23.94	23.97	23.97	31.72	1.4859		
20	1	1	64-QAM	22.33	22.45	22.40				
20	1	1	256-QAM	20.28	20.36	20.31				
Limit	ERP < 7W			Result			Pass			

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.38	-	32.21	1.6634		
10	1	22		-	24.46	-				
10	12	6		-	24.42	-				
10	1	0		-	24.04	-				
10	1	23		-	24.25	-				
10	24	0		-	24.28	-				
10	1	1	QPSK	-	24.34	-				
10	1	22		-	24.40	-				
10	12	6		-	24.42	-				
10	1	0		-	23.49	-				
10	1	23		-	23.83	-				
10	24	0		-	23.84	-				
10	1	1	16-QAM	-	23.92	-	31.67	1.4689		
10	1	1	64-QAM	-	22.36	-				
10	1	1	256-QAM	-	20.21	-				
Limit	Power < 100W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.41	-	32.21	1.6634		
10	1	22		-	24.38	-				
10	12	6		-	24.46	-				
10	1	0		-	24.15	-				
10	1	23		-	24.19	-				
10	24	0		-	24.25	-				
10	1	1	QPSK	-	24.46	-				
10	1	22		-	24.42	-				
10	12	6		-	24.43	-				
10	1	0		-	23.71	-				
10	1	23		-	23.79	-				
10	24	0		-	23.87	-				
10	1	1	16-QAM	-	23.85	-	31.6	1.4454		
10	1	1	64-QAM	-	22.37	-				
10	1	1	256-QAM	-	20.27	-				
Limit	EIRP < 7W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	24.38	-	32.17	1.6482		
15	1	36		-	24.33	-				
15	18	9		-	24.41	-				
15	1	0		-	24.12	-				
15	1	37		-	24.19	-				
15	36	0		-	24.22	-				
15	1	1	QPSK	-	24.35	-				
15	1	36		-	24.39	-				
15	18	9		-	24.42	-				
15	1	0		-	23.60	-				
15	1	37		-	23.73	-				
15	36	0		-	23.82	-				
15	1	1	16-QAM	-	23.82	-	31.57	1.4355		
15	1	1	64-QAM	-	22.26	-				
15	1	1	256-QAM	-	20.19	-				
Limit	EIRP < 7W			Result			Pass			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.45	-	32.2	1.6596		
20	1	49		-	24.38	-				
20	25	12		-	24.41	-				
20	1	0		-	23.97	-				
20	1	50		-	24.12	-				
20	50	0		-	24.25	-				
20	1	1	QPSK	-	24.44	-				
20	1	49		-	24.38	-				
20	25	12		-	24.43	-				
20	1	0		-	23.43	-				
20	1	50		-	23.67	-				
20	50	0		-	23.81	-				
20	1	1	16-QAM	-	23.80	-	31.55	1.4289		
20	1	1	64-QAM	-	22.19	-				
20	1	1	256-QAM	-	20.12	-				
Limit	EIRP < 7W			Result			Pass			

NR n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	22.32	-	23.32	0.2148		
10	1	22		-	22.29	-				
10	12	6		-	22.42	-				
10	1	0		-	21.78	-				
10	1	23		-	21.81	-				
10	24	0		-	21.85	-				
10	1	1	QPSK	-	22.26	-				
10	1	22		-	22.29	-				
10	12	6		-	22.42	-				
10	1	0		-	21.28	-				
10	1	23		-	21.32	-				
10	24	0		-	21.41	-				
10	1	1	16-QAM	-	21.44	-	22.34	0.1714		
10	1	1	64-QAM	-	19.90	-				
10	1	1	256-QAM	-	17.84	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.31	24.45	32.95	1.9724		
10	1	22		24.40	24.37	24.38				
10	12	6		24.41	24.36	24.40				
10	1	0		23.94	23.85	23.98				
10	1	23		23.92	23.91	24.01				
10	24	0		23.93	23.86	24.00				
10	1	1	QPSK	24.38	24.29	24.41				
10	1	22		24.36	24.35	24.44				
10	12	6		24.45	24.44	24.39				
10	1	0		23.42	23.32	23.48				
10	1	23		23.42	23.40	23.52				
10	24	0		23.48	23.43	23.57				
10	1	1	16-QAM	23.31	23.21	23.29	31.81	1.5171		
10	1	1	64-QAM	22.28	22.21	22.37				
10	1	1	256-QAM	19.90	19.86	20.01				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.42	24.36	24.38	32.98	1.9861		
15	1	36		24.39	24.40	24.44				
15	18	9		24.46	24.42	24.44				
15	1	0		23.95	23.87	24.10				
15	1	37		23.94	23.96	24.14				
15	36	0		23.98	23.94	24.15				
15	1	1	QPSK	24.41	24.26	24.38				
15	1	36		24.39	24.34	24.43				
15	18	9		24.47	24.39	24.48				
15	1	0		23.49	23.35	23.61				
15	1	37		23.45	23.38	23.65				
15	36	0		23.54	23.45	23.68				
15	1	1	16-QAM	23.34	23.21	23.41	31.91	1.5524		
15	1	1	64-QAM	22.33	22.22	22.48				
15	1	1	256-QAM	20.01	19.91	20.15				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.43	24.32	24.45	32.99	1.9907		
20	1	49		24.43	24.40	24.39				
20	25	12		24.49	24.42	24.47				
20	1	0		24.01	23.87	24.01				
20	1	50		23.98	23.95	24.11				
20	50	0		24.02	23.95	24.08				
20	1	1	QPSK	24.43	24.27	24.40				
20	1	49		24.40	24.36	24.48				
20	25	12		24.38	24.46	24.47				
20	1	0		23.51	23.33	23.47				
20	1	50		23.49	23.40	23.53				
20	50	0		23.58	23.48	23.61				
20	1	1	16-QAM	23.29	23.19	23.37	31.87	1.5382		
20	1	1	64-QAM	22.33	22.17	22.34				
20	1	1	256-QAM	20.03	19.84	20.07				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.48	24.37	32.99	1.9907		
10	1	22		24.38	24.38	24.35				
10	12	6		24.40	24.38	24.41				
10	1	0		24.07	24.02	24.03				
10	1	23		24.13	24.04	23.89				
10	24	0		24.14	24.06	23.90				
10	1	1	QPSK	24.37	24.44	24.35				
10	1	22		24.38	24.49	24.34				
10	12	6		24.42	24.37	24.42				
10	1	0		23.56	23.48	23.36				
10	1	23		23.65	23.50	23.37				
10	24	0		23.69	23.58	23.42				
10	1	1	16-QAM	23.40	23.37	23.23	31.90	1.5488		
10	1	1	64-QAM	22.65	22.35	22.16				
10	1	1	256-QAM	20.12	19.96	19.84				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.39	24.37	24.38	32.98	1.9861		
15	1	36		24.45	24.44	24.47				
15	18	9		24.48	24.42	24.40				
15	1	0		24.22	24.06	24.02				
15	1	37		24.23	24.09	24.00				
15	36	0		24.24	24.11	24.05				
15	1	1	QPSK	24.39	24.37	24.44				
15	1	36		24.41	24.41	24.43				
15	18	9		24.42	24.30	24.31				
15	1	0		23.63	23.57	23.52				
15	1	37		23.65	23.57	23.50				
15	36	0		23.76	23.64	23.57				
15	1	1	16-QAM	23.55	23.37	23.36	32.05	1.6032		
15	1	1	64-QAM	22.65	22.32	22.35				
15	1	1	256-QAM	20.23	19.97	20.00				
Limit	EIRP < 2W			Result			Pass			

NR n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.47	24.43	24.46	32.99	1.9907		
20	1	49		24.49	24.42	24.44				
20	25	12		24.41	24.39	24.37				
20	1	0		24.06	24.06	23.99				
20	1	50		24.06	24.05	23.94				
20	50	0		24.11	24.12	24.05				
20	1	1	QPSK	24.45	24.48	24.42				
20	1	49		24.46	24.48	24.42				
20	25	12		24.42	24.39	24.40				
20	1	0		23.46	23.51	23.50				
20	1	50		23.46	23.52	23.47				
20	50	0		23.63	23.63	23.57				
20	1	1	16-QAM	23.38	23.39	23.35	31.89	1.5453		
20	1	1	64-QAM	22.47	22.35	22.33				
20	1	1	256-QAM	20.01	19.94	19.99				
Limit	EIRP < 2W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.45	24.37	24.45	29.95	0.9886		
10	1	22		24.43	24.41	24.38				
10	12	6		24.45	24.38	24.36				
10	1	0		23.89	24.06	23.93				
10	1	23		23.88	24.02	24.04				
10	24	0		23.99	24.10	24.04				
10	1	1	QPSK	24.38	24.38	24.44				
10	1	22		24.36	24.43	24.37				
10	12	6		24.38	24.43	24.41				
10	1	0		23.46	23.60	23.46				
10	1	23		23.42	23.49	23.55				
10	24	0		23.50	23.63	23.62				
10	1	1	16-QAM	23.56	23.70	23.64	29.20	0.8318		
10	1	1	64-QAM	22.08	22.18	22.09				
10	1	1	256-QAM	19.99	20.10	19.96				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.33	24.36	24.32	29.96	0.9908		
15	1	36		24.40	24.46	24.42				
15	18	9		24.44	24.40	24.43				
15	1	0		23.89	24.05	23.83				
15	1	37		23.97	23.99	23.99				
15	36	0		23.94	24.09	23.96				
15	1	1	QPSK	24.35	24.37	24.30				
15	1	36		24.41	24.40	24.43				
15	18	9		24.39	24.38	24.46				
15	1	0		23.43	23.56	23.35				
15	1	37		23.53	23.48	23.48				
15	36	0		23.44	23.60	23.48				
15	1	1	16-QAM	23.53	23.69	23.52	29.19	0.8299		
15	1	1	64-QAM	21.98	22.17	21.99				
15	1	1	256-QAM	19.92	20.09	19.81				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.37	24.38	24.35	29.96	0.9908		
20	1	49		24.39	24.38	24.45				
20	25	12		24.42	24.42	24.44				
20	1	0		23.89	24.08	23.85				
20	1	50		23.99	23.94	23.98				
20	50	0		24.02	24.07	23.99				
20	1	1	QPSK	24.31	24.37	24.31				
20	1	49		24.35	24.39	24.46				
20	25	12		24.43	24.38	24.43				
20	1	0		23.38	23.55	23.36				
20	1	50		23.54	23.45	23.50				
20	50	0		23.47	23.60	23.48				
20	1	1	16-QAM	23.49	23.67	23.49	29.17	0.8260		
20	1	1	64-QAM	21.93	22.11	21.97				
20	1	1	256-QAM	19.92	20.06	19.86				
Limit	EIRP < 1W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.48	24.42	24.38	31.23	1.3274		
10	1	22		24.39	24.38	24.35				
10	12	6		24.40	24.42	24.38				
10	1	0		24.38	24.22	23.98				
10	1	23		24.27	24.11	23.95				
10	24	0		24.37	24.26	24.03				
10	1	1	QPSK	24.42	24.41	24.37				
10	1	22		24.40	24.34	24.35				
10	12	6		24.46	24.42	24.37				
10	1	0		23.89	23.78	23.47				
10	1	23		23.77	23.59	23.50				
10	24	0		23.88	23.78	23.56				
10	1	1	16-QAM	23.99	23.87	23.67	30.74	1.1858		
10	1	1	64-QAM	22.42	22.34	22.12				
10	1	1	256-QAM	20.44	20.30	20.03				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.41	24.38	24.33	31.18	1.3122		
15	1	36		24.38	24.35	24.40				
15	18	9		24.39	24.40	24.33				
15	1	0		24.32	24.25	24.11				
15	1	37		24.18	24.04	23.89				
15	36	0		24.25	24.24	23.98				
15	1	1	QPSK	24.43	24.39	24.33				
15	1	36		24.38	24.34	24.38				
15	18	9		24.42	24.37	24.36				
15	1	0		23.83	23.77	23.54				
15	1	37		23.70	23.53	23.46				
15	36	0		23.82	23.74	23.50				
15	1	1	16-QAM	23.95	23.93	23.66	30.70	1.1749		
15	1	1	64-QAM	22.41	22.36	22.09				
15	1	1	256-QAM	20.41	20.28	20.07				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.38	24.42	24.30	31.21	1.3213		
20	1	49		24.28	24.27	24.30				
20	25	12		24.46	24.42	24.35				
20	1	0		24.27	24.25	24.14				
20	1	50		24.05	23.97	23.87				
20	50	0		24.20	24.31	24.05				
20	1	1	QPSK	24.42	24.40	24.38				
20	1	49		24.42	24.41	24.45				
20	25	12		24.43	24.46	24.38				
20	1	0		23.79	23.72	23.68				
20	1	50		23.62	23.42	23.43				
20	50	0		23.74	23.78	23.53				
20	1	1	16-QAM	23.91	23.95	23.74	30.70	1.1749		
20	1	1	64-QAM	22.35	22.35	22.14				
20	1	1	256-QAM	20.36	20.27	20.17				
Limit	ERP < 3W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.38	24.35	24.48	29.99	0.9977		
10	1	22		24.34	24.38	24.44				
10	12	6		24.33	24.39	24.49				
10	1	0		24.08	24.17	24.33				
10	1	23		24.20	24.19	24.37				
10	24	0		24.16	24.18	24.46				
10	1	1	QPSK	24.48	24.34	24.46				
10	1	22		24.38	24.37	24.42				
10	12	6		24.34	24.37	24.31				
10	1	0		23.54	23.60	23.94				
10	1	23		23.71	23.65	23.83				
10	24	0		23.73	23.68	23.99				
10	1	1	16-QAM	23.37	23.47	23.80	29.30	0.8511		
10	1	1	64-QAM	22.44	22.44	22.82				
10	1	1	256-QAM	20.06	19.92	20.36				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.38	24.39	24.35	29.98	0.9954		
15	1	36		24.41	24.35	24.40				
15	18	9		24.42	24.38	24.47				
15	1	0		24.09	24.18	24.38				
15	1	37		24.19	24.23	24.39				
15	36	0		24.22	24.14	24.37				
15	1	1	QPSK	24.38	24.42	24.48				
15	1	36		24.37	24.36	24.34				
15	18	9		24.38	24.42	24.39				
15	1	0		23.60	23.64	23.99				
15	1	37		23.65	23.67	23.83				
15	36	0		23.75	23.66	24.07				
15	1	1	16-QAM	23.41	23.47	23.89	29.39	0.8690		
15	1	1	64-QAM	22.38	22.48	22.87				
15	1	1	256-QAM	20.06	19.91	20.40				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.46	24.42	24.40	30.00	1.0000		
20	1	49		24.42	24.45	24.43				
20	25	12		24.45	24.43	24.42				
20	1	0		24.10	24.22	24.50				
20	1	50		24.09	24.23	24.37				
20	50	0		24.21	24.28	24.38				
20	1	1	QPSK	24.42	24.43	24.45				
20	1	49		24.38	24.41	24.42				
20	25	12		24.42	24.42	24.45				
20	1	0		23.60	23.67	23.94				
20	1	50		23.55	23.68	23.84				
20	50	0		23.75	23.76	24.08				
20	1	1	16-QAM	23.42	23.51	23.77	29.27	0.8453		
20	1	1	64-QAM	22.39	22.49	22.86				
20	1	1	256-QAM	20.08	19.96	20.34				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.44	23.47	23.74	29.24	0.8395		
10	1	22		23.57	23.36	23.60				
10	12	6		23.49	23.44	23.69				
10	1	0		22.95	22.99	23.28				
10	1	23		23.07	22.86	23.08				
10	24	0		23.04	22.91	23.18				
10	1	1	QPSK	23.36	23.37	23.69				
10	1	22		23.50	23.29	23.53				
10	12	6		23.53	23.45	23.72				
10	1	0		22.42	22.44	22.73				
10	1	23		22.52	22.33	22.57				
10	24	0		22.56	22.43	22.72				
10	1	1	16-QAM	22.27	22.29	22.56	28.06	0.6397		
10	1	1	64-QAM	21.11	21.19	21.40				
10	1	1	256-QAM	18.75	18.75	19.03				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.45	23.54	23.88	29.38	0.8670		
15	1	36		23.66	23.34	23.60				
15	18	9		23.54	23.44	23.84				
15	1	0		22.98	23.05	23.43				
15	1	37		23.17	22.88	23.10				
15	36	0		23.09	22.97	23.33				
15	1	1	QPSK	23.38	23.47	23.84				
15	1	36		23.59	23.31	23.54				
15	18	9		23.55	23.42	23.81				
15	1	0		22.44	22.51	22.87				
15	1	37		22.64	22.33	22.56				
15	36	0		22.58	22.48	22.83				
15	1	1	16-QAM	22.27	22.33	22.70	28.20	0.6607		
15	1	1	64-QAM	21.17	21.24	21.55				
15	1	1	256-QAM	18.77	18.83	19.18				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.47	23.56	23.79	29.37	0.8650		
20	1	49		23.74	23.33	23.57				
20	25	12		23.64	23.41	23.87				
20	1	0		23.00	23.06	23.34				
20	1	50		23.27	22.85	23.07				
20	50	0		23.16	22.95	23.34				
20	1	1	QPSK	23.41	23.50	23.74				
20	1	49		23.67	23.27	23.53				
20	25	12		23.63	23.42	23.85				
20	1	0		22.45	22.57	22.79				
20	1	50		22.71	22.32	22.54				
20	50	0		22.64	22.45	22.85				
20	1	1	16-QAM	22.26	22.34	22.65	28.15	0.6531		
20	1	1	64-QAM	21.11	21.25	21.46				
20	1	1	256-QAM	18.76	18.84	19.14				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.38	24.47	24.46	29.98	0.9954		
10	1	22		24.33	24.34	24.44				
10	12	6		24.31	24.46	24.48				
10	1	0		24.29	24.30	24.32				
10	1	23		24.25	24.31	24.34				
10	24	0		24.28	24.38	24.48				
10	1	1	QPSK	24.38	24.32	24.33				
10	1	22		24.33	24.46	24.45				
10	12	6		24.38	24.47	24.42				
10	1	0		23.81	24.17	24.32				
10	1	23		23.76	24.06	24.30				
10	24	0		23.84	24.18	24.42				
10	1	1	16-QAM	23.63	23.98	24.15	29.65	0.9226		
10	1	1	64-QAM	22.69	23.01	23.16				
10	1	1	256-QAM	20.31	20.92	21.09				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.32	24.45	24.46	29.98	0.9954		
15	1	36		24.34	24.38	24.46				
15	18	9		24.35	24.47	24.48				
15	1	0		24.37	24.31	24.35				
15	1	37		24.35	24.31	24.33				
15	36	0		24.35	24.31	24.35				
15	1	1	QPSK	24.38	24.46	24.47				
15	1	36		24.38	24.35	24.46				
15	18	9		24.34	24.45	24.47				
15	1	0		23.84	24.21	24.24				
15	1	37		23.86	24.05	24.30				
15	36	0		23.90	24.20	24.32				
15	1	1	16-QAM	23.65	23.98	24.06	29.56	0.9036		
15	1	1	64-QAM	22.58	22.99	23.06				
15	1	1	256-QAM	20.35	20.92	21.00				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.35	24.33	24.31	30.00	1.0000		
20	1	49		24.35	24.46	24.47				
20	25	12		24.36	24.47	24.48				
20	1	0		24.40	24.33	24.35				
20	1	50		24.44	24.50	24.30				
20	50	0		24.45	24.31	24.31				
20	1	1	QPSK	24.30	24.46	24.41				
20	1	49		24.31	24.33	24.47				
20	25	12		24.38	24.42	24.49				
20	1	0		23.90	24.13	24.08				
20	1	50		23.94	24.02	24.21				
20	50	0		24.00	24.20	24.29				
20	1	1	16-QAM	23.73	23.98	23.91	29.48	0.8872		
20	1	1	64-QAM	22.73	23.07	22.97				
20	1	1	256-QAM	20.40	20.80	20.88				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.23	24.25	24.16	29.88	0.9727		
10	1	22		24.29	24.38	24.25				
10	12	6		24.30	24.37	24.30				
10	1	0		23.72	23.73	23.69				
10	1	23		23.77	23.85	23.79				
10	24	0		23.77	23.87	23.78				
10	1	1	QPSK	24.21	24.23	24.15				
10	1	22		24.22	24.36	24.24				
10	12	6		24.30	24.35	24.30				
10	1	0		23.24	23.23	23.15				
10	1	23		23.28	23.37	23.26				
10	24	0		23.34	23.40	23.37				
10	1	1	16-QAM	23.11	23.14	23.04	28.64	0.7311		
10	1	1	64-QAM	22.18	22.30	22.12				
10	1	1	256-QAM	19.97	20.02	20.02				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.26	24.19	24.11	29.86	0.9683		
15	1	36		24.23	24.34	24.21				
15	18	9		24.32	24.35	24.20				
15	1	0		23.79	23.74	23.67				
15	1	37		23.74	23.87	23.77				
15	36	0		23.84	23.86	23.72				
15	1	1	QPSK	24.24	24.19	24.13				
15	1	36		24.24	24.33	24.21				
15	18	9		24.34	24.36	24.22				
15	1	0		23.34	23.23	23.15				
15	1	37		23.28	23.38	23.25				
15	36	0		23.37	23.40	23.25				
15	1	1	16-QAM	23.13	23.04	23.04	28.63	0.7295		
15	1	1	64-QAM	22.11	22.09	22.03				
15	1	1	256-QAM	20.04	19.99	19.99				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.31	24.13	24.14	29.92	0.9817		
20	1	49		24.25	24.34	24.19				
20	25	12		24.41	24.38	24.18				
20	1	0		23.81	23.67	23.61				
20	1	50		23.75	23.86	23.69				
20	50	0		23.88	23.86	23.67				
20	1	1	QPSK	24.31	24.15	24.12				
20	1	49		24.19	24.31	24.17				
20	25	12		24.42	24.41	24.20				
20	1	0		23.34	23.19	23.17				
20	1	50		23.27	23.33	23.22				
20	50	0		23.45	23.41	23.24				
20	1	1	16-QAM	23.11	23.03	22.95	28.61	0.7261		
20	1	1	64-QAM	22.26	22.09	22.06				
20	1	1	256-QAM	20.05	19.98	19.88				
Limit	EIRP < 1W			Result			Pass			

5G NR Redcap SCS 30KHz

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.84	23.79	23.79	32.97	1.9815		
10	1	22		23.95	23.62	23.86				
10	12	6		24.47	24.26	24.43				
10	1	0		23.35	23.28	23.28				
10	1	23		23.49	23.61	23.40				
10	24	0		23.99	23.77	23.89				
10	1	1	QPSK	24.08	23.77	23.75				
10	1	22		23.93	23.58	23.87				
10	12	6		24.41	24.35	24.47				
10	1	0		22.86	22.81	22.79				
10	1	23		22.97	22.59	22.90				
10	24	0		23.51	23.29	23.41				
10	1	1	16-QAM	23.76	22.90	22.97	32.26	1.6827		
10	1	1	64-QAM	22.12	21.38	21.40				
10	1	1	256-QAM	19.96	19.20	19.22				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.26	23.81	23.66	32.94	1.9679		
15	1	36		23.89	23.59	23.77				
15	18	9		24.43	24.28	24.29				
15	1	0		23.78	23.32	23.18				
15	1	37		23.89	23.11	23.31				
15	36	0		23.95	23.75	23.79				
15	1	1	QPSK	23.72	23.78	23.65				
15	1	36		23.89	23.55	23.76				
15	18	9		24.44	24.24	24.28				
15	1	0		22.79	22.83	22.71				
15	1	37		22.96	22.60	22.82				
15	36	0		23.49	23.28	23.28				
15	1	1	16-QAM	23.13	22.96	22.91	31.63	1.4555		
15	1	1	64-QAM	21.81	21.38	21.37				
15	1	1	256-QAM	19.92	19.28	19.18				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n2 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.23	23.79	23.60	32.98	1.9861		
20	1	49		23.81	23.58	23.76				
20	25	12		24.46	24.28	24.32				
20	1	0		23.76	23.32	23.11				
20	1	50		23.81	23.12	23.30				
20	50	0		23.98	23.72	23.86				
20	1	1	QPSK	23.69	23.78	23.55				
20	1	49		23.78	23.53	23.75				
20	25	12		24.48	24.30	24.27				
20	1	0		22.71	22.83	22.61				
20	1	50		22.82	22.59	22.80				
20	50	0		23.45	23.27	23.31				
20	1	1	16-QAM	23.07	22.97	22.80	31.57	1.4355		
20	1	1	64-QAM	21.37	21.42	21.26				
20	1	1	256-QAM	19.87	19.29	19.10				
Limit	EIRP < 2W			Result			Pass			
NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.06	24.17	24.50	32.25	1.6788		
10	1	22		24.14	24.09	23.97				
10	12	6		24.45	24.42	24.42				
10	1	0		23.66	24.17	24.01				
10	1	23		23.67	24.07	23.99				
10	24	0		24.13	24.18	24.01				
10	1	1	QPSK	24.06	24.18	24.03				
10	1	22		24.11	24.11	23.98				
10	12	6		24.42	24.41	24.31				
10	1	0		23.17	23.18	23.52				
10	1	23		23.15	23.55	23.08				
10	24	0		23.79	23.74	23.59				
10	1	1	16-QAM	23.35	23.39	23.66	31.41	1.3836		
10	1	1	64-QAM	21.83	22.35	22.15				
10	1	1	256-QAM	20.26	20.25	20.07				
Limit	ERP < 7W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	23.97	24.41	24.38	32.19	1.6558		
15	1	36		24.01	24.44	24.42				
15	18	9		24.33	24.32	24.30				
15	1	0		23.63	24.08	24.07				
15	1	37		23.54	23.93	23.92				
15	36	0		24.10	24.16	24.05				
15	1	1	QPSK	23.98	24.39	24.38				
15	1	36		23.99	24.41	23.98				
15	18	9		24.42	24.43	24.38				
15	1	0		23.11	23.64	23.58				
15	1	37		23.03	23.49	23.58				
15	36	0		23.72	23.68	23.57				
15	1	1	16-QAM	23.76	23.86	23.74	31.61	1.4488		
15	1	1	64-QAM	22.20	22.27	22.17				
15	1	1	256-QAM	20.17	20.20	20.13				
Limit	ERP < 7W			Result			Pass			

NR Redcap n5 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.41	24.38	24.35	32.20	1.6596		
20	1	49		24.35	24.35	24.41				
20	25	12		24.38	24.41	24.40				
20	1	0		23.94	24.08	24.02				
20	1	50		23.84	23.87	23.90				
20	50	0		24.07	24.15	24.06				
20	1	1	QPSK	24.45	24.35	24.36				
20	1	49		24.35	24.35	23.97				
20	25	12		24.35	24.43	24.41				
20	1	0		23.54	23.70	23.60				
20	1	50		23.36	23.52	23.08				
20	50	0		23.61	23.70	23.62				
20	1	1	16-QAM	23.69	23.82	23.80	31.57	1.4355		
20	1	1	64-QAM	22.13	22.25	22.23				
20	1	1	256-QAM	20.12	20.25	20.15				
Limit	ERP < 7W			Result			Pass			
NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.75	23.92	23.81	32.52	1.7865		
10	1	22		23.76	23.89	23.92				
10	12	6		23.82	23.99	23.99				
10	1	0		23.26	23.41	23.33				
10	1	23		23.27	23.38	23.43				
10	24	0		23.79	23.97	23.94				
10	1	1	QPSK	23.68	23.90	23.81				
10	1	22		23.74	23.82	23.88				
10	12	6		23.86	24.02	23.98				
10	1	0		22.75	22.94	22.86				
10	1	23		22.81	22.86	22.92				
10	24	0		23.38	23.51	23.48				
10	1	1	16-QAM	23.04	23.15	23.09	31.65	1.4622		
10	1	1	64-QAM	21.51	21.59	21.54				
10	1	1	256-QAM	19.36	19.50	19.43				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.77	23.90	23.77	32.96	1.9770		
15	1	36		23.85	23.85	23.96				
15	18	9		24.33	24.46	24.44				
15	1	0		23.25	23.44	23.31				
15	1	37		23.37	23.34	23.52				
15	36	0		23.83	23.95	23.93				
15	1	1	QPSK	23.72	23.88	23.80				
15	1	36		23.80	23.75	23.94				
15	18	9		24.35	24.46	24.46				
15	1	0		22.76	22.99	22.83				
15	1	37		22.87	22.87	22.99				
15	36	0		23.37	23.49	23.49				
15	1	1	16-QAM	23.05	23.15	23.02	31.65	1.4622		
15	1	1	64-QAM	21.44	21.58	21.45				
15	1	1	256-QAM	19.32	19.51	19.37				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n7 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.76	23.90	23.74	33.00	1.9953		
20	1	49		23.89	23.77	23.89				
20	25	12		24.44	24.47	24.45				
20	1	0		23.29	23.42	23.26				
20	1	50		23.44	23.29	23.45				
20	50	0		23.89	23.95	23.90				
20	1	1	QPSK	23.68	23.85	23.69				
20	1	49		23.88	23.75	23.87				
20	25	12		24.40	24.50	24.45				
20	1	0		22.74	22.91	22.75				
20	1	50		22.95	22.80	22.95				
20	50	0		23.47	23.52	23.45				
20	1	1	16-QAM	23.00	23.14	22.99	31.64	1.4588		
20	1	1	64-QAM	21.43	21.56	21.38				
20	1	1	256-QAM	19.34	19.49	19.32				
Limit	EIRP < 2W			Result			Pass			
NR Redcap n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.14	24.24	24.30	31.45	1.3964		
10	1	22		24.28	24.44	24.40				
10	12	6		24.33	24.44	24.46				
10	1	0		23.66	23.78	23.77				
10	1	23		23.79	23.94	23.88				
10	24	0		23.81	23.93	23.92				
10	1	1	QPSK	24.14	24.21	24.28				
10	1	22		24.22	24.43	24.26				
10	12	6		24.42	24.50	24.50				
10	1	0		23.17	23.30	23.31				
10	1	23		23.25	23.46	22.92				
10	24	0		23.33	23.46	23.45				
10	1	1	16-QAM	23.45	23.64	23.61	30.59	1.1455		
10	1	1	64-QAM	21.91	22.09	22.00				
10	1	1	256-QAM	19.76	19.91	19.91				
Limit	ERP < 3W			Result			Pass			

NR Redcap n12 Maximum Average Power [dBm] (GT - LC = 9.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.20	24.23	24.27	31.36	1.3677		
15	1	36		24.40	24.39	24.35				
15	18	9		24.41	24.41	24.40				
15	1	0		23.73	23.75	23.77				
15	1	37		23.90	23.91	23.86				
15	36	0		23.89	23.93	23.93				
15	1	1	QPSK	24.16	24.19	24.20				
15	1	36		24.41	23.99	24.34				
15	18	9		24.40	24.38	24.40				
15	1	0		23.19	23.20	23.25				
15	1	37		23.45	23.43	23.43				
15	36	0		23.40	23.46	23.43				
15	1	1	16-QAM	23.52	23.58	23.58	30.53	1.1298		
15	1	1	64-QAM	21.95	21.82	21.96				
15	1	1	256-QAM	19.84	19.90	19.91				
Limit	ERP < 3W			Result			Pass			
NR Redcap n13 Maximum Average Power [dBm] (GT - LC = 9.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.38	-	31.95	1.5668		
10	1	22		-	24.40	-				
10	12	6		-	24.50	-				
10	1	0		-	23.83	-				
10	1	23		-	23.81	-				
10	24	0		-	23.97	-				
10	1	1	QPSK	-	24.28	-				
10	1	22		-	23.84	-				
10	12	6		-	24.48	-				
10	1	0		-	23.29	-				
10	1	23		-	23.22	-				
10	24	0		-	23.43	-				
10	1	1	16-QAM	-	22.98	-	30.43	1.1041		
10	1	1	64-QAM	-	22.02	-				
10	1	1	256-QAM	-	19.93	-				
Limit	ERP < 3W			Result			Pass			

NR Redcap n14 Maximum Average Power [dBm] (GT - LC = 9.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.40	-	32.05	1.6032		
10	1	22		-	24.39	-				
10	12	6		-	24.49	-				
10	1	0		-	23.97	-				
10	1	23		-	23.86	-				
10	24	0		-	24.04	-				
10	1	1	QPSK	-	24.38	-				
10	1	22		-	23.90	-				
10	12	6		-	24.50	-				
10	1	0		-	23.41	-				
10	1	23		-	23.46	-				
10	24	0		-	23.64	-				
10	1	1	16-QAM	-	23.87	-	31.42	1.3868		
10	1	1	64-QAM	-	22.29	-				
10	1	1	256-QAM	-	20.13	-				
Limit	ERP < 3W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.25	24.14	23.99	33.00	1.9953		
10	1	22		24.27	23.97	23.74				
10	12	6		24.41	24.15	24.28				
10	1	0		23.74	23.62	23.73				
10	1	23		23.81	23.51	23.73				
10	24	0		23.87	23.63	23.81				
10	1	1	QPSK	24.15	24.07	23.75				
10	1	22		24.25	23.91	23.69				
10	12	6		24.50	24.21	24.35				
10	1	0		23.21	23.13	22.78				
10	1	23		23.32	23.05	22.80				
10	24	0		23.40	23.19	23.34				
10	1	1	16-QAM	23.72	23.32	22.88	32.22	1.6672		
10	1	1	64-QAM	22.07	21.79	21.90				
10	1	1	256-QAM	19.92	19.67	19.73				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.16	24.12	23.66	32.84	1.9231		
15	1	36		24.23	23.94	23.73				
15	18	9		24.34	24.11	24.30				
15	1	0		23.69	23.64	23.20				
15	1	37		23.77	23.49	23.25				
15	36	0		23.86	23.65	23.80				
15	1	1	QPSK	24.10	23.61	23.61				
15	1	36		24.21	23.50	23.73				
15	18	9		24.33	24.08	24.26				
15	1	0		23.23	23.15	22.68				
15	1	37		23.32	22.52	22.82				
15	36	0		23.38	23.16	23.28				
15	1	1	16-QAM	23.55	22.74	22.85	32.05	1.6032		
15	1	1	64-QAM	21.96	21.18	21.31				
15	1	1	256-QAM	19.87	19.61	19.14				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n25 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.14	23.61	23.60	32.82	1.9143		
20	1	49		24.10	23.51	23.75				
20	25	12		24.31	24.17	24.32				
20	1	0		23.65	23.60	23.13				
20	1	50		23.67	23.52	23.27				
20	50	0		23.85	23.61	23.74				
20	1	1	QPSK	24.06	23.59	23.57				
20	1	49		23.67	23.44	23.73				
20	25	12		24.32	24.16	24.30				
20	1	0		23.16	22.65	22.67				
20	1	50		22.70	23.00	22.83				
20	50	0		23.36	23.14	23.25				
20	1	1	16-QAM	23.60	22.73	22.82	32.10	1.6218		
20	1	1	64-QAM	21.95	21.18	21.30				
20	1	1	256-QAM	19.81	19.56	19.10				
Limit	EIRP < 2W			Result			Pass			
NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.36	24.43	24.22	32.25	1.6788		
10	1	22		24.37	24.31	23.68				
10	12	6		24.44	24.50	24.26				
10	1	0		23.80	23.97	23.81				
10	1	23		23.88	23.83	23.67				
10	24	0		23.95	23.98	23.71				
10	1	1	QPSK	24.39	24.43	24.24				
10	1	22		24.35	24.36	23.69				
10	12	6		24.44	24.47	24.33				
10	1	0		23.31	23.41	23.29				
10	1	23		23.39	23.31	23.18				
10	24	0		23.48	23.49	23.27				
10	1	1	16-QAM	23.56	23.59	23.39	31.34	1.3614		
10	1	1	64-QAM	22.03	22.05	21.85				
10	1	1	256-QAM	19.96	20.00	19.78				
Limit	ERP < 7W			Result			Pass			

NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.28	24.42	24.33	32.23	1.6711		
15	1	36		24.35	24.19	24.16				
15	18	9		24.42	24.48	24.29				
15	1	0		23.81	23.88	23.84				
15	1	37		23.81	23.71	23.65				
15	36	0		23.91	23.93	23.80				
15	1	1	QPSK	24.29	24.40	24.30				
15	1	36		24.28	24.16	23.68				
15	18	9		24.42	24.45	24.30				
15	1	0		23.31	23.36	23.31				
15	1	37		23.32	23.19	23.21				
15	36	0		23.42	23.44	23.29				
15	1	1	16-QAM	23.47	23.58	23.45	31.33	1.3583		
15	1	1	64-QAM	21.95	22.00	21.90				
15	1	1	256-QAM	19.87	19.97	19.90				
Limit	ERP < 7W			Result			Pass			

NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.27	24.28	24.34	32.24	1.6749		
20	1	49		24.11	24.14	24.18				
20	25	12		24.41	24.49	24.43				
20	1	0		23.75	23.82	23.85				
20	1	50		23.59	23.67	23.64				
20	50	0		23.86	23.93	23.87				
20	1	1	QPSK	24.27	24.33	24.32				
20	1	49		24.10	24.14	23.67				
20	25	12		24.43	24.49	24.41				
20	1	0		23.22	23.33	23.35				
20	1	50		23.12	23.19	23.18				
20	50	0		23.36	23.44	23.34				
20	1	1	16-QAM	23.43	23.45	23.51	31.26	1.3366		
20	1	1	64-QAM	21.89	21.95	21.99				
20	1	1	256-QAM	19.85	19.82	19.90				
Limit	ERP < 7W			Result			Pass			
Part90s NR Redcap n26 Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.30	-	32.25	1.6788		
10	1	22		-	24.50	-				
10	12	6		-	24.48	-				
10	1	0		-	23.80	-				
10	1	23		-	24.04	-				
10	24	0		-	24.06	-				
10	1	1	QPSK	-	24.29	-				
10	1	22		-	24.49	-				
10	12	6		-	24.49	-				
10	1	0		-	23.33	-				
10	1	23		-	23.45	-				
10	24	0		-	23.57	-				
10	1	1	16-QAM	-	23.62	-	31.37	1.3709		
10	1	1	64-QAM	-	22.13	-				
10	1	1	256-QAM	-	20.00	-				
Limit	Power < 100W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	23.97	-	32.25	1.6788		
10	1	22		-	24.45	-				
10	12	6		-	24.49	-				
10	1	0		-	23.93	-				
10	1	23		-	23.99	-				
10	24	0		-	24.03	-				
10	1	1	QPSK	-	23.94	-				
10	1	22		-	24.17	-				
10	12	6		-	24.50	-				
10	1	0		-	22.98	-				
10	1	23		-	23.47	-				
10	24	0		-	23.53	-				
10	1	1	16-QAM	-	23.07	-	30.82	1.2078		
10	1	1	64-QAM	-	22.02	-				
10	1	1	256-QAM	-	20.01	-				
Limit	EIRP < 7W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	23.83	-	32.25	1.6788		
15	1	36		-	24.49	-				
15	18	9		-	24.50	-				
15	1	0		-	23.80	-				
15	1	37		-	24.00	-				
15	36	0		-	23.99	-				
15	1	1	QPSK	-	24.32	-				
15	1	36		-	24.48	-				
15	18	9		-	24.49	-				
15	1	0		-	23.29	-				
15	1	37		-	23.52	-				
15	36	0		-	23.51	-				
15	1	1	16-QAM	-	23.45	-	31.2	1.3183		
15	1	1	64-QAM	-	21.96	-				
15	1	1	256-QAM	-	19.90	-				
Limit	EIRP < 7W			Result			Pass			

NR Redcap n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 9.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.20	-	32.25	1.6788		
20	1	49		-	24.48	-				
20	25	12		-	24.50	-				
20	1	0		-	23.71	-				
20	1	50		-	24.02	-				
20	50	0		-	24.03	-				
20	1	1	QPSK	-	24.17	-				
20	1	49		-	24.44	-				
20	25	12		-	24.49	-				
20	1	0		-	23.23	-				
20	1	50		-	23.47	-				
20	50	0		-	23.53	-				
20	1	1	16-QAM	-	23.52	-	31.27	1.3397		
20	1	1	64-QAM	-	21.96	-				
20	1	1	256-QAM	-	19.84	-				
Limit	EIRP < 7W			Result			Pass			
NR Redcap n30 Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	22.29	-	23.33	0.2153		
10	1	22		-	22.30	-				
10	12	6		-	22.43	-				
10	1	0		-	21.74	-				
10	1	23		-	21.80	-				
10	24	0		-	21.85	-				
10	1	1	QPSK	-	22.26	-				
10	1	22		-	22.31	-				
10	12	6		-	22.43	-				
10	1	0		-	21.28	-				
10	1	23		-	21.34	-				
10	24	0		-	21.42	-				
10	1	1	16-QAM	-	21.44	-	22.34	0.1714		
10	1	1	64-QAM	-	19.92	-				
10	1	1	256-QAM	-	17.86	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.15	24.23	24.10	32.83	1.9187		
10	1	22		24.17	24.16	24.17				
10	12	6		24.30	24.28	24.25				
10	1	0		23.68	23.74	23.64				
10	1	23		23.76	23.65	23.71				
10	24	0		23.76	23.76	23.75				
10	1	1	QPSK	24.22	24.27	24.21				
10	1	22		24.27	24.22	24.18				
10	12	6		24.33	24.30	24.25				
10	1	0		23.27	23.30	23.25				
10	1	23		23.31	23.20	23.27				
10	24	0		23.34	23.32	23.29				
10	1	1	16-QAM	23.41	23.34	23.39	31.91	1.5524		
10	1	1	64-QAM	21.71	21.85	21.75				
10	1	1	256-QAM	19.56	19.69	19.55				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.19	24.26	24.16	32.83	1.9187		
15	1	36		24.26	24.11	24.21				
15	18	9		24.30	24.27	24.24				
15	1	0		23.69	23.79	23.68				
15	1	37		23.80	23.64	23.74				
15	36	0		23.82	23.77	23.79				
15	1	1	QPSK	24.22	24.26	24.19				
15	1	36		24.29	24.19	24.24				
15	18	9		24.33	24.28	24.27				
15	1	0		23.26	23.35	23.28				
15	1	37		23.35	23.24	23.33				
15	36	0		23.35	23.30	23.33				
15	1	1	16-QAM	23.41	23.44	23.43	31.94	1.5631		
15	1	1	64-QAM	21.78	21.82	21.86				
15	1	1	256-QAM	19.59	19.69	19.60				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n38 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.16	24.20	24.11	32.89	1.9454		
20	1	49		24.24	24.11	24.12				
20	25	12		24.36	24.28	24.25				
20	1	0		23.69	23.75	23.65				
20	1	50		23.77	23.61	23.70				
20	50	0		23.84	23.80	23.74				
20	1	1	QPSK	24.19	24.28	24.12				
20	1	49		24.26	24.12	24.14				
20	25	12		24.39	24.32	24.28				
20	1	0		23.26	23.32	23.20				
20	1	50		23.30	23.18	23.22				
20	50	0		23.37	23.31	23.28				
20	1	1	16-QAM	23.37	23.44	23.27	31.94	1.5631		
20	1	1	64-QAM	21.75	21.76	21.64				
20	1	1	256-QAM	19.60	19.65	19.60				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.99	24.28	24.09	32.86	1.9320		
10	1	22		24.07	24.28	24.13				
10	12	6		24.13	24.33	24.21				
10	1	0		23.52	23.79	23.57				
10	1	23		23.60	23.74	23.63				
10	24	0		23.61	23.80	23.66				
10	1	1	QPSK	24.11	24.29	24.12				
10	1	22		24.11	24.28	24.17				
10	12	6		24.18	24.36	24.24				
10	1	0		23.09	23.34	23.19				
10	1	23		23.14	23.30	23.24				
10	24	0		23.20	23.40	23.26				
10	1	1	16-QAM	23.22	23.34	23.31	31.84	1.5276		
10	1	1	64-QAM	21.72	22.14	21.69				
10	1	1	256-QAM	19.54	19.71	19.53				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.03	24.25	24.03	32.85	1.9275		
15	1	36		24.18	24.23	24.20				
15	18	9		24.15	24.35	24.23				
15	1	0		23.55	23.81	23.60				
15	1	37		23.74	23.72	23.70				
15	36	0		23.67	23.85	23.72				
15	1	1	QPSK	24.04	24.31	24.06				
15	1	36		24.18	24.28	24.23				
15	18	9		24.17	24.33	24.22				
15	1	0		23.12	23.36	23.14				
15	1	37		23.29	23.31	23.31				
15	36	0		23.24	23.37	23.25				
15	1	1	16-QAM	23.35	23.52	23.28	32.02	1.5922		
15	1	1	64-QAM	21.79	21.83	21.68				
15	1	1	256-QAM	19.53	19.70	19.54				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n41 PC3 Maximum Average Power [dBm] (GT - LC = 8.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.93	24.26	23.99	32.91	1.9543		
20	1	49		24.11	24.15	24.18				
20	25	12		24.22	24.37	24.20				
20	1	0		23.48	23.80	23.52				
20	1	50		23.65	23.69	23.72				
20	50	0		23.66	23.84	23.67				
20	1	1	QPSK	23.90	24.26	24.06				
20	1	49		24.11	24.23	24.21				
20	25	12		24.23	24.41	24.22				
20	1	0		23.00	23.30	23.11				
20	1	50		23.20	23.24	23.29				
20	50	0		23.24	23.41	23.26				
20	1	1	16-QAM	23.20	23.38	23.20	31.88	1.5417		
20	1	1	64-QAM	21.48	21.88	21.53				
20	1	1	256-QAM	19.48	19.69	19.47				
Limit	EIRP < 2W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.82	24.28	24.19	29.95	0.9886		
10	1	22		23.75	24.36	24.16				
10	12	6		24.32	24.41	24.26				
10	1	0		23.31	23.82	23.68				
10	1	23		23.75	23.89	23.70				
10	24	0		23.83	23.93	23.78				
10	1	1	QPSK	23.80	24.28	24.19				
10	1	22		24.21	24.28	24.15				
10	12	6		24.31	24.45	24.32				
10	1	0		23.36	23.34	23.23				
10	1	23		23.26	23.32	23.20				
10	24	0		23.36	23.45	23.27				
10	1	1	16-QAM	22.90	23.51	23.41	29.01	0.7962		
10	1	1	64-QAM	21.92	21.97	21.90				
10	1	1	256-QAM	19.80	19.88	19.68				
Limit	EIRP < 1W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.24	24.28	24.13	29.90	0.9772		
15	1	36		24.16	24.35	24.04				
15	18	9		24.27	24.40	24.14				
15	1	0		23.76	23.79	23.64				
15	1	37		23.73	23.86	23.61				
15	36	0		23.80	23.90	23.67				
15	1	1	QPSK	24.22	24.25	24.08				
15	1	36		24.12	24.29	23.98				
15	18	9		24.28	24.37	24.17				
15	1	0		23.30	23.33	23.14				
15	1	37		23.20	23.43	23.06				
15	36	0		23.28	23.46	23.19				
15	1	1	16-QAM	23.40	23.46	23.31	28.96	0.7870		
15	1	1	64-QAM	21.84	21.85	21.76				
15	1	1	256-QAM	19.77	19.85	19.62				
Limit	EIRP < 1W			Result			Pass			

NR Redcap n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.17	24.22	24.18	29.94	0.9863		
20	1	49		24.07	24.26	24.04				
20	25	12		24.22	24.44	24.21				
20	1	0		23.74	23.75	23.72				
20	1	50		23.63	23.80	23.61				
20	50	0		23.79	23.91	23.80				
20	1	1	QPSK	24.13	24.16	24.13				
20	1	49		24.10	24.24	24.02				
20	25	12		24.22	24.41	24.18				
20	1	0		23.23	23.23	23.20				
20	1	50		23.16	23.33	23.09				
20	50	0		23.28	23.43	23.27				
20	1	1	16-QAM	23.35	23.37	23.40	28.90	0.7762		
20	1	1	64-QAM	21.76	21.80	21.76				
20	1	1	256-QAM	19.70	19.74	19.73				
Limit	EIRP < 1W			Result			Pass			
NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.39	23.87	23.61	31.25	1.3335		
10	1	22		24.41	23.80	23.58				
10	12	6		24.45	24.45	24.16				
10	1	0		23.86	23.87	23.60				
10	1	23		23.88	23.75	23.53				
10	24	0		23.91	23.92	23.64				
10	1	1	QPSK	24.46	23.90	24.10				
10	1	22		24.38	23.80	23.61				
10	12	6		24.50	24.45	24.19				
10	1	0		23.44	22.92	23.10				
10	1	23		23.39	22.76	22.59				
10	24	0		23.46	23.44	23.15				
10	1	1	16-QAM	23.53	22.95	23.25	30.28	1.0666		
10	1	1	64-QAM	21.96	21.43	21.72				
10	1	1	256-QAM	19.95	19.88	19.61				
Limit	ERP < 3W			Result			Pass			

NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.35	24.36	23.79	31.20	1.3183		
15	1	36		24.38	23.66	23.53				
15	18	9		24.42	24.45	24.22				
15	1	0		23.85	23.85	23.78				
15	1	37		23.83	23.67	23.54				
15	36	0		23.83	23.89	23.66				
15	1	1	QPSK	23.92	23.89	23.75				
15	1	36		23.88	23.64	23.63				
15	18	9		24.45	24.42	24.19				
15	1	0		23.39	23.41	22.75				
15	1	37		22.90	23.17	22.63				
15	36	0		23.38	23.40	23.17				
15	1	1	16-QAM	22.93	22.99	22.87	29.74	0.9419		
15	1	1	64-QAM	21.42	21.95	21.77				
15	1	1	256-QAM	19.90	19.93	19.79				
Limit	ERP < 3W			Result			Pass			

NR Redcap n71 Maximum Average Power [dBm] (GT - LC = 8.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.39	23.87	23.61	31.25	1.3335		
20	1	49		24.41	23.80	23.58				
20	25	12		24.45	24.45	24.16				
20	1	0		23.86	23.87	23.60				
20	1	50		23.88	23.75	23.53				
20	50	0		23.91	23.92	23.64				
20	1	1	QPSK	24.46	23.90	24.10				
20	1	49		24.38	23.80	23.61				
20	25	12		24.50	24.45	24.19				
20	1	0		23.44	22.92	23.10				
20	1	50		23.39	22.76	22.59				
20	50	0		23.46	23.44	23.15				
20	1	1	16-QAM	23.53	22.95	23.25	30.28	1.0666		
20	1	1	64-QAM	21.96	21.43	21.72				
20	1	1	256-QAM	19.95	19.88	19.61				
Limit	ERP < 3W			Result			Pass			
Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.88	24.32	24.38	30.00	1.0000		
10	1	22		23.72	24.44	24.34				
10	12	6		23.94	24.43	24.38				
10	1	0		23.47	23.85	23.96				
10	1	23		23.29	23.95	24.07				
10	24	0		23.44	23.97	24.05				
10	1	1	QPSK	23.96	24.34	24.47				
10	1	22		23.77	24.44	24.46				
10	12	6		24.01	24.50	24.44				
10	1	0		23.00	23.37	23.49				
10	1	23		22.82	23.46	23.56				
10	24	0		22.96	23.46	23.57				
10	1	1	16-QAM	23.18	23.38	23.44	28.94	0.7834		
10	1	1	64-QAM	21.57	22.11	22.06				
10	1	1	256-QAM	19.34	19.65	19.77				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.91	24.29	24.43	30.00	1.0000		
15	1	36		23.74	24.45	24.48				
15	18	9		23.87	24.41	24.47				
15	1	0		23.47	23.81	24.02				
15	1	37		23.27	23.98	24.15				
15	36	0		23.43	23.95	24.13				
15	1	1	QPSK	23.93	24.28	24.38				
15	1	36		23.72	24.48	24.50				
15	18	9		23.87	24.39	24.41				
15	1	0		22.98	23.34	23.57				
15	1	37		22.77	23.57	23.70				
15	36	0		22.94	23.44	23.63				
15	1	1	16-QAM	23.09	23.34	23.69	29.19	0.8299		
15	1	1	64-QAM	21.53	21.84	22.08				
15	1	1	256-QAM	19.37	19.64	19.81				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.92	24.27	24.42	29.99	0.9977		
20	1	49		23.82	24.49	24.38				
20	25	12		23.91	24.45	24.41				
20	1	0		23.48	23.78	23.99				
20	1	50		23.33	24.03	24.09				
20	50	0		23.46	24.02	24.10				
20	1	1	QPSK	23.95	24.31	24.43				
20	1	49		23.84	24.49	24.48				
20	25	12		23.92	24.45	24.47				
20	1	0		23.03	23.32	23.50				
20	1	50		22.89	23.50	23.60				
20	50	0		22.98	23.52	23.59				
20	1	1	16-QAM	23.20	23.32	23.54	29.04	0.8017		
20	1	1	64-QAM	21.49	21.85	21.96				
20	1	1	256-QAM	19.44	19.64	19.85				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.86	24.08	24.08	29.74	0.9419		
10	1	22		23.67	23.96	24.16				
10	12	6		23.83	24.13	24.19				
10	1	0		23.45	23.64	23.56				
10	1	23		23.27	23.47	23.69				
10	24	0		23.37	23.62	23.71				
10	1	1	QPSK	23.91	24.12	24.14				
10	1	22		23.73	23.98	24.14				
10	12	6		23.89	24.18	24.24				
10	1	0		22.98	23.15	23.13				
10	1	23		22.75	22.96	23.19				
10	24	0		22.88	23.15	23.22				
10	1	1	16-QAM	23.07	23.18	23.11	28.68	0.7379		
10	1	1	64-QAM	21.49	21.64	21.65				
10	1	1	256-QAM	19.22	19.50	19.44				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.85	24.13	24.02	29.78	0.9506		
15	1	36		23.66	23.86	24.25				
15	18	9		23.81	24.13	24.24				
15	1	0		23.44	23.68	23.59				
15	1	37		23.23	23.40	23.82				
15	36	0		23.38	23.66	23.73				
15	1	1	QPSK	23.88	24.17	24.08				
15	1	36		23.65	23.91	24.28				
15	18	9		23.82	24.09	24.19				
15	1	0		22.94	23.16	23.12				
15	1	37		22.79	22.92	23.33				
15	36	0		22.86	23.15	23.25				
15	1	1	16-QAM	22.97	23.21	22.99	28.71	0.7430		
15	1	1	64-QAM	21.44	21.69	21.58				
15	1	1	256-QAM	19.24	19.45	19.38				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.86	24.05	23.81	29.73	0.9397		
20	1	49		23.71	23.80	24.20				
20	25	12		23.84	24.11	24.16				
20	1	0		23.43	23.61	23.39				
20	1	50		23.26	23.34	23.73				
20	50	0		23.38	23.62	23.66				
20	1	1	QPSK	23.88	24.13	23.86				
20	1	49		23.75	23.82	24.23				
20	25	12		23.85	24.12	24.13				
20	1	0		22.92	23.14	22.94				
20	1	50		22.78	22.85	23.27				
20	50	0		22.90	23.10	23.17				
20	1	1	16-QAM	23.00	23.13	23.01	28.63	0.7295		
20	1	1	64-QAM	21.69	21.62	21.58				
20	1	1	256-QAM	19.16	19.45	19.16				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.41	24.33	24.33	30.00	1.0000		
10	1	22		24.38	24.45	24.36				
10	12	6		24.49	24.44	24.46				
10	1	0		24.22	24.06	23.93				
10	1	23		24.23	24.25	24.00				
10	24	0		24.30	24.27	24.02				
10	1	1	QPSK	24.36	24.31	24.38				
10	1	22		24.38	24.40	24.38				
10	12	6		24.48	24.49	24.50				
10	1	0		23.79	23.68	23.43				
10	1	23		23.76	23.81	23.43				
10	24	0		23.84	23.83	23.57				
10	1	1	16-QAM	23.95	23.94	23.64	29.45	0.8810		
10	1	1	64-QAM	22.28	22.22	22.00				
10	1	1	256-QAM	20.16	20.26	20.08				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.38	24.31	24.44	29.99	0.9977		
15	1	36		24.45	24.38	24.39				
15	18	9		24.46	24.38	24.47				
15	1	0		24.23	24.05	24.02				
15	1	37		24.24	24.29	23.95				
15	36	0		24.34	24.28	24.01				
15	1	1	QPSK	24.47	24.47	24.48				
15	1	36		24.47	24.49	24.39				
15	18	9		24.47	24.41	24.48				
15	1	0		23.77	23.59	23.52				
15	1	37		23.75	23.82	23.48				
15	36	0		23.84	23.81	23.57				
15	1	1	16-QAM	23.83	23.74	23.75	29.33	0.8570		
15	1	1	64-QAM	22.34	22.28	22.08				
15	1	1	256-QAM	20.22	20.30	20.11				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n77 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.38	24.45	24.49	30.00	1.0000		
20	1	49		24.31	24.33	24.34				
20	25	12		24.46	24.38	24.49				
20	1	0		24.22	24.05	24.01				
20	1	50		24.18	24.26	23.88				
20	50	0		24.34	24.24	24.04				
20	1	1	QPSK	24.35	24.43	24.50				
20	1	49		24.31	24.35	24.32				
20	25	12		24.47	24.44	24.47				
20	1	0		23.72	23.53	23.64				
20	1	50		23.66	23.73	23.43				
20	50	0		23.89	23.77	23.60				
20	1	1	16-QAM	23.85	23.52	23.96	29.46	0.8831		
20	1	1	64-QAM	21.85	22.07	22.08				
20	1	1	256-QAM	20.18	20.09	20.11				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.38	24.36	24.21	29.92	0.9817		
10	1	22		24.35	24.36	24.28				
10	12	6		24.40	24.41	24.37				
10	1	0		24.16	23.97	23.82				
10	1	23		24.14	24.13	23.87				
10	24	0		24.31	24.13	23.90				
10	1	1	QPSK	24.36	24.38	24.29				
10	1	22		24.33	24.42	24.25				
10	12	6		24.38	24.42	24.41				
10	1	0		23.63	23.52	23.34				
10	1	23		23.64	23.66	23.30				
10	24	0		23.86	23.70	23.50				
10	1	1	16-QAM	23.92	23.82	23.54	29.42	0.8750		
10	1	1	64-QAM	22.30	22.15	21.96				
10	1	1	256-QAM	20.29	20.12	20.05				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.32	24.42	24.28	29.92	0.9817		
15	1	36		24.33	24.40	24.23				
15	18	9		24.40	24.31	24.37				
15	1	0		24.21	23.93	23.86				
15	1	37		24.15	24.08	23.84				
15	36	0		24.31	24.15	23.91				
15	1	1	QPSK	24.38	24.36	24.29				
15	1	36		24.41	24.42	24.24				
15	18	9		24.40	24.33	24.39				
15	1	0		23.75	23.56	23.33				
15	1	37		23.68	23.74	23.30				
15	36	0		23.86	23.68	23.45				
15	1	1	16-QAM	23.95	23.88	23.60	29.45	0.8810		
15	1	1	64-QAM	22.28	22.04	21.95				
15	1	1	256-QAM	20.26	20.14	20.05				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR Redcap n78 PC3 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.21	24.35	24.37	29.94	0.9863		
20	1	49		24.30	24.31	24.22				
20	25	12		24.41	24.38	24.40				
20	1	0		24.17	23.88	23.87				
20	1	50		24.06	24.16	23.75				
20	50	0		24.26	24.11	23.92				
20	1	1	QPSK	24.31	24.32	24.36				
20	1	49		24.28	24.20	24.20				
20	25	12		24.41	24.38	24.44				
20	1	0		23.63	23.42	23.48				
20	1	50		23.59	23.71	23.30				
20	50	0		23.81	23.70	23.48				
20	1	1	16-QAM	23.87	23.72	23.66	29.37	0.8650		
20	1	1	64-QAM	22.26	22.03	22.01				
20	1	1	256-QAM	20.26	20.07	20.10				
Limit	EIRP < 1W			Result			Pass			


**FR1 n7****<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n7 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.42	5.52	6.28	6.56	PASS
Mode	FR1 n7 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.50				PASS




FR1 n7 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

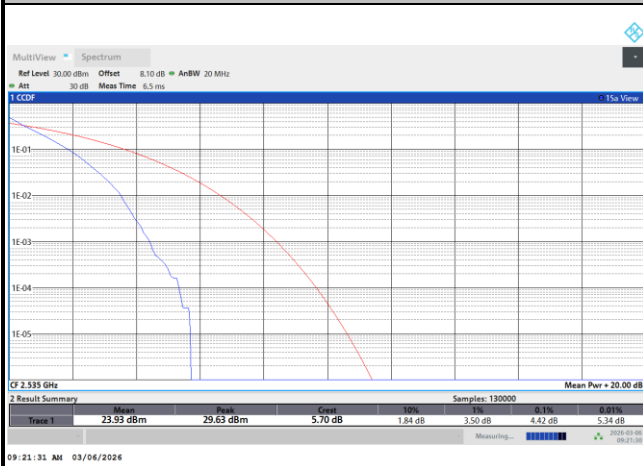


QPSK

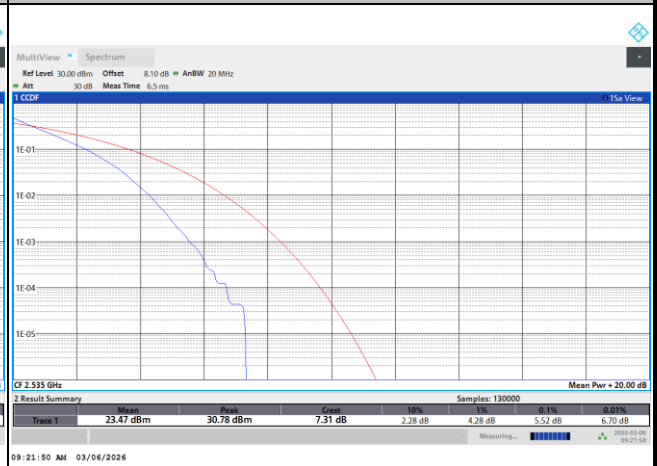


16QAM

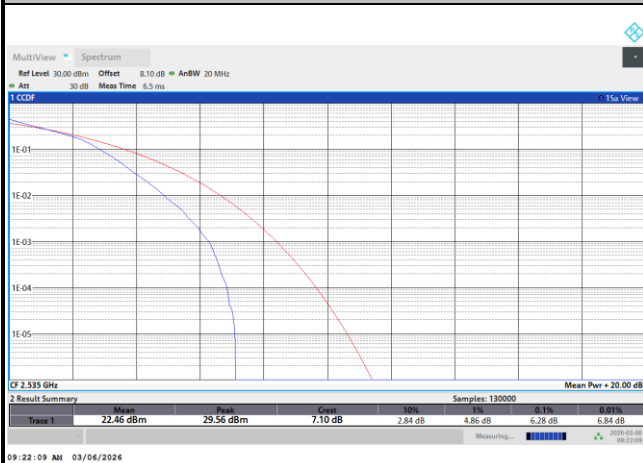

64QAM

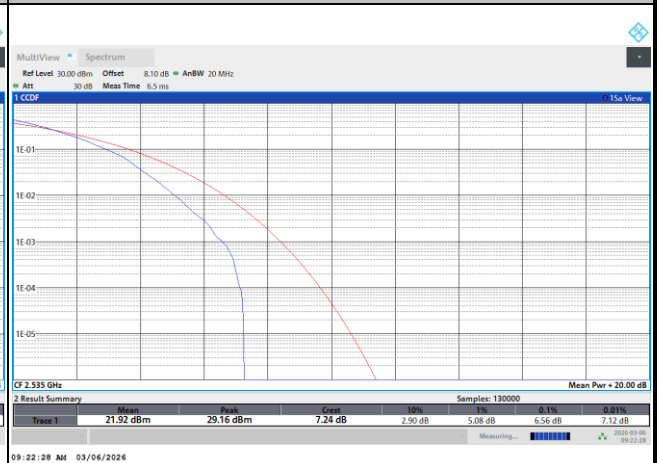

256QAM

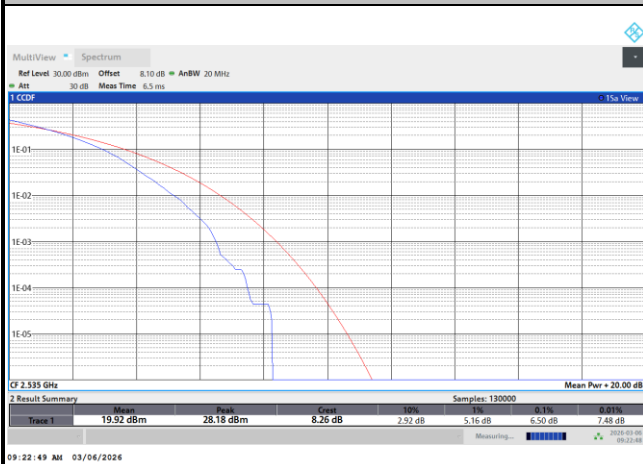


**26dB Bandwidth**

Mode	FR1 n7 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	4.94	4.92	9.59	9.51	14.28	14.25	19.15	19.17
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	4.89		9.52		14.29		19.17	




FR1 n7 / 5MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

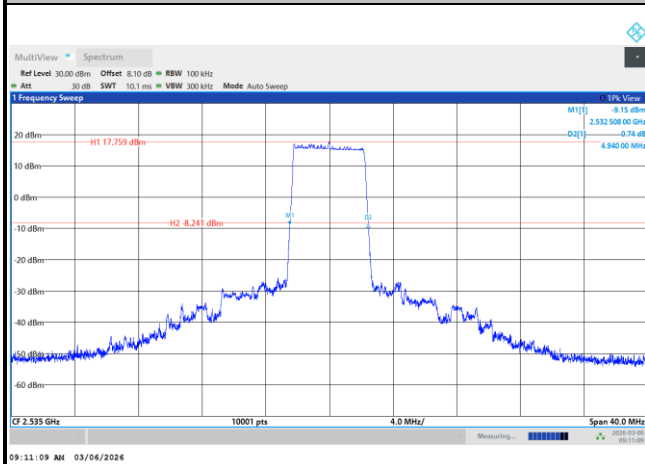

QPSK

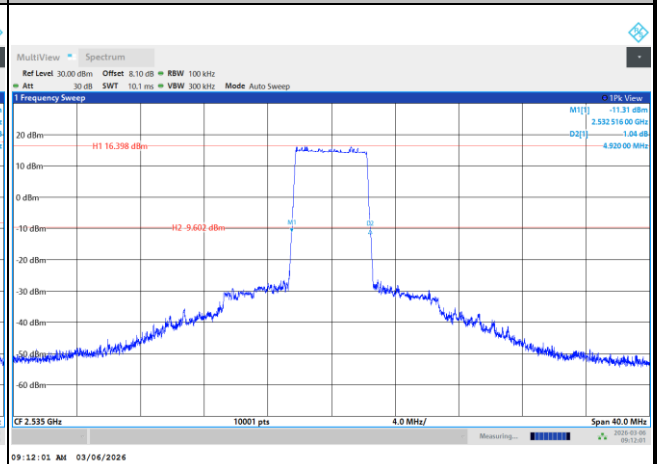


16QAM

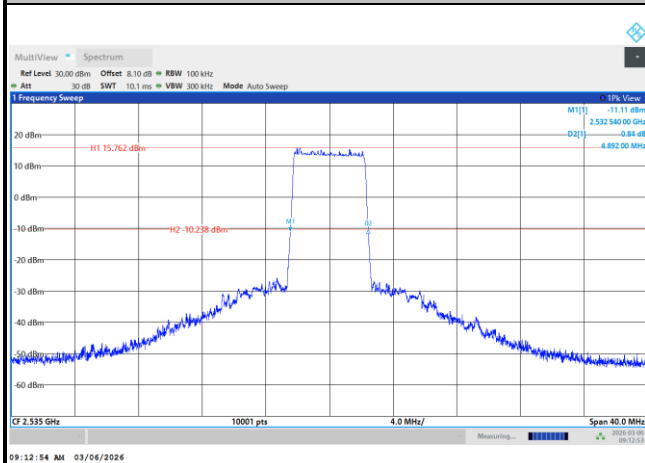




FR1 n7 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

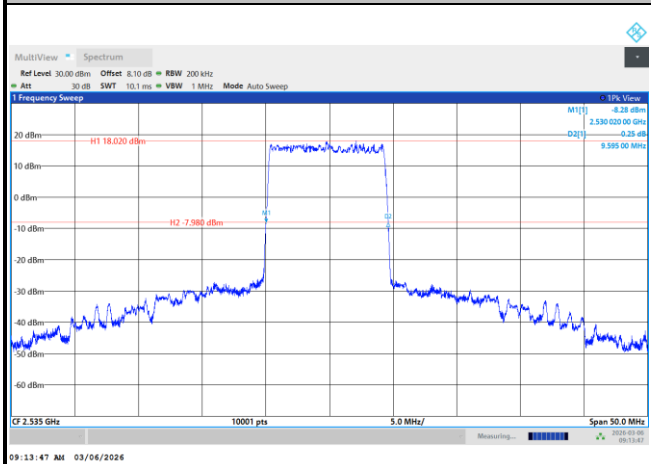

QPSK

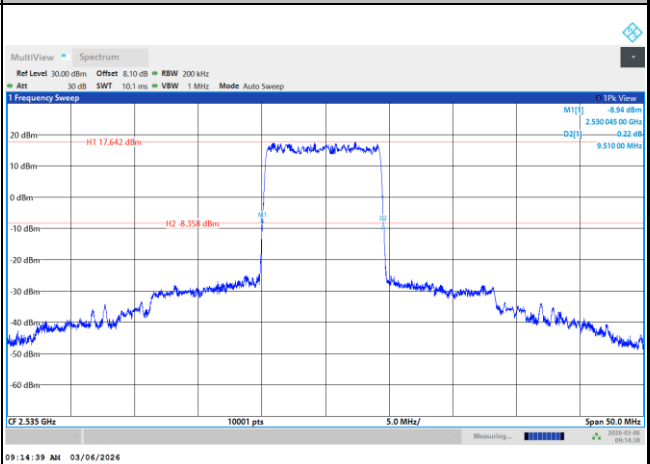


16QAM

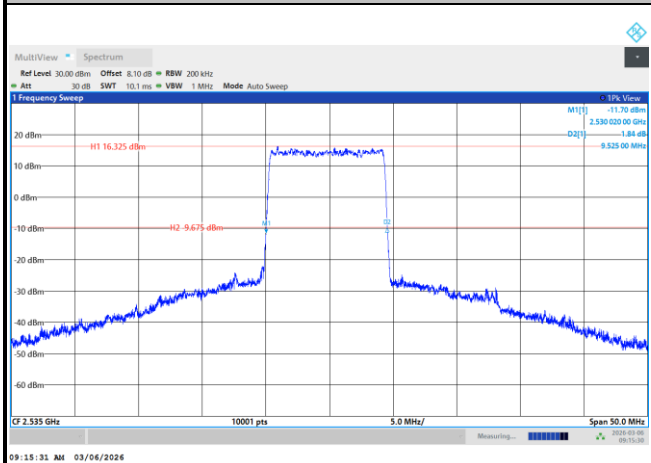




FR1 n7 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

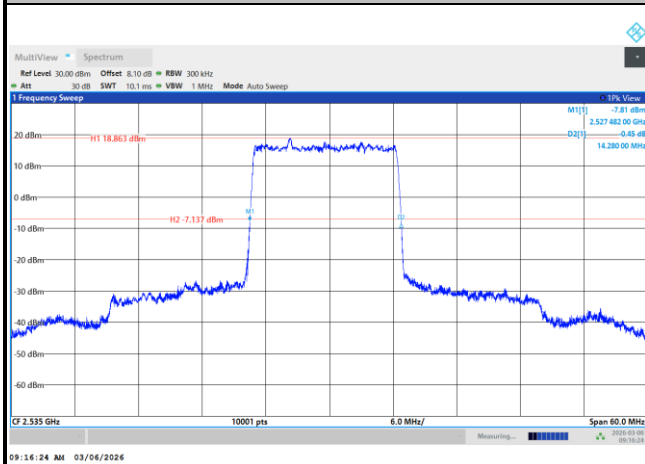

QPSK

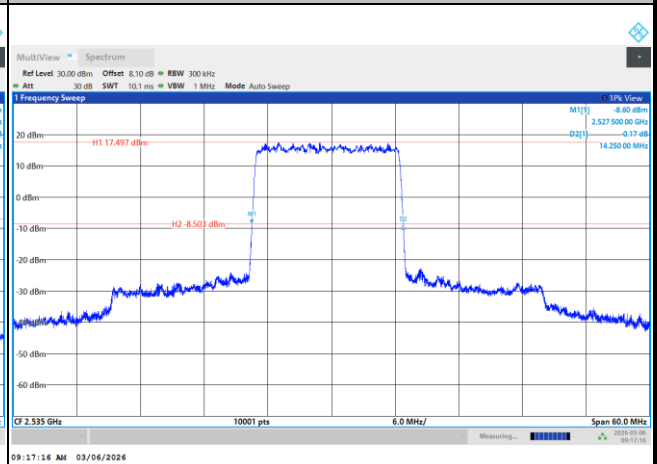


16QAM

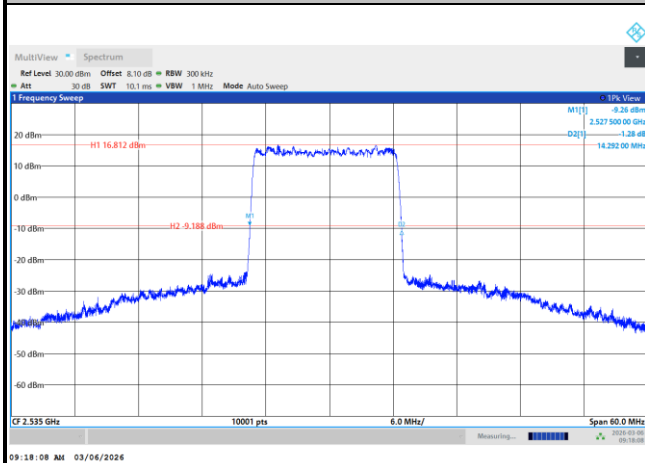




FR1 n7 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

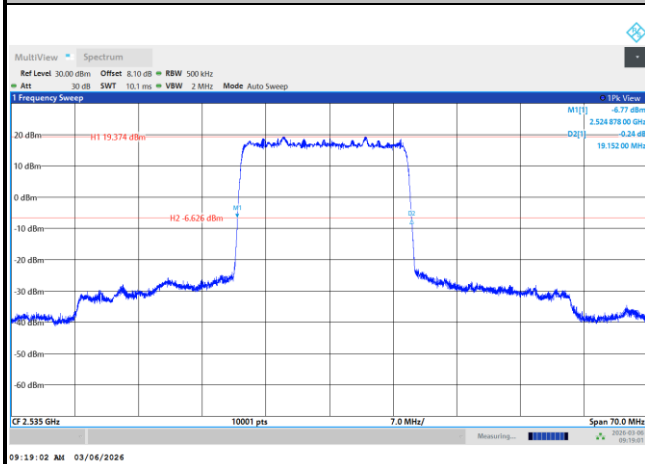

QPSK

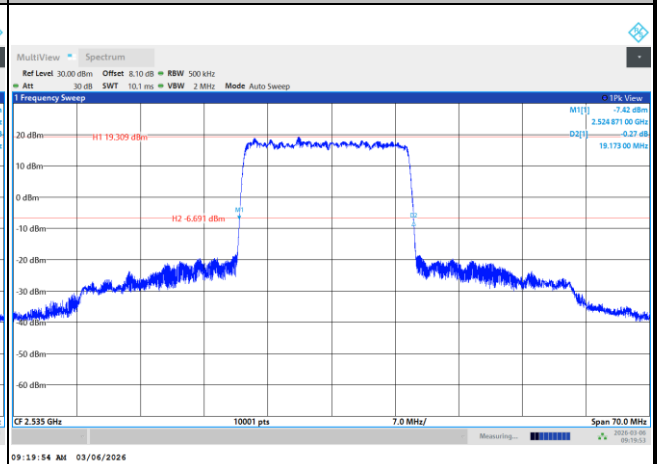

16QAM

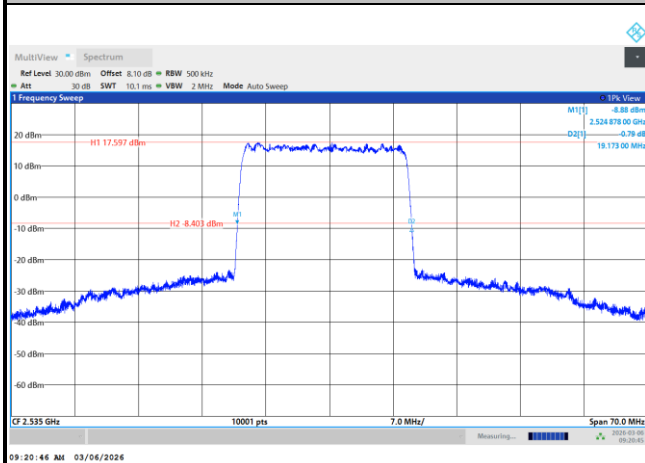

**Occupied Bandwidth**

Mode	FR1 n7 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	4.48	4.51	9.01	8.96	13.47	13.47	18.02	18.00
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	4.48		8.96		13.47		17.97	



FR1 n7 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK



09:11:35 AM 03/06/2026

QPSK



09:12:27 AM 03/06/2026

16QAM




09:13:19 AM 03/06/2026




FR1 n7 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

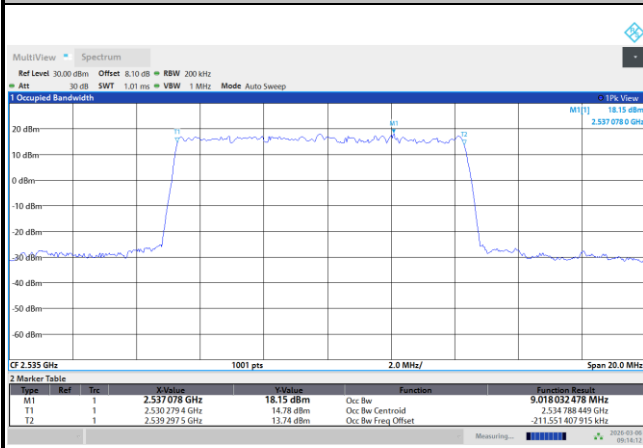


09:14:13 AM 03/06/2026

QPSK

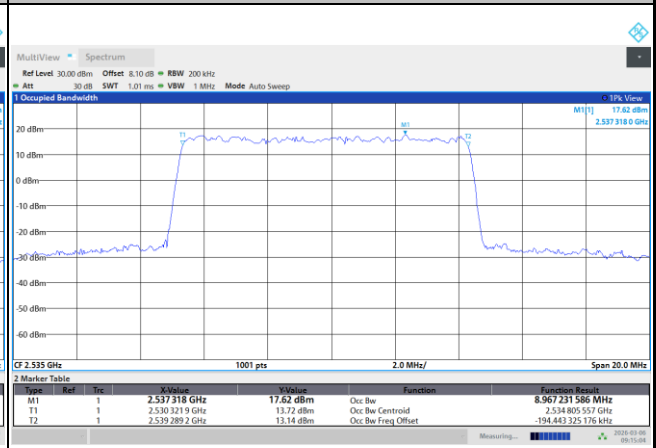

09:15:05 AM 03/06/2026

16QAM

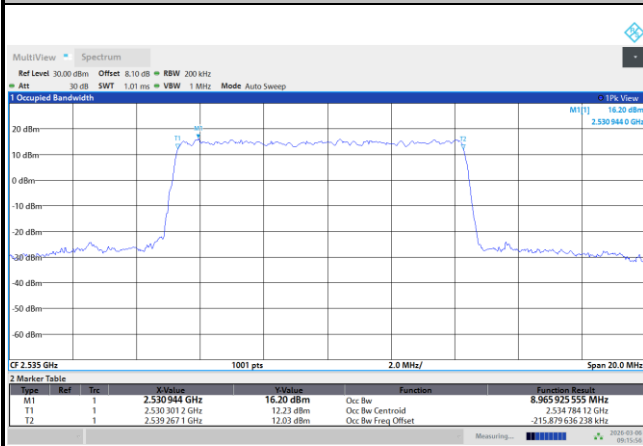


09:15:16 AM 03/06/2026




FR1 n7 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

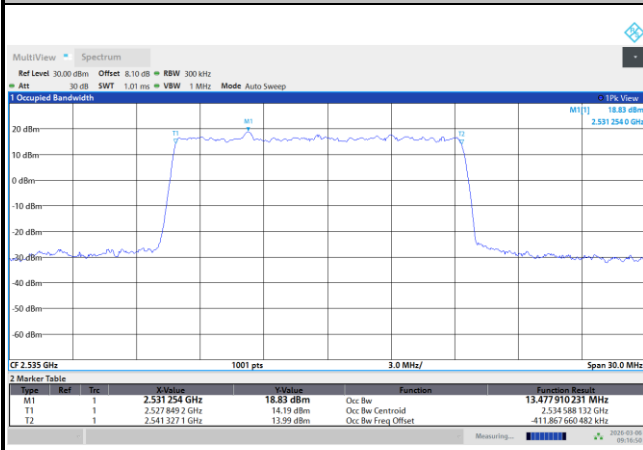


09:16:50 AM 03/06/2026

QPSK

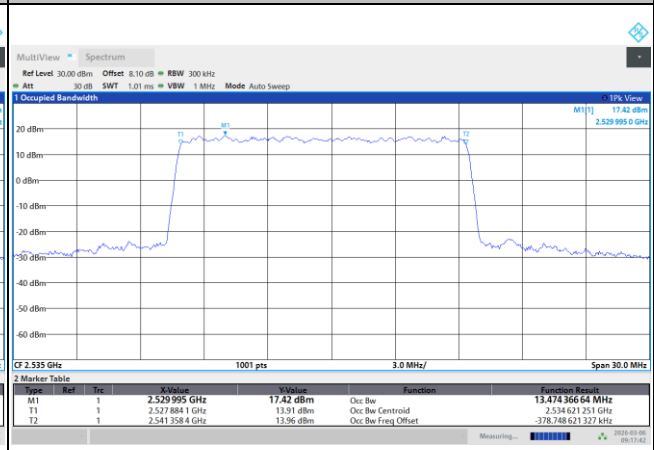

09:17:42 AM 03/06/2026

16QAM

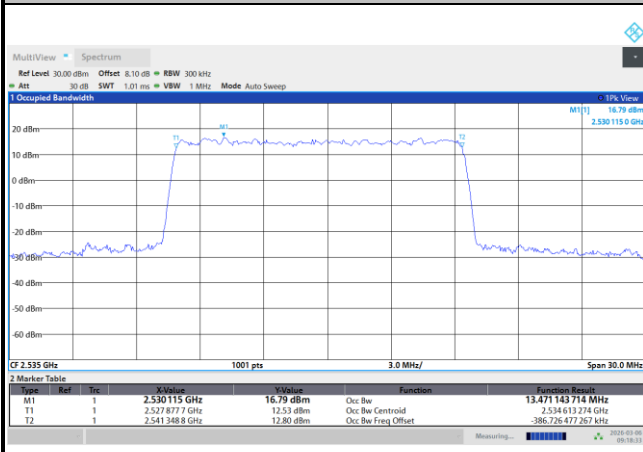


09:18:34 AM 03/06/2026




FR1 n7 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

QPSK

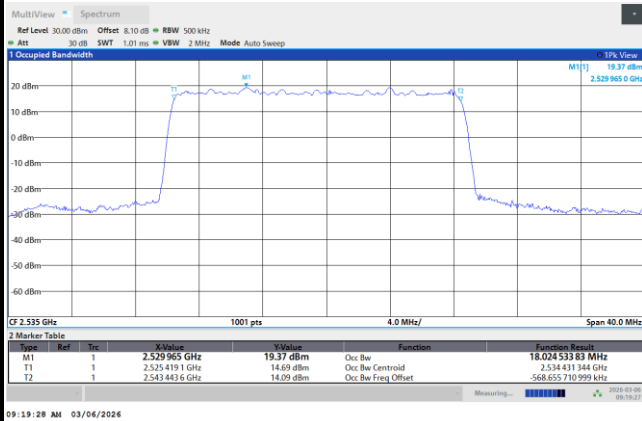


09:19:28 AM 03/06/2026

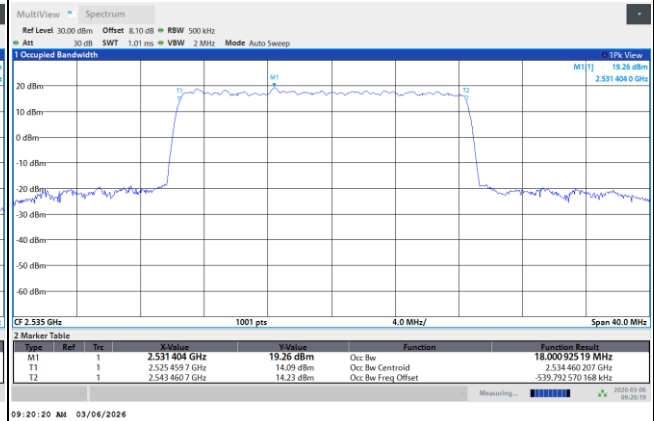

09:20:20 AM 03/06/2026

16QAM

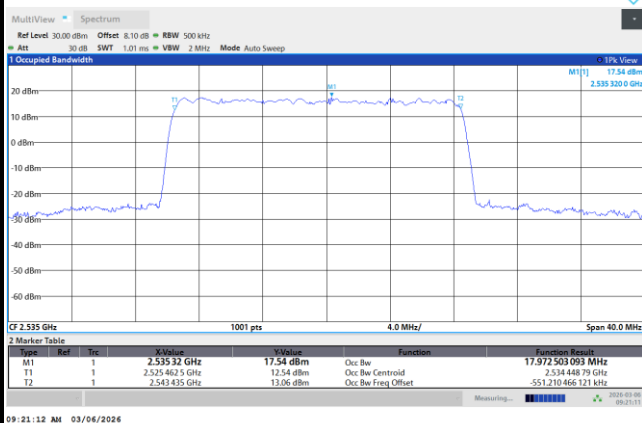

09:21:12 AM 03/06/2026





Conducted Band Edge

FR1 n7 / 5MHz / DFT-S OFDM / PI/2 BPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

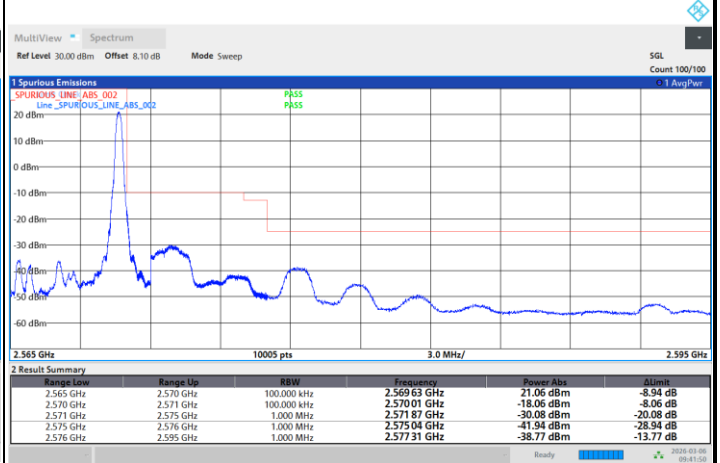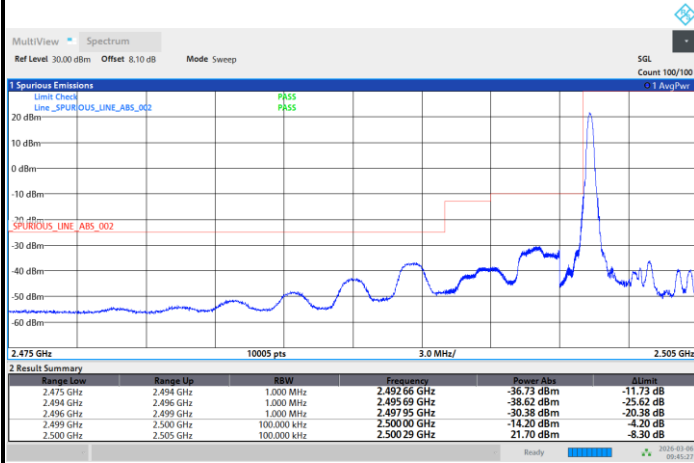

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

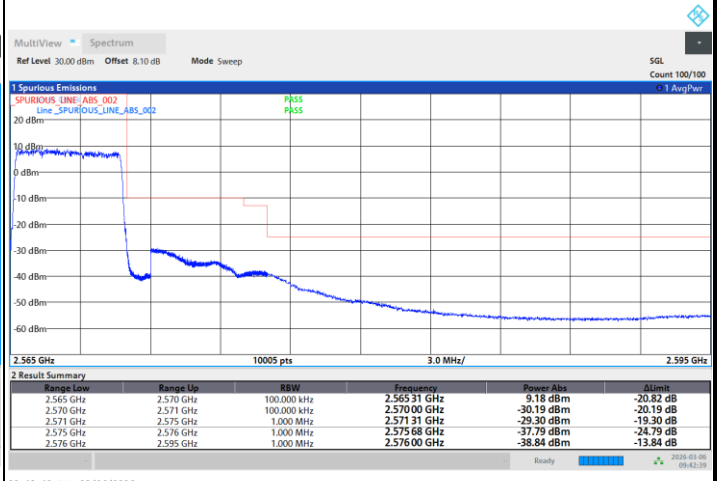
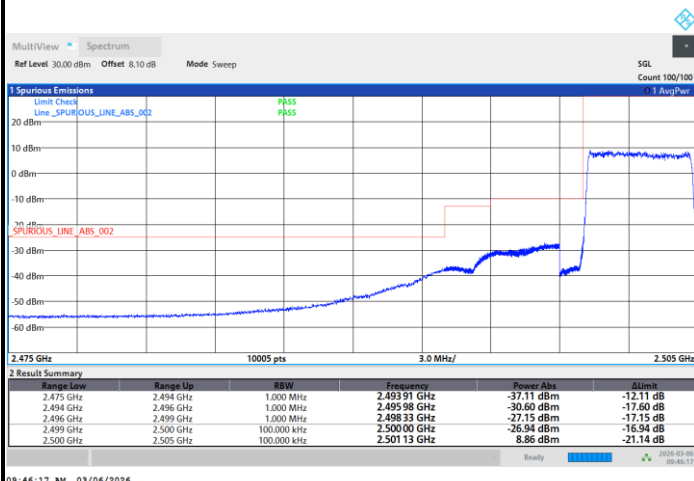




FR1 n7 / 5MHz / DFT-S OFDM / QPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

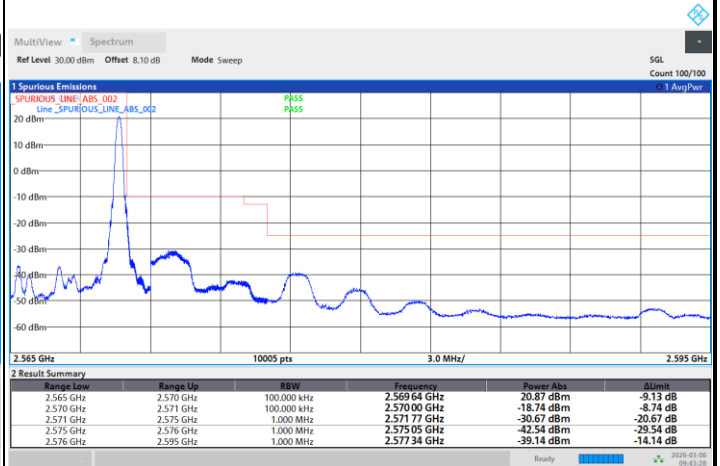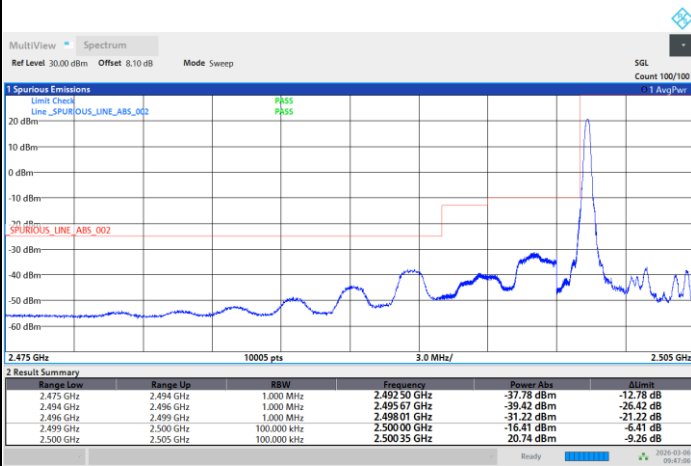

Lowest Band Edge / Full RB


Highest Band Edge / Full RB

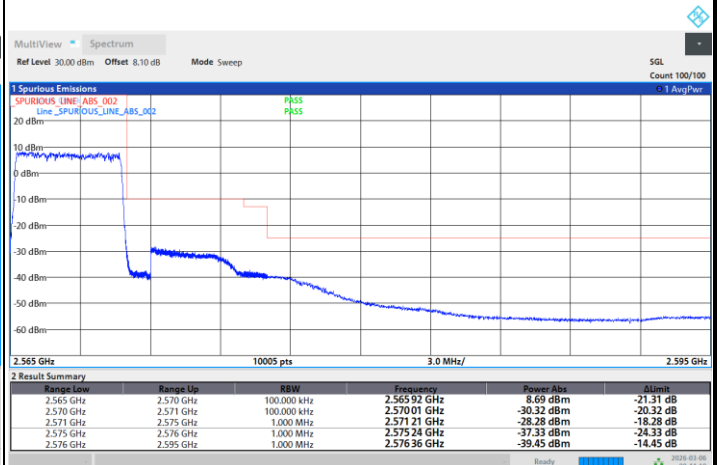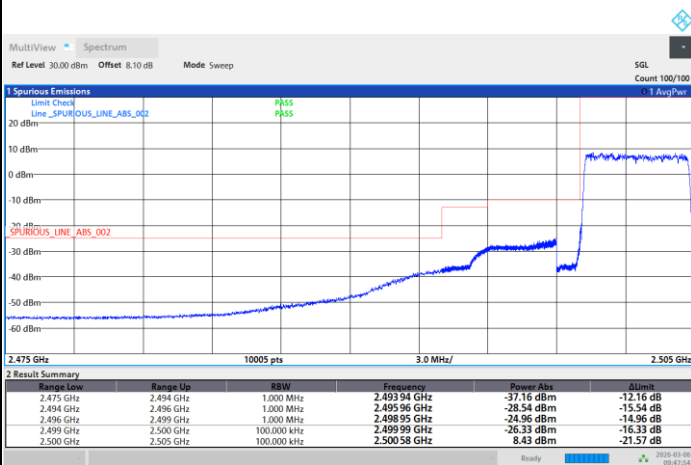




FR1 n7 / 10MHz / DFT-s-OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

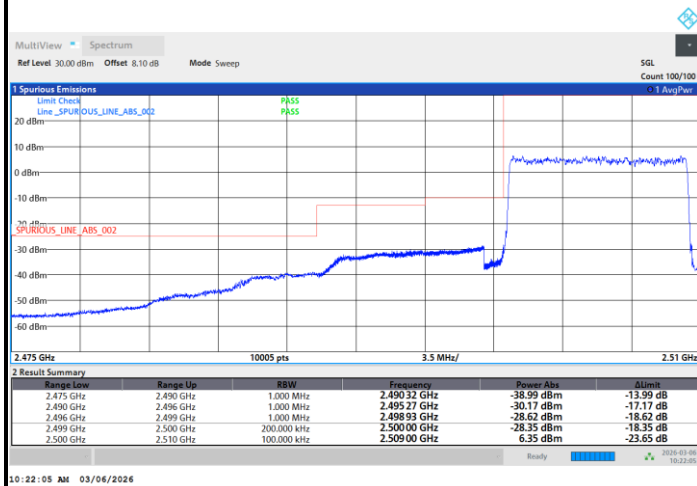


Highest Band Edge / Full RB

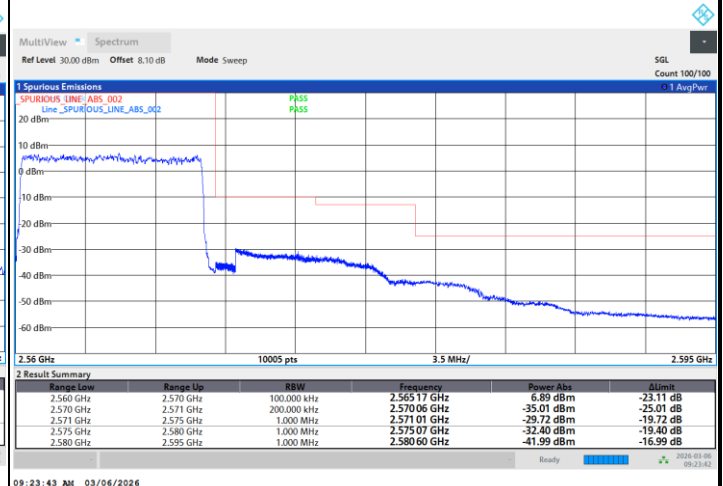


FR1 n7 / 10MHz / DFT-s-OFDM / QPSK

Lowest Band Edge / Full RB

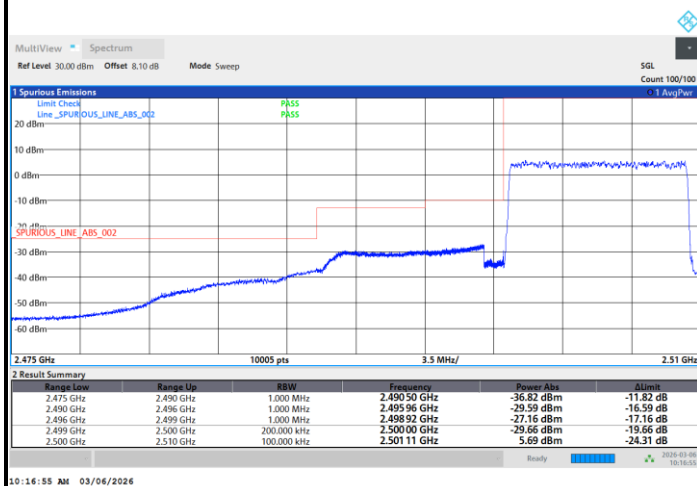


Highest Band Edge / Full RB

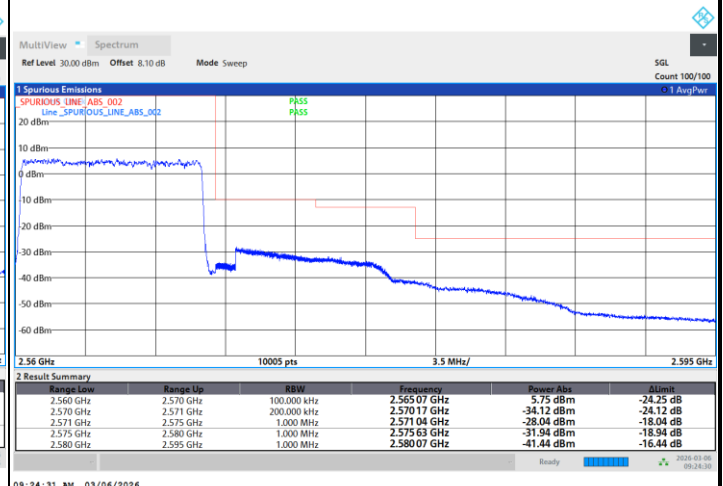




FR1 n7 / 15MHz / DFT-s-OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

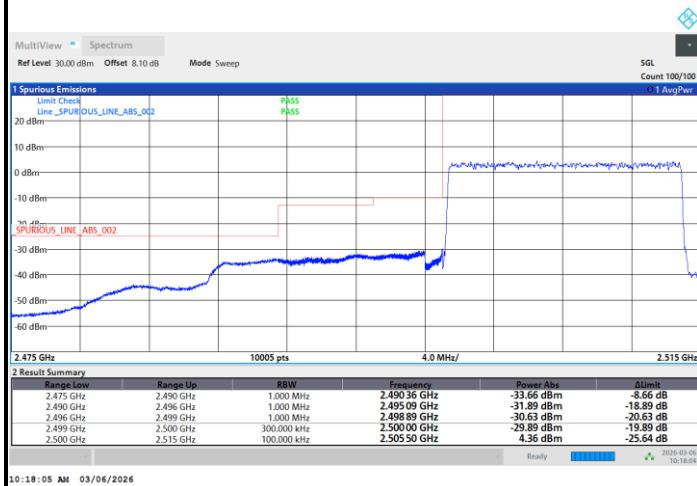


Highest Band Edge / Full RB

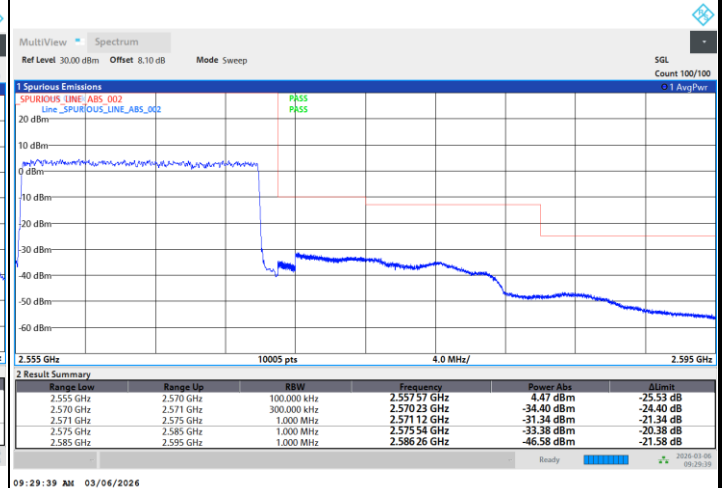


FR1 n7 / 15MHz / DFT-s-OFDM / QPSK

Lowest Band Edge / Full RB

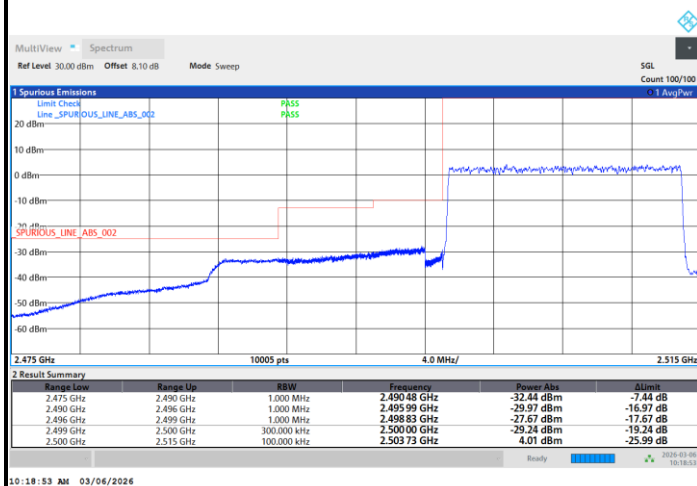


Highest Band Edge / Full RB

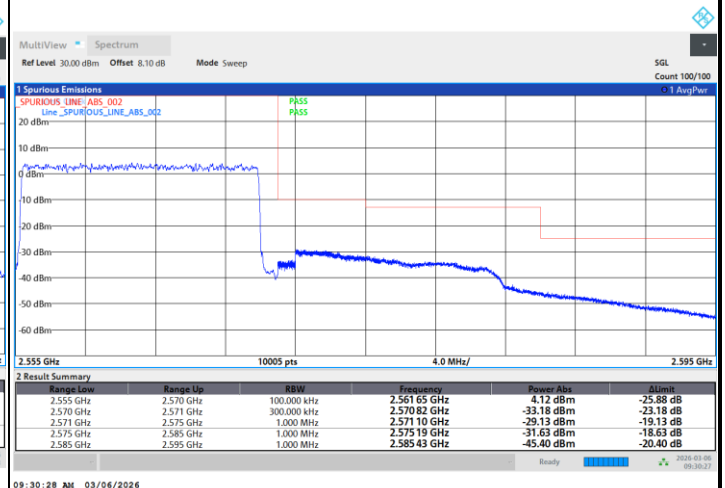




FR1 n7 / 20MHz / DFT-s-OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

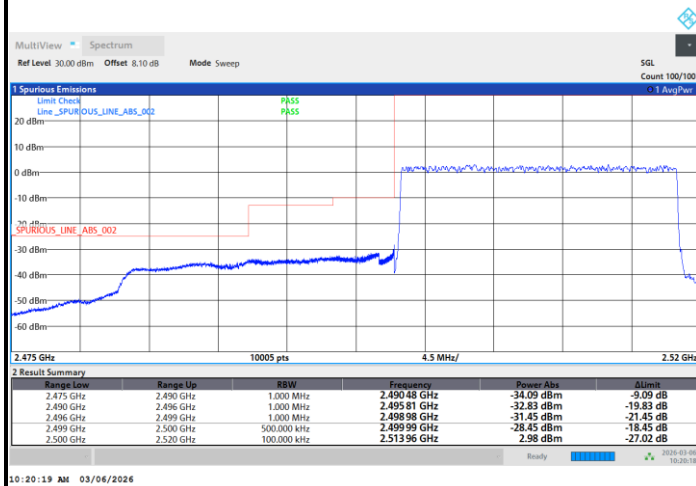


Highest Band Edge / Full RB

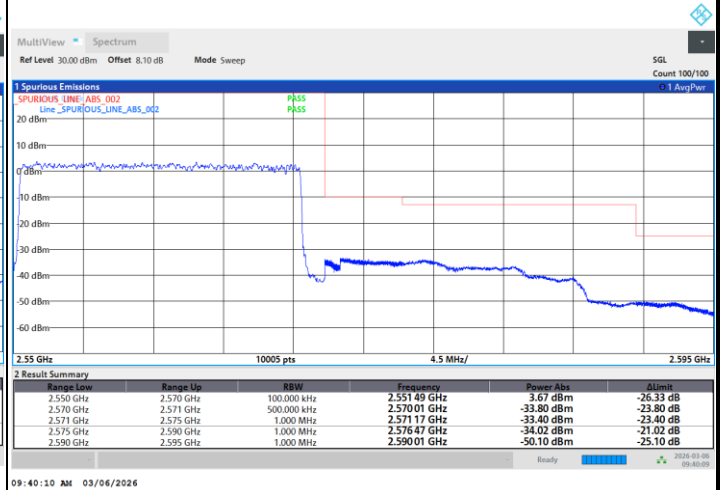


FR1 n7 / 20MHz / DFT-s-OFDM / QPSK

Lowest Band Edge / Full RB

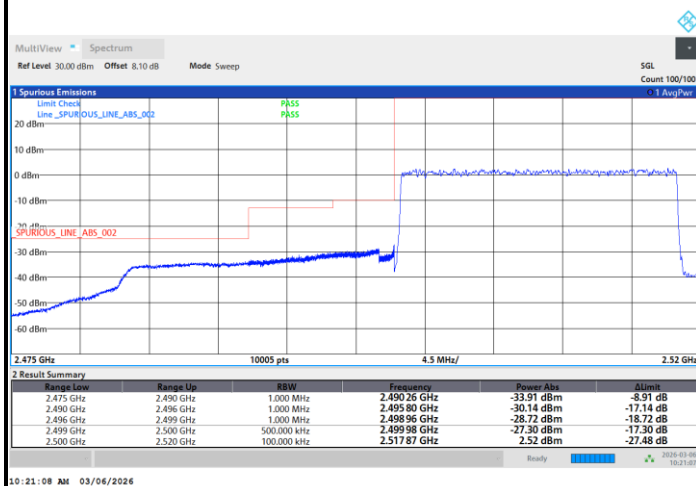

Highest Band Edge / Full RB

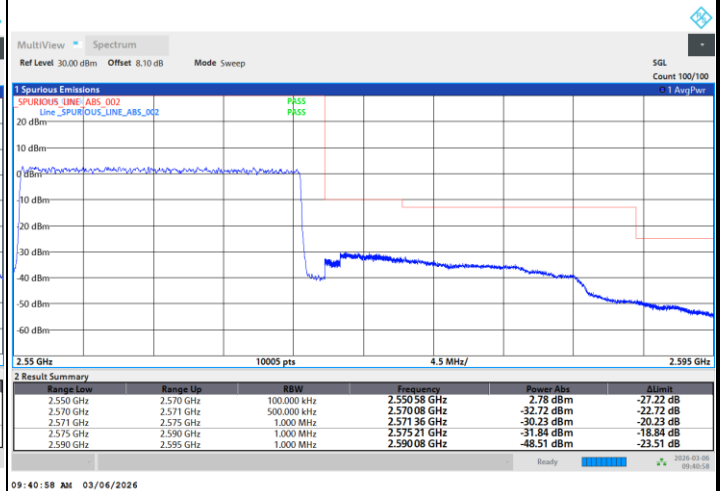





Conducted Spurious Emission

FR1 n7 / 5MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

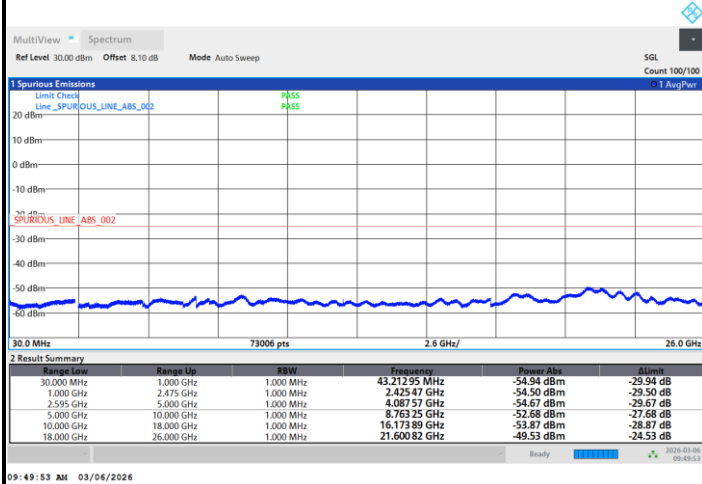

Middle Channel

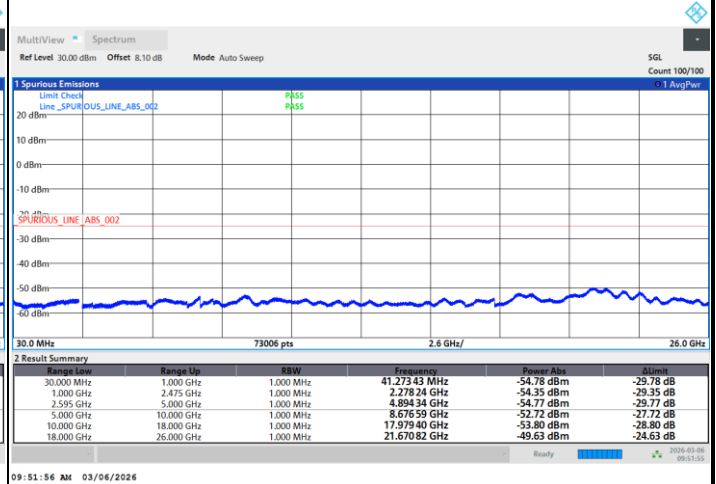

Highest Channel

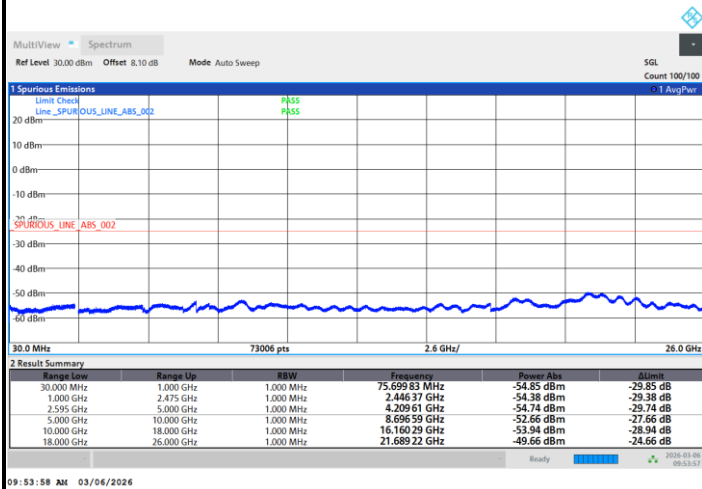

Frequency Stability

Test Conditions		FR1 n7 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0021	5.3	Yes	PASS
40	Normal Voltage	0.0045	-11.4	Yes	
30	Normal Voltage	0.0006	1.6	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0021	5.3	Yes	
0	Normal Voltage	0.0047	-12	Yes	
-10	Normal Voltage	0.0010	2.5	Yes	
-20	Normal Voltage	0.0025	-6.4	Yes	
-30	Normal Voltage	0.0017	-4.4	Yes	
20	Maximum Voltage	0.0021	-5.2	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0040	-10.2	Yes	

Note:

1. Normal Voltage = 3.3 V. ; Minimum Voltage = 3.135 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.


**FR1 n12****<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n12 / 15MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.26	5.26	5.92	6.18	PASS
Mode	FR1 n12 / 15MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.52				PASS




FR1 n12 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

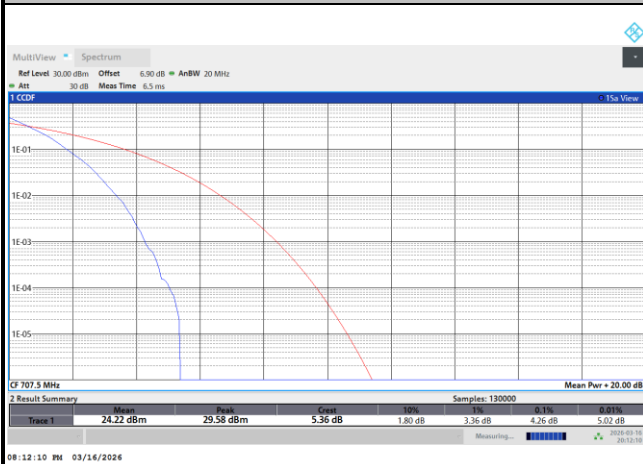


QPSK

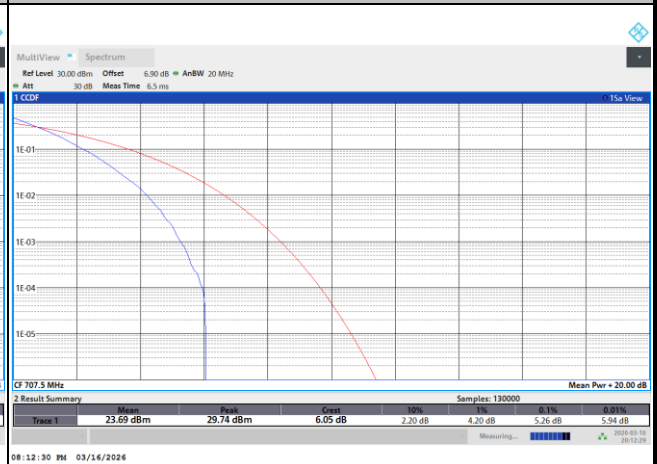


16QAM

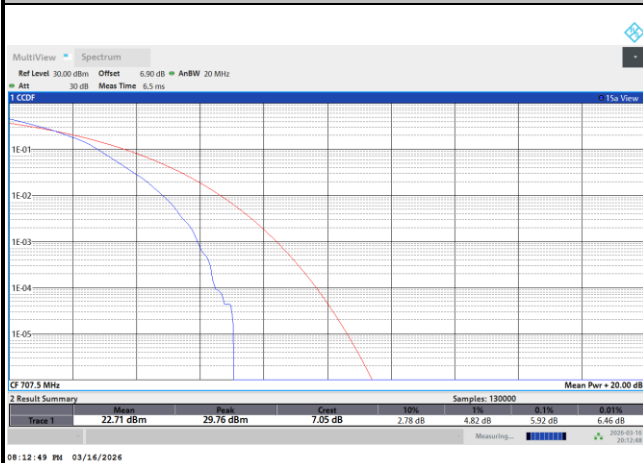

64QAM

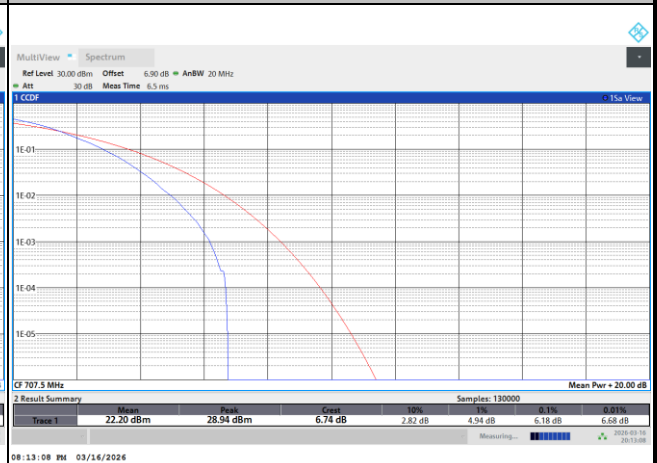

256QAM

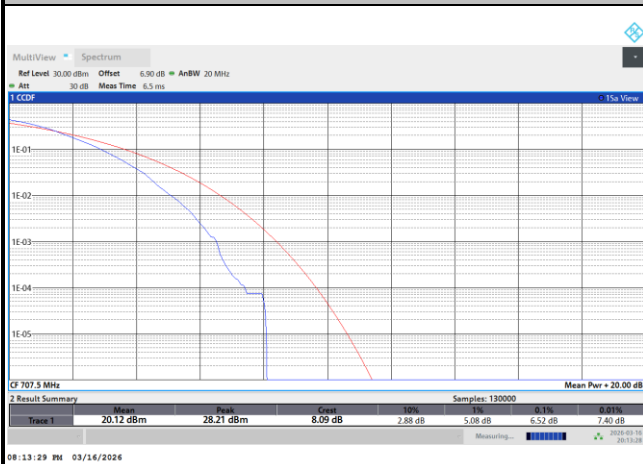

**26dB Bandwidth**

Mode	FR1 n12 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz			
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK		
Middle CH	4.88	4.92	9.58	9.57	14.13	14.07		
Mod.	16QAM		16QAM		16QAM			
Middle CH	4.94		9.53		14.07			