




Appendix B

Peak Output Power


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.412GHz, Pmax: 12.44dBm, RBW: 10MHz

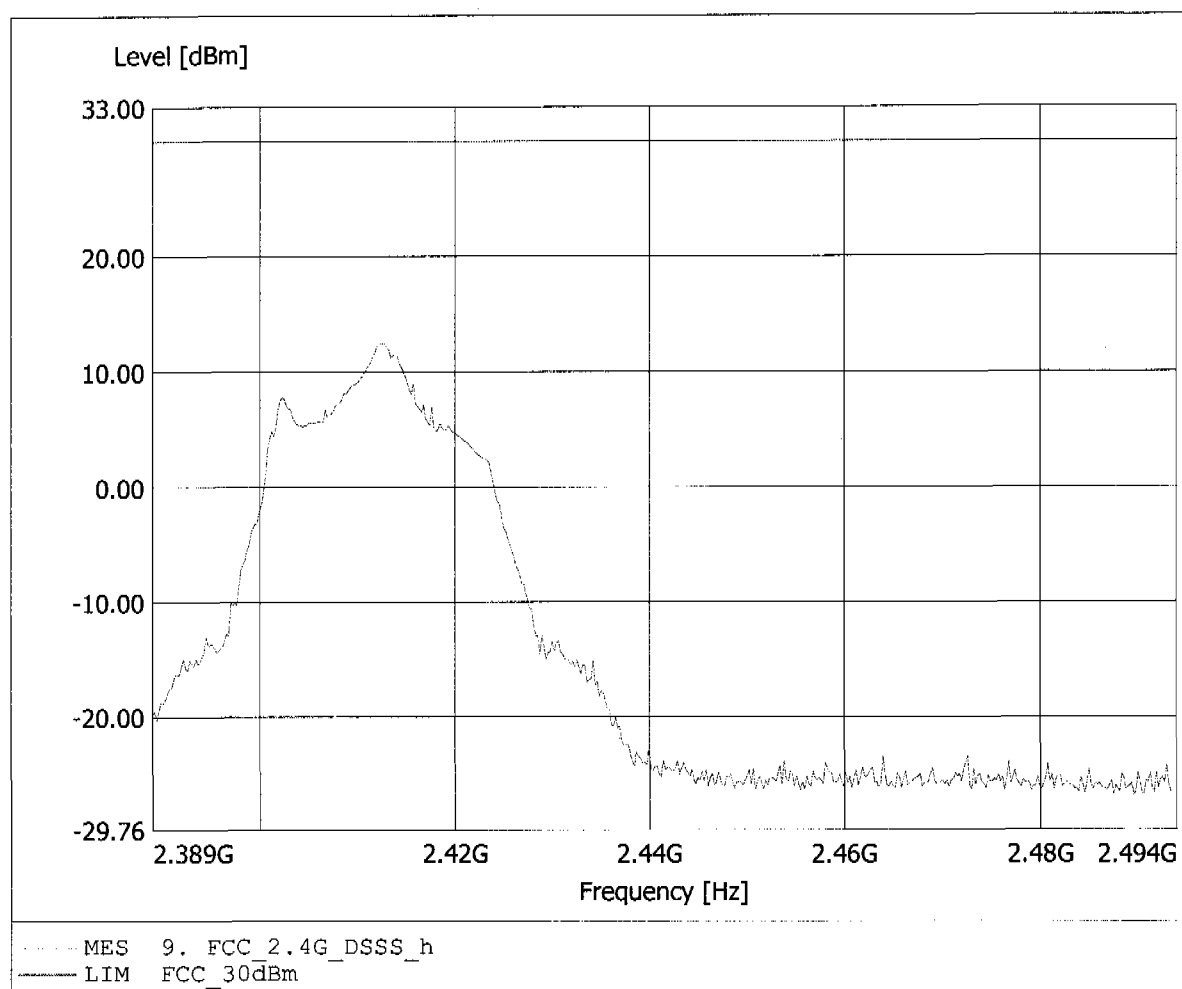


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.413GHz, Pmax: 10.47dBm, RBW: 10MHz

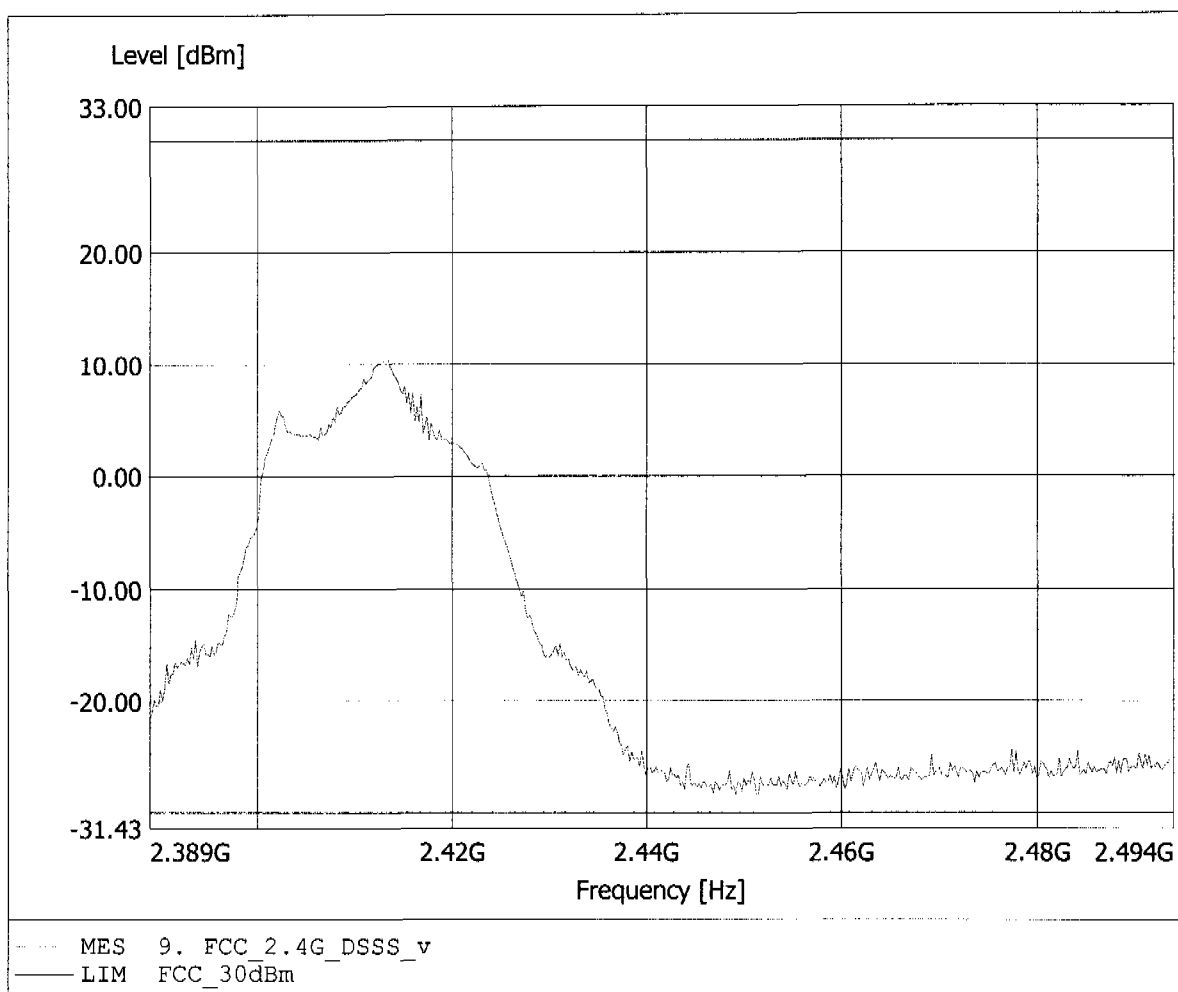


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.438GHz, Pmax: 13.74dBm, RBW: 10MHz

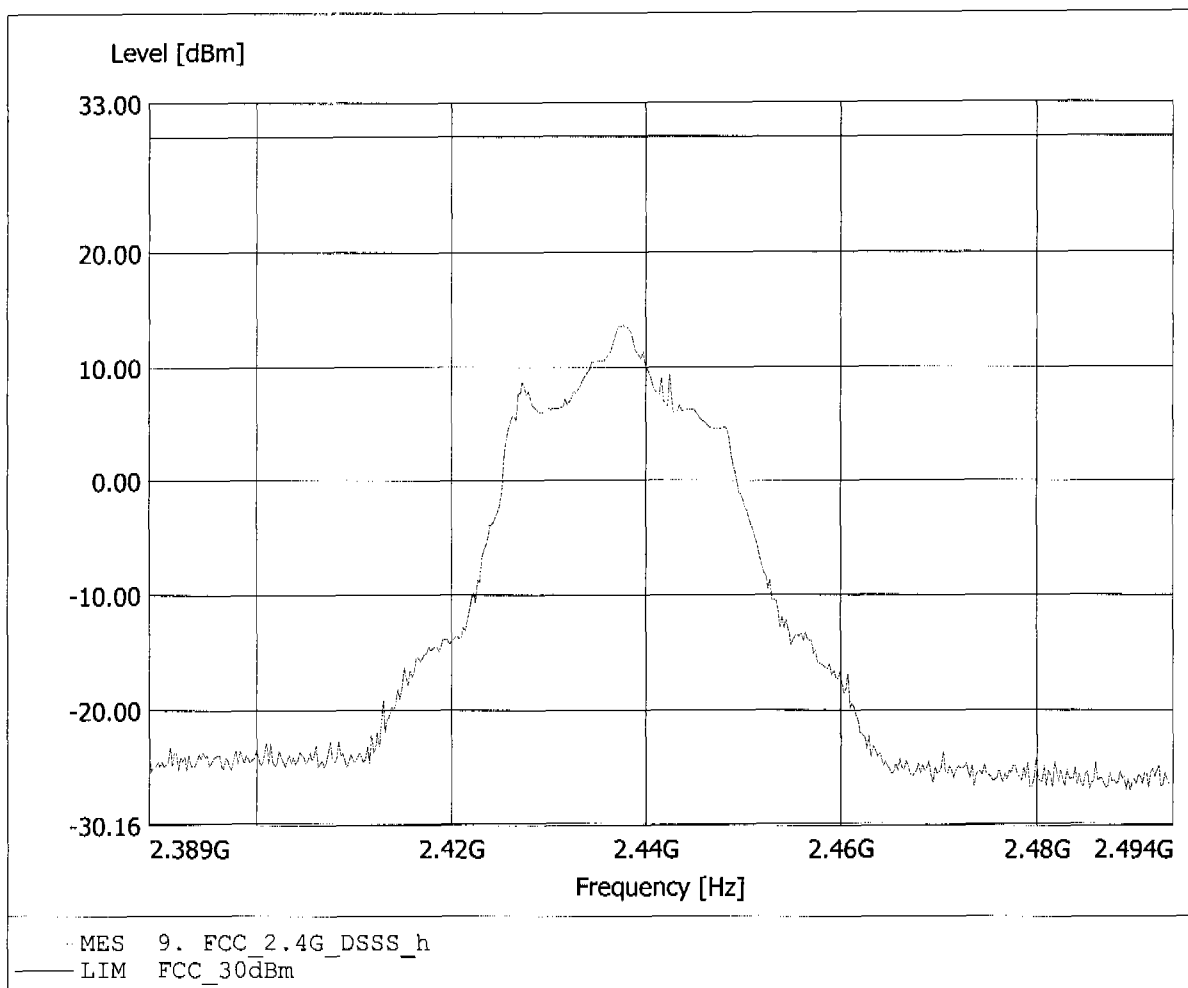


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.439GHz, Pmax: 11.58dBm, RBW: 10MHz

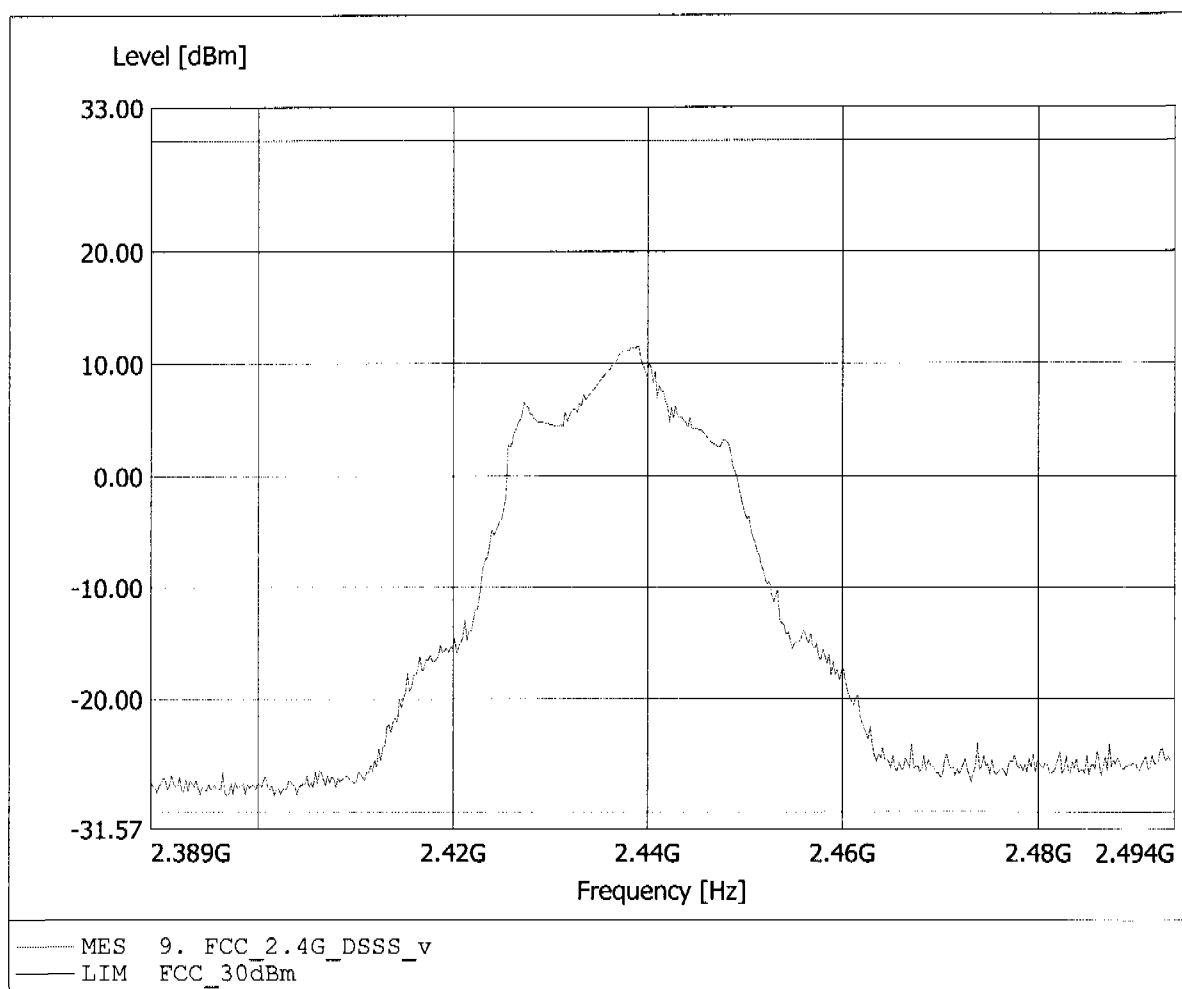


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.463GHz, Pmax: 14.92dBm, RBW: 10MHz

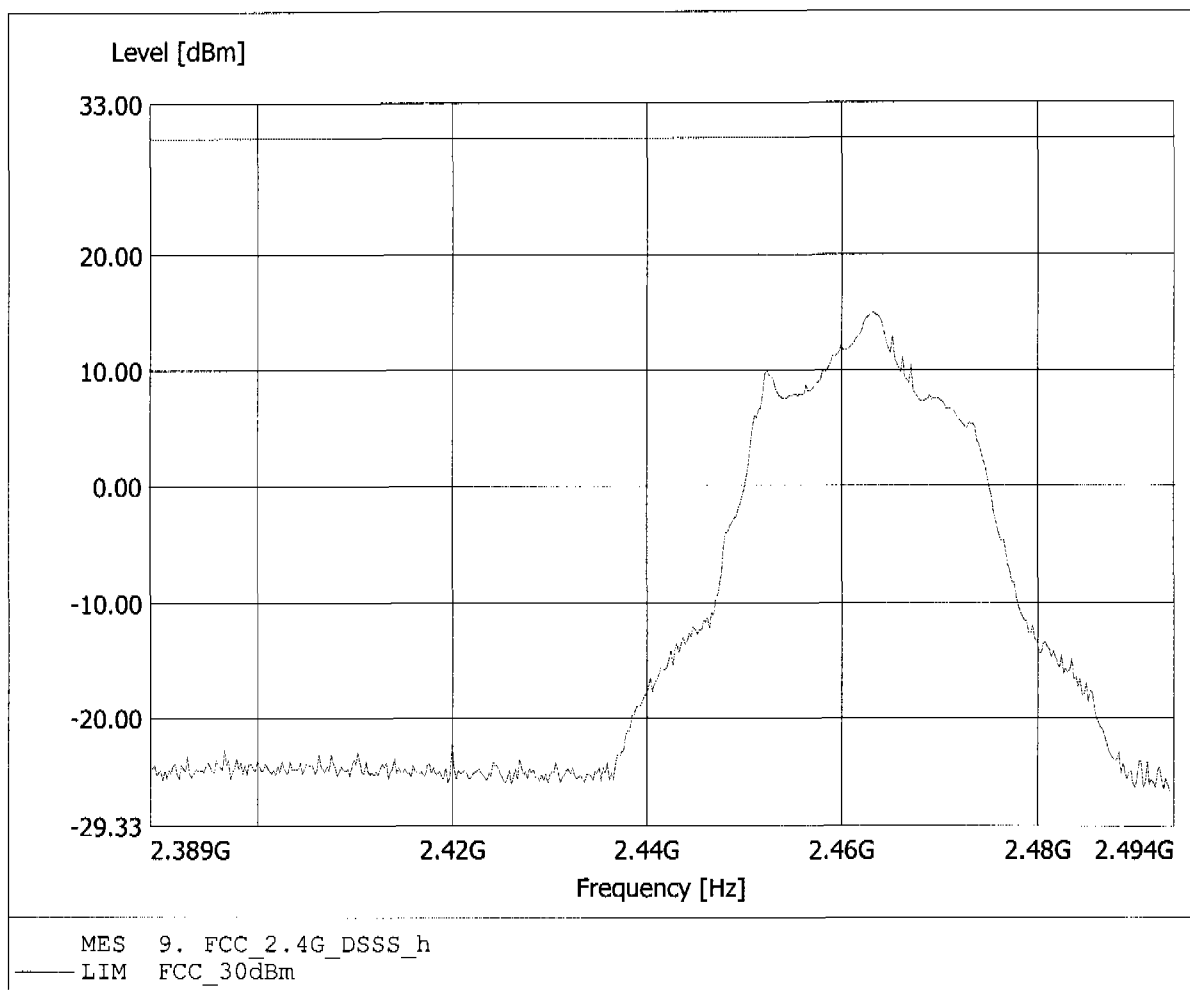

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.463GHz, Pmax: 14.36dBm, RBW: 10MHz

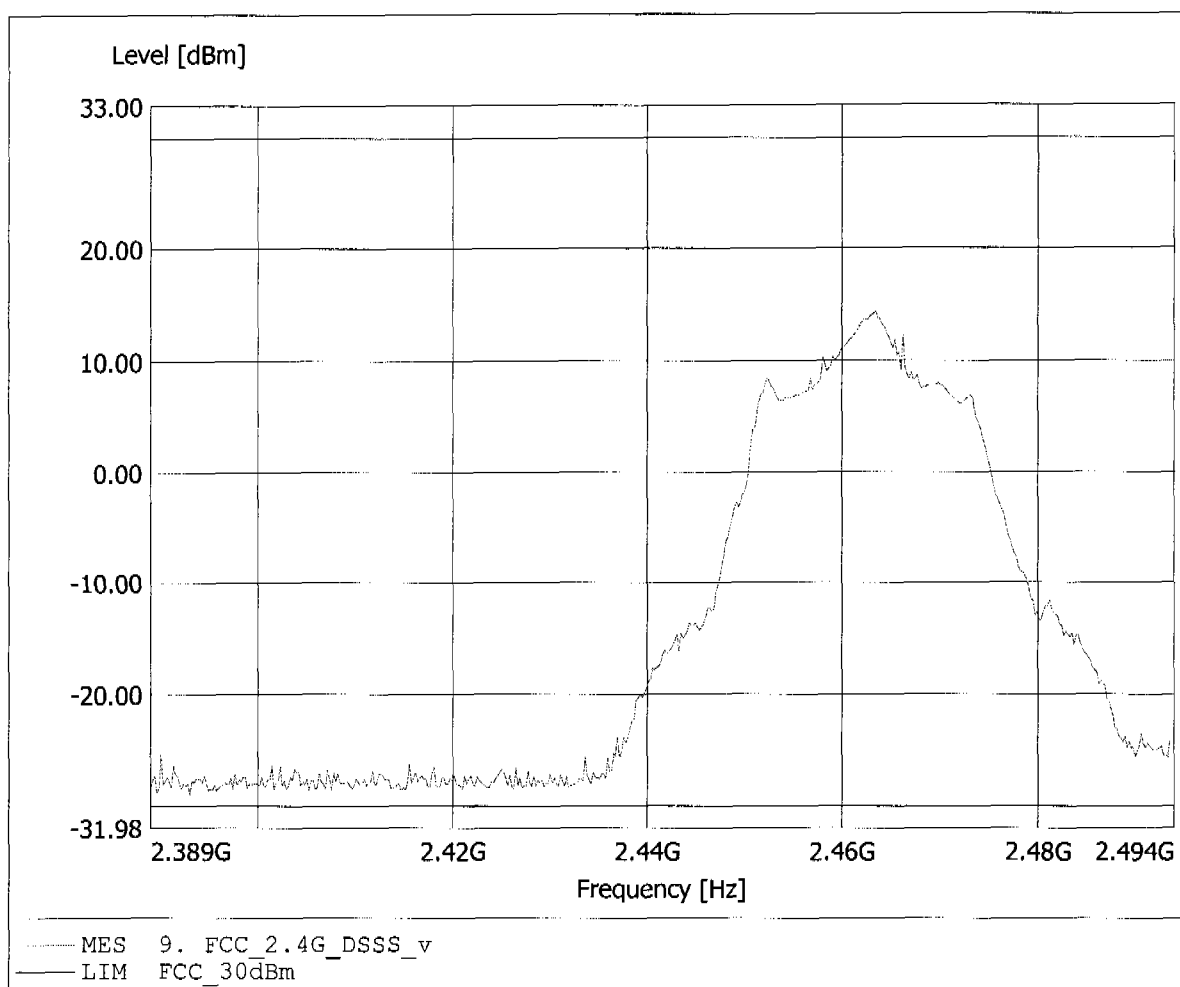


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.461GHz, Emax: 93.86dBµV/m, RBW: 100kHz

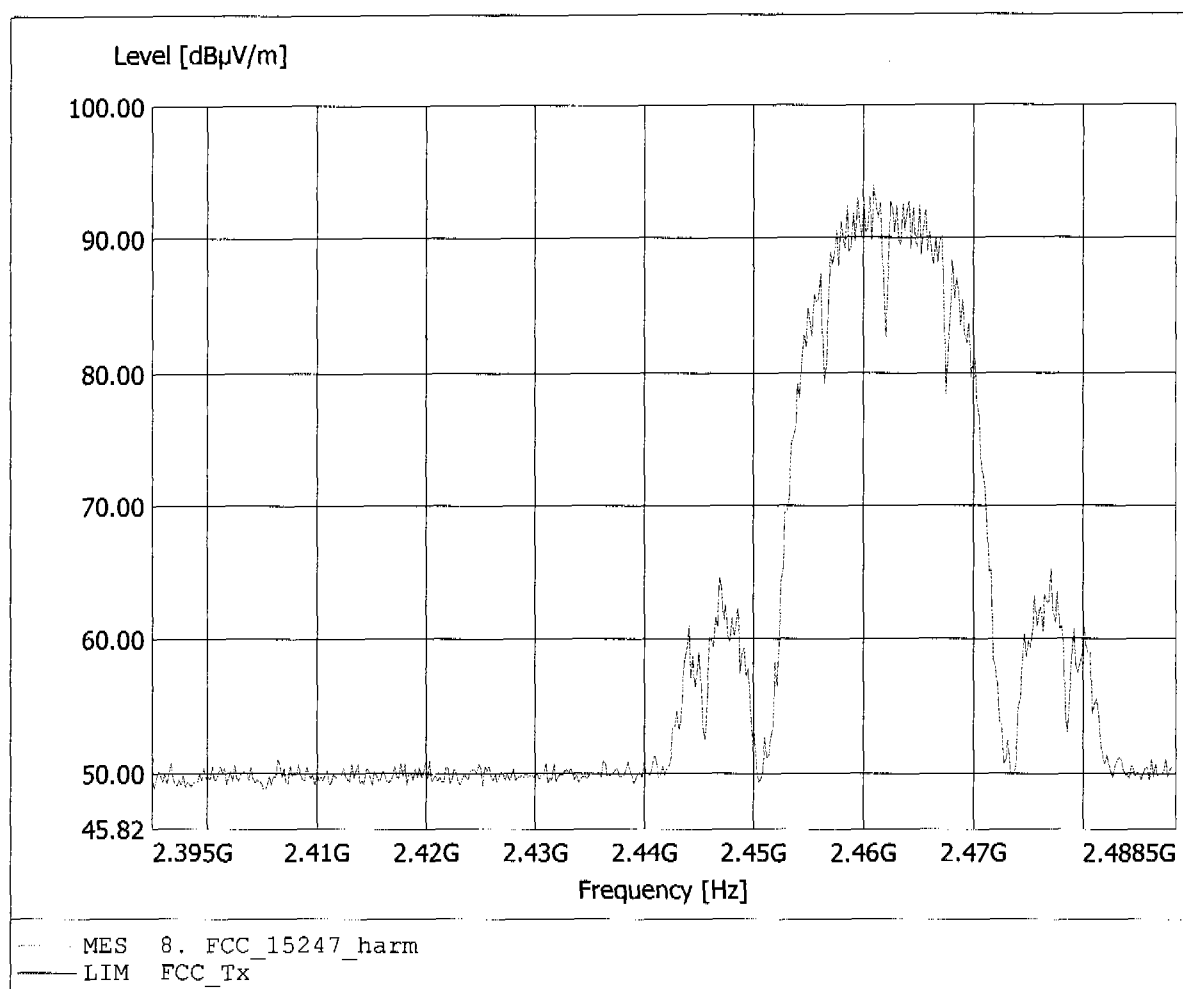


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.593MHz, Emax: 32.42dBµV/m, RBW: 100kHz

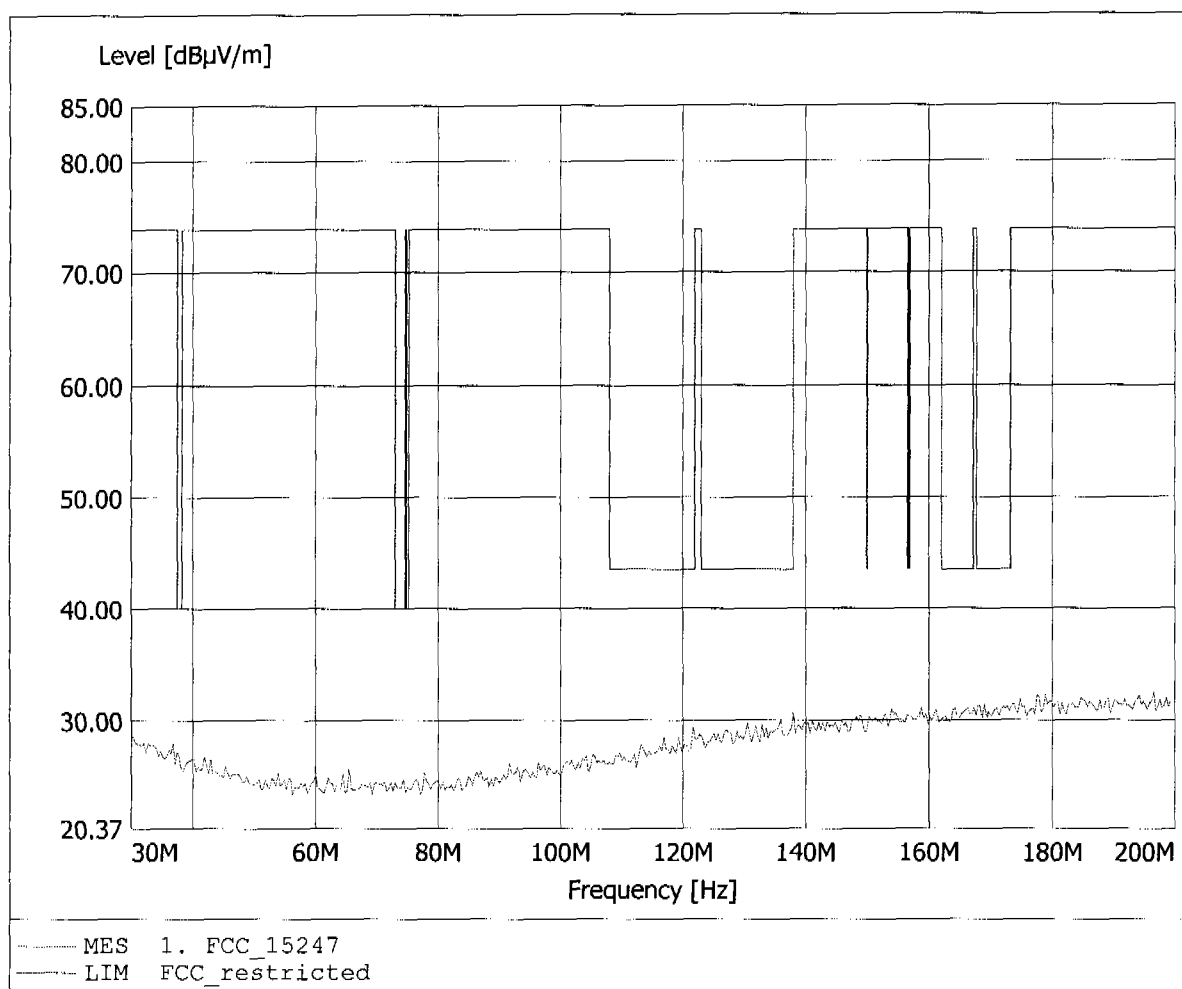


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 33.10dBµV/m, RBW: 100kHz

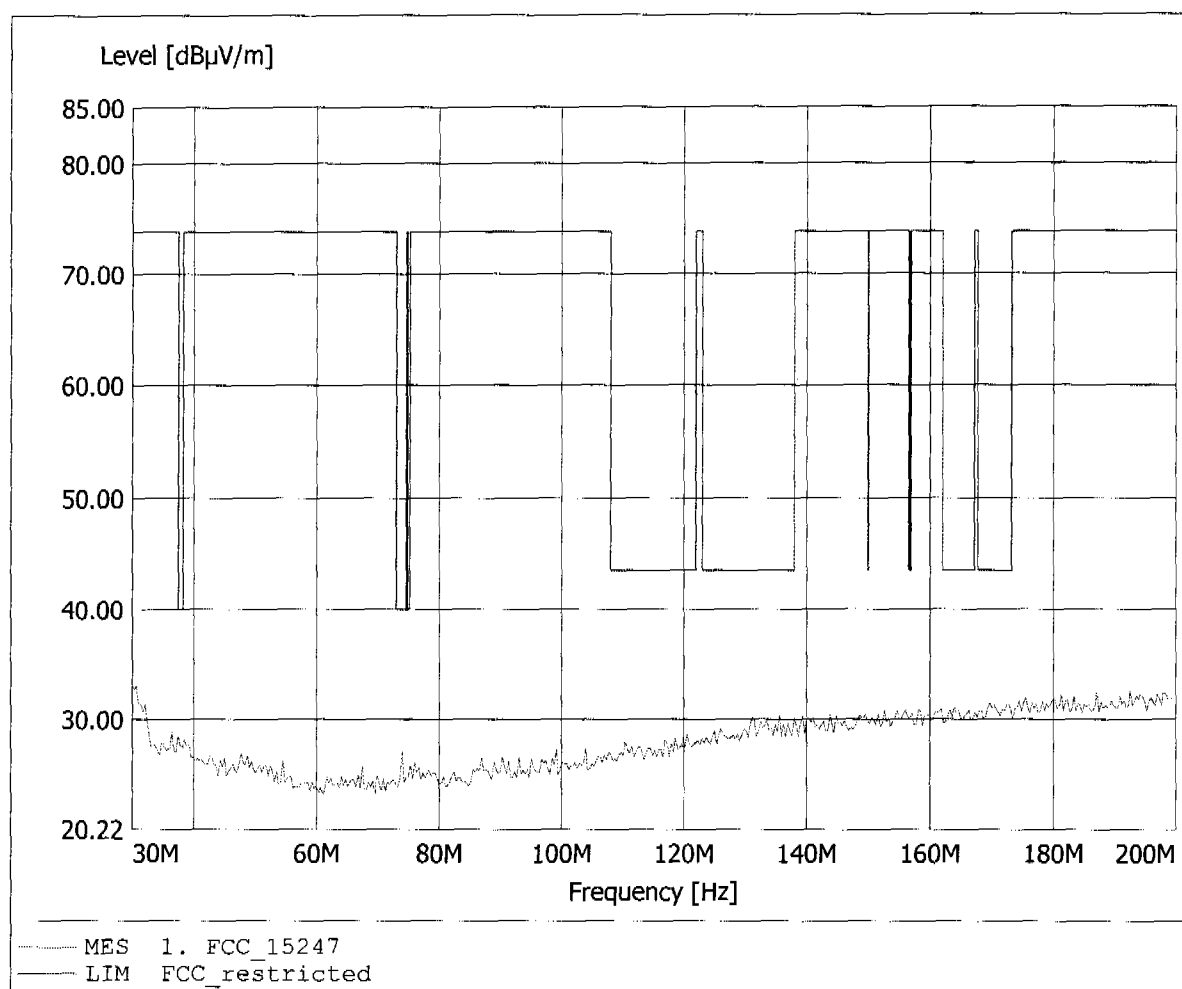


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.802MHz, Emax: 32.99dBµV/m, RBW: 100kHz

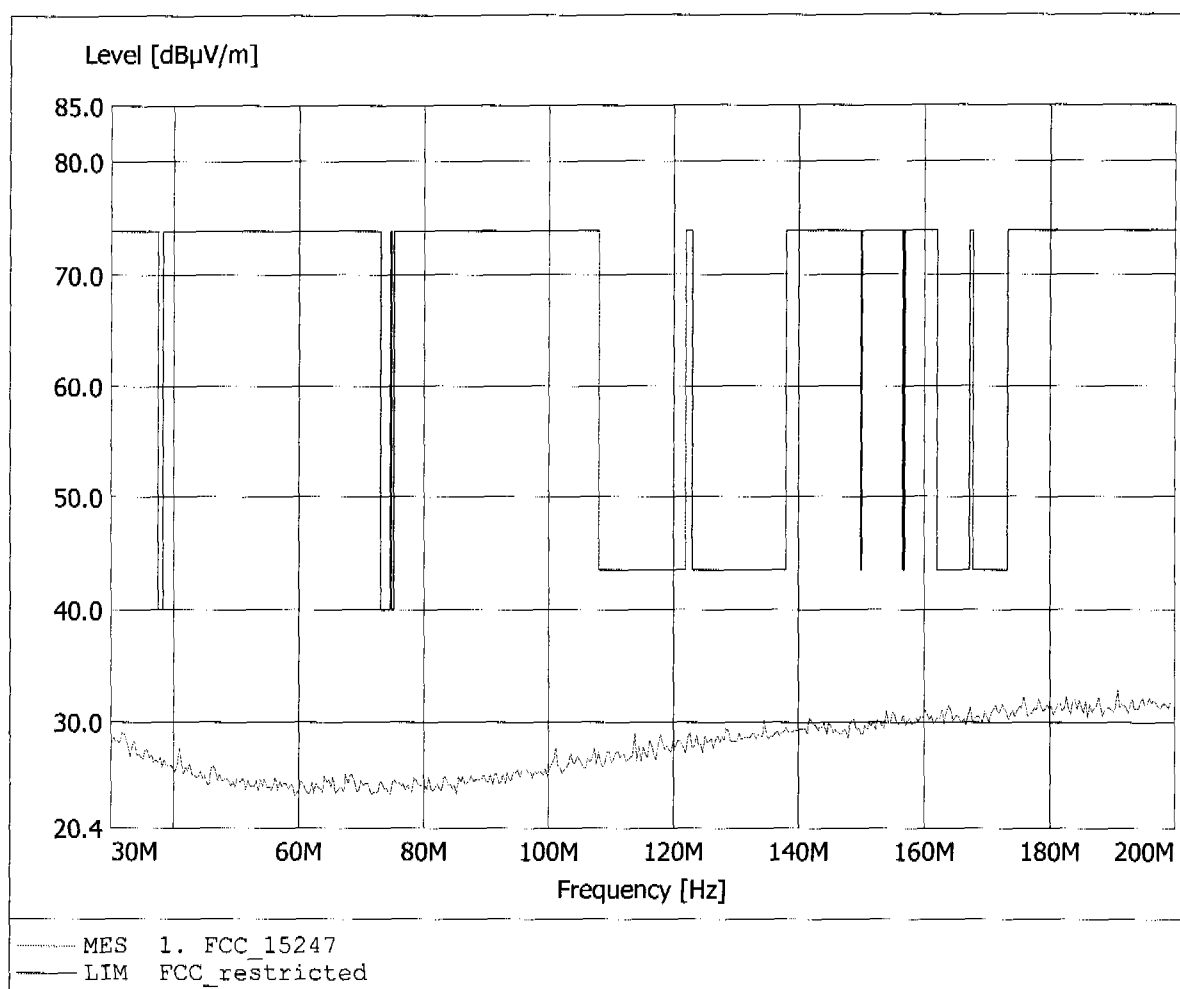


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.341MHz, Emax: 33.52dBµV/m, RBW: 100kHz

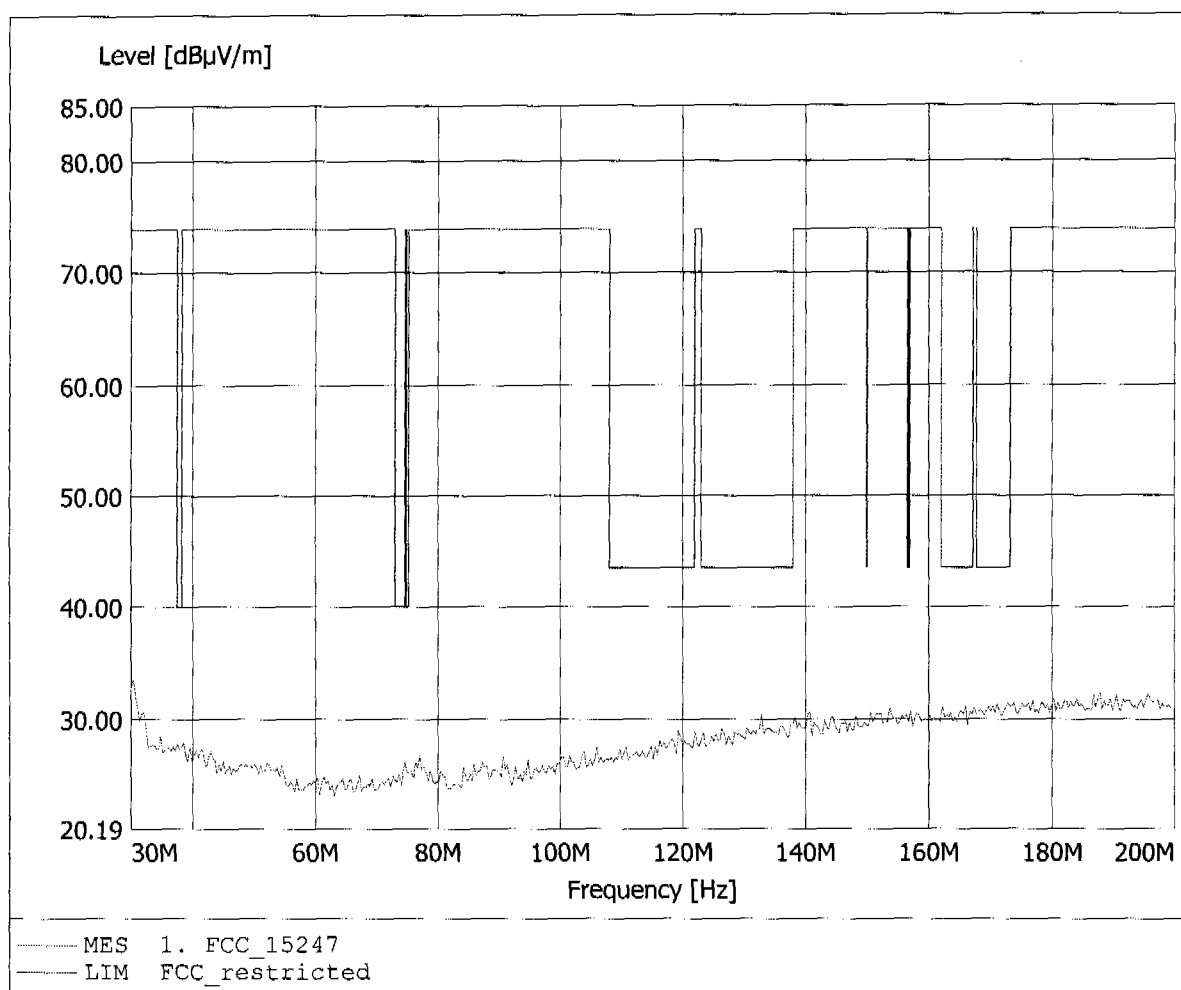


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 176.493MHz, Emax: 32.88dBµV/m, RBW: 100kHz

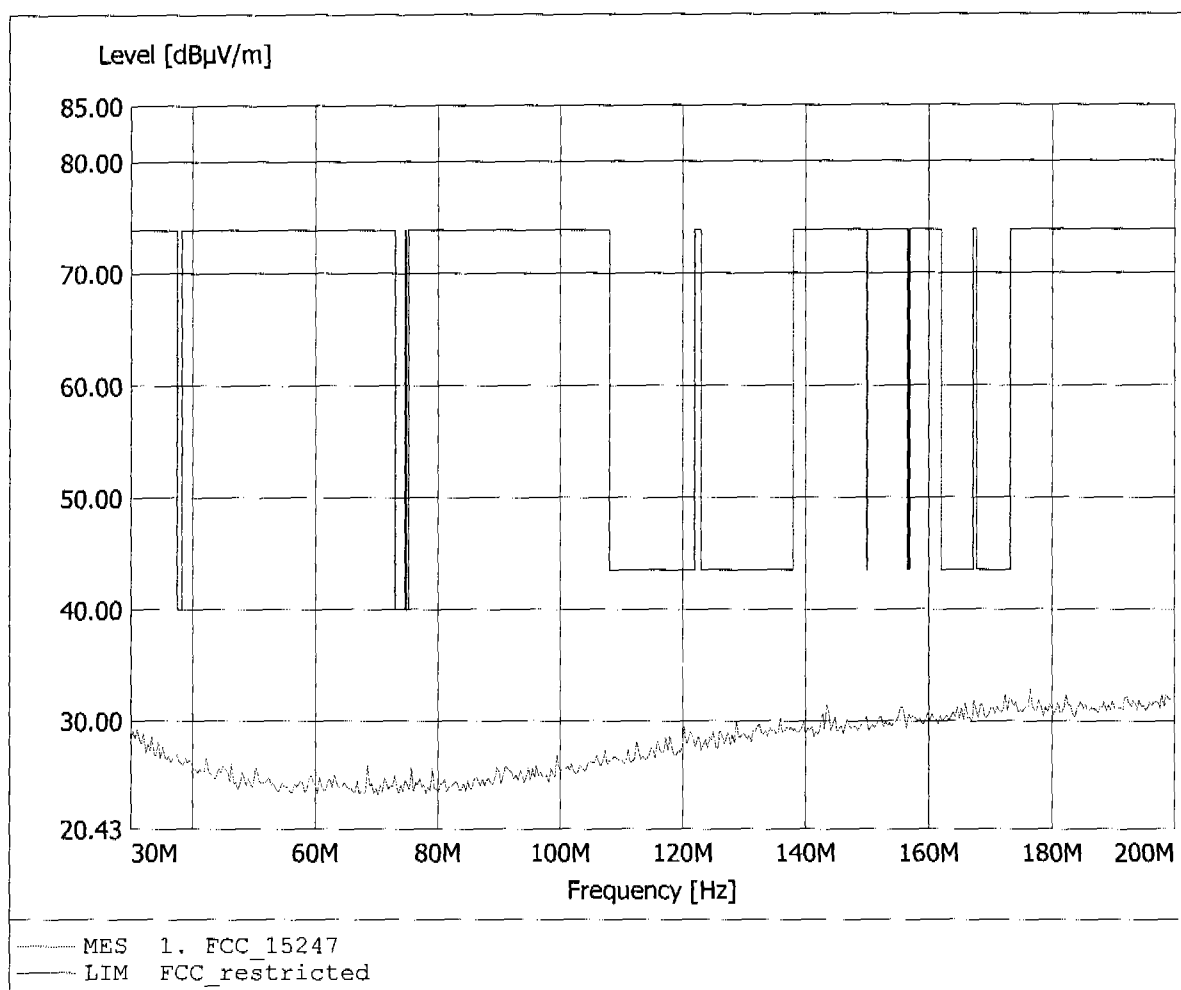


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 33.65dBµV/m, RBW: 100kHz

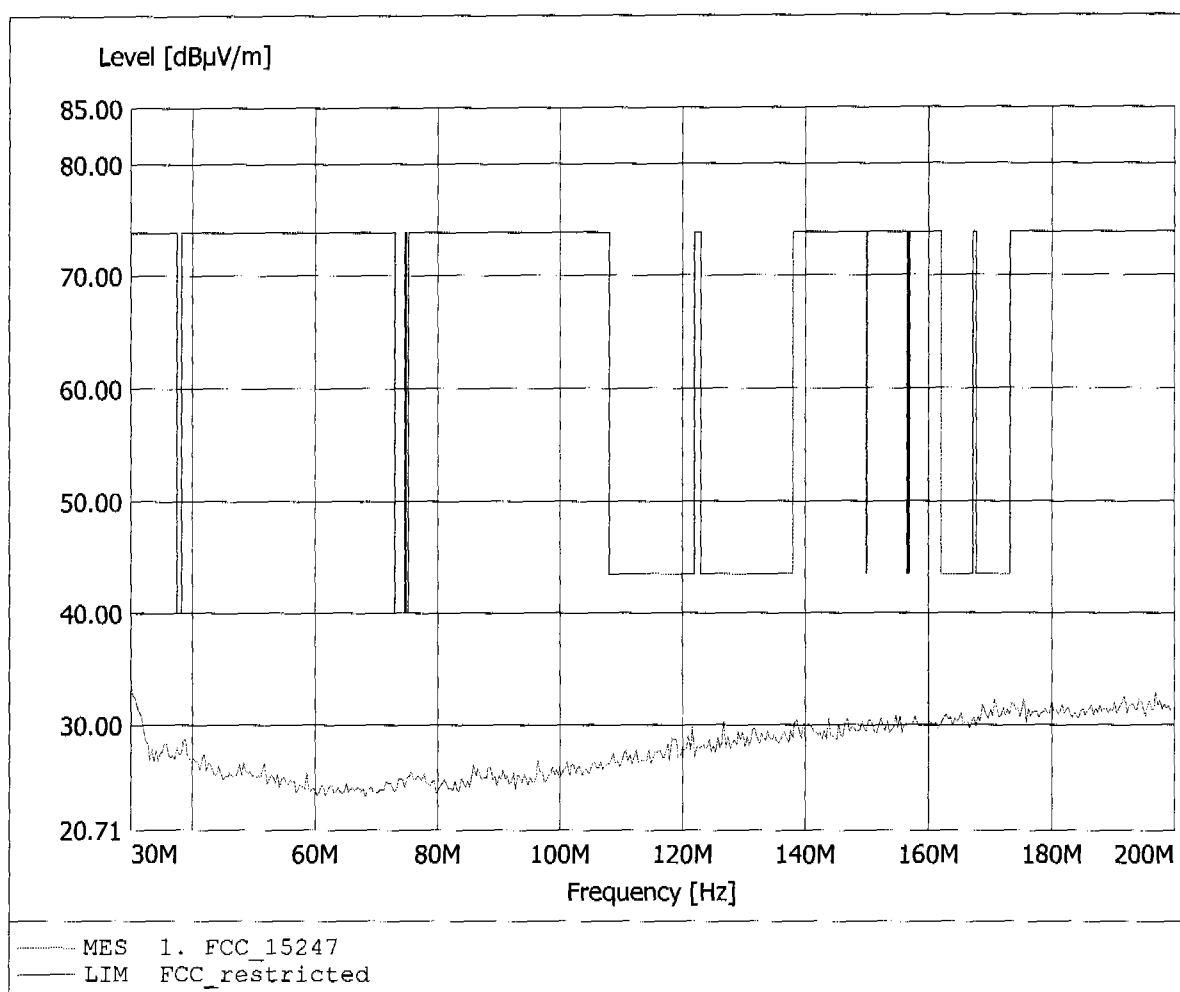


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 919.840MHz, Emax: 23.30dBµV/m, RBW: 100kHz

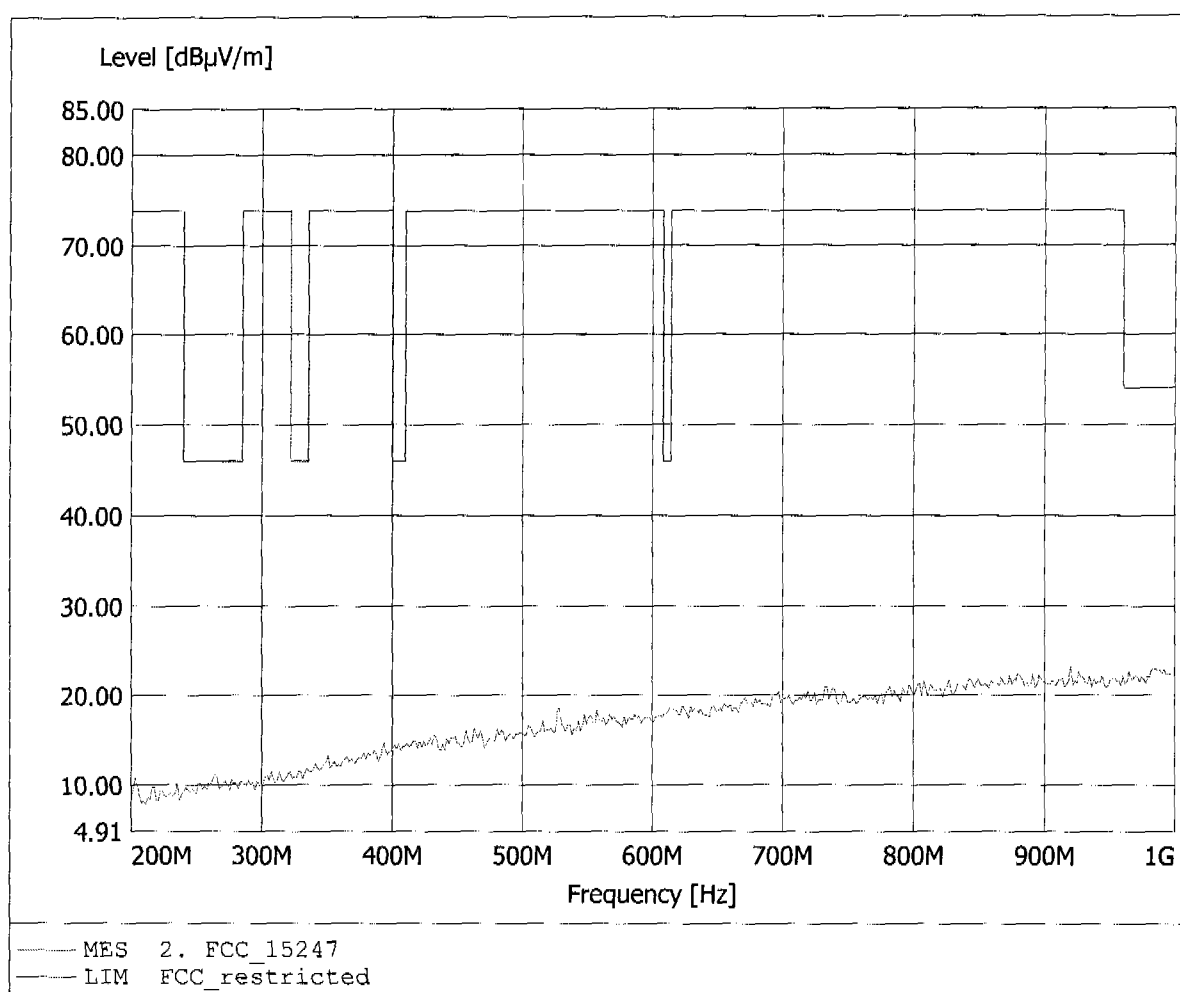


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 964.729MHz, Emax: 23.22dBµV/m, RBW: 100kHz

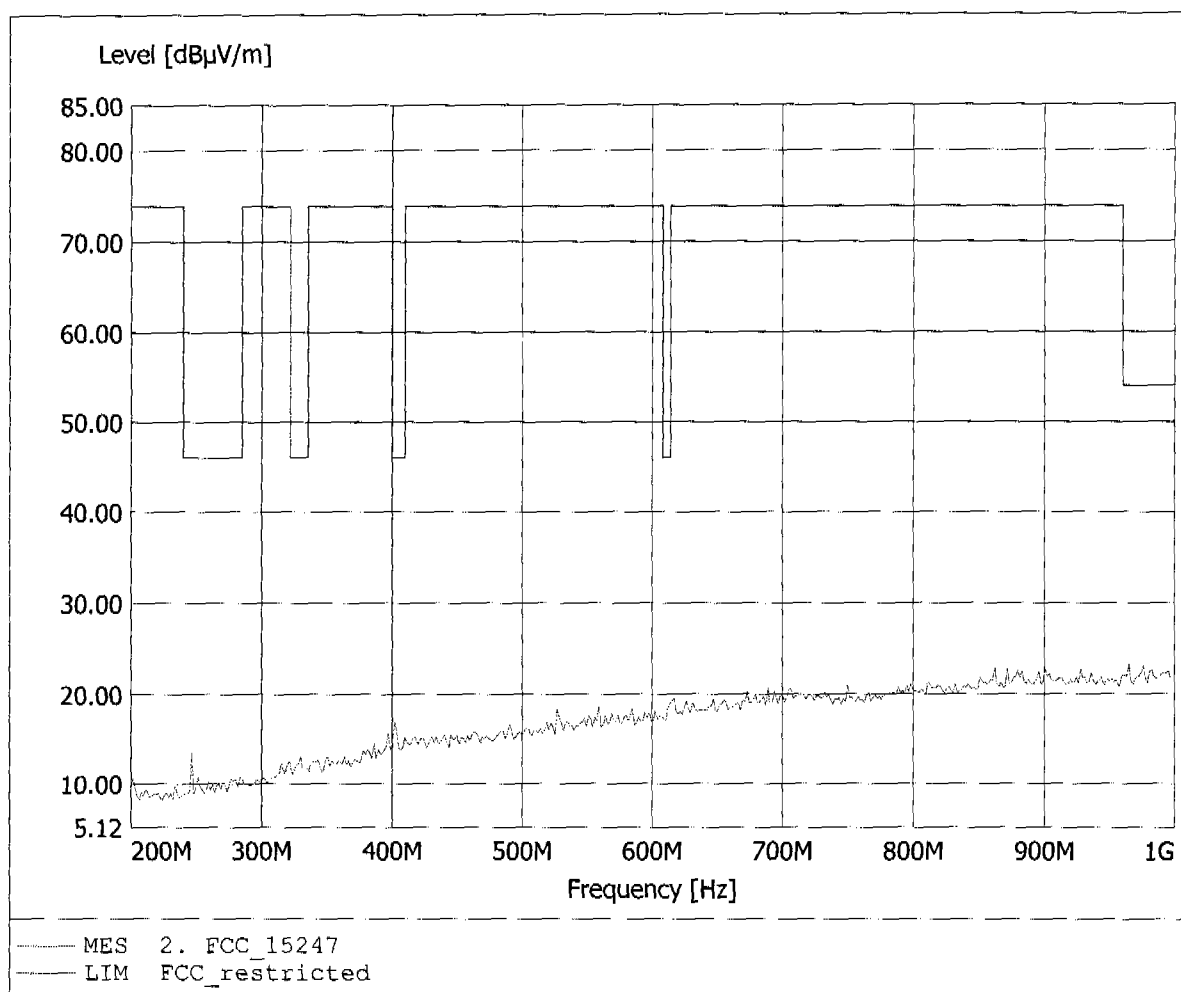


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 23.02dBµV/m, RBW: 100kHz

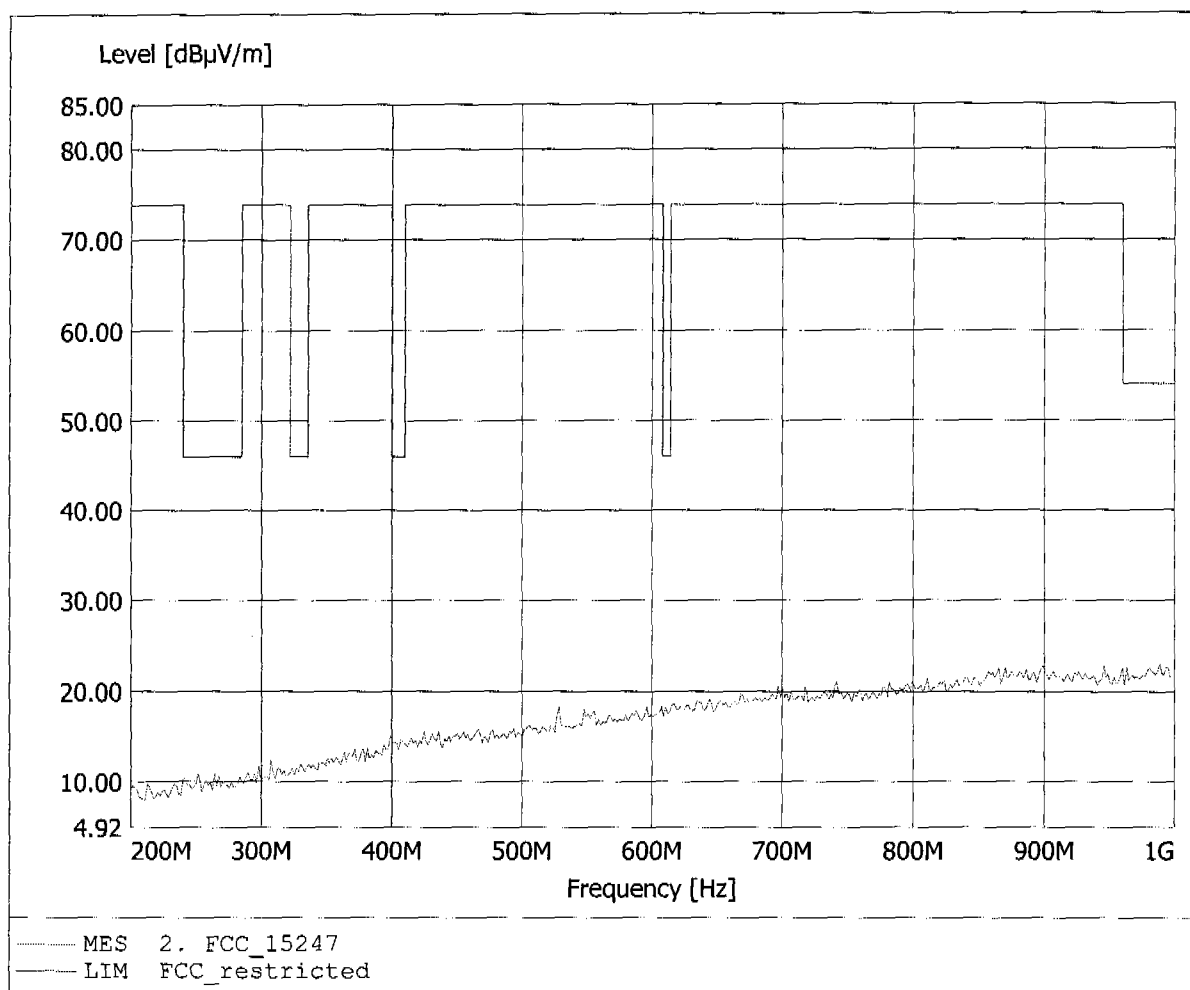


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 916.633MHz, Emax: 22.78dBµV/m, RBW: 100kHz

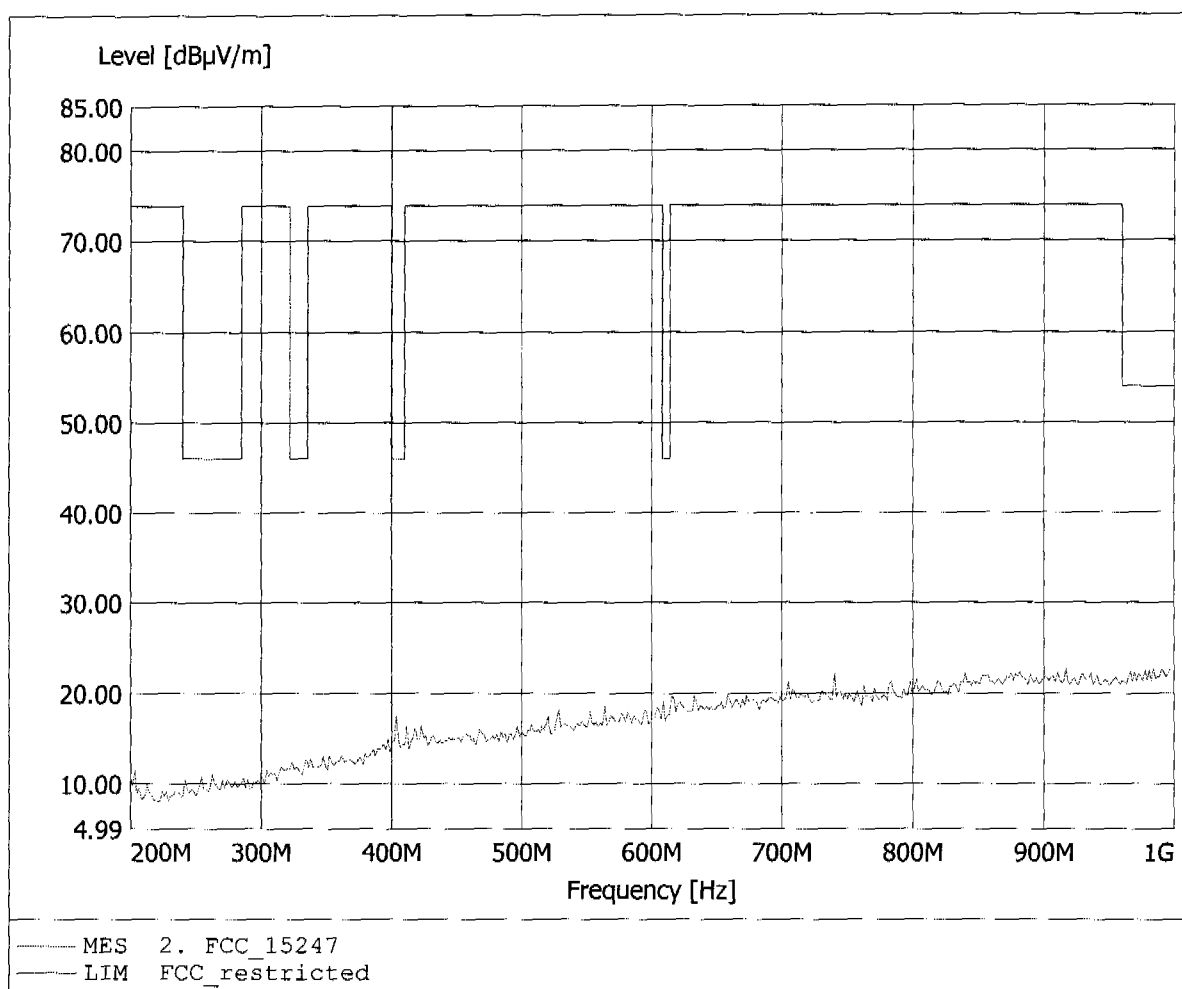


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 23.75dBµV/m, RBW: 100kHz

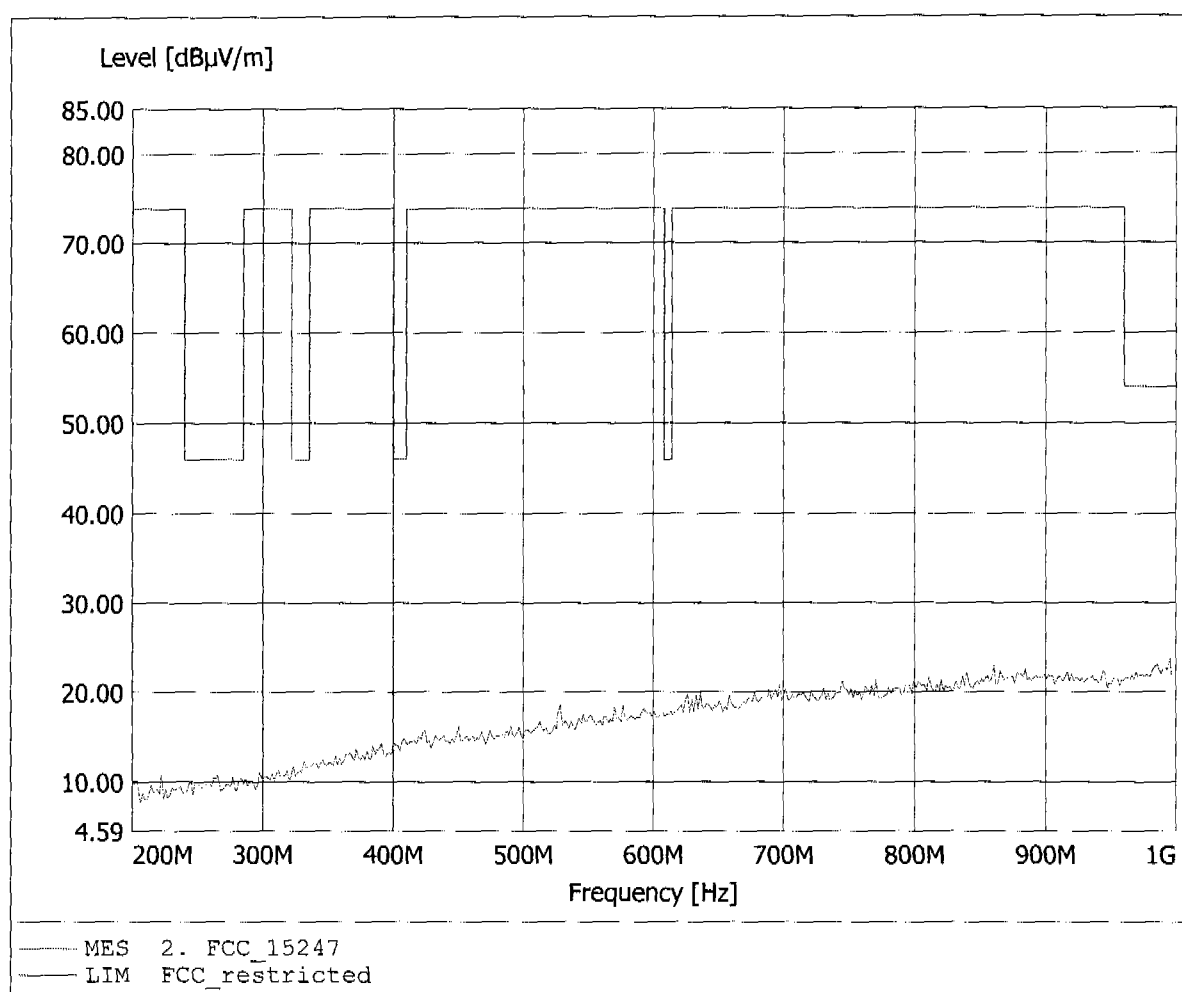


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 921.443MHz, Emax: 23.92dBµV/m, RBW: 100kHz

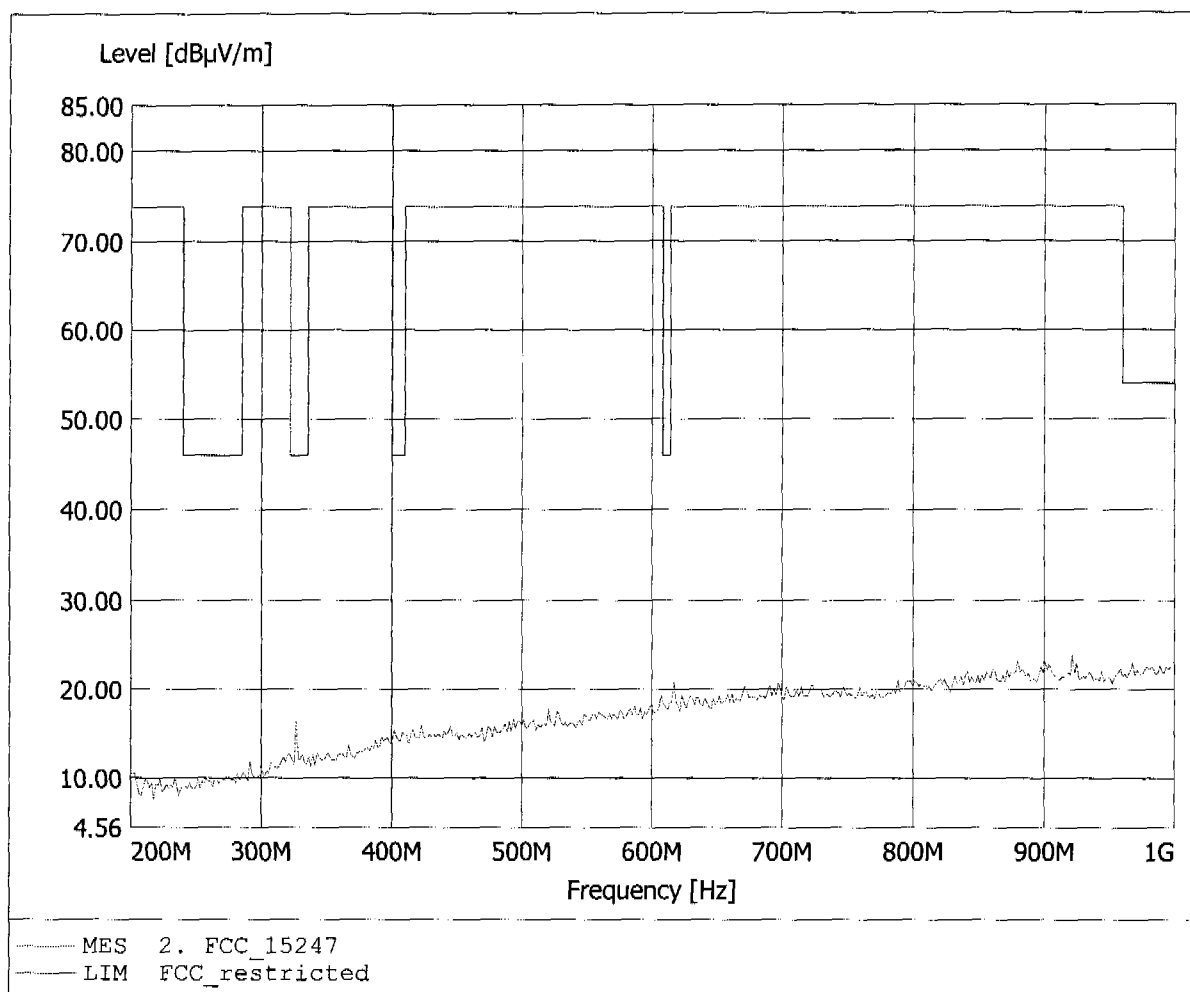


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 50.18dBµV/m, RBW: 1MHz

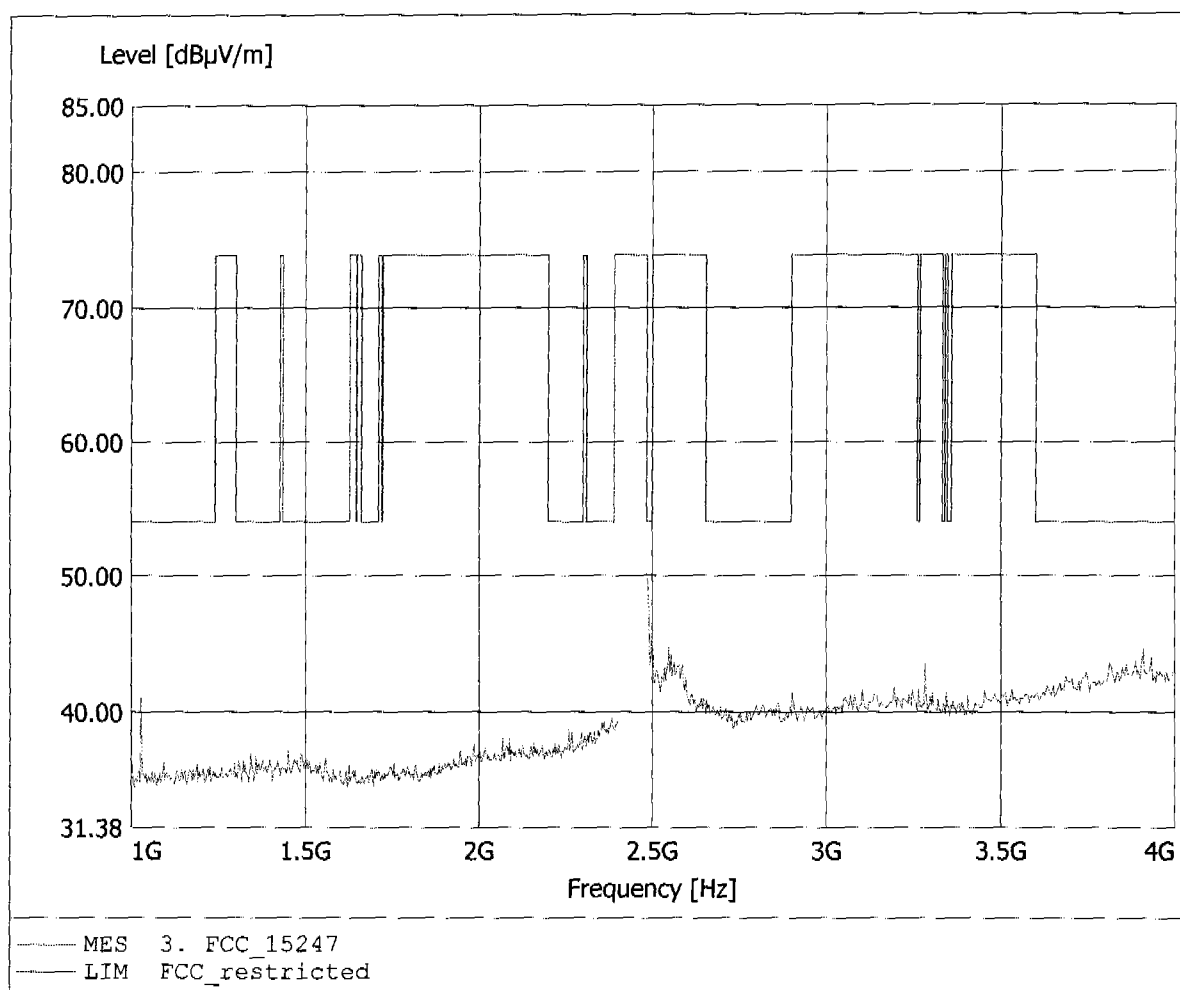


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 52.13dBµV/m, RBW: 1MHz

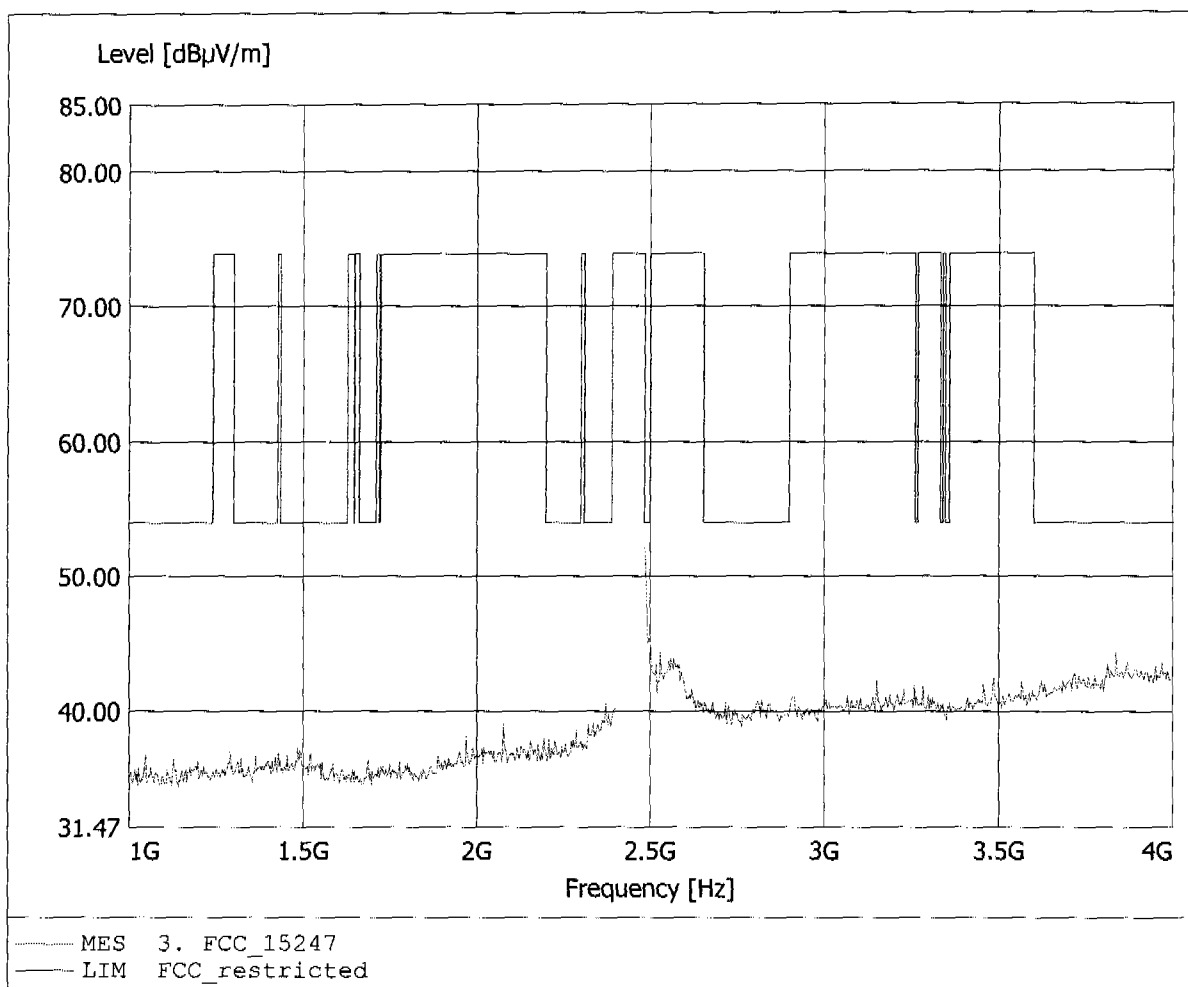


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 52.13dBµV/m, RBW: 1MHz

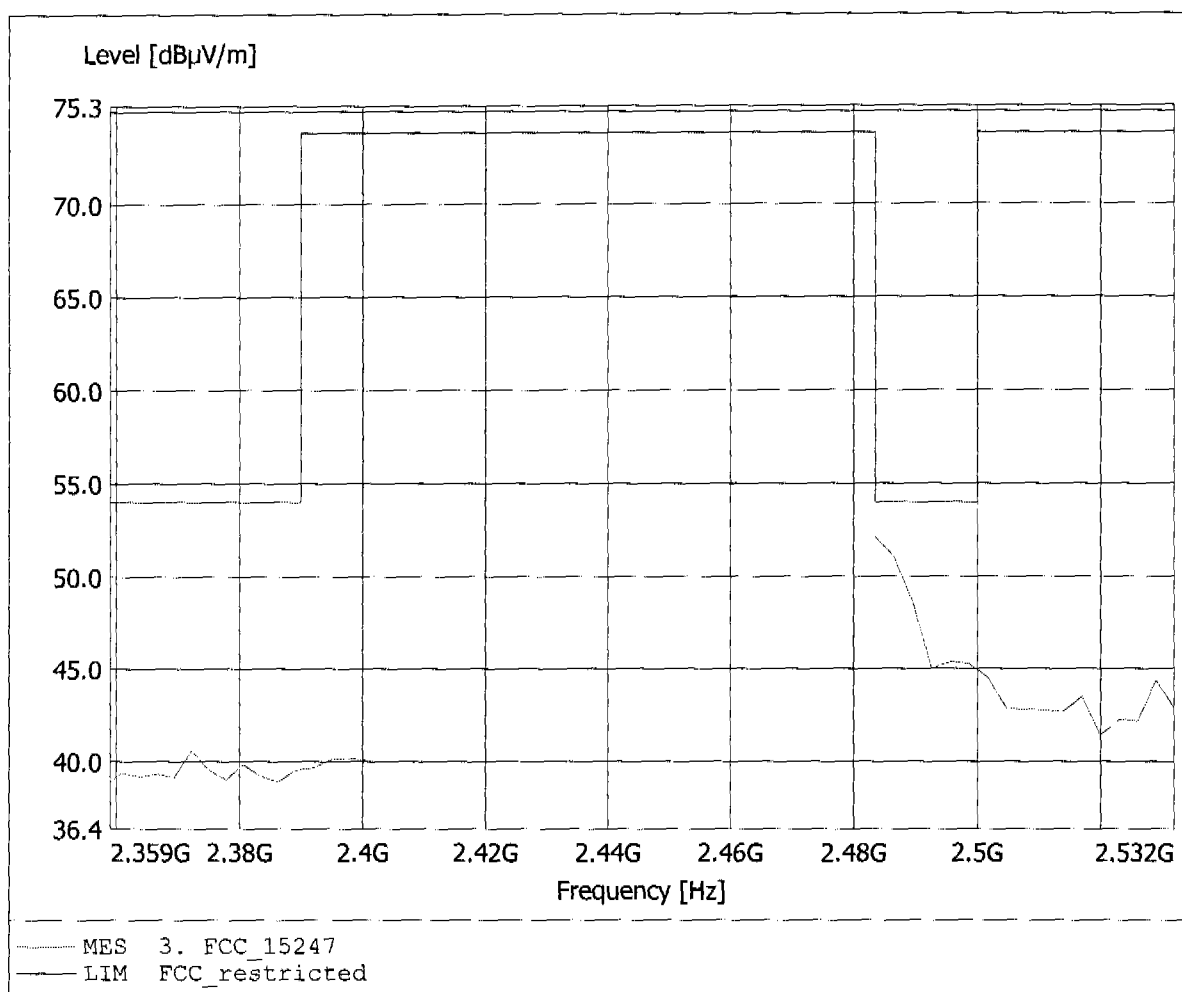


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.398GHz, Emax: 64.61dBµV/m, RBW: 1MHz

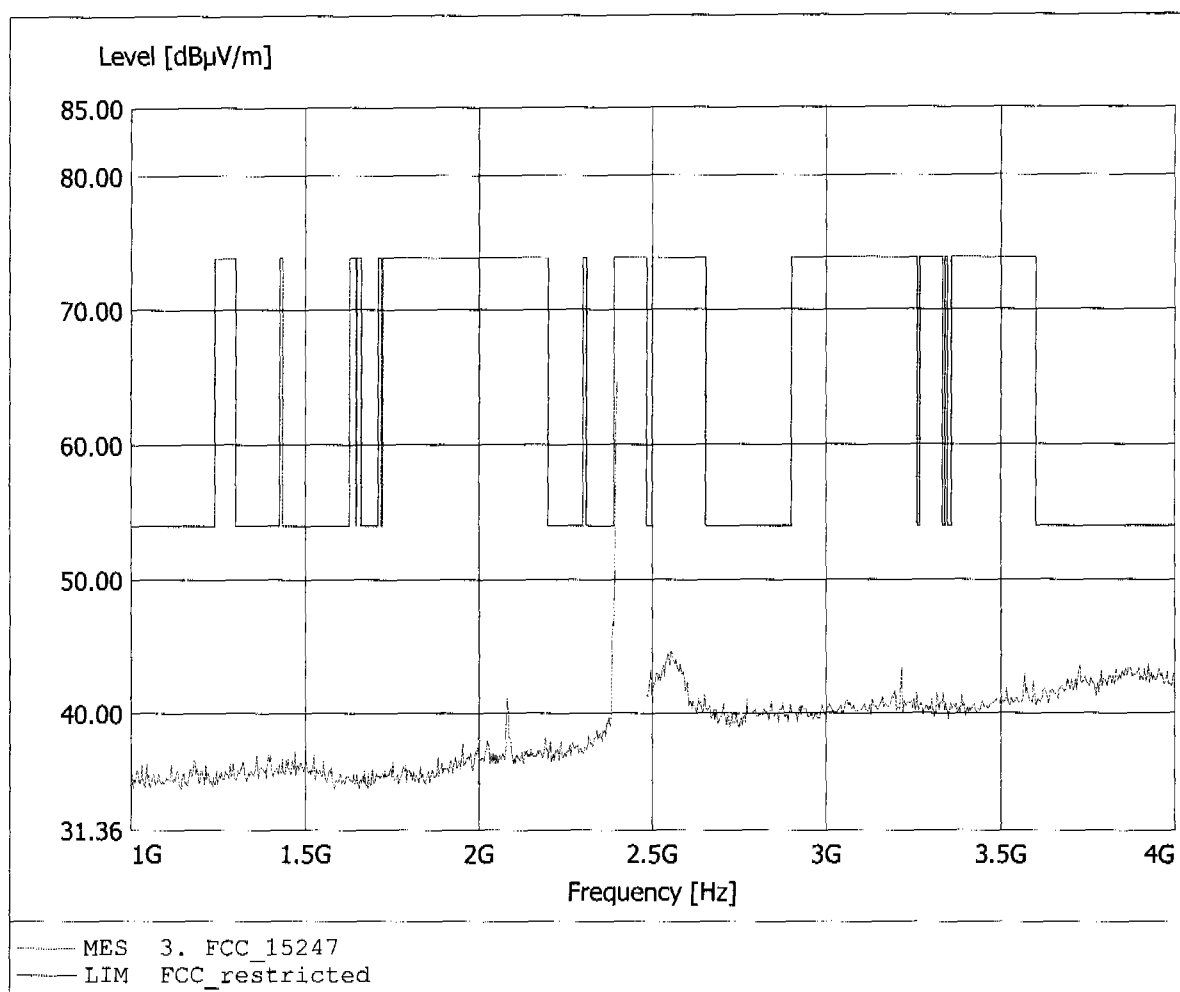


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.398GHz, Emax: 64.61dBµV/m, RBW: 1MHz

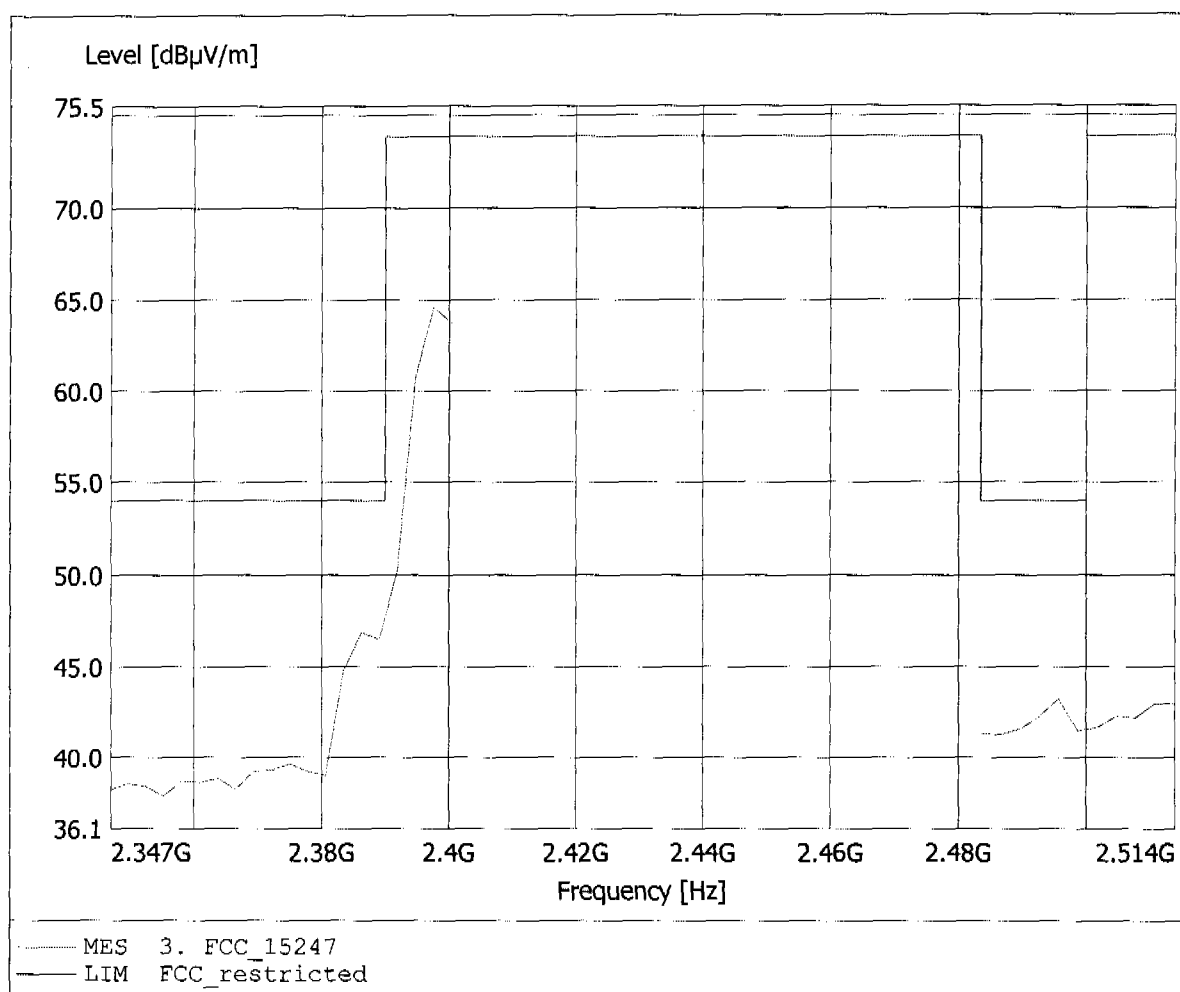


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.398GHz, Emax: 67.36dBµV/m, RBW: 1MHz

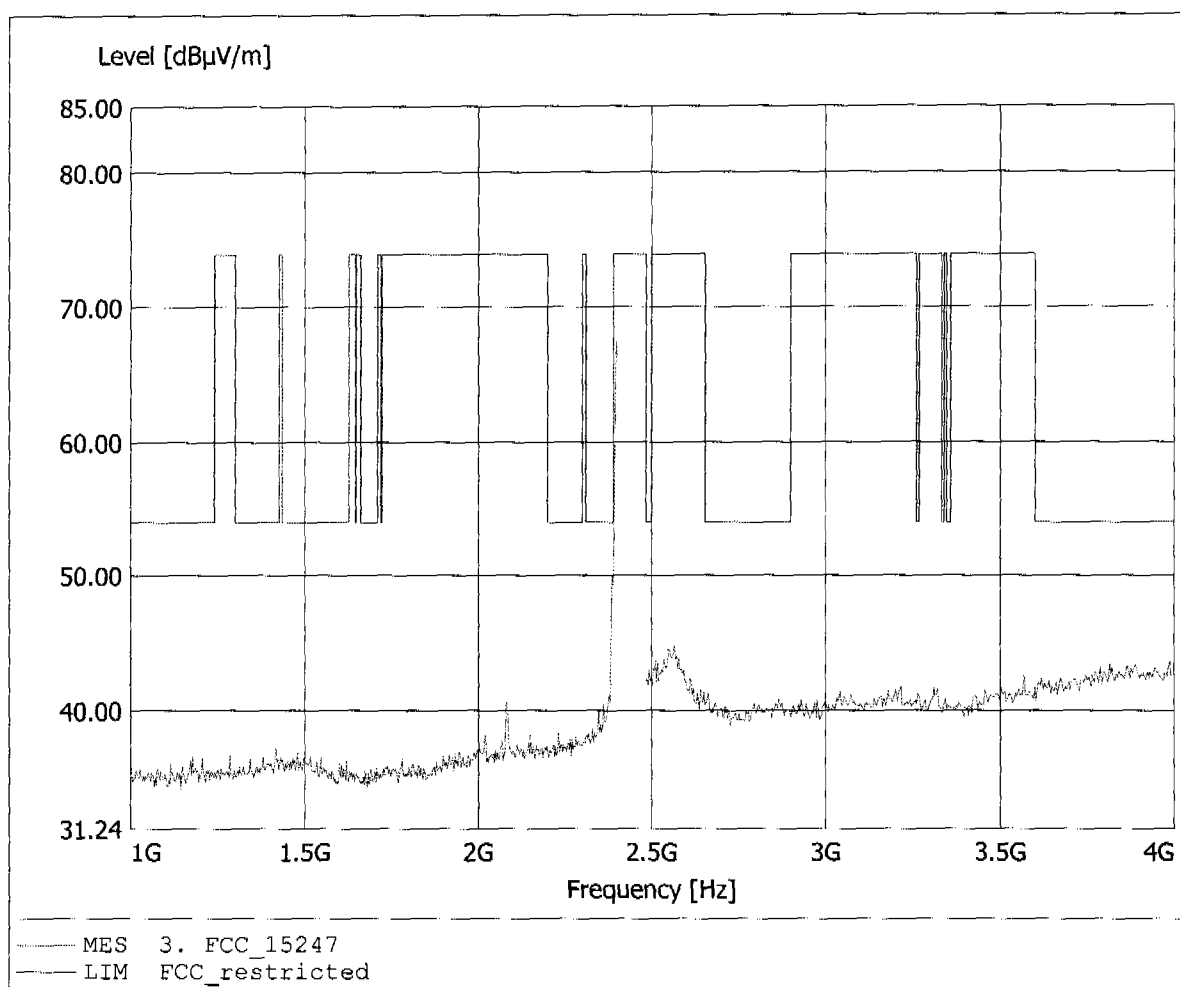


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.398GHz, Emax: 67.36dBµV/m, RBW: 1MHz

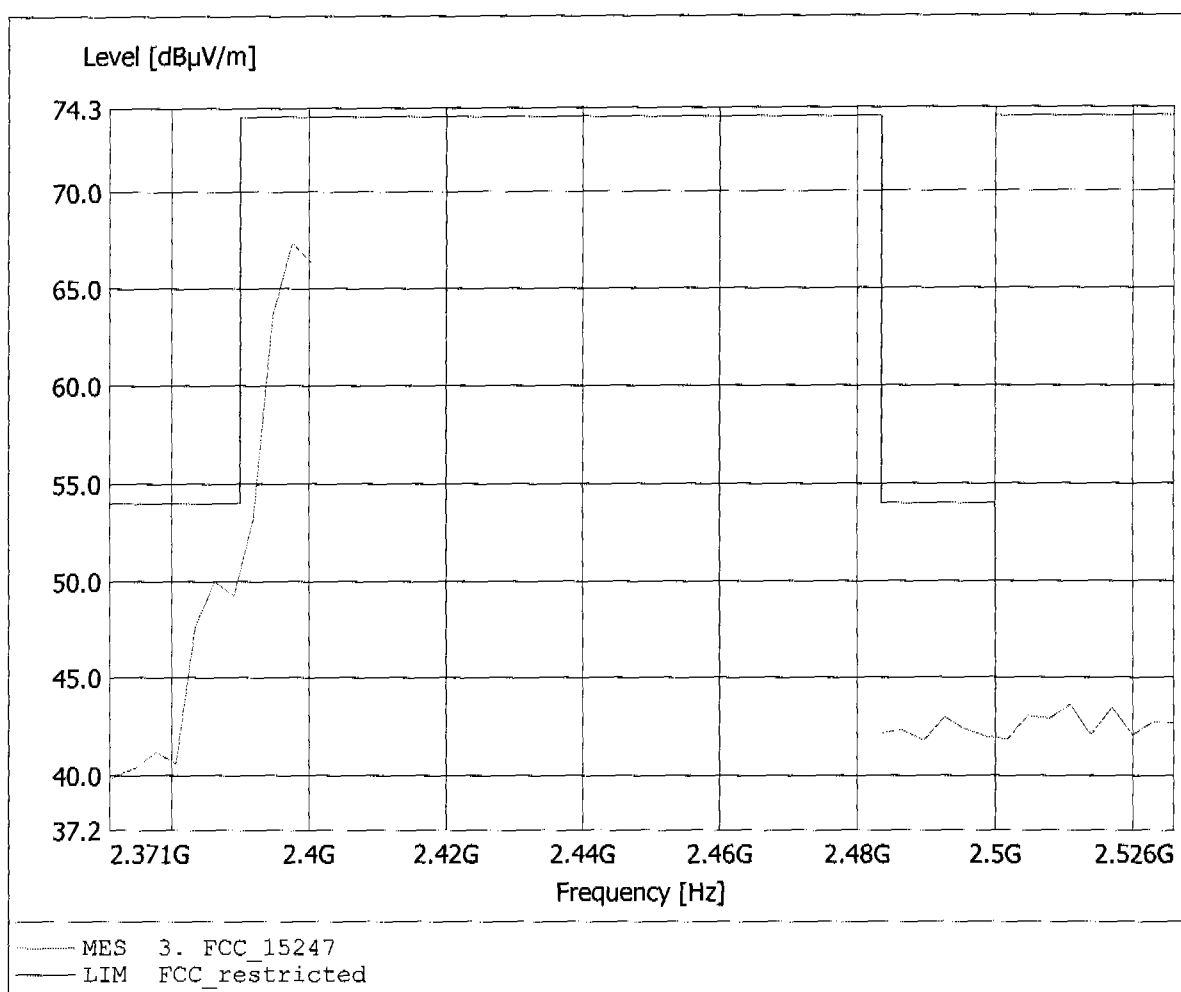


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.547GHz, Emax: 45.40dBµV/m, RBW: 1MHz

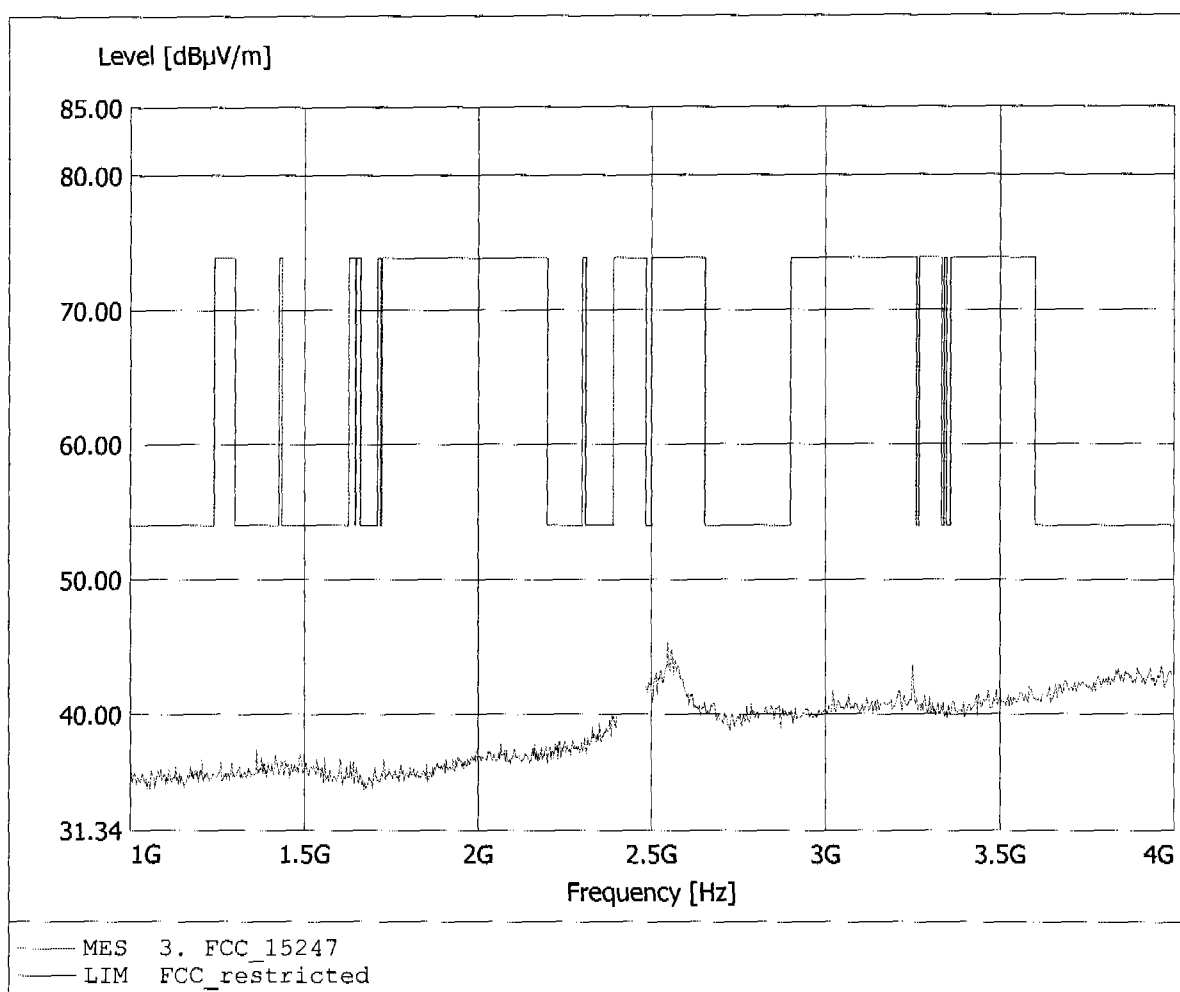


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.550GHz, Emax: 44.47dBµV/m, RBW: 1MHz

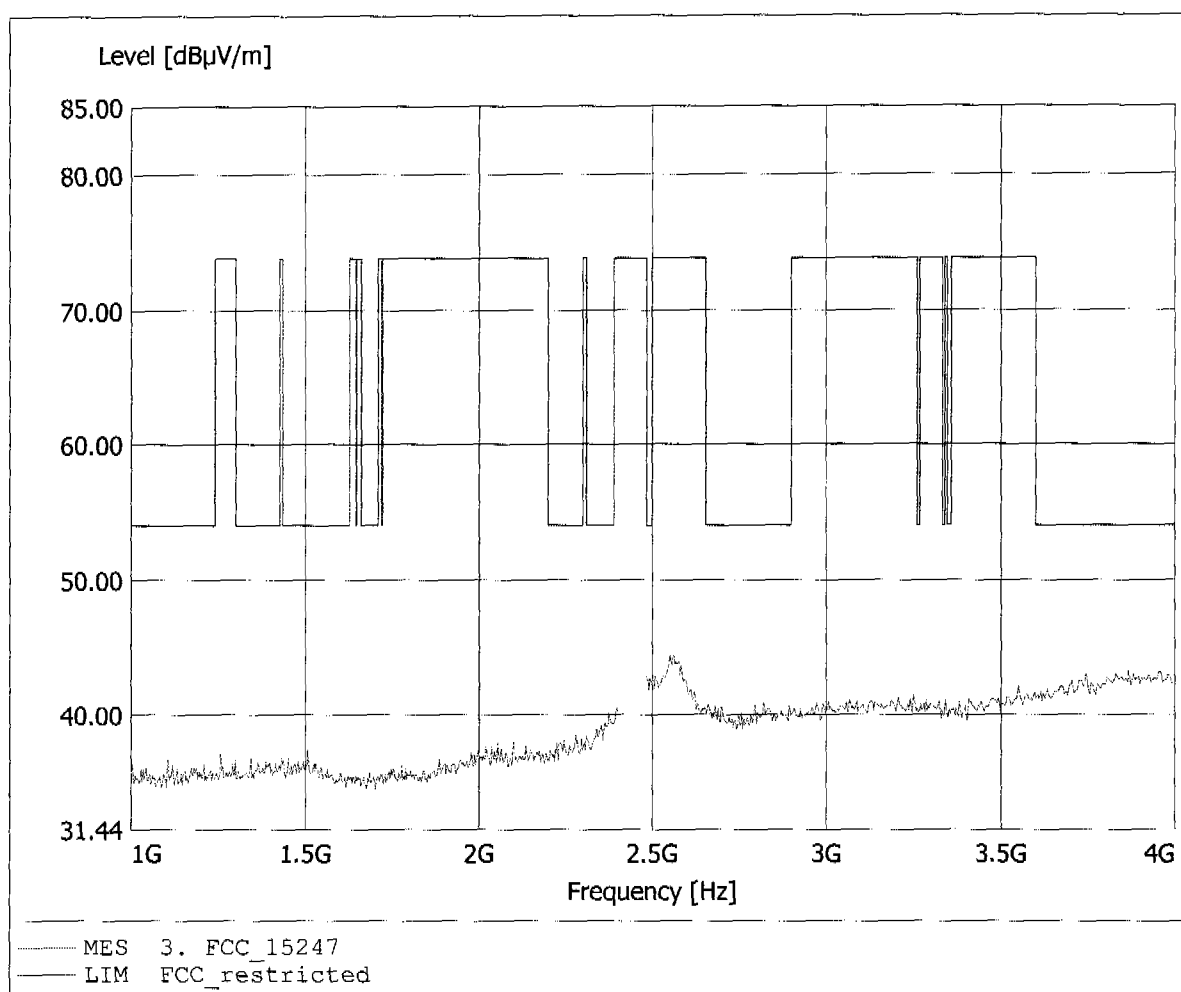


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.391GHz, Emax: 43.68dB μ V/m, RBW: 1MHz

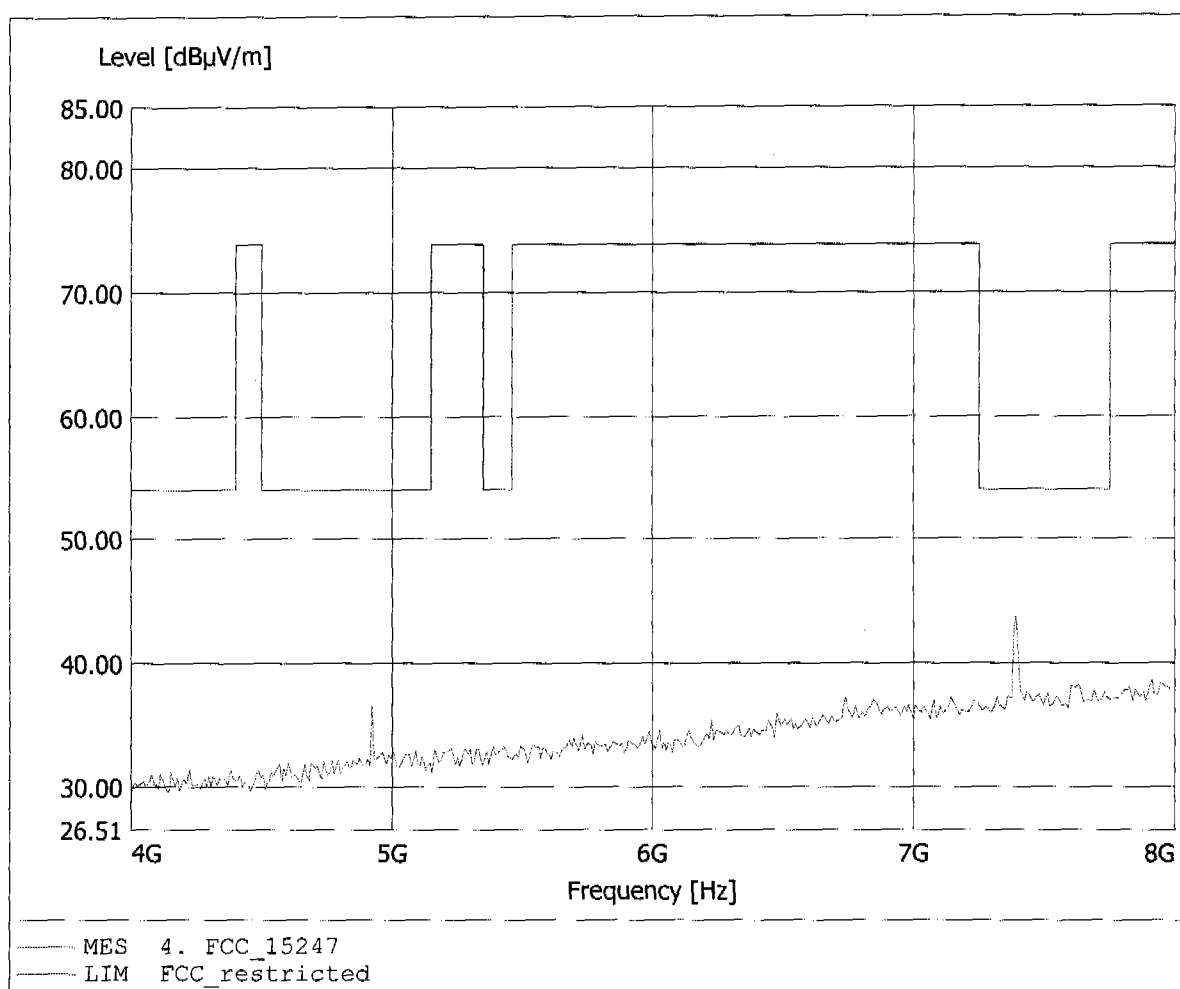


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.391GHz, Emax: 41.03dBµV/m, RBW: 1MHz

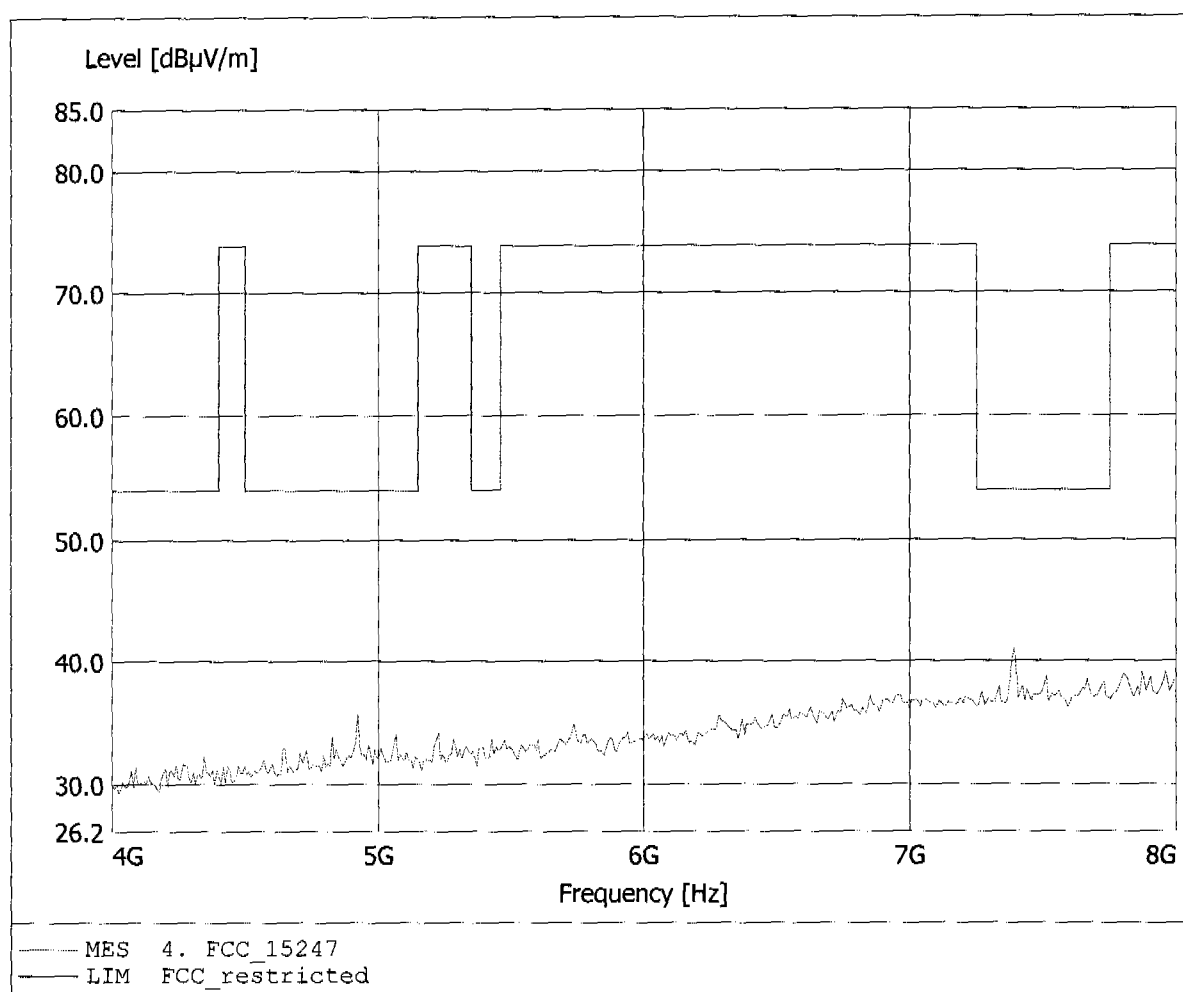


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.826GHz, Emax: 45.18dBuV/m, RBW: 1MHz

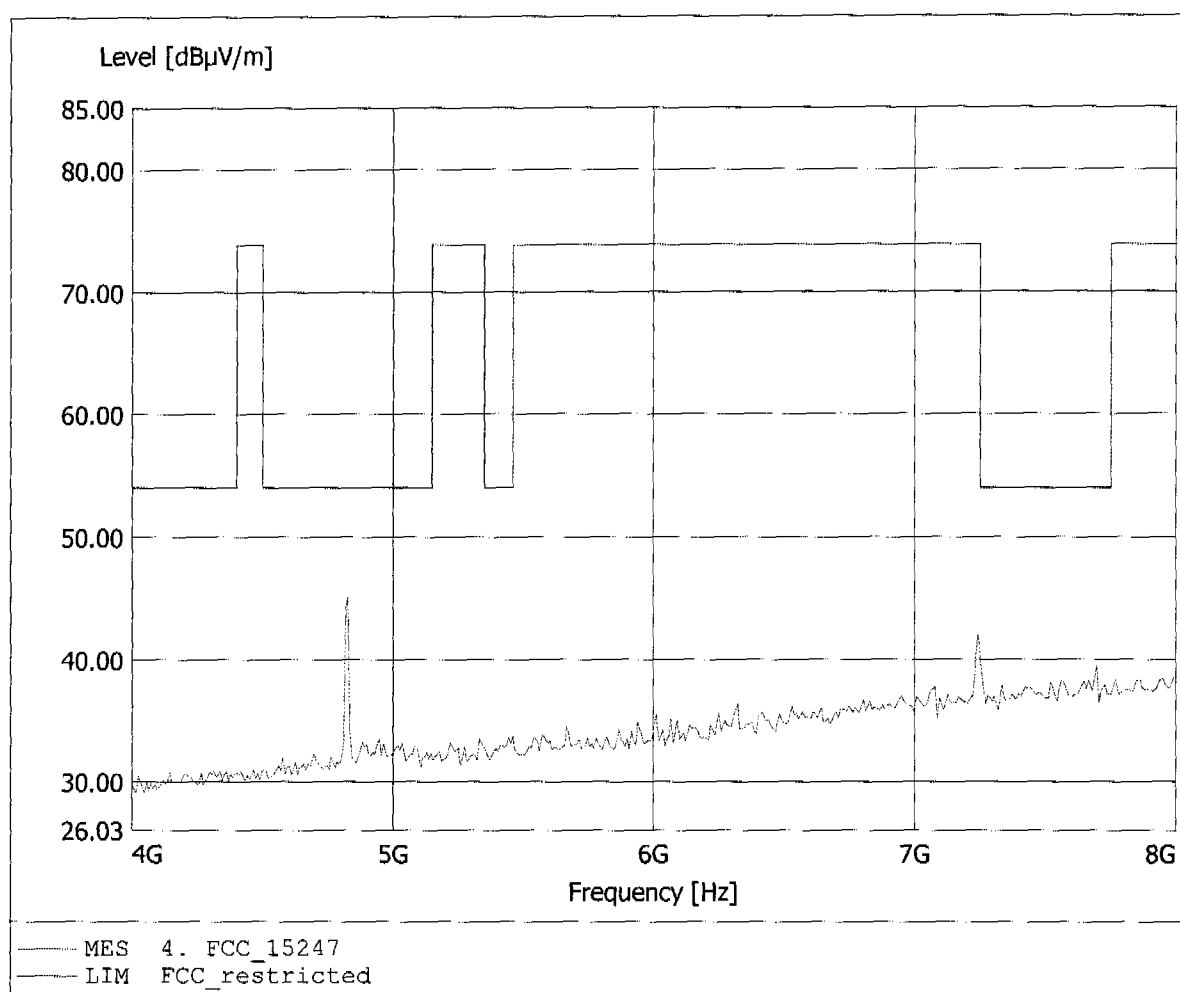


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.826GHz, Emax: 44.41dBµV/m, RBW: 1MHz

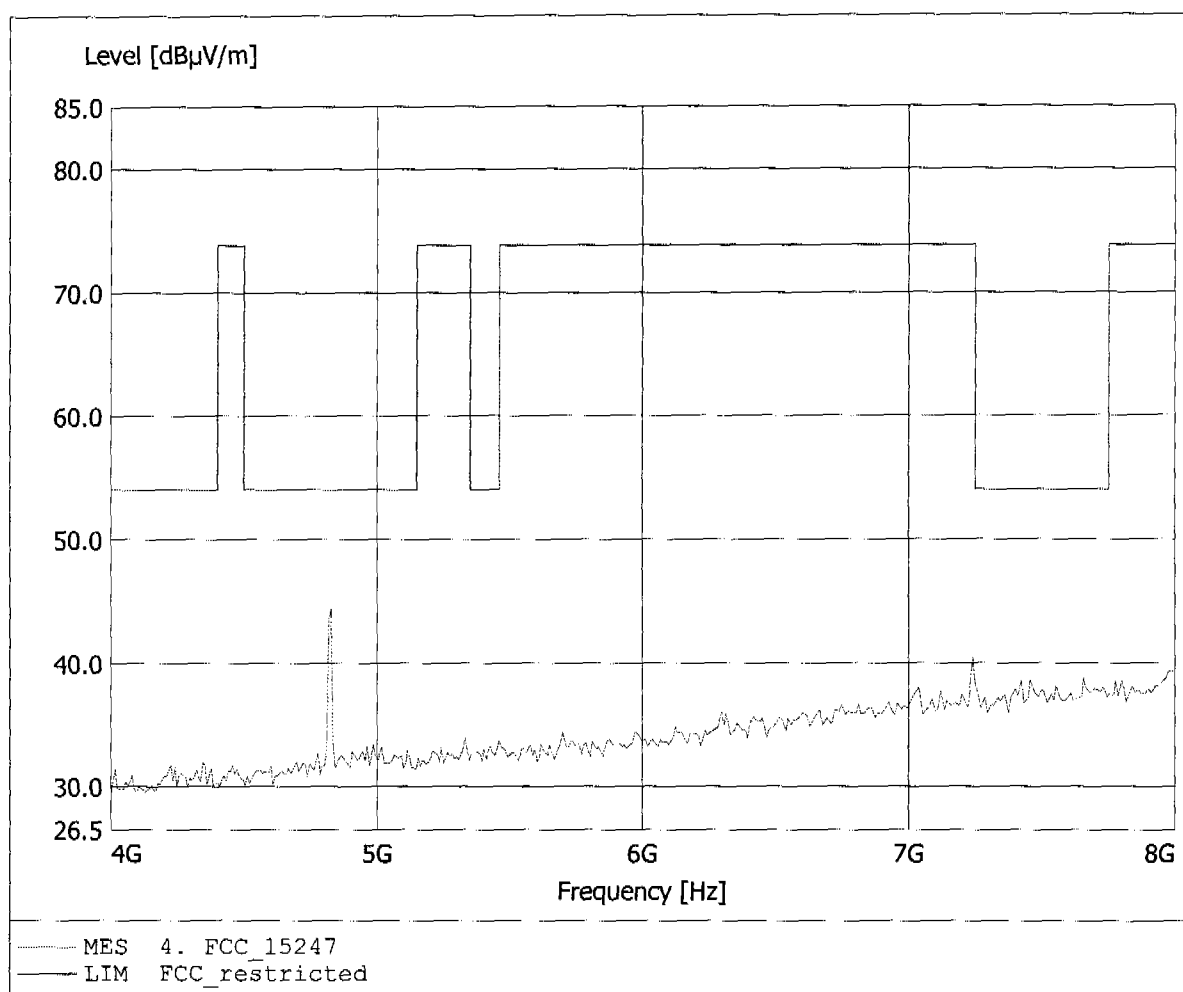


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.319GHz, Emax: 43.92dBuV/m, RBW: 1MHz

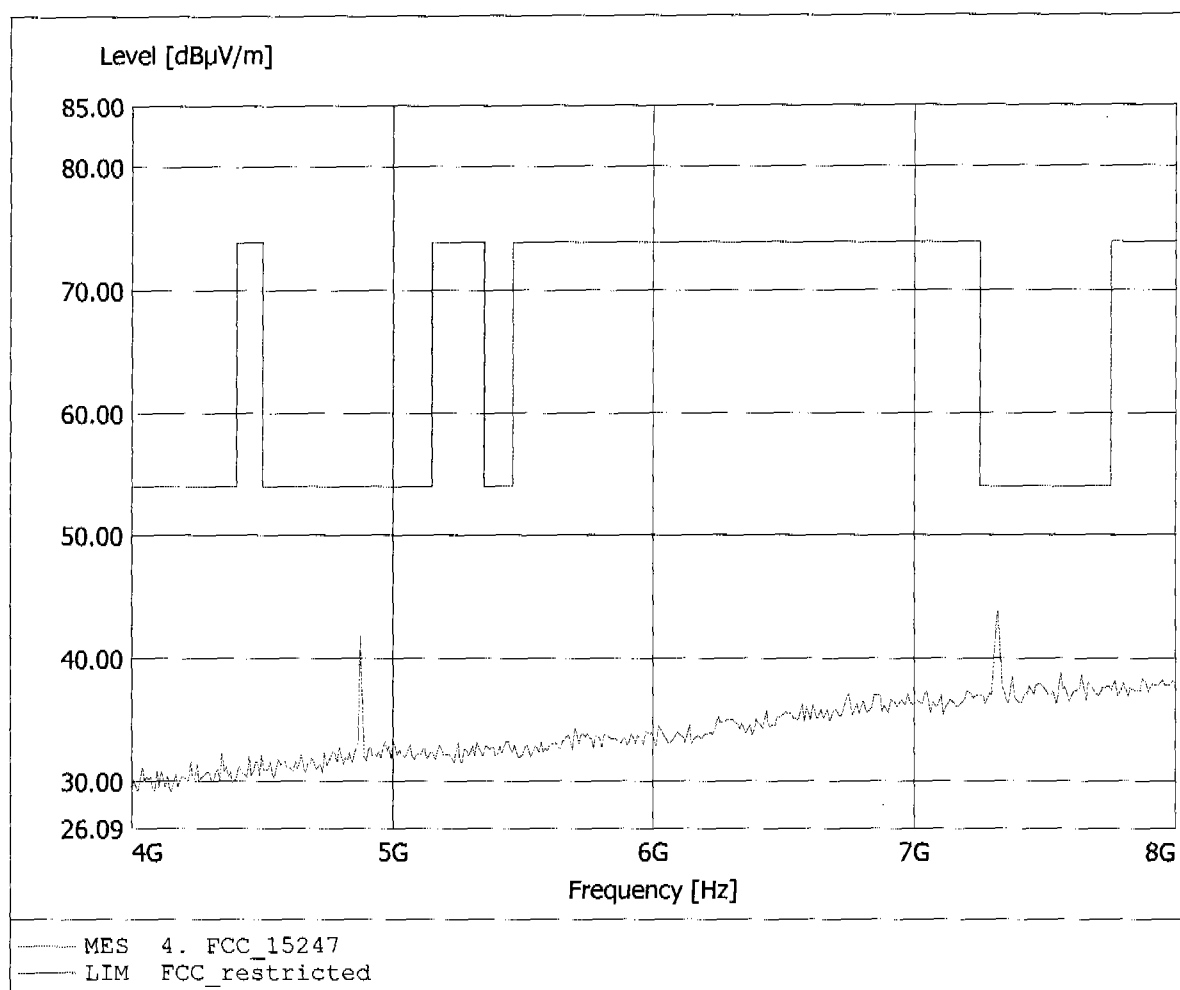


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.874GHz, Emax: 41.88dBµV/m, RBW: 1MHz

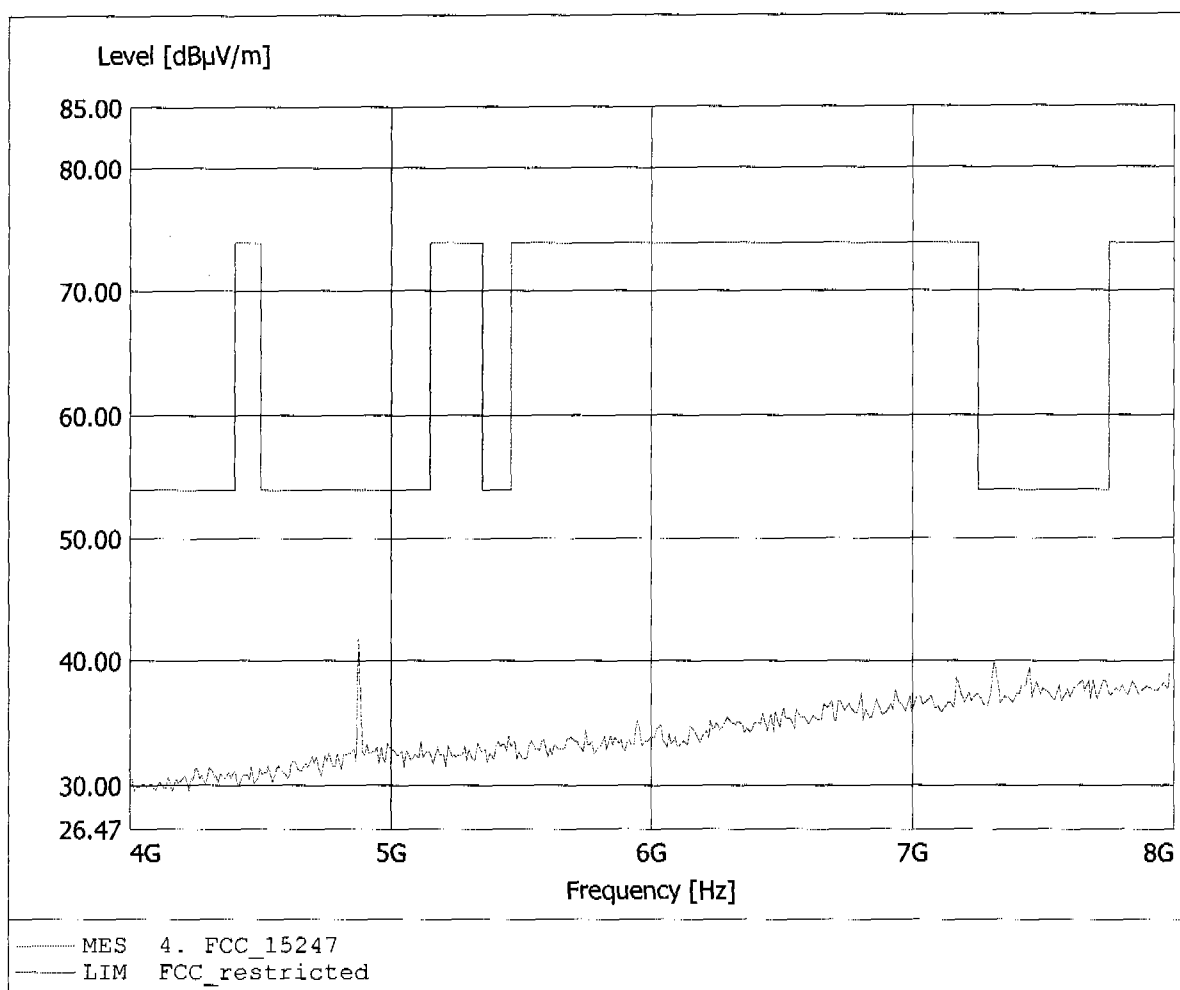


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.852GHz, Emax: 49.42dBµV/m, RBW: 1MHz

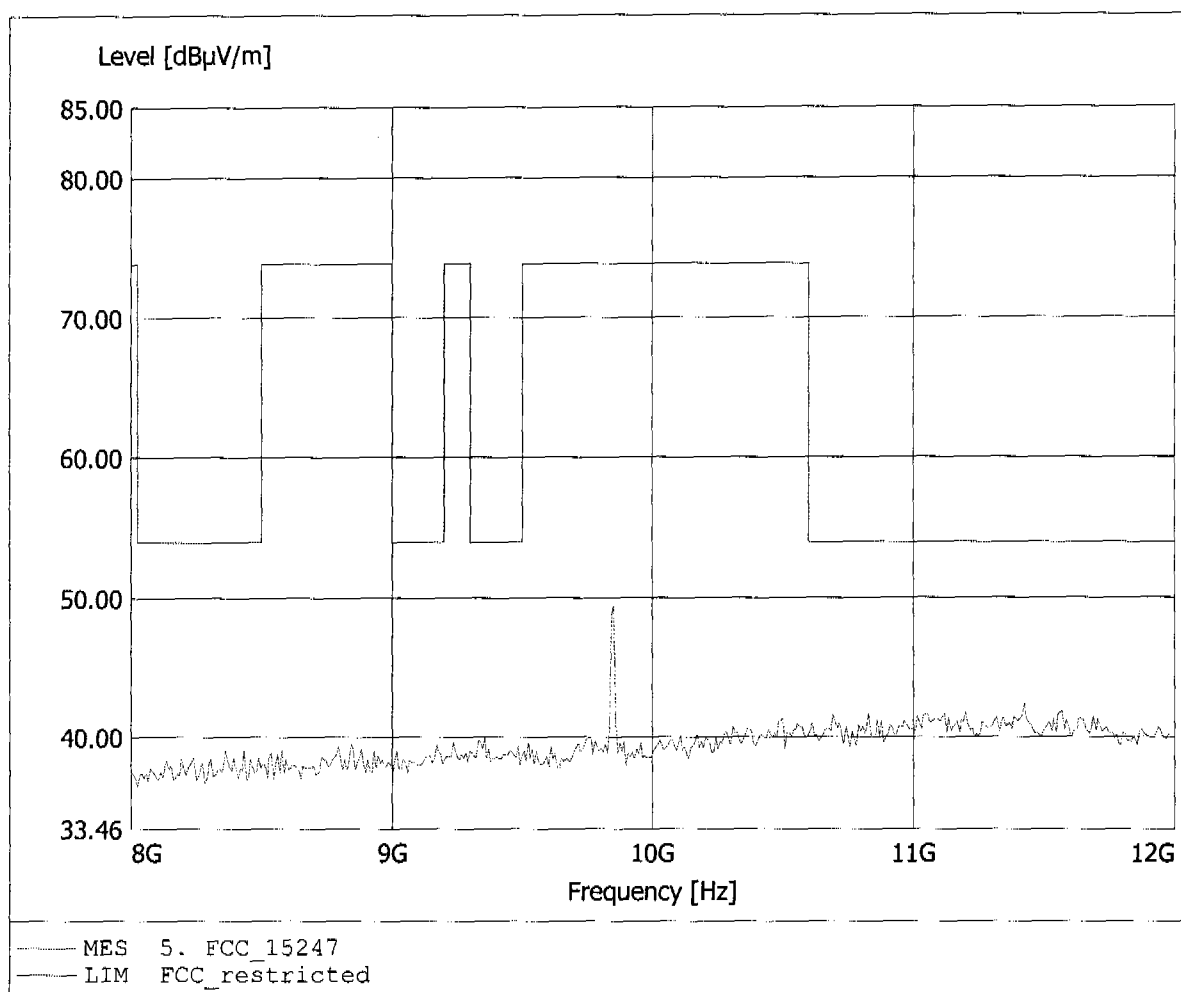


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.852GHz, Emax: 47.85dBµV/m, RBW: 1MHz

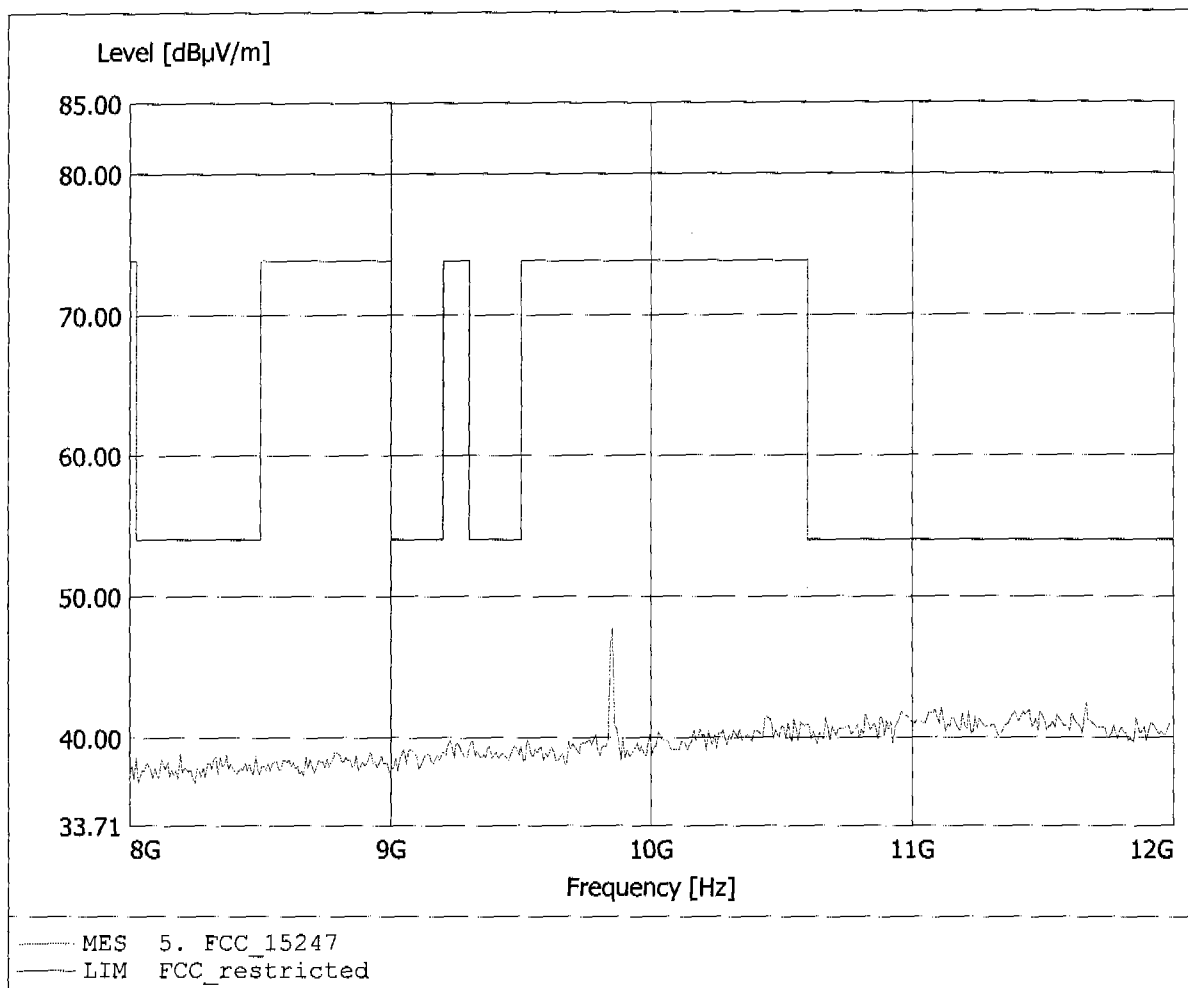


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.998GHz, Emax: 42.22dBµV/m, RBW: 1MHz

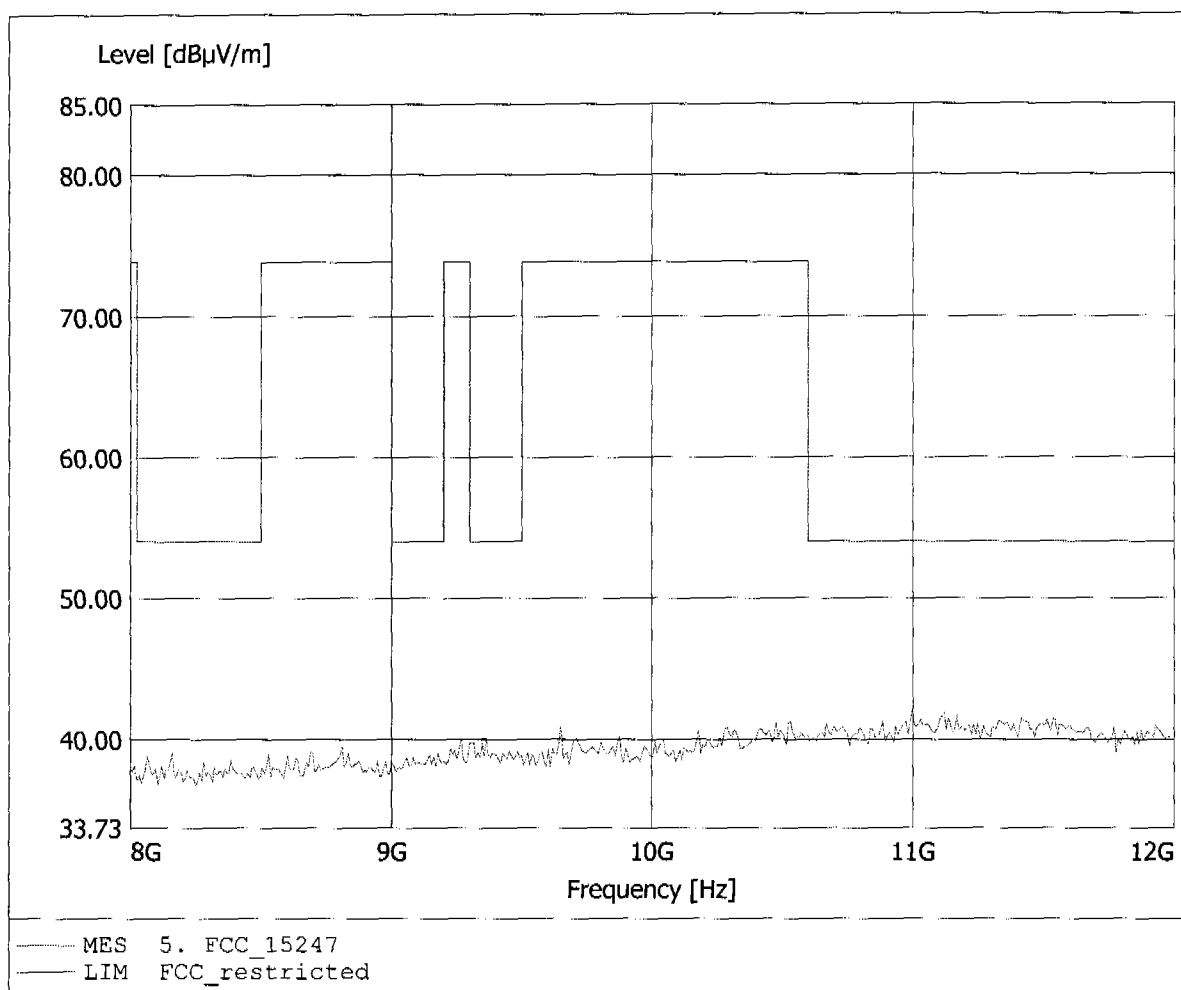


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.118GHz, Emax: 42.57dBµV/m, RBW: 1MHz

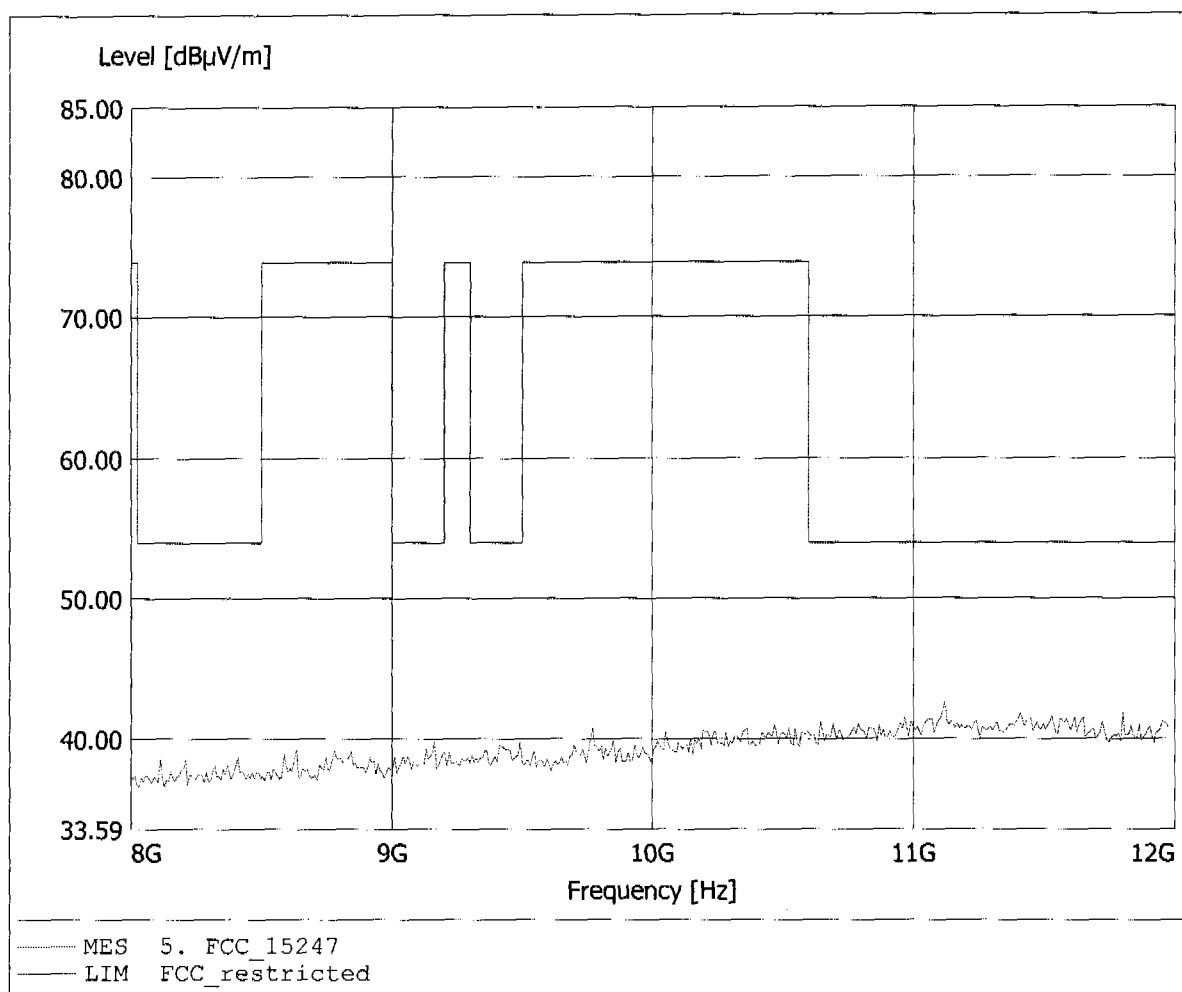


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.747GHz, Emax: 44.66dBµV/m, RBW: 1MHz

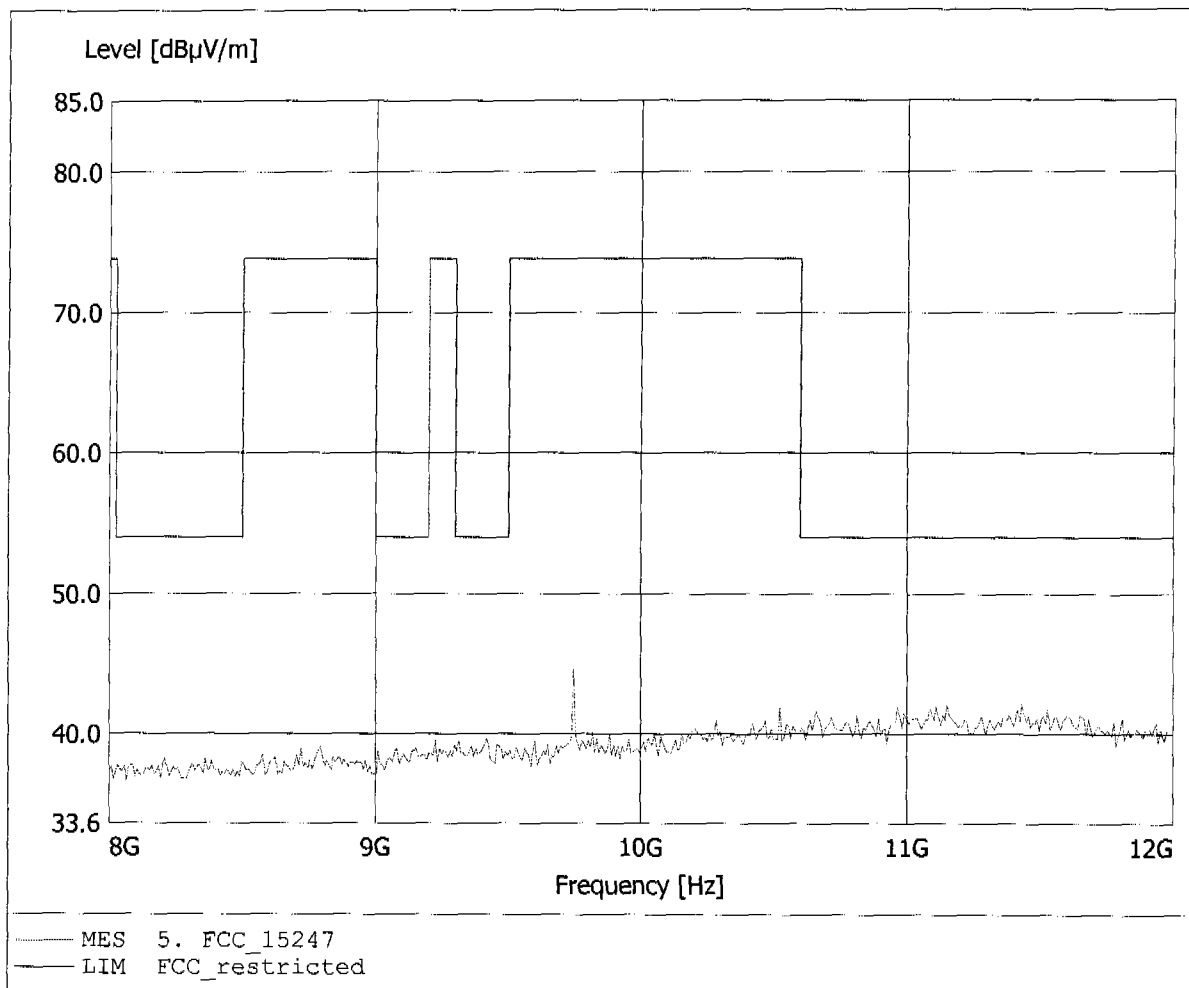


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.747GHz, Emax: 45.13dBµV/m, RBW: 1MHz

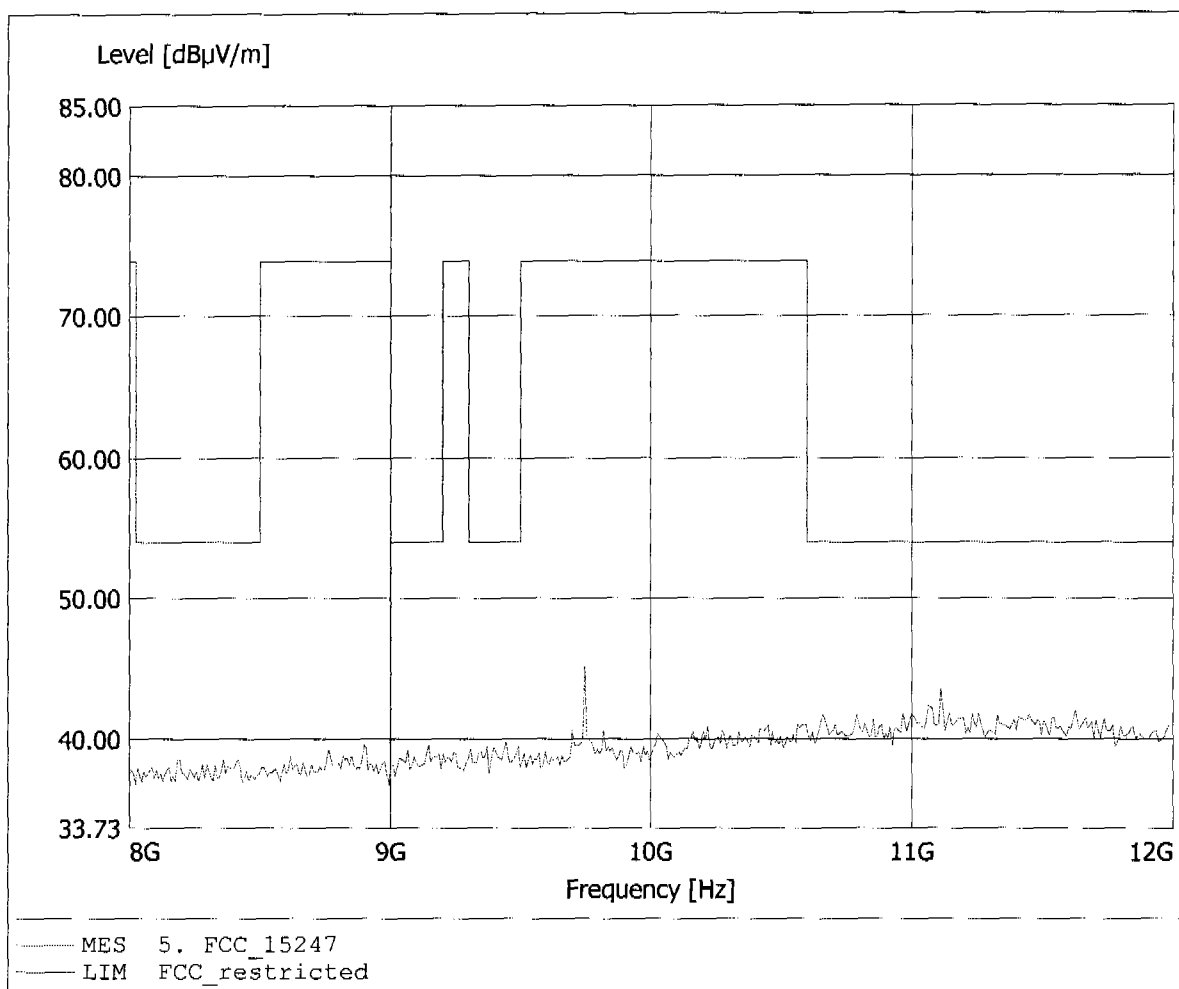


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.485GHz, Emax: 45.15dBµV/m, RBW: 1MHz

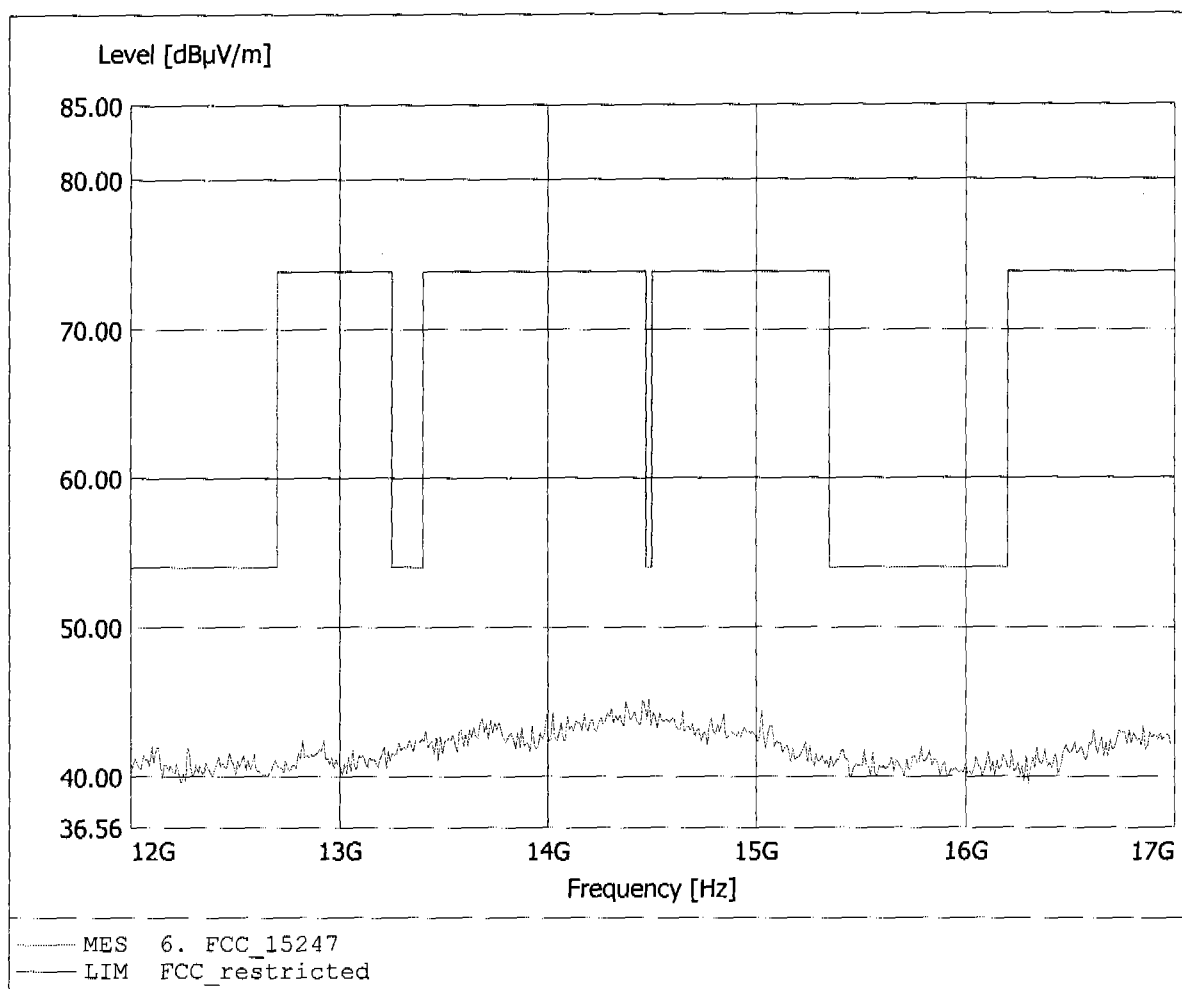


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 11
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.635GHz, Emax: 45.29dBµV/m, RBW: 1MHz

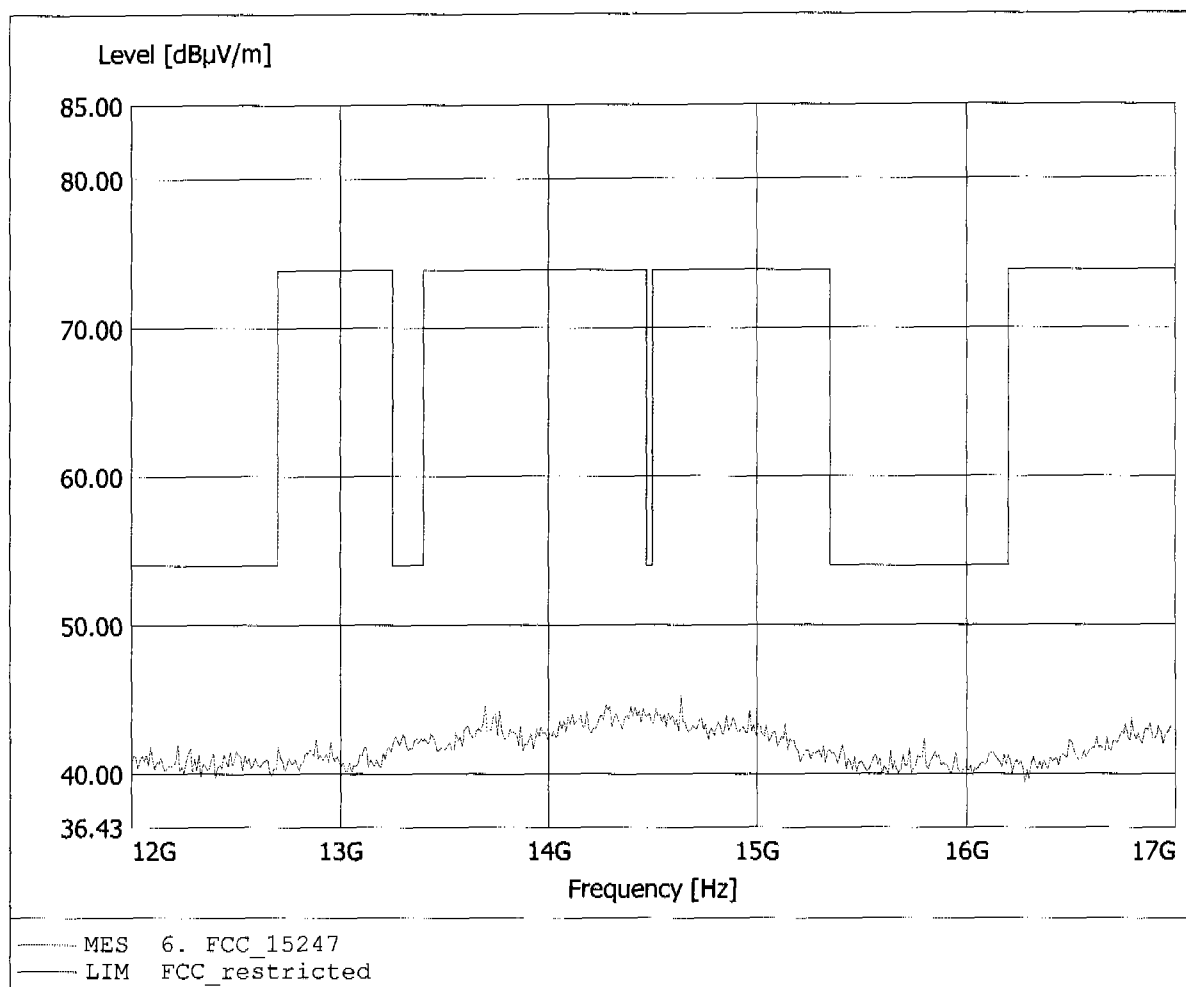


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.806GHz, Emax: 44.97dBµV/m, RBW: 1MHz

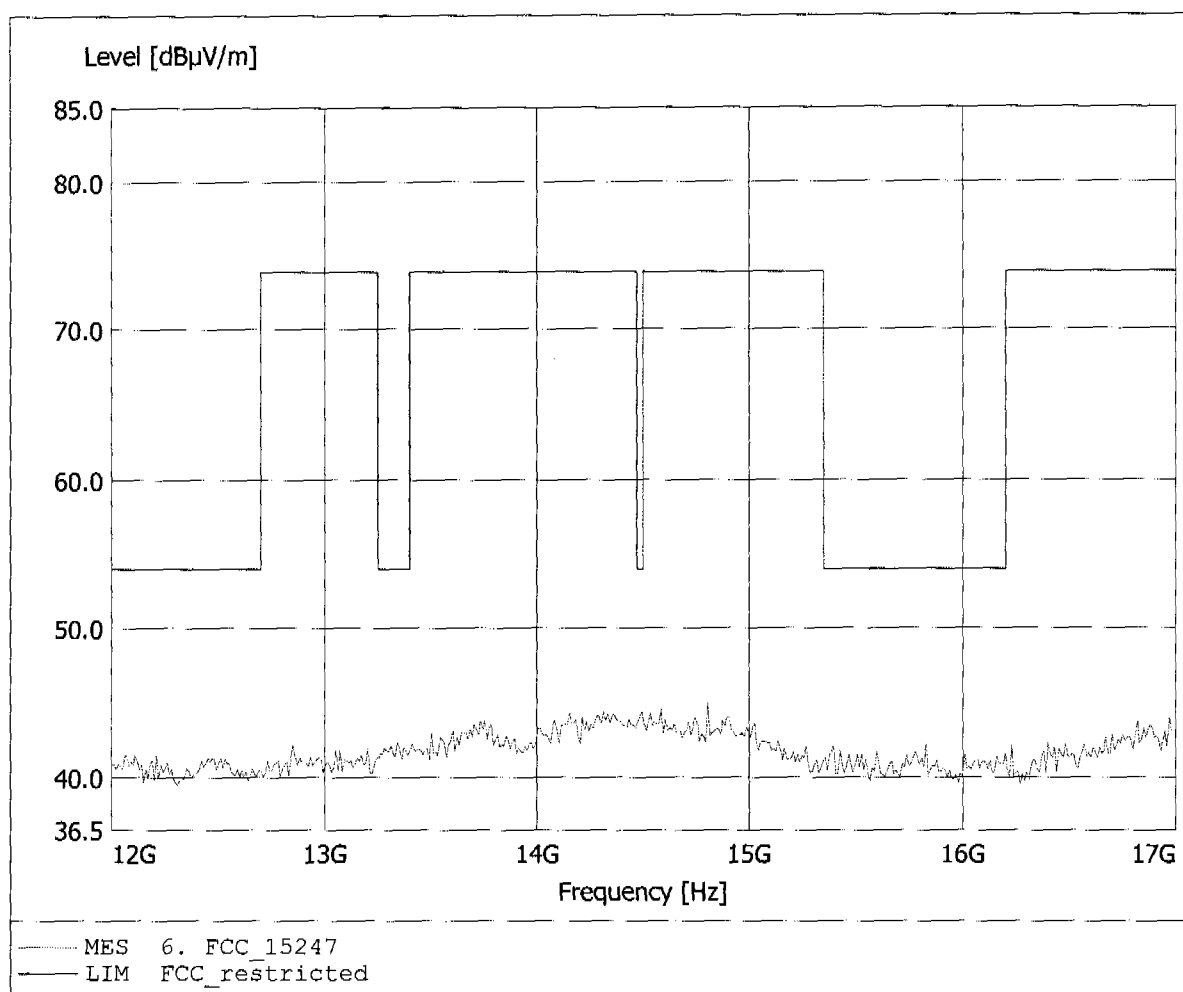


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 1
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.705GHz, Emax: 45.27dBµV/m, RBW: 1MHz

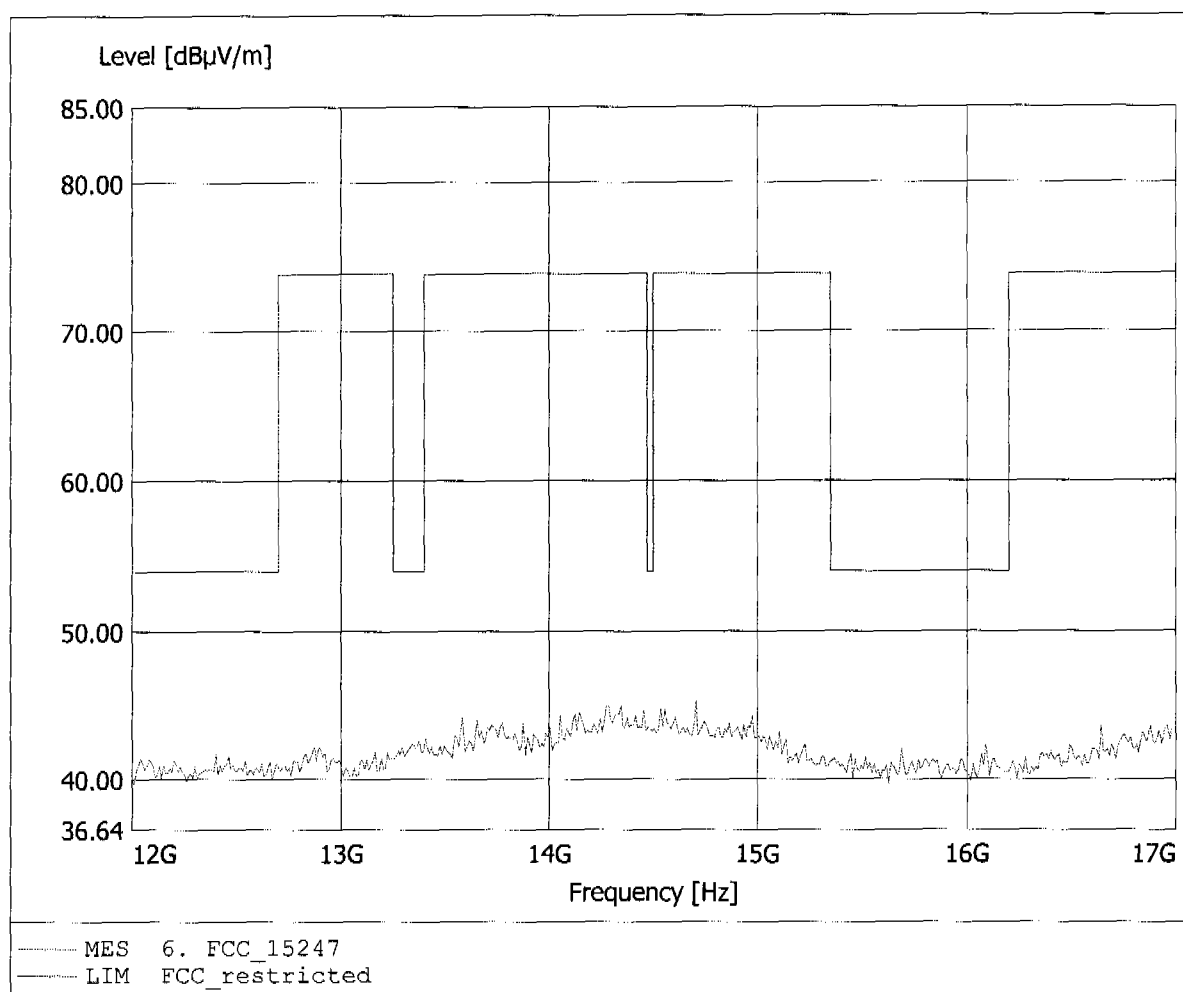


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.375GHz, Emax: 44.86dBµV/m, RBW: 1MHz

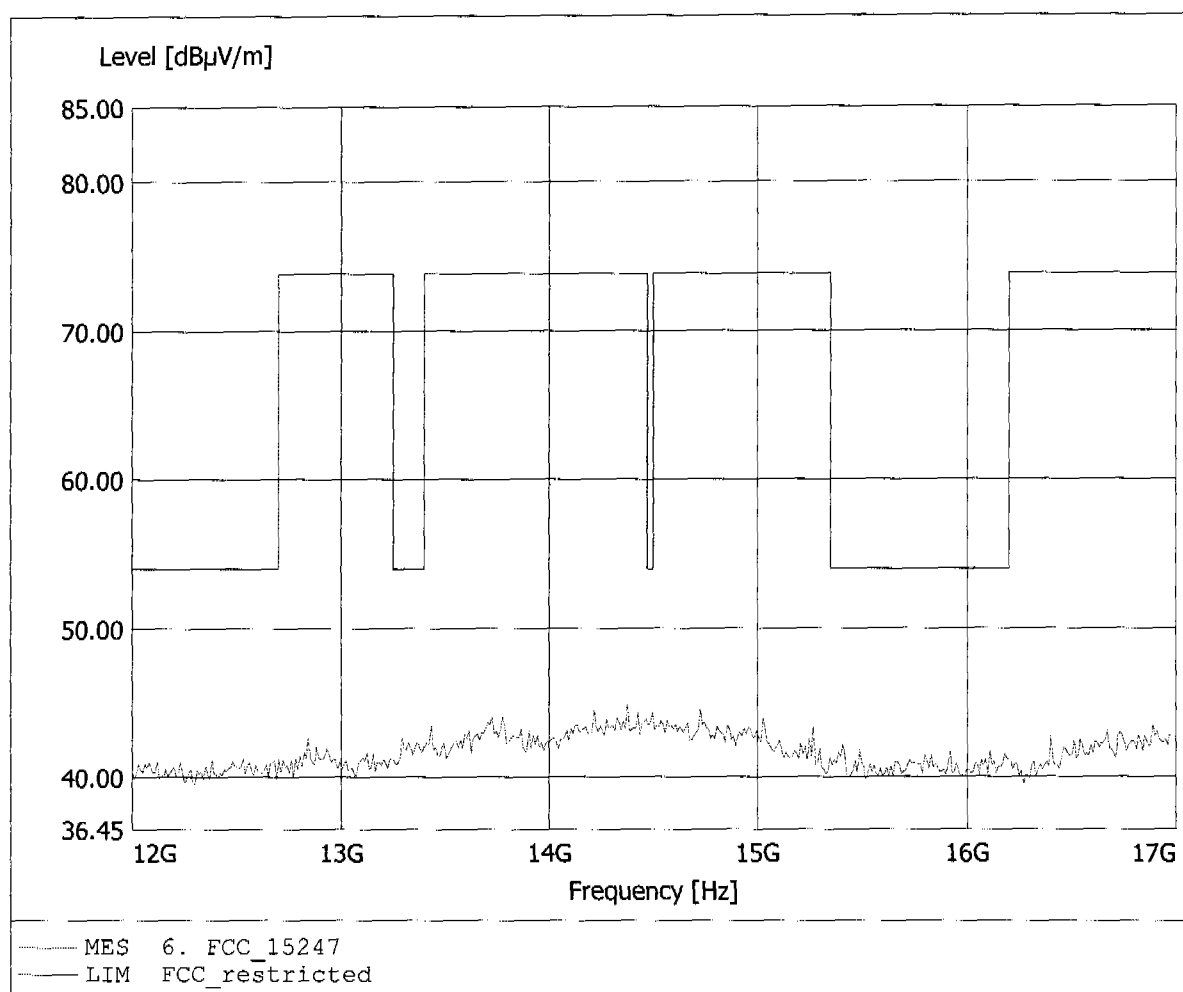

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Ch.: 6
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.856GHz, Emax: 45.67dBµV/m, RBW: 1MHz

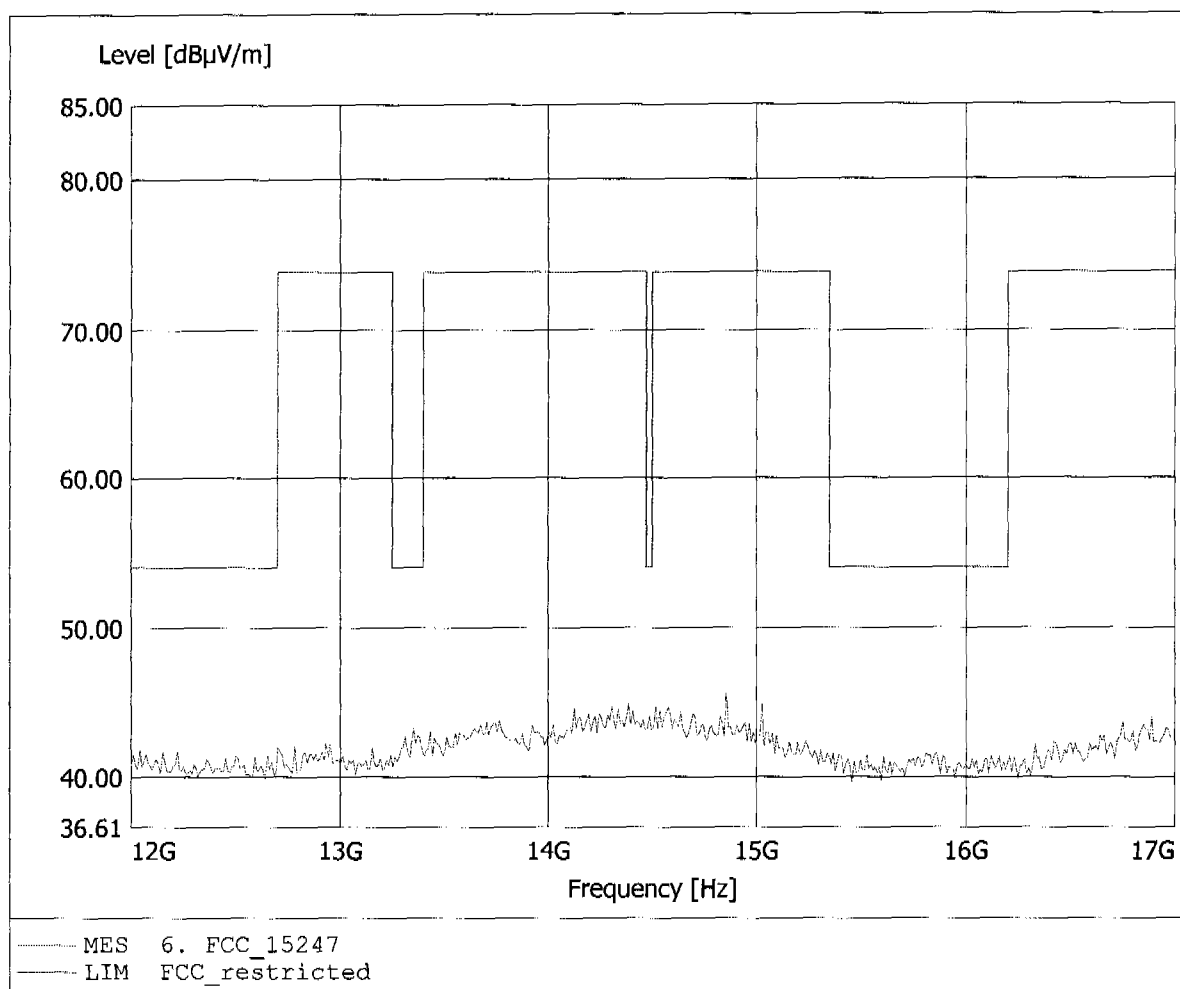



Appendix D

Spurious Emissions conducted - Transmitter operating



Appendix E

Maximum 6 dB Bandwidth

Appendix F


Peak Power Spectral Density

Appendix G

Conducted Emission at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA 850/ 900/ 1800/ 1900/ WLAN/ BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 V AC (AC / DC -adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: HSTNH-C01C mode: link

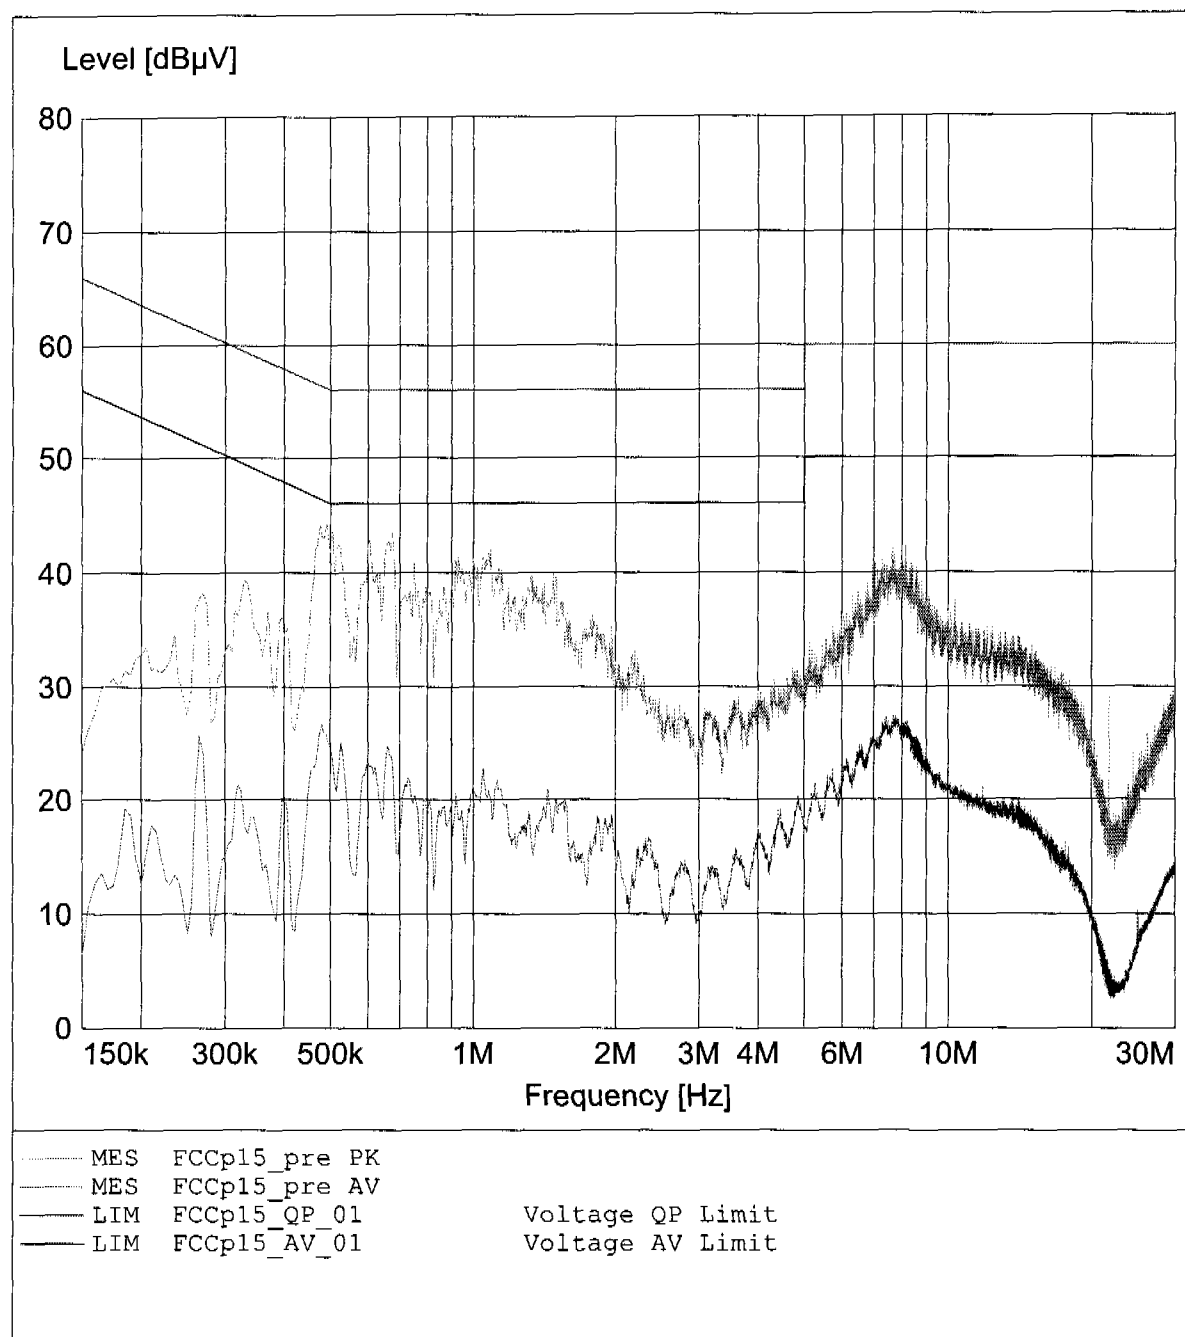

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA 850/ 900/ 1800/ 1900/ WLAN/ BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 V AC (AC / DC -adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: HSTNH-C01C mode: link

