



3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

Dec. 13, 2004

TIMCO ENGINEERING INC.

P.O. Box 370
849 N.W. State Road 45
Newberry, Florida

Subject: Type Acceptance Application under FCC CFR 47, Parts 2 and 90 (Subpart I) - Non-Broadcast Radio Transceivers Operating in the frequency bands 435-470 MHz (12.5 kHz Spacing).

Applicant: Psion Teklogix Inc.
Product: UHF Radio Transceiver Module
Model: RA1001
FCC ID: GM3RA1001

Dear Sir/Madam,

As appointed agent for Psion Teklogix Inc., we would like to submit the application for certification of the above product. Please review all required documents uploaded to your E-Filing web site.

If you have any queries, please do not hesitate to contact us.

Yours truly,



Tri Minh Luu, P. Eng.,
V.P., Engineering

TML/DH

Encl.



3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

Dec. 13, 2004

Psion Teklogix Inc.
2100 Meadowvale Blvd.
Mississauga, Ontario
Canada, L5N 7J9

Attn.: Sada Dharwarkar

Subject: Certification Testing in accordance with FCC CFR 47, Parts 2 and 90 (Subpart I) - Non-Broadcast Radio Transceivers Operating in the frequency bands 435-470 MHz (12.5 kHz Spacing).

Product: UHF Radio Transceiver Module
Model: RA1001
FCC ID: GM3RA1001

Dear Dharwarkar,

The product sample has been tested in accordance with **FCC CFR 47, Parts 2 and 90 (Subpart I) - Non-Broadcast Radio Transceivers Operating in the frequency bands 435-470 MHz (12.5 kHz Spacing)**, and the results and observation were recorded in the engineering report, Our File No.: TEK-464FCC90

Enclosed you will find copy of the engineering report. If you have any queries, please do not hesitate to contact us.


Yours truly,



Tri Minh Luu, P.Eng
Vice President - Engineering

Encl.

ENGINEERING TEST REPORT



UHF Radio Transceiver Module Model No.: RA1001 FCC ID: GM3RA1001

Applicant: Psion Teklogix Inc.
2100 Meadowvale Blvd.
Mississauga, Ontario
Canada, L5N 7J9

Tested in Accordance With

**Federal Communications Commission (FCC)
CFR 47, PARTS 2 and 90 (Subpart I)**

UltraTech's File No.: TEK-464FCC90

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: Dec. 13, 2004



Report Prepared by: Tri M. Luu

Tested by: Hung Trinh

Issued Date: Dec. 13, 2004

Test Dates: Nov. 22- Dec. 12, 2004

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



TABLE OF CONTENTS

EXHIBIT 1. SUBMITTAL CHECK LIST.....	3
EXHIBIT 2. INTRODUCTION	4
2.1. SCOPE.....	4
2.2. RELATED SUBMITAL(S)/GRANT(S).....	4
2.3. NORMATIVE REFERENCES	4
EXHIBIT 3. PERFORMANCE ASSESSMENT	5
3.1. CLIENT INFORMATION	5
3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	5
3.3. EUT'S TECHNICAL SPECIFICATIONS	6
3.4. ANCILLARY EQUIPMENT	6
EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	7
4.1. CLIMATE TEST CONDITIONS	7
4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	7
EXHIBIT 5. SUMMARY OF TEST RESULTS	8
5.1. LOCATION OF TESTS	8
5.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS	8
5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	9
5.4. DEVIATION OF STANDARD TEST PROCEDURES.....	9
EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	10
6.1. TEST PROCEDURES	10
6.2. MEASUREMENT UNCERTAINTIES	10
6.3. MEASUREMENT EQUIPMENT USED:.....	10
6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:	10
6.5. RF POWER OUTPUT @ FCC 2.1046 & 90.205.....	11
6.5.1. Limits @ FCC 90.205.....	11
6.5.2. Method of Measurements.....	11
6.5.3. Test Equipment List	11
6.5.4. Test Arrangement	11
6.5.5. Test Data.....	11
CONDUCTED POWER.....	11
6.6. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1091.....	12
6.6.1. Limits	12
6.6.2. Method of Measurements.....	12
6.6.3. Test Data.....	14
6.7. FREQUENCY STABILITY @ FCC 2.1055 & 90.213.....	15
6.7.1. Limits @ FCC 90.213.....	15
6.7.2. Method of Measurements.....	15
6.7.3. Test Equipment List	15
6.7.4. Test Arrangement	15

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7.5.	Test Data.....	16
6.8.	MODULATION LIMITING @ FCC 2.1047(B) & 90.210	18
6.8.1.	Limits @ FCC 2.1047(b) and 90.210	18
6.8.2.	Method of Measurements.....	18
6.8.3.	Test Equipment List	18
6.8.4.	Test Arrangement	18
6.8.5.	Test Data.....	18
6.9.	EMISSION MASK @ FCC 2.1049, 90.208 & 90.210	19
6.9.1.	Limits @ FCC 90.209 & 90.210.....	19
6.9.2.	Method of Measurements.....	19
6.9.3.	Test Equipment List	19
6.9.4.	Test Arrangement	19
6.9.5.	Test Data.....	20
6.10.	TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210.....	33
6.10.1.	Limits @ 90.210.....	33
6.10.2.	Method of Measurements.....	33
6.10.3.	Test Equipment List	33
6.10.4.	Test Arrangement	33
6.10.5.	Test Data.....	34
6.11.	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210	46
6.11.1.	Limits @ FCC 90.210.....	46
6.11.2.	Method of Measurements.....	46
6.11.3.	Test Equipment List	46
6.11.4.	Test Setup.....	47
6.11.5.	Test Data.....	47
6.12.	TRANSIENT FREQUENCY BEHAVIOR @ 90.214	49
6.12.1.	Limits	49
6.12.2.	Method of Measurements.....	49
6.12.3.	Test Equipment List	50
6.12.4.	Test Arrangement	50
6.12.5.	Test Data.....	51
EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	55
7.1.	RADIATED EMISSION MEASUREMENT UNCERTAINTY.....	55
EXHIBIT 8.	MEASUREMENT METHODS	56
8.1.	CONDUCTED POWER MEASUREMENTS	56
8.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	57
8.2.1.	Maximizing RF Emission Level (E-Field).....	57
8.2.2.	Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method.....	58
8.3.	FREQUENCY STABILITY	60
8.4.	EMISSION MASK	61
8.5.	SPURIOUS EMISSIONS (CONDUCTED).....	61
8.6.	TRANSIENT FREQUENCY BEHAVIOR	62

EXHIBIT 1. SUBMITTAL CHECK LIST

Annex No.	Exhibit Type	Description of Contents	Quality Check (OK)
--	Test Report	Exhibit 1: Submittal check lists Exhibit 2: Introduction Exhibit 3: Performance Assessment Exhibit 4: EUT Operation and Configuration during Tests Exhibit 5: Summary of test Results Exhibit 6: Measurement Data Exhibit 7: Measurement Uncertainty Exhibit 8: Measurement Methods	Yes
1	Test Setup Photos	Test Setup Photos	Yes
2	External Photos of EUT	External Photos of EUT	Yes
3	Internal Photos of EUT	Internal Photos of EUT	Yes
4	Cover Letters	➤ Letter from Ultratech for Certification Request ➤ Letter from the Applicant to appoint Ultratech to act as an agent ➤ Letter from the Applicant to request for Confidentiality Filing	
5	Attestation Statements	➤ Attestation Statements	No
6	ID Label/Location Info	ID Label/Location Info	Yes
7	Block Diagrams	Block Diagrams	Yes
8	Schematic Diagrams	Schematic Diagrams	Yes
9	Parts List/Tune Up Info	Parts List/Tune Up Info	Yes
10	Operational Description	Operational Description	Yes
11	RF Exposure Info	RF Exposure Info	Yes
12	Users Manual	Users Manual	Yes

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. INTRODUCTION

2.1. SCOPE

Reference:	FCC Parts 2 and 90
Title:	Telecommunication - Code of Federal Regulations, CFR 47, Parts 2 & 90
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the frequency bands 435-470 MHz (12.5 kHz Spacing).
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA- 603 (01-Nov-2002) - Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

2.2. RELATED SUBMITAL(S)/GRANT(S)

None

2.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2004	Code of Federal Regulations – Telecommunication
ANSI C63.4	2004	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 16-1-1	2004	Specification for Radio Disturbance and Immunity measuring apparatus and methods
TIA/EIA 603, Edition B	01-Nov-2002	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. PERFORMANCE ASSESSMENT

3.1. CLIENT INFORMATION

APPLICANT	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, Ontario Canada, L5N 7J9
Contact Person:	Sada Dharwarkar Phone #: 905-812-6200 Fax #: 905-812-6301 Email Address: sdharwar@teklogix.com

MANUFACTURER	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, Ontario Canada, L5N 7J9
Contact Person:	Sada Dharwarkar Phone #: 905-812-6200 Fax #: 905-812-6301 Email Address: sdharwar@teklogix.com

3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Psion Teklogix Inc.
Product Name:	UHF Radio Transceiver Module
Model Name or Number:	RA1001
Serial Number:	Preproduction
Type of Equipment:	Non-broadcast Radio Communication Equipment
External Power Supply:	Using DC voltage (11.1 Vdc nominal) from a host system
Transmitting/Receiving Antenna Type:	Non-integral

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Modular Transceiver
Intended Operating Environment:	Commercial, Light Industry & Heavy Industry
Power Supply Requirement:	DC 11.1 Volts
RF Output Power Rating:	1.0 Watts
Operating Frequency Range:	435-470 MHz
RF Output Impedance:	50 Ohms
Channel Spacing:	12.5 kHz
Occupied Bandwidth (99%):	5.77 kHz (See note 1)
Maximum Duty Cycle:	50%
Maximum Data Rate:	9600 bps
Emission Designation*:	9K00F1D
Oscillator Frequencies:	44 MHz, 14.67 MHz, 45 MHz (Rx IF), Lo. Osc. = Rx Freq-45 MHz
Antenna Description:	For Mobile: The antenna gain limit is 2 dBi For Fixed, Base: The antenna gain limit is 12 dBi

Necessary Bandwidth Calculation:

For FM Digital Modulation:

Channel Spacing = 12.5 KHz, D = 2.1 KHz max., K = 1, M = Data Rate in kb/s / Level of FM,

Level of FM = 4

(a) M = 9.6/8 kb/s

$B_n = 2M + 2DK = 2(9.6/4) + 2(2.1)(1) = \underline{9 \text{ KHz}}$

Emission designation: 9K00F1D

3.4. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Handheld Computer
Brand name:	Psion Teklogix
Model Name or Number:	7530-RA1001
Serial Number:	ENG-002
Cable Length & Type:	N/A
Connected to EUT's Port:	Test Expansion Card

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	DC 11.1 Volts

4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	The test software incorporated with the Psion Teklogix Model 7530-RA1001 was used to testing
Special Hardware Used:	Expansion card to allow to connect the Psion Teklogix UHF Radio Module, Model RA1001 to the Psion Teklogix Handheld Computer, Model 7530-RA1001 externally
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.

Transmitter Test Signals	
Frequency Band(s):	Near lowest, near middle & near highest frequencies in each frequency bands that the transmitter covers:
▪ 435-451 MHz band: ▪ 450-470 MHz band:	▪ 435, 443 and 451 MHz ▪ 450, 460 & 470 MHz
Transmitter Wanted Output Test Signals:	
▪ RF Power Output (measured maximum output power): ▪ Normal Test Modulation ▪ Modulating signal source:	▪ 1.0 Watts ▪ FM Level 4 with 9600 bps internal data source ▪ Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. SUMMARY OF TEST RESULTS

5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Feb. 17, 2004.

5.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	APPLICABILITY (YES/NO)
90.205 & 2.1046	RF Power Output	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
90.213 & 2.1055	Frequency Stability	Yes
90.242(b)(8) & 2.1047(a)	Audio Frequency Response	N/A for data equipment
90.210 & 2.1047(b)	Modulation Limiting	Yes
90.210 & 2.1049	Emission Limitation & Emission Mask	Yes
90.210, 2.1057 & 2.1051	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
90.210, 2.1057 & 2.1053	Emission Limits - Field Strength of Spurious Emissions	Yes
90.214	Transient Frequency Behavior	Yes
UHF Radio Transceiver Module, Model No.: RA1001, by Psion Teklogix Inc. has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.		

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

5.4. DEVIATION OF STANDARD TEST PROCEDURES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

6.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

6.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.5. RF POWER OUTPUT @ FCC 2.1046 & 90.205

6.5.1. Limits @ FCC 90.205

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.205 for specification details.

6.5.2. Method of Measurements


Refer to Exhibit 8, § 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

6.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Power Meter	Hewlett Packard	436A	1725A02249	10 kHz – 50 GHz, sensor dependent
Power Sensor	Hewlett Packard	8481A	2702A68983	10 MHz – 18 GHz

6.5.4. Test Arrangement

- Power at RF Power Output Terminals



6.5.5. Test Data

Conducted Power

Frequency Band (MHz)	Fundamental Frequency (MHz)	Measured (Average) Power (Watts)	Power Rating (Watts)
435-451	435	1.04	1.0
435-451	443	0.99	1.0
435-451	451	0.99	1.0
450-470	450	0.97	1.0
450-470	460	0.96	1.0
450-470	470	0.95	1.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.6. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1091

6.6.1. Limits

- **FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
300-1500	...	...	F/300	6
(B) Limits for General Population/Uncontrolled Exposure				
300-1500	...	...	F/1500	6

F = Frequency in MHz

6.6.2. Method of Measurements

Refer to FCC @ 1.1310, 2.1091

- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
 - (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
 - (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
 - (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
 - (4) Any other RF exposure related issues that may affect MPE compliance

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Calculation Method of RF Safety Distance:

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

- For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones., an SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that an SAR evaluation be performed, as provided for in Section 1.1307(d)

6.6.3. Test Data

For Mobile Application with Antenna Gain Limit of 2 dBi

Frequency (MHz)	Measured Peak RF Conducted (dBm)	Average RF Conducted Power wrt. 50% Duty Cycle	Calculated Average EIRP (dBm)	Laboratory's Recommended Minimum RF Safety Distance r (cm)	FCC Minimum RF Safety Distance Required (cm)
435	30.2	27.2	29.2	15.1	20.0

Note 1: RF EXPOSURE DISTANCE LIMITS: $r = (PG/4IIS)^{1/2} = (EIRP/4IIS)^{1/2}$
 $S = F/1500 = 435/1500 = 0.29 \text{ mW/cm}^2$
 $r = \text{sqrt} [(831.8)/(4*\pi*0.29)] = 15.1 \text{ cm}$

For Mobile Application with Antenna Gain Limit of 12 dBi

Frequency (MHz)	Measured Peak RF Conducted (dBm)	Average RF Conducted Power wrt. 50% Duty Cycle	Calculated Average EIRP (dBm)	Laboratory's Recommended Minimum RF Safety Distance r (cm)	FCC Minimum RF Safety Distance Required (cm)
435	30.2	27.2	39.2	47.8	50

Note 1: RF EXPOSURE DISTANCE LIMITS: $r = (PG/4IIS)^{1/2} = (EIRP/4IIS)^{1/2}$
 $S = F/1500 = 435/1500 = 0.29 \text{ mW/cm}^2$
 $r = \text{sqrt} [(8317.6)/(4*\pi*0.29)] = 47.8 \text{ cm}$

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required:	Manufacturer' instruction for separation distance between antenna and persons required:
➤ 15.1 cm for Mobile application with respect to 2 dBi maximum antenna gain specified by the manufacturer ➤ 47.8 cm for Fixed Base application with respect to 12 dBi maximum antenna gain specified by the manufacturer	➤ 20 cm. for Mobile application ➤ 50 cm meter for Fixed Base Station application

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7. FREQUENCY STABILITY @ FCC 2.1055 & 90.213

6.7.1. Limits @ FCC 90.213

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.213 for specification details.

FREQUENCY RANGE (MHz)	FIXED & BASE STATIONS (ppm)			MOBILE STATIONS (ppm)					
				> 2 W			≤ 2 W		
	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz
403-512 MHz	0.5	1.5	2.5	1.0	2.5	5.0	1.0	2.5	5.0


6.7.2. Method of Measurements

Refer to Exhibit 8, § 8.3 of this report for measurement details

6.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird	..	...	DC – 22 GHz
Temperature & Humidity Chamber	Tenney	T5	9723B	-40° to +60° C range

6.7.4. Test Arrangement

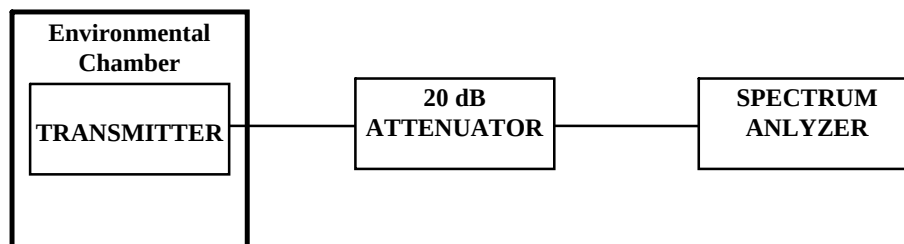

6.7.5. Test Data

Product Name:	UHF Radio Transceiver Module
Model No.:	RA1001
Center Frequency:	435 MHz
Full Power Level:	1.04 Watts
Frequency Tolerance Limit:	1.5 ppm or 652.5 Hz at 435 MHz
Max. Frequency Tolerance Measured:	+247 Hz or +0.57 ppm
Input Voltage Rating:	11.1 Vdc nominal

CENTER FREQUENCY & RF POWER OUTPUT VARIATION			
Ambient Temperature (°C)	Supply Voltage (Nominal) 11.1 Volts dc	Supply Voltage (85% of Nominal) 9.43 Volts dc	Supply Voltage (115% of Nominal) 12.77 Volts dc
	Hz	Hz	Hz
-30	+180	N/A	N/A
-20	+123	N/A	N/A
-10	+98	N/A	N/A
0	-56	N/A	N/A
+10	-79	N/A	N/A
+20	0	-9	-11
+30	+247	N/A	N/A
+40	+87	N/A	N/A
+50	+88	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Product Name:	UHF Radio Transceiver Module
Model No.:	RA1001
Center Frequency:	450 MHz
Full Power Level:	0.97 Watts
Frequency Tolerance Limit:	1.5 ppm or 675 Hz at 450 MHz
Max. Frequency Tolerance Measured:	+500 Hz or +1.11 ppm
Input Voltage Rating:	11.1 Vdc nominal

CENTER FREQUENCY & RF POWER OUTPUT VARIATION			
Ambient Temperature (°C)	Supply Voltage (Nominal) 11.1 Volts dc	Supply Voltage (85% of Nominal) 9.43 Volts dc	Supply Voltage (115% of Nominal) 12.77 Volts dc
	Hz	Hz	Hz
-30	+375	N/A	N/A
-20	+500	N/A	N/A
-10	+214	N/A	N/A
0	-22	N/A	N/A
+10	-186	N/A	N/A
+20	0	-12	-26
+30	-7	N/A	N/A
+40	+86	N/A	N/A
+50	+428	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8. MODULATION LIMITING @ FCC 2.1047(B) & 90.210

6.8.1. Limits @ FCC 2.1047(b) and 90.210

Recommended frequency deviation characteristics are give below:

- 2.5 kHz for 12.5 kHz Channel Spacing


6.8.2. Method of Measurements

For Data Transmitter with Maximum Frequency Deviation set by Factory:- The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

6.8.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Communication Analyzer	Rohde & Schawrz	SMF02	879988/057	400 kHz - 1000 MHz including AF & RF Signal Generators, SINAD, DISTORTION, DEVIATION meters and etc

6.8.4. Test Arrangement

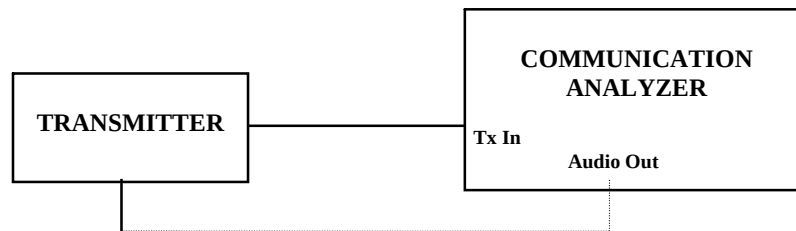

6.8.5. Test Data

6.8.5.1. Data Modulation Limiting: FM modulation with random data and Modulation Limiter set at a Maximum Frequency Deviation (Factory Setting: 2.1 kHz).

Test Frequency (MHz)	Data Baud Rate	Peak Deviation (kHz)	Maximum Limit (kHz)
435	9600	2.09	2.5
450	9600	2.11	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. EMISSION MASK @ FCC 2.1049, 90.208 & 90.210

6.9.1. Limits @ FCC 90.209 & 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
403-512	11.25	12.5	2.5	• Mask D –Data


6.9.2. Method of Measurements

Refer to Exhibit 8, § 8.4 of this report for measurement details

6.9.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird	..	...	DC – 22 GHz
Audio Oscillator	Hewlett Packard	HP 204C	0989A08798	DC to 1.2 MHz

6.9.4. Test Arrangement



6.9.5. Test Data

6.9.5.1. 99% Occupied Bandwidth

Operating Frequency Band: 435 – 451 MHz			
Frequency (MHz)	Channel Spacing (kHz)	Measured 99% OBW (kHz)	Recommended Maximum 99% OBW (kHz)
435	12.5	5.46	11.25
443	12.5	5.43	11.25
451	12.5	5.46	11.25

** Note: Please refer to Plots # 1 to 3 for detailed measurements


Operating Frequency Band: 435 – 451 MHz			
Frequency (MHz)	Channel Spacing (kHz)	Measured 99% OBW (kHz)	Recommended Maximum 99% OBW (kHz)
450	12.5	5.49	11.25
460	12.5	5.77	11.25
470	12.5	5.49	11.25

** Note: Please refer to Plots # 4 to 6 for detailed measurements

6.9.5.2. Emission Masks

Conform. Please refer to Plots # 7 through # 12 for Details of measurements of Emission Mask D

Plot #1: 99% OCCUPIED BANDWIDTH @435 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

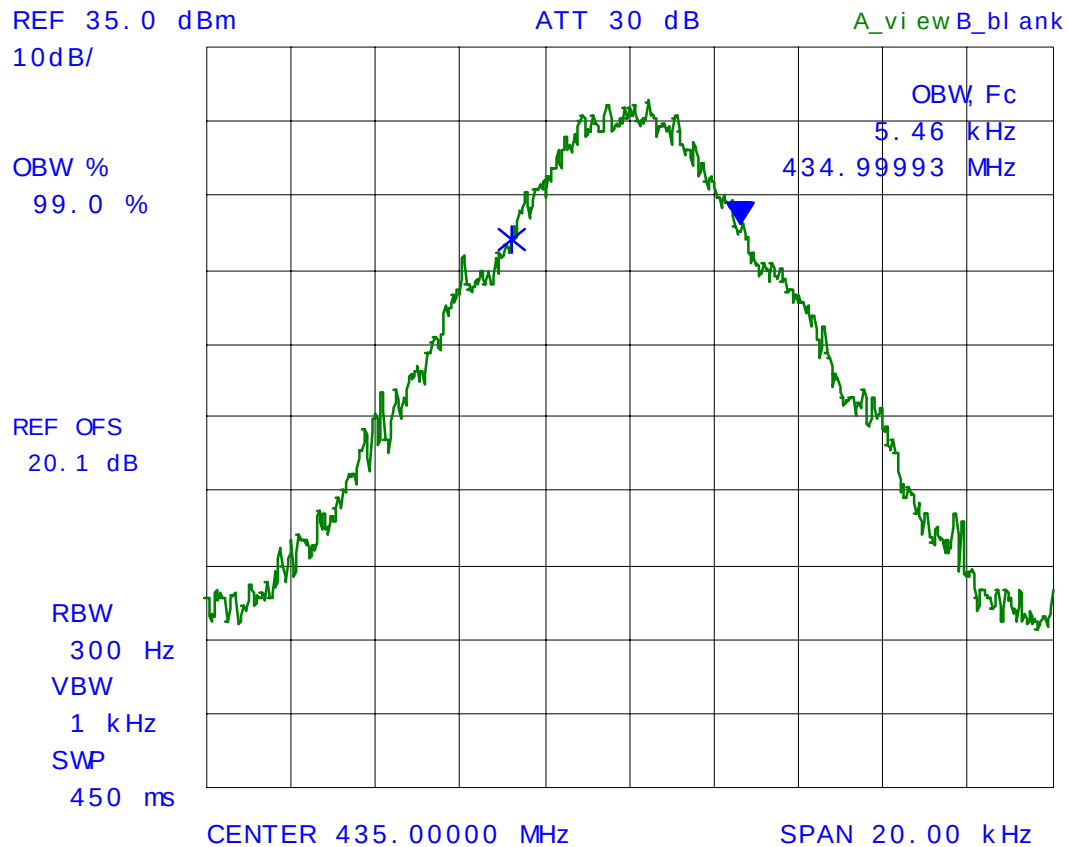

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #2: 99% OCCUPIED BANDWIDTH @ 443 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

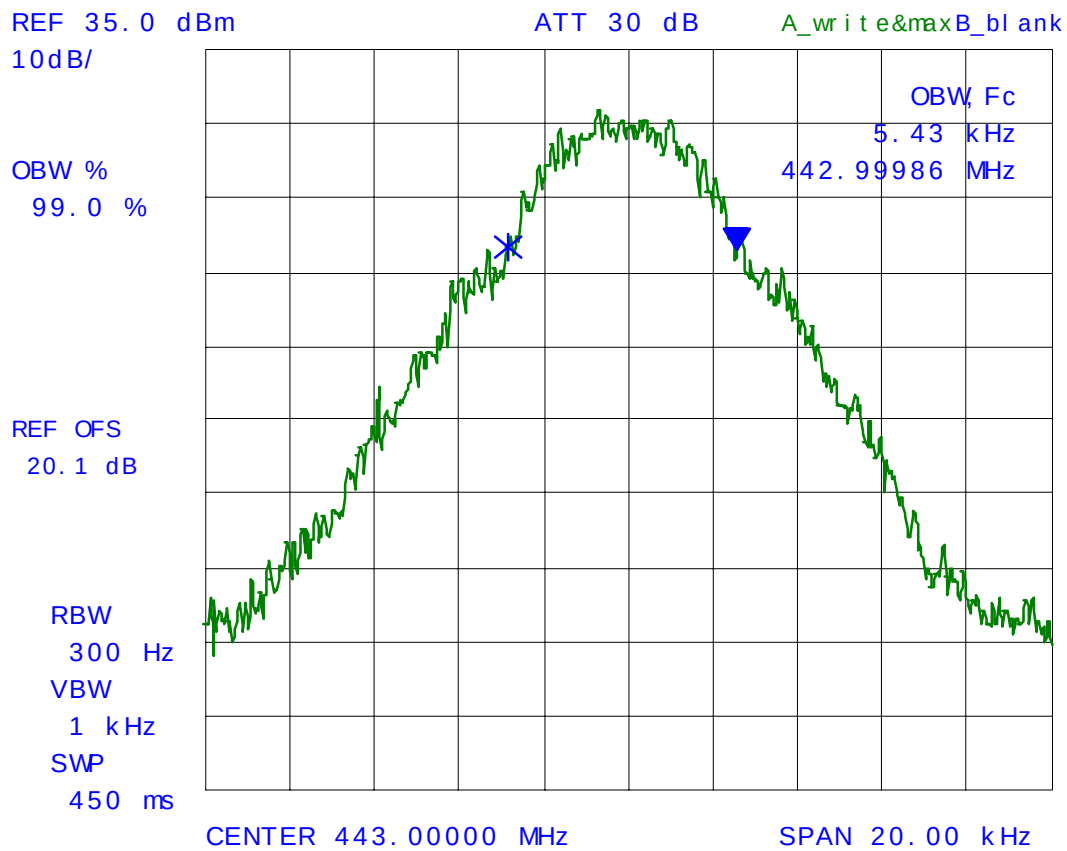

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #3: 99% OCCUPIED BANDWIDTH @ 451 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

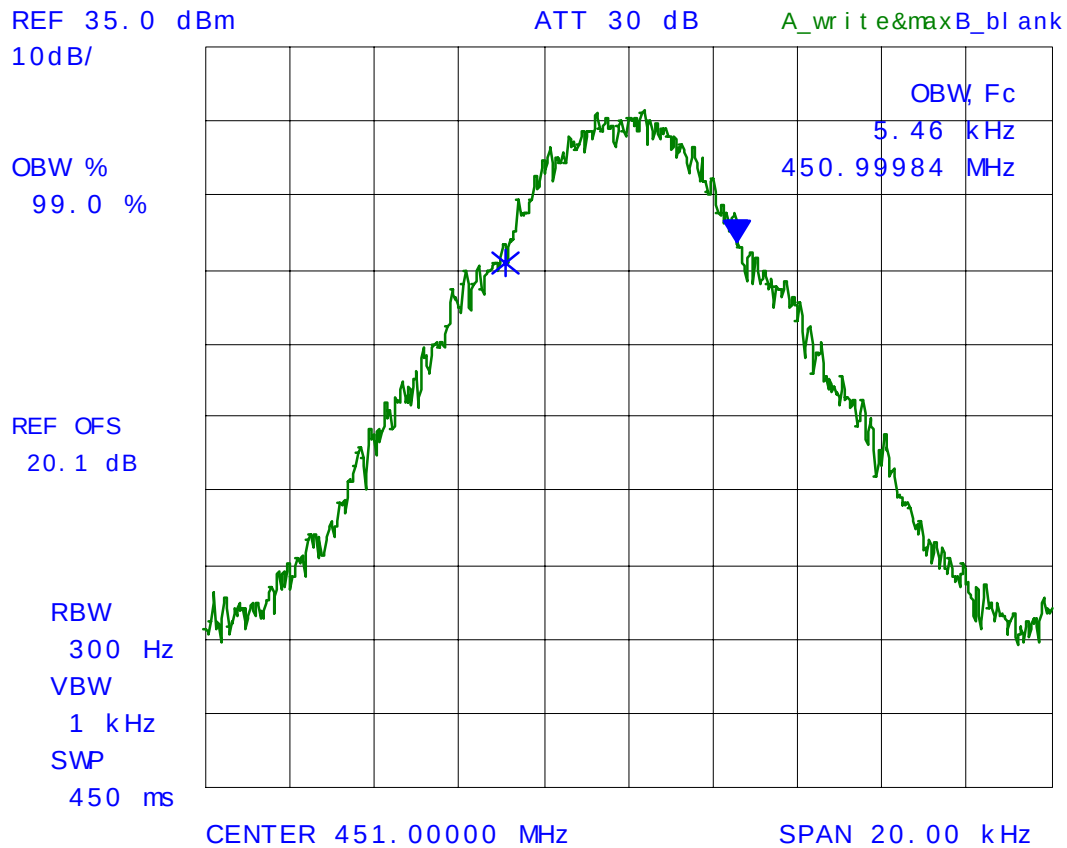

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #4: 99% OCCUPIED BANDWIDTH @ 450 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

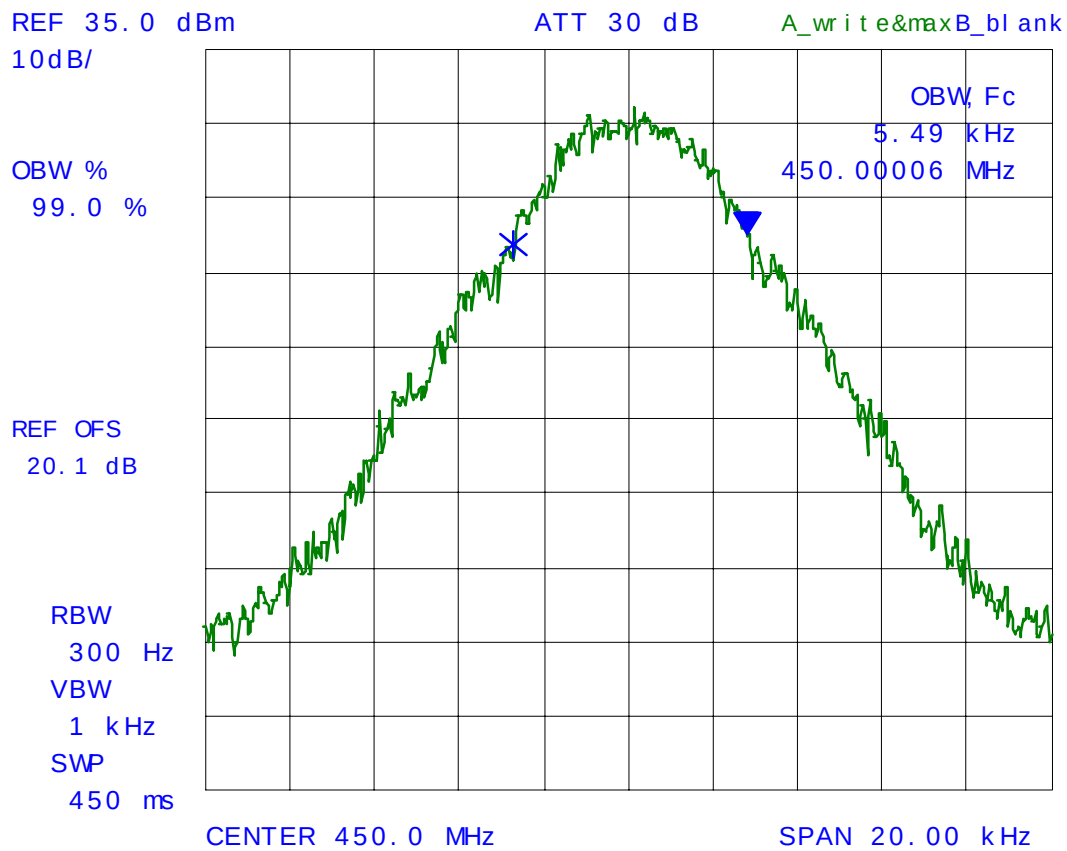

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #5: 99% OCCUPIED BANDWIDTH @ 460 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

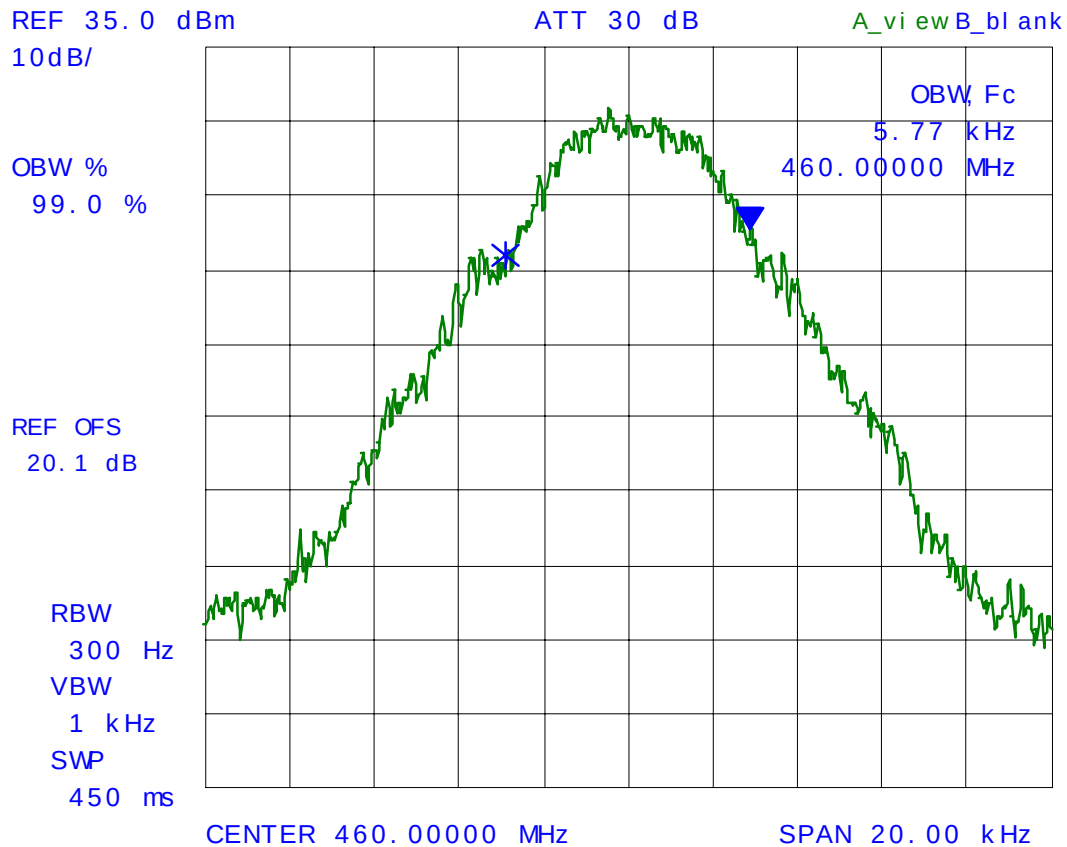

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #6: 99% OCCUPIED BANDWIDTH @ 470 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

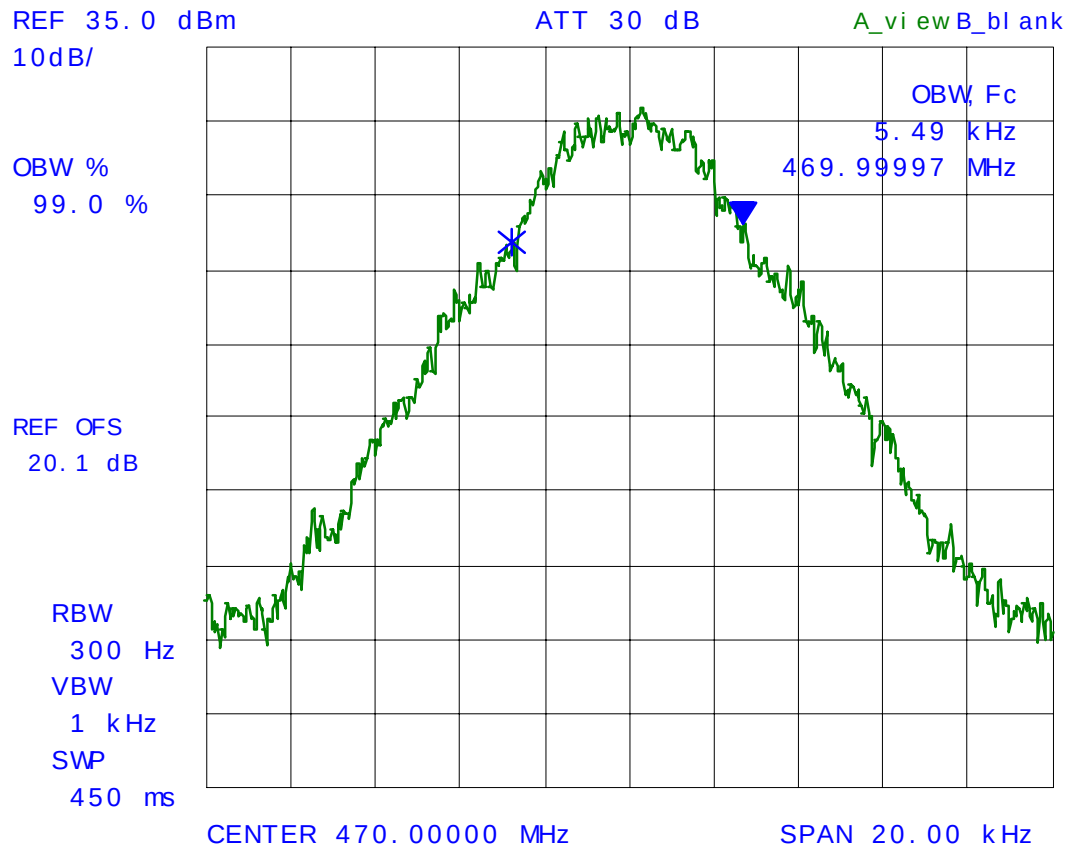

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #7: EMISISON MASK D @ 435 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

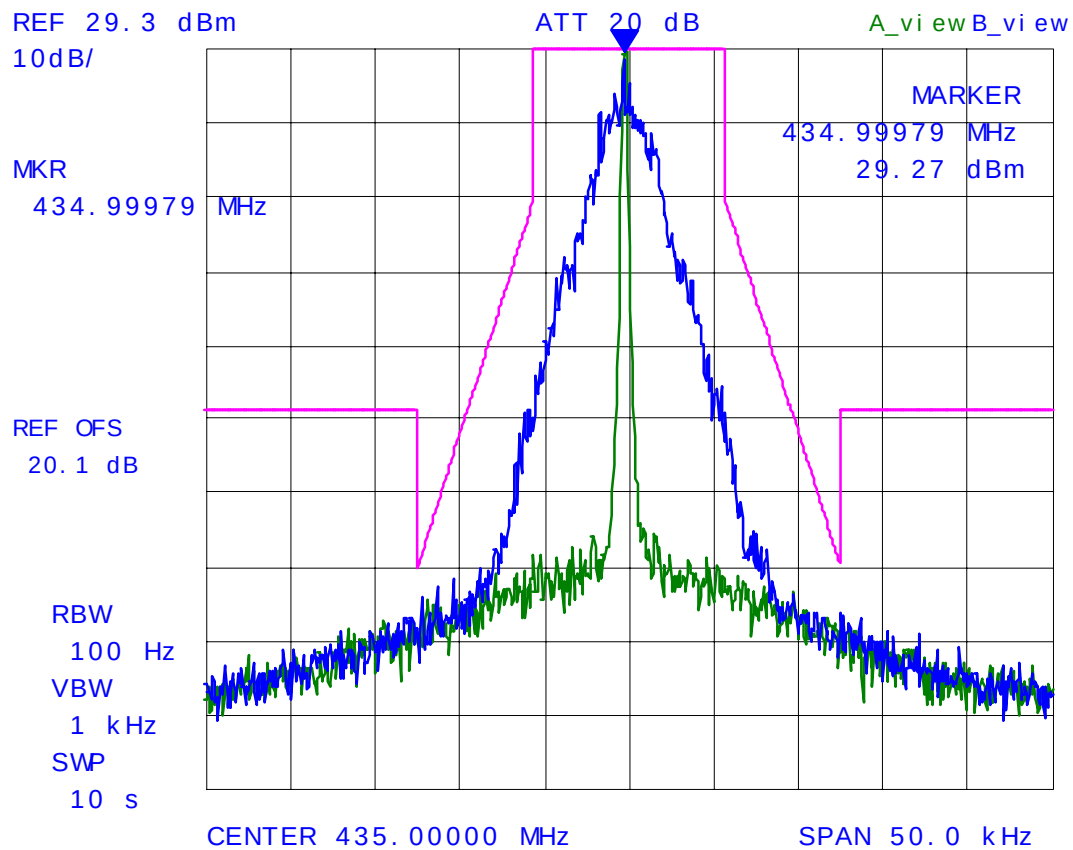

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #8: EMISION MASK D @ 443 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

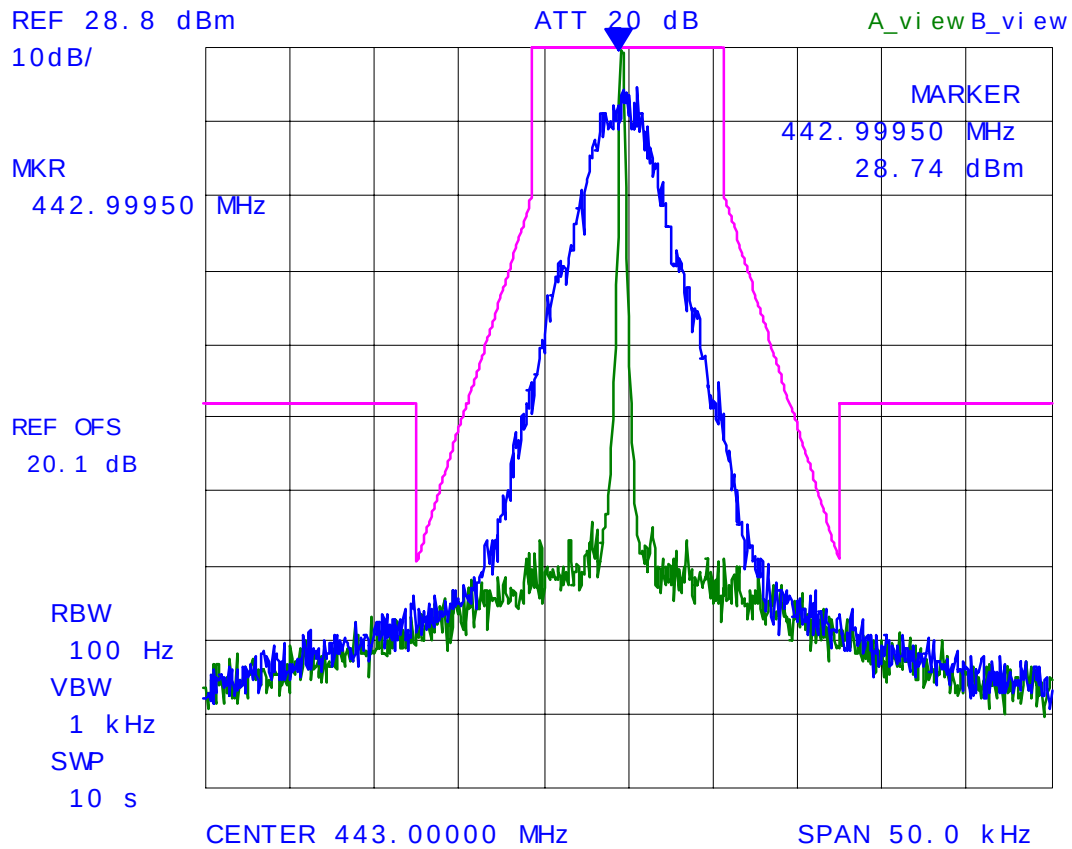

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #9: EMISION MASK D @ 451 MHz in 435-451 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

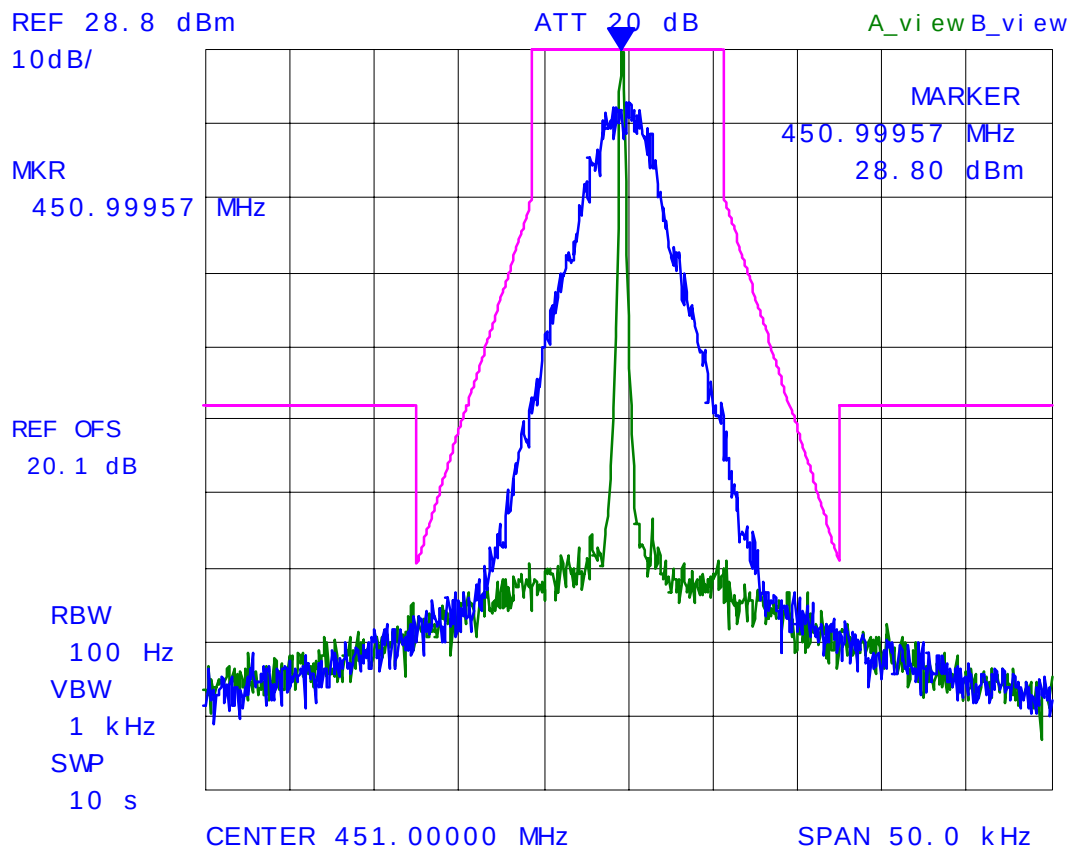

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #10: EMISISON MASK D @ 450 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

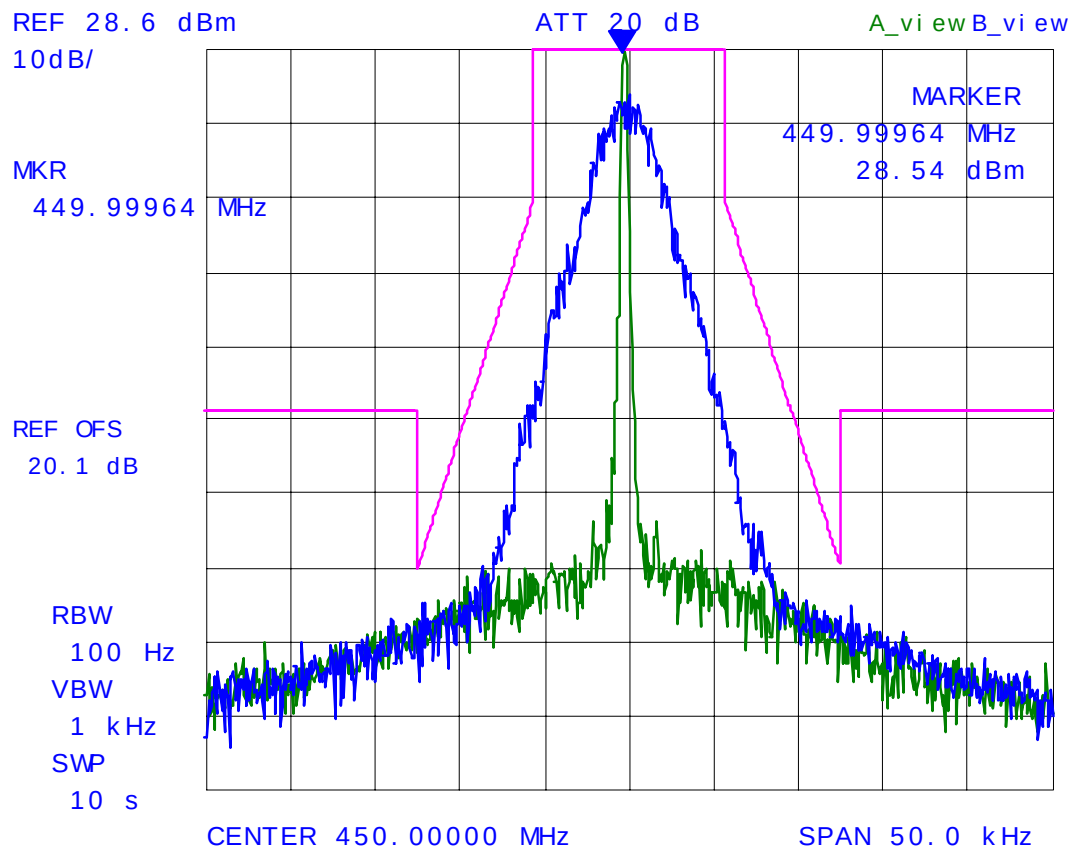

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #11: EMISION MASK D @ 460 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

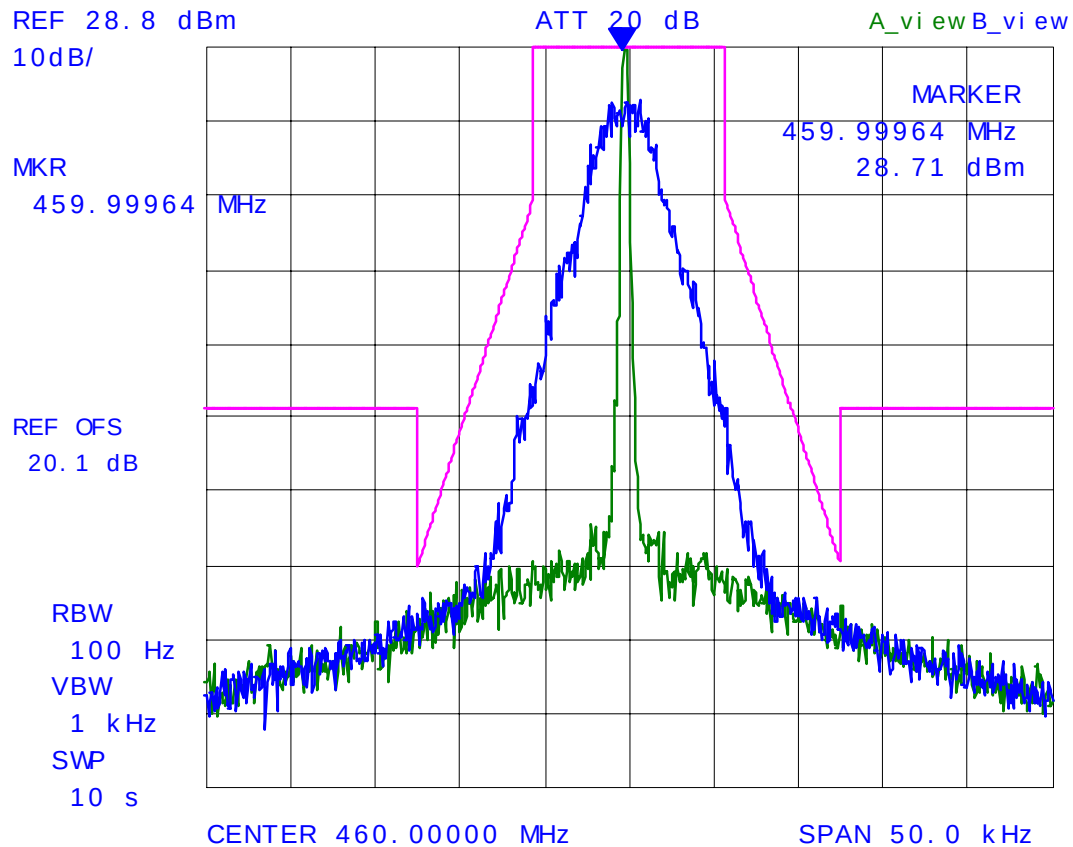

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #12: EMISISON MASK D @ 470 MHz in 450-470 MHz Band
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

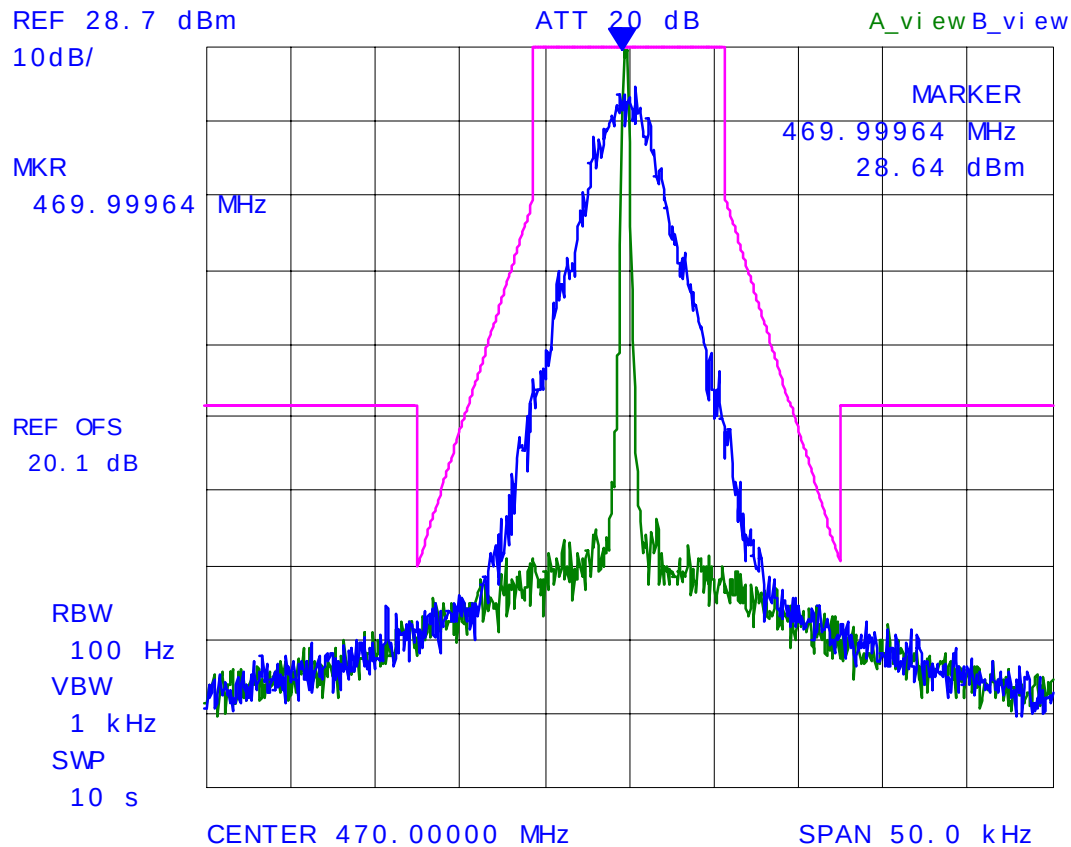

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210

6.10.1. Limits @ 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Frequency Range	Attenuation Limit (dBc)
90.210(d) – Voice & data	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	50+10*log(P) or -20 dBm or 70 dBc whichever is less


6.10.2. Method of Measurements

Refer to Exhibit 8 § 8.5 of this report for measurement details

6.10.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird	..	...	DC – 22 GHz
Audio Oscillator	Hewlett Packard	HP 204C	0989A08798	DC to 1.2 MHz
Highpass Filter, Microphase	Microphase	CR220HID	IITI11000AC	Cut-off Frequency at 600 MHz, 1.3 GHz or 4 GHz

6.10.4. Test Arrangement

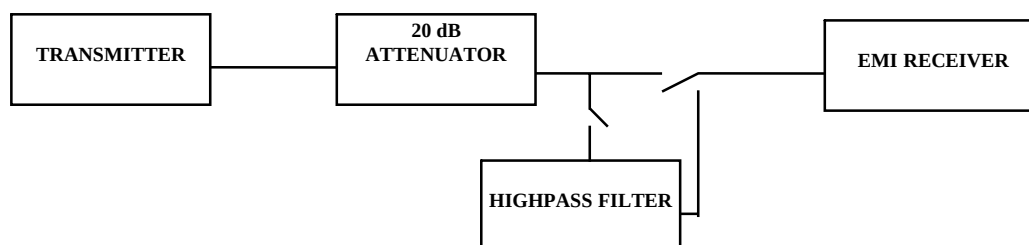


6.10.5. Test Data

Conforms. Please refer to Plots # 13(a)&(b) to 18(a)&(b) for detailed measurements.

All spurious conducted emissions were found to be at least 80 dB below the carrier output power (approx. 30 dBm).

Plot #13(a): SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT
@ 435 MHz in 435-451 MHz Band, Maximum Output Power: 1.04 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

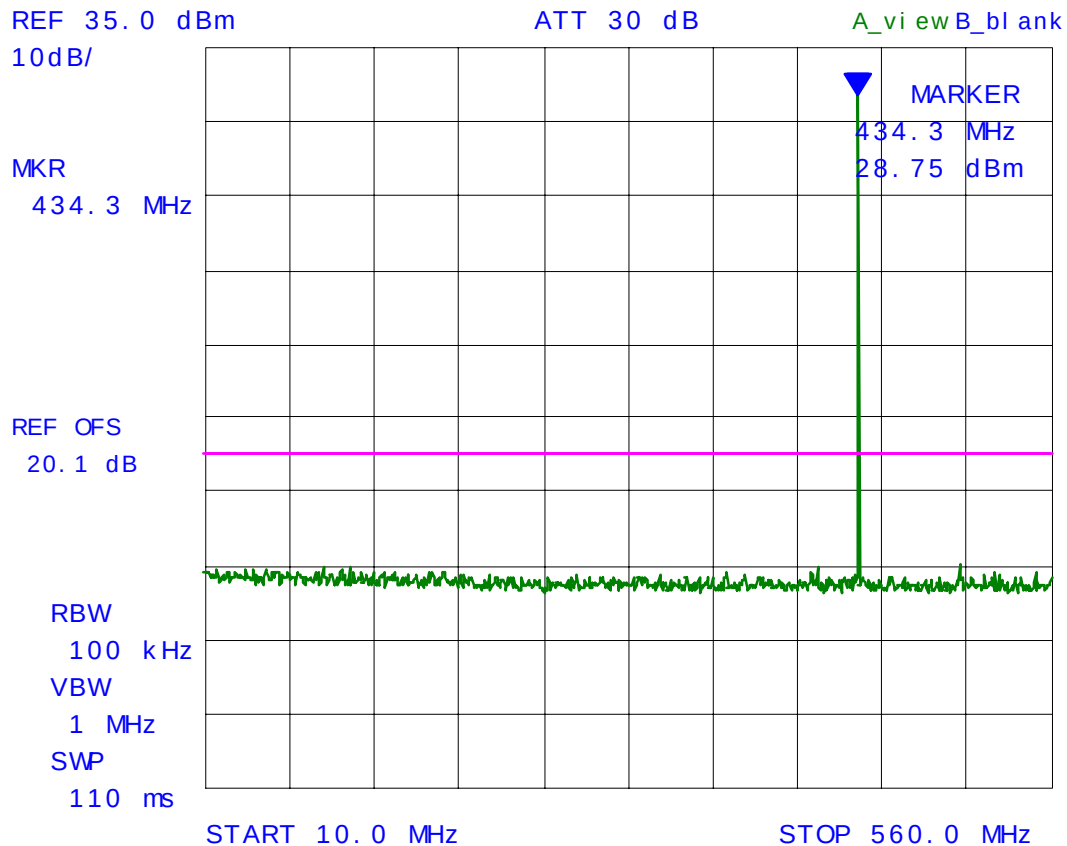

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #13(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 435 MHz in 435-451 MHz Band, Maximum Output Power: 1.04 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

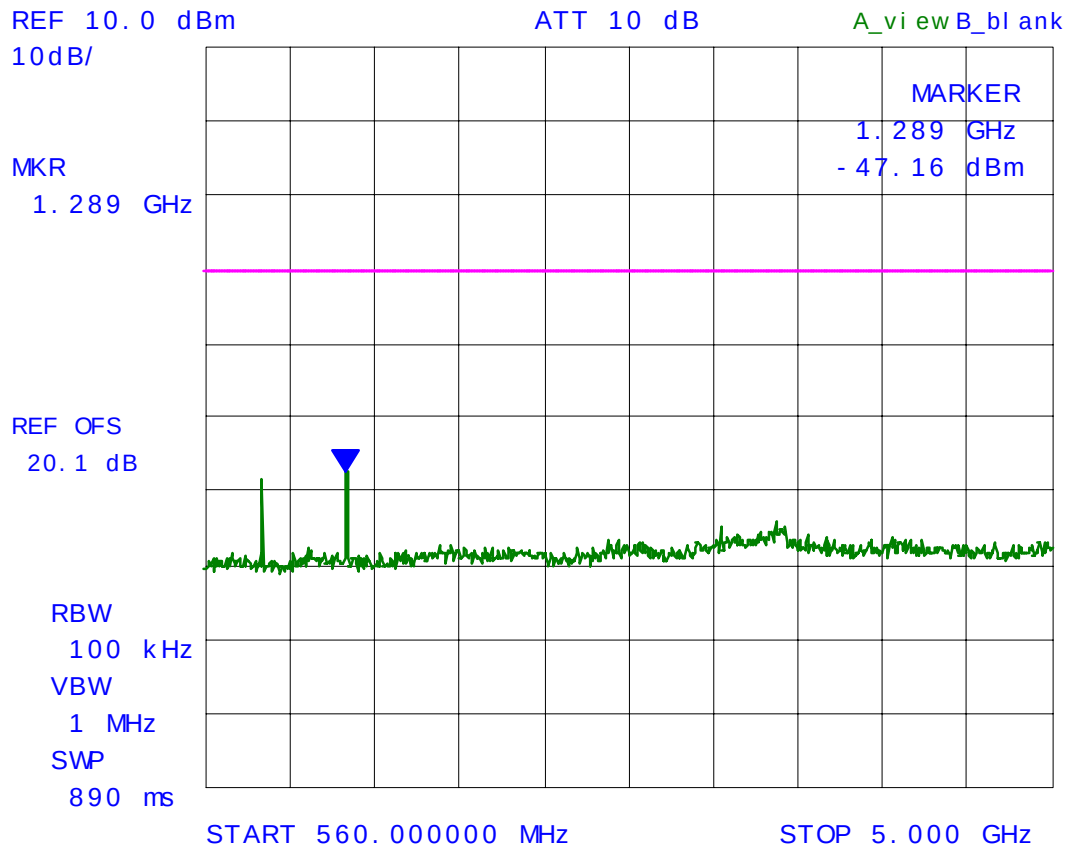

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #14(a): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 443 MHz in 435-451 MHz Band, Maximum Output Power: 0.99 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

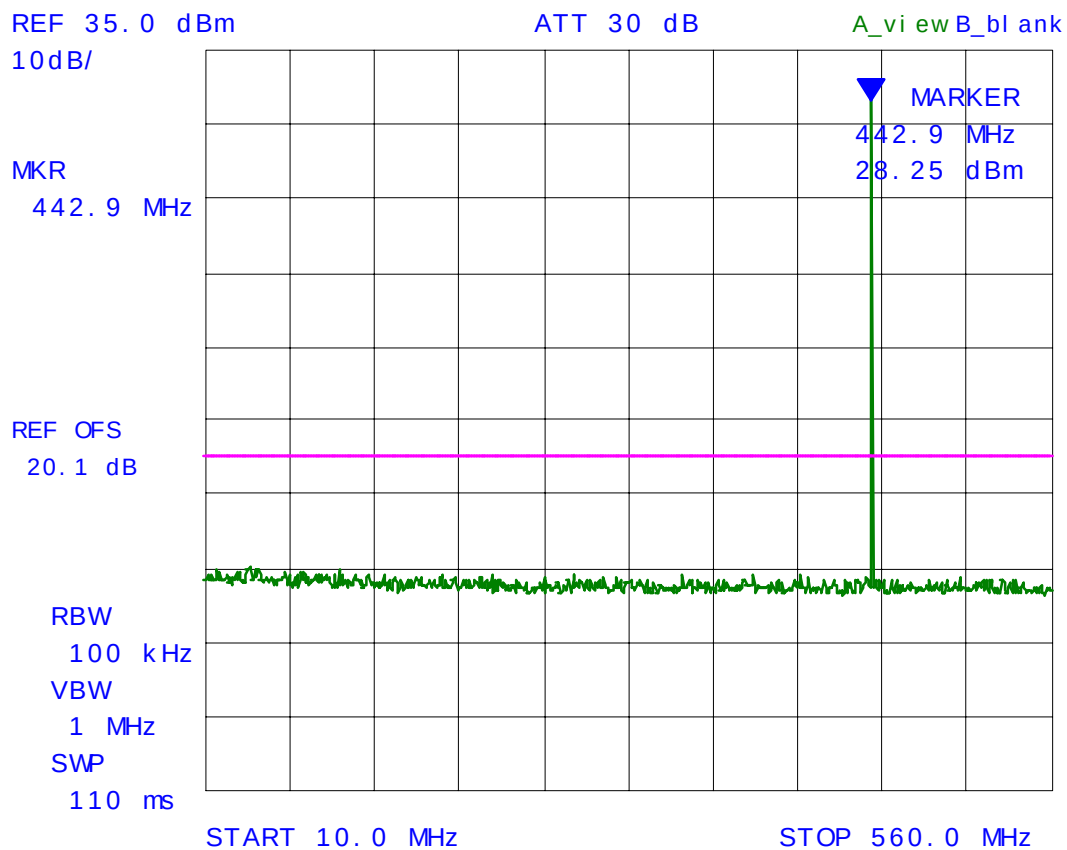

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #14(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 443 MHz in 435-451 MHz Band, Maximum Output Power: 0.99 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

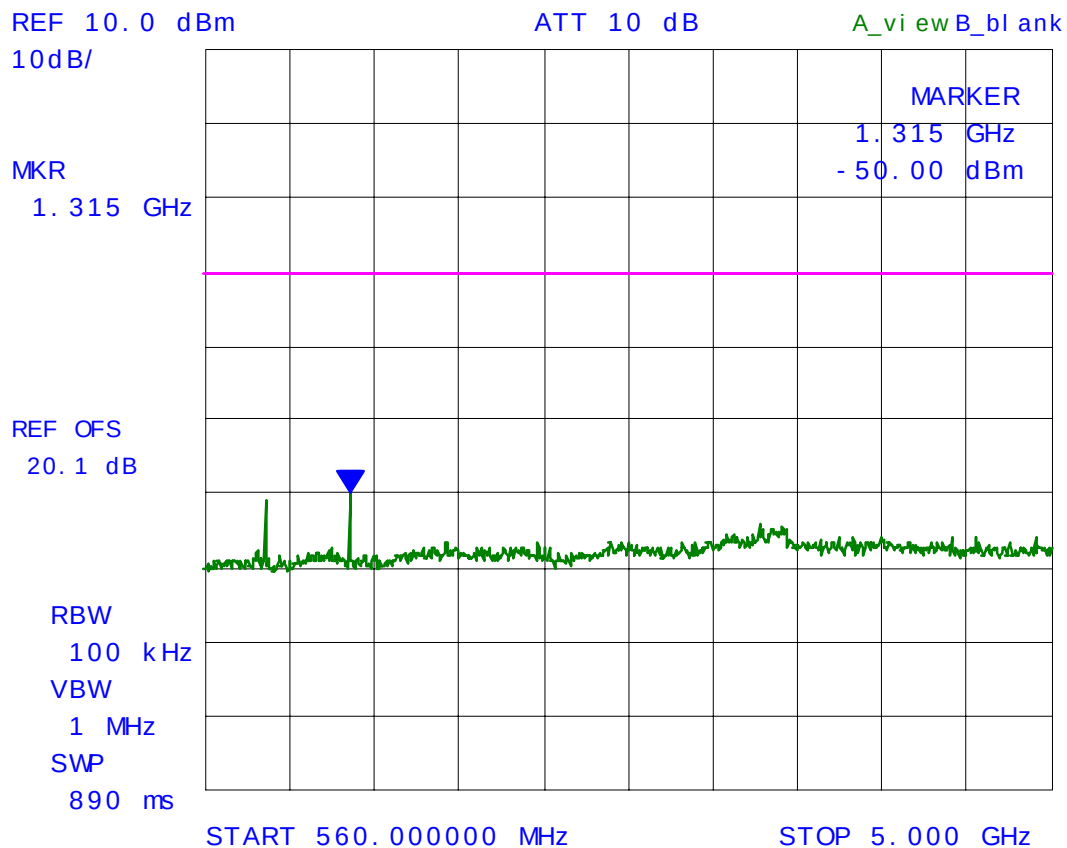

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #15(a): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 451 MHz in 435-451 MHz Band, Maximum Output Power: 0.99 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

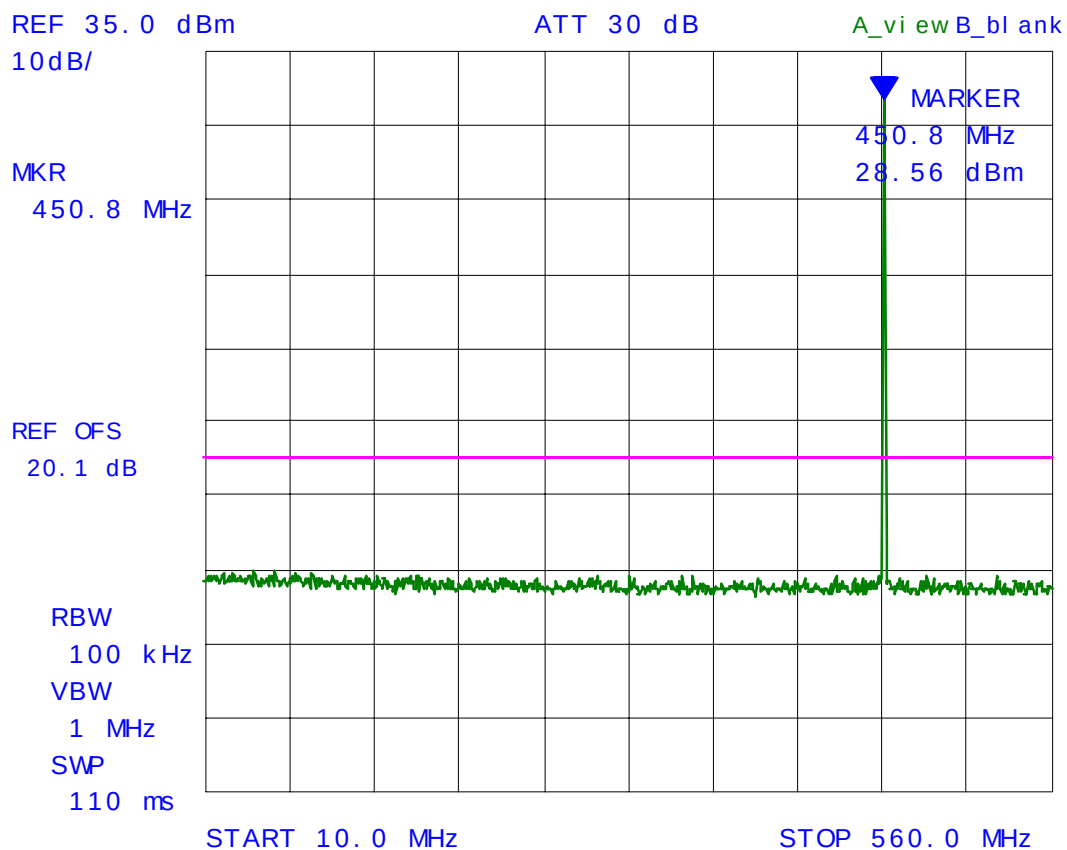

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #15(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 451 MHz in 435-451 MHz Band, Maximum Output Power: 0.99 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

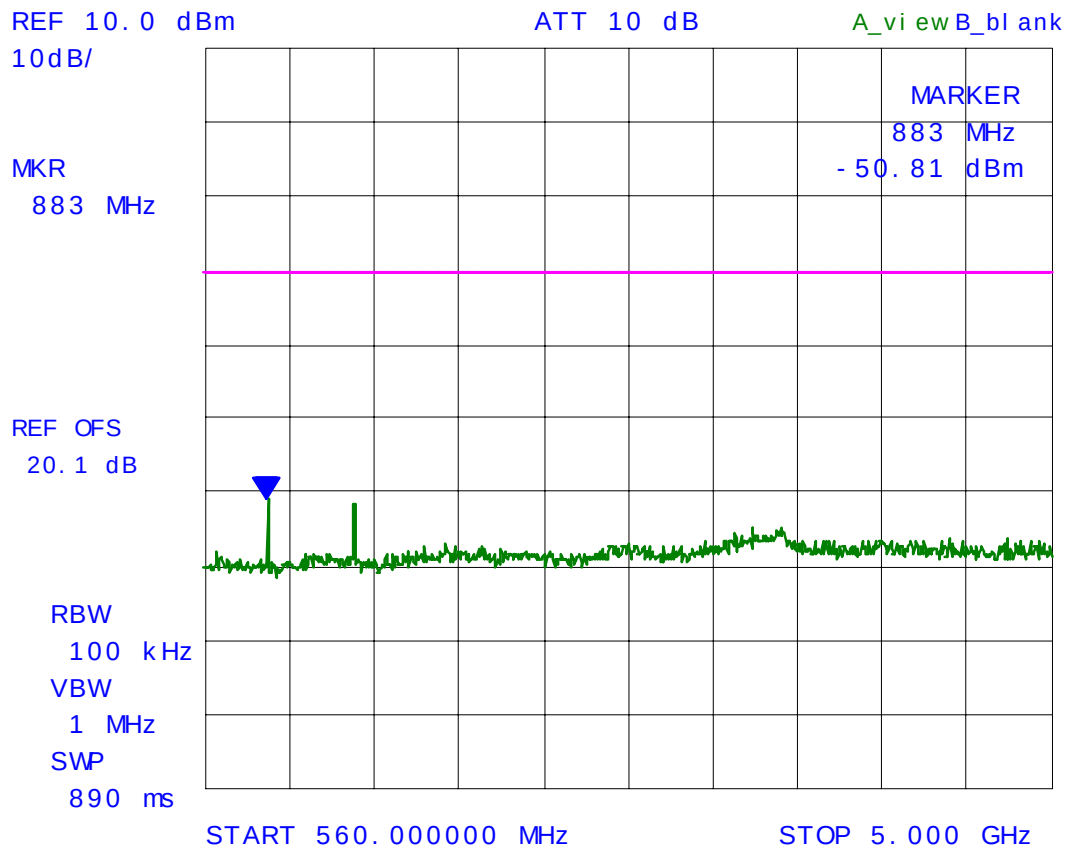

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #16(a): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 450 MHz in 450-470 MHz Band, Maximum Output Power: 0.97 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

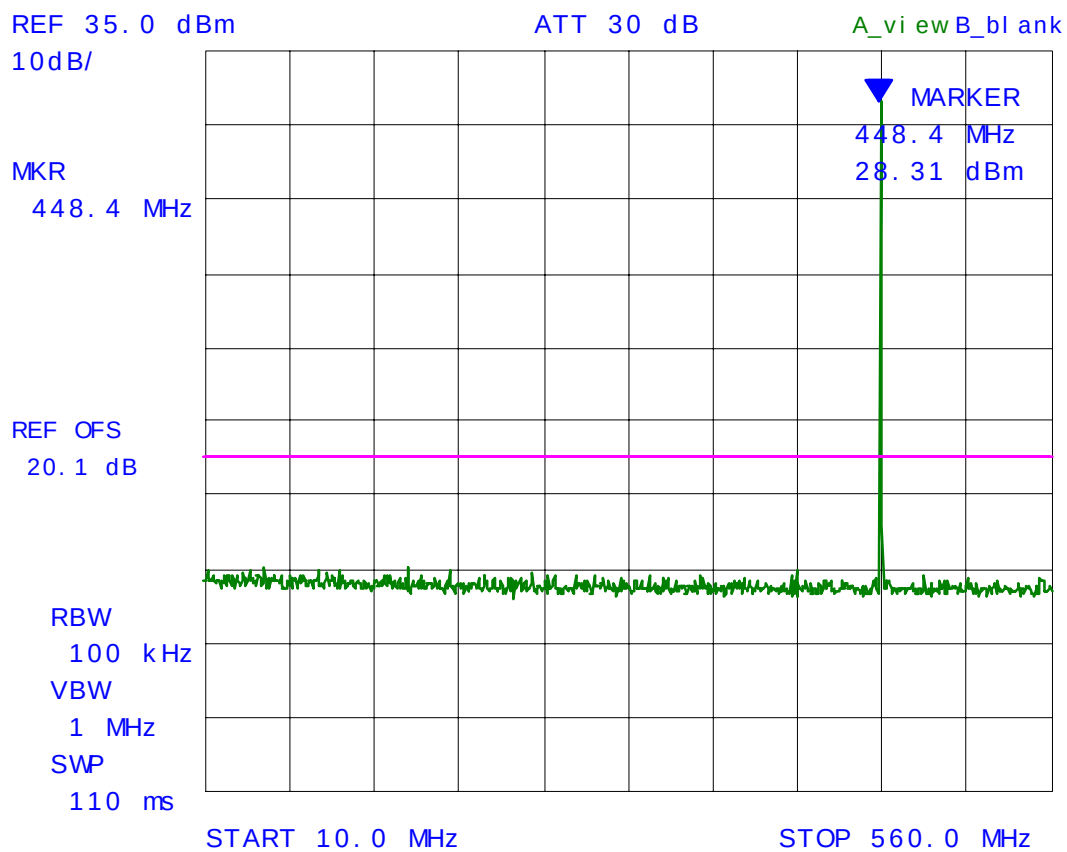

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #16(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 450 MHz in 450-470 MHz Band, Maximum Output Power: 0.97 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

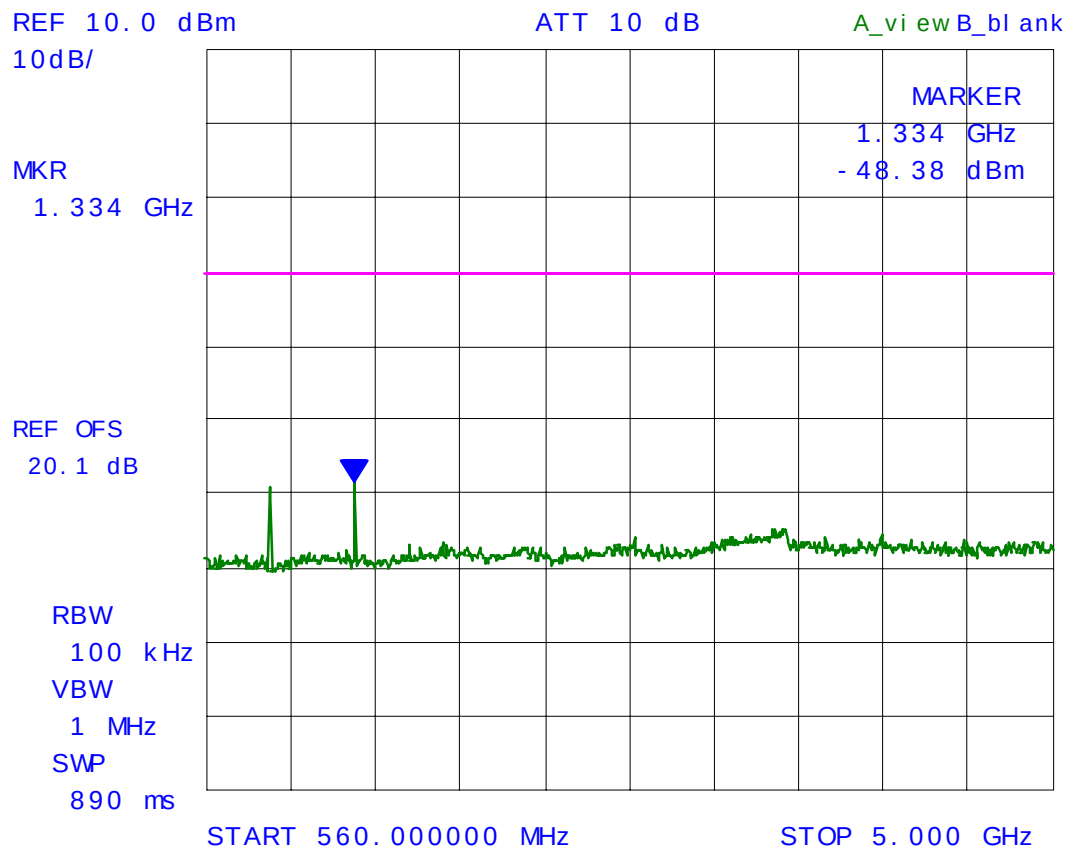

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #17(a): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 460 MHz in 450-470 MHz Band, Maximum Output Power: 0.96 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

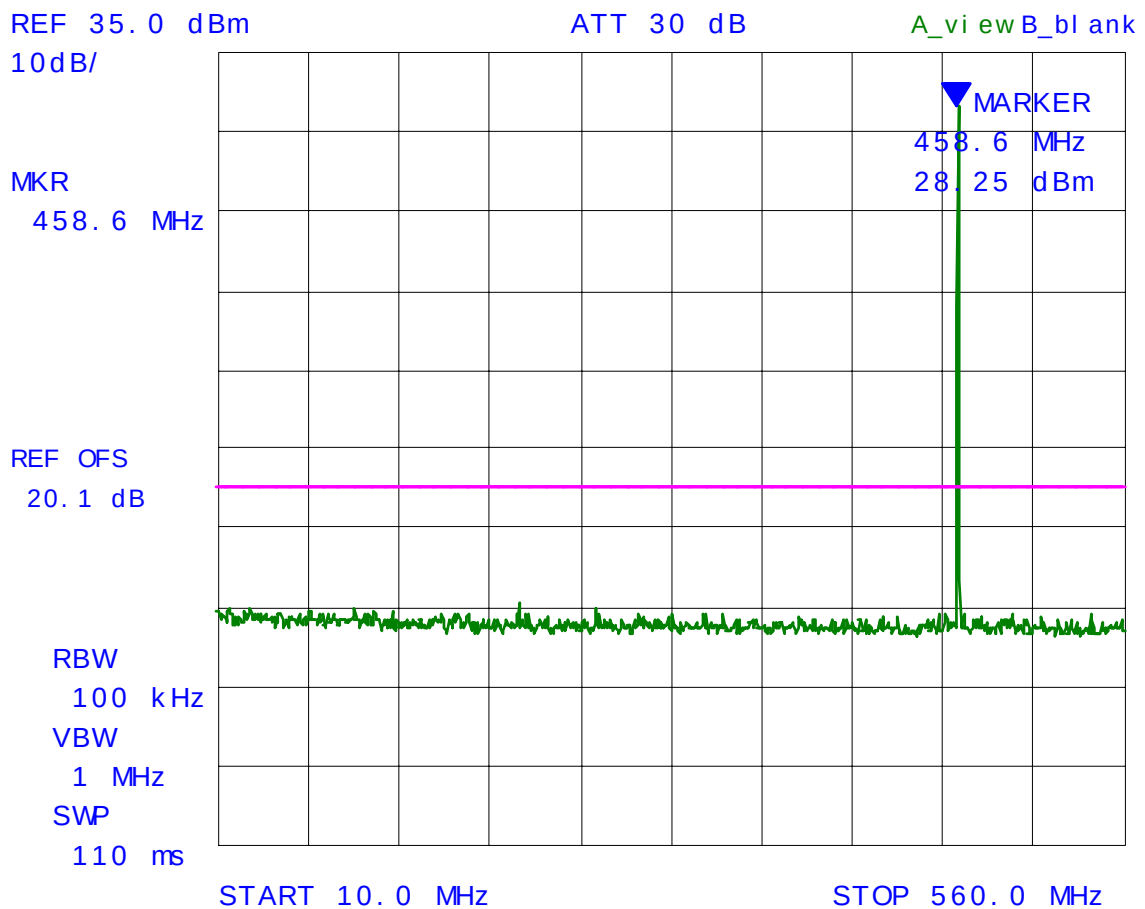

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #17(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 460 MHz in 450-470 MHz Band, Maximum Output Power: 0.96 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

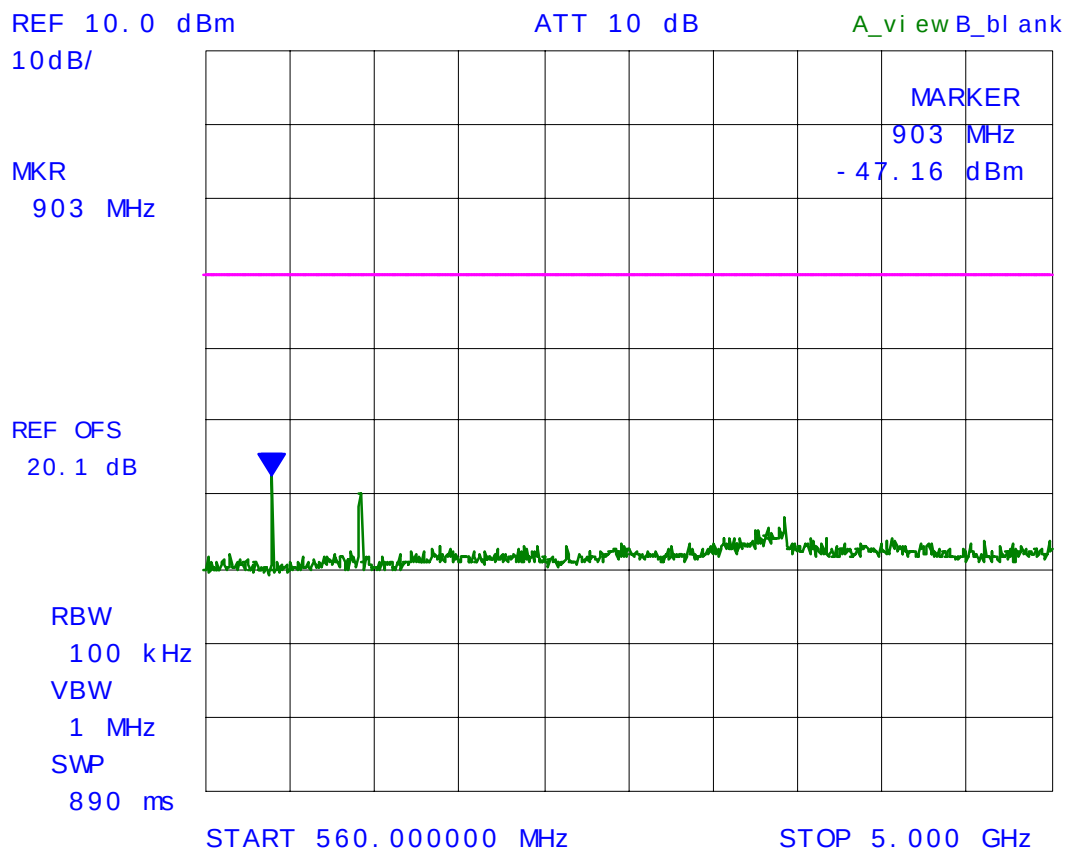

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #18(a): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 470 MHz in 450-470 MHz Band, Maximum Output Power: 0.95 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

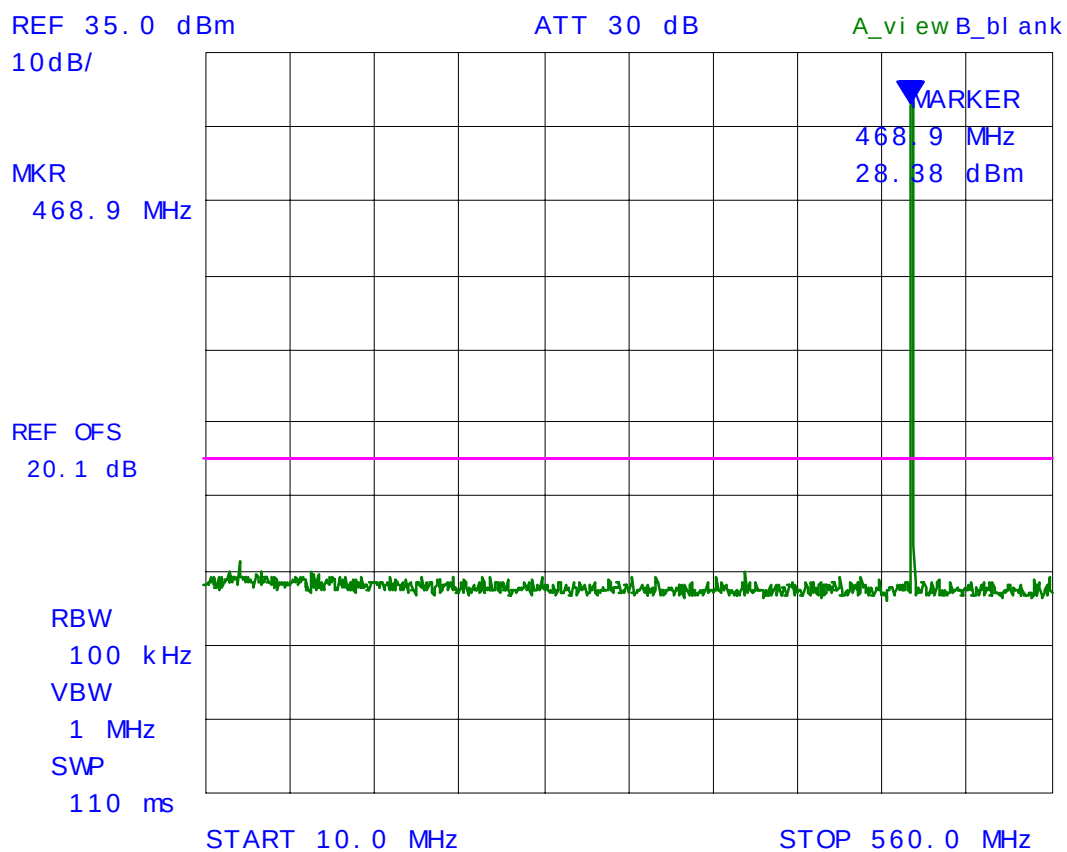

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #18(b): **SPURIOUS CONDUCTED EMISSIONS AT THE ANTENNA PORT**
@ 470 MHz in 450-470 MHz Band, Maximum Output Power: 0.95 Watts
FM Modulation with data @ 9600 bps, maximum freq deviation: 2.1 kHz

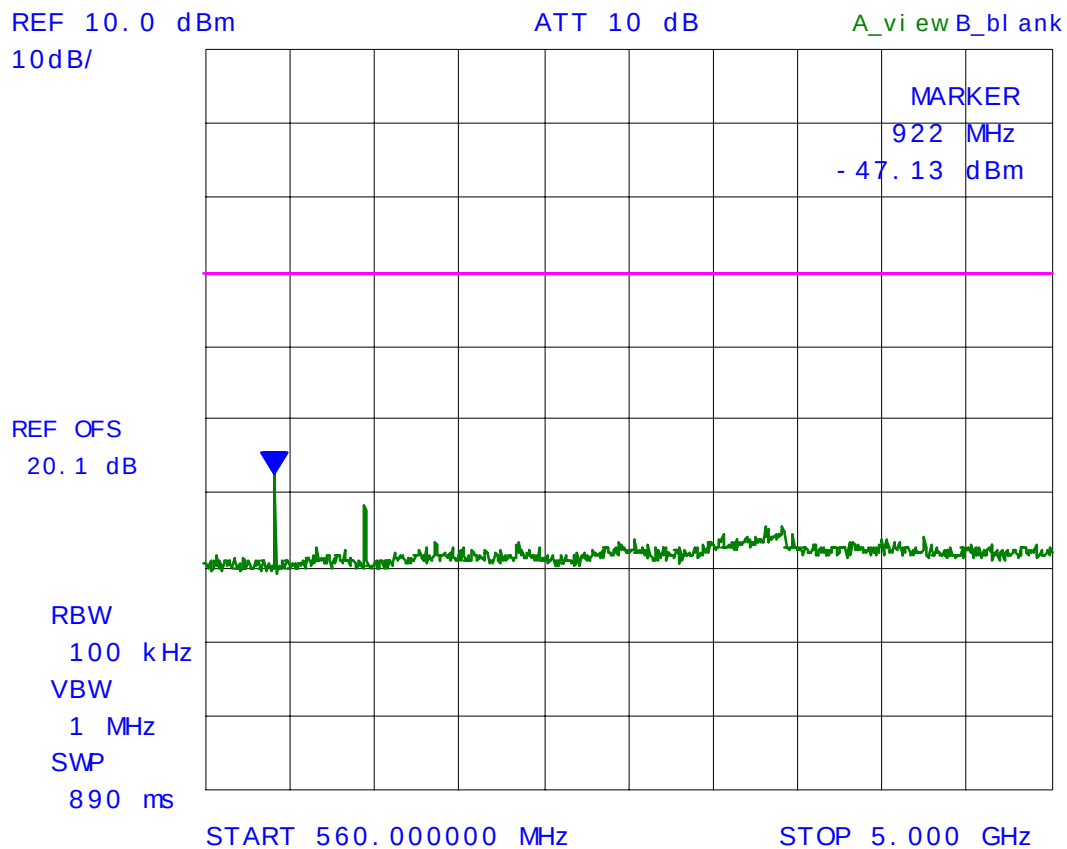

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

6.11.1. Limits @ FCC 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Frequency Range	Attenuation Limit (dBc)
90.210(b)&(c) – Voice & data	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	43+10*log(P) or -13 dBm
90.210(d) – Voice & data	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	50+10*log(P) or -20 dBm or 70 dBc whichever is less

6.11.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, § 8.2 of this report and its value in dBc is calculated as follows:

If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.

If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:

Lowest ERP of the carrier = EIRP – 2.15 dB = $P_c + G - 2.15 \text{ dB} = \text{xxx dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$

Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

ERP of spurious/harmonic (dBc) = ERP of carrier (dBm) – ERP of spurious/harmonic emission (dBm)

6.11.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8546A	...	9 kHz to 5.6 GHz with built-in 30 dB Gain Pre-selector, QP, Average & Peak Detectors.
RF Amplifier	Com-Power	PA-102		1 MHz to 1 GHz, 30 dB gain nominal
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz, 30 dB nominal
Biconilog Antenna	EMCO	3142	10005	30 MHz to 2 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 GHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 GHz – 1 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz
RF Signal Generator	Hewlett Packard	HP 83752B	3610A00457	0.01 – 20 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

▪ All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.4. Test Setup

Please refer to Photos # 1 to 3 in Annex 1 for detailed of test setup.

6.11.5. Test Data

6.11.5.1. Test Configuration #1: 435 MHz in 435-451 MHz Band, RF Output power: 1.04 Watts

Fundamental Frequency:		435 MHz						
Conducted RF Output Power:		1.04 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

6.11.5.2. Test Configuration #2: 443 MHz in 435-451 MHz Band, RF Output power: 0.99 Watts

Fundamental Frequency:		443 MHz						
Conducted RF Output Power:		0.99 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

6.11.5.3. Test Configuration #3: 451 MHz in 435-451 MHz Band, RF Output power: 0.99 Watts

Fundamental Frequency:		451 MHz						
Conducted RF Output Power:		0.99 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

6.11.5.4. Test Configuration #4: 450 MHz in 450-470 MHz Band, RF Output power: 0.97 Watts

Fundamental Frequency:		450 MHz						
Conducted RF Output Power:		0.97 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

6.11.5.5. Test Configuration #5: 460 MHz in 450-470 MHz Band, RF Output power: 0.96 Watts

Fundamental Frequency:		460 MHz						
Conducted RF Output Power:		0.96 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

6.11.5.6. Test Configuration #6: 470 MHz in 450-470 MHz Band, RF Output power: 0.95 Watts

Fundamental Frequency:		470 MHz						
Conducted RF Output Power:		0.95 Watts						
Modulation:		FM Modulation with data @ 9600 bps						
FREQUENCY (MHz)	E-FIELD @3m (dBuV/m)	ERP measured by Substitution Method (dBm) (dBc)		EMI DETECTOR (Peak/QP)	ANTENNA POLARIZATION (H/V)	LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
30 – 5000	Note 1	Note 1	Note 1	PEAK	V & H	50.0	Note 1	PASS
Note (1): The emissions were scanned from 10 MHz to 5 GHz. No significant rf radiated emissions were found.								

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.12. TRANSIENT FREQUENCY BEHAVIOR @ 90.214

6.12.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment
		421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels		
t ₁ ⁴	± 25.0 kHz	10.0 ms
t ₂	± 12.5 kHz	25.0 ms
t ₃ ⁴	± 25.0 kHz	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels		
t ₁ ⁴	± 12.5 kHz	10.0 ms
t ₂	± 6.25 kHz	25.0 ms
t ₃ ⁴	± 12.5 kHz	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels		
t ₁ ⁴	± 6.25 kHz	10.0 ms
t ₂	± 3.125 kHz	25.0 ms
t ₃ ⁴	± 6.25 kHz	10.0 ms

- t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 t_1 is the time period immediately following t_{on} .
 t_2 is the time period immediately following t_1 .
 t_3 is the time period from the instant when the transmitter is turned off until t_{off} .
 t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.12.2. Method of Measurements

Refer to Exhibit 8, § 8.6 of this test report and ANSI/TIA/EIA - 603 - 1992, Sec. 2.2.19, Page 83

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90


- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.12.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
RF Synthesized Signal Generator	Fluke	6061A	...	10 kHz – 1GHz 13 dBm output max. @ 50 Ohms
Communication Analyzer (Test Receiver)	Rohde & Schwarz	SMFP2	879988/057	GHz including SINAD, S/N, Modulation meters, AF & RF signal generators and etc....
Network Combiner	Mini-circuit	15542	...	DC to 22 GHz (7 dB insertion loss)
Digital Storage Scope	Phillips	3320A	DQ 646	DC - 5 MHz
67297 RF Detector,	Herotex	DZ122-553	63400	..

6.12.4. Test Arrangement

The following drawings show details of the test setup for radiated emissions measurements

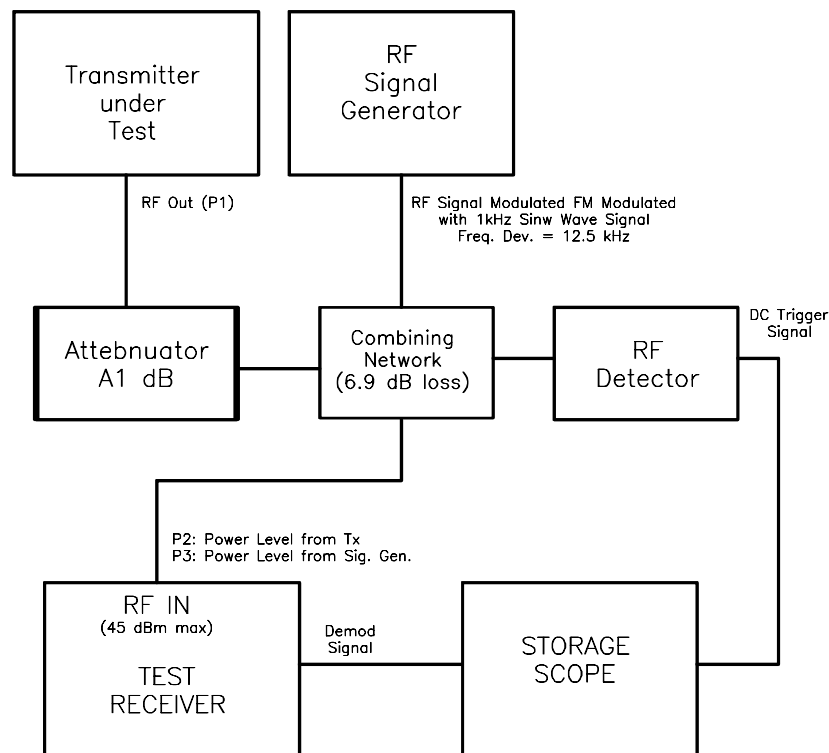

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.12.5. Test Data

Conforms. Refer to the Plots 19 to 22 for test results.

Plot #19: Turned OFF, Operation in 435-451 MHz Band

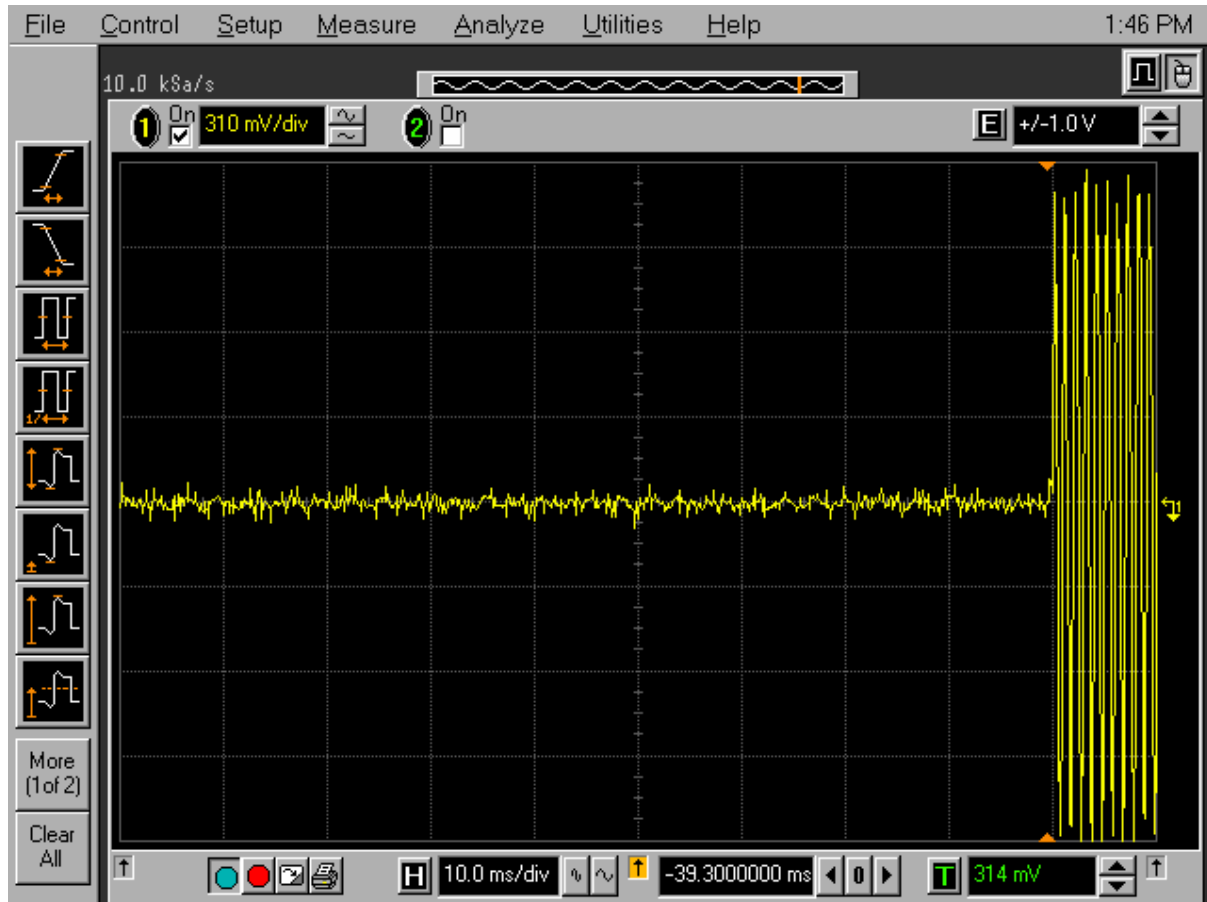

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #20: Turned ON, Operation in 435-451 MHz Band

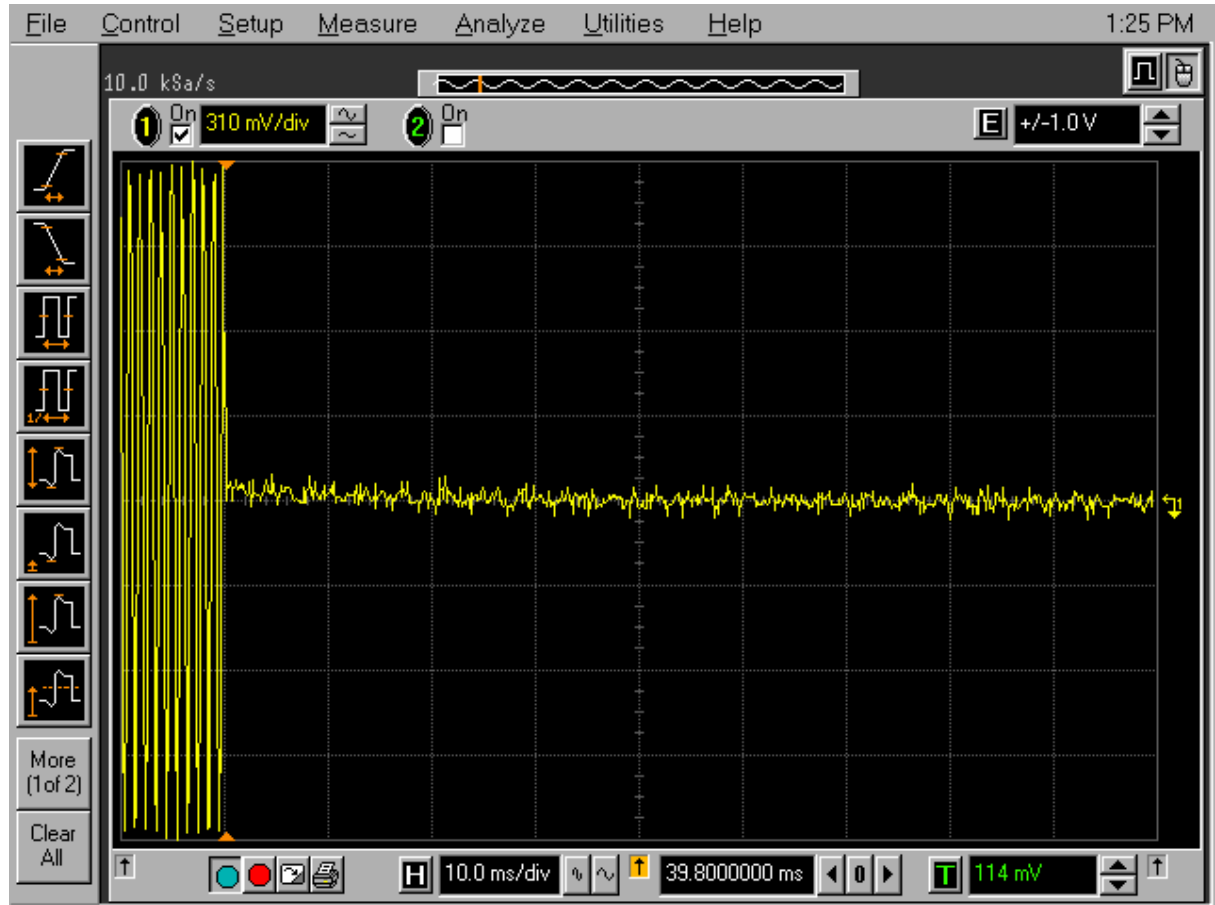

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #21: Turned OFF, Operation in 450-470 MHz Band

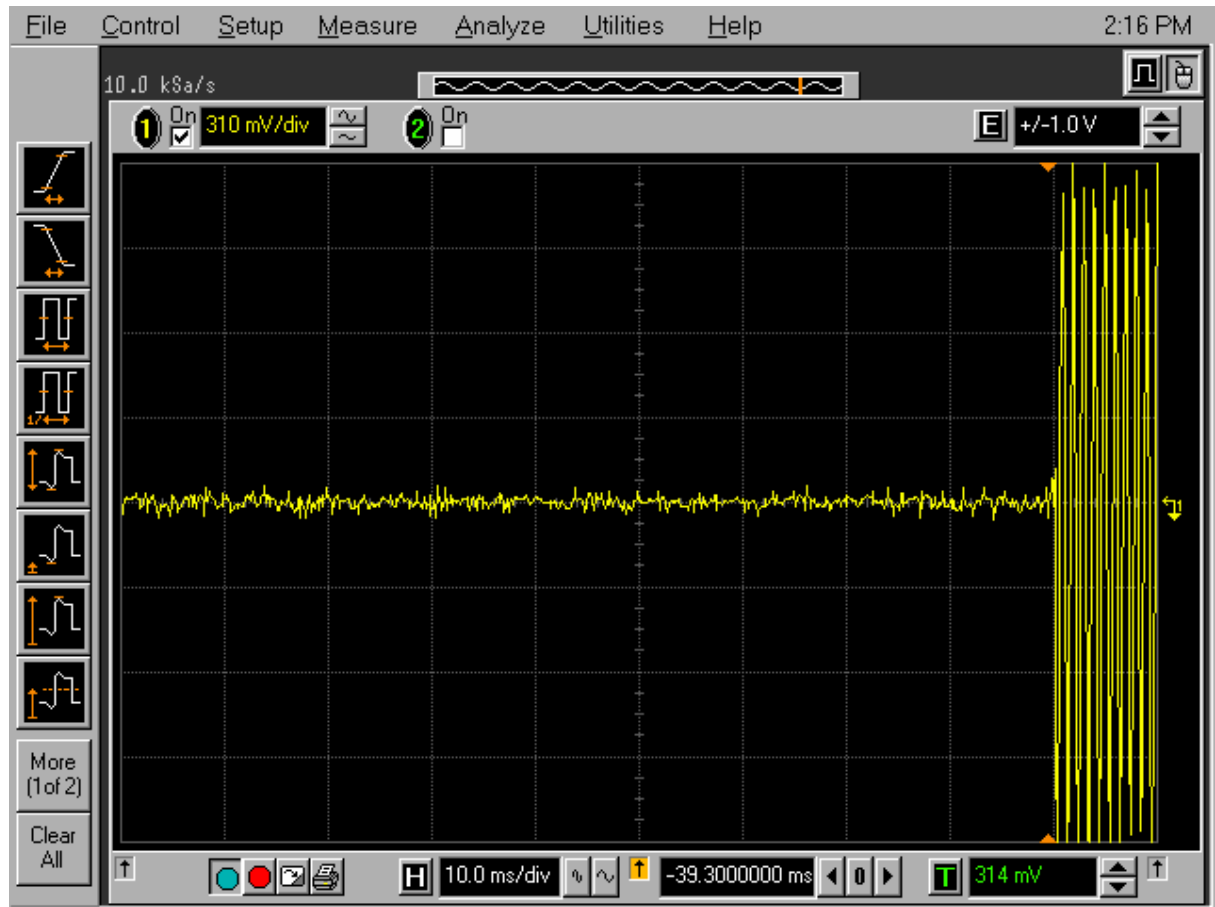

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #22: Turned ON, Operation in 450-470 MHz Band

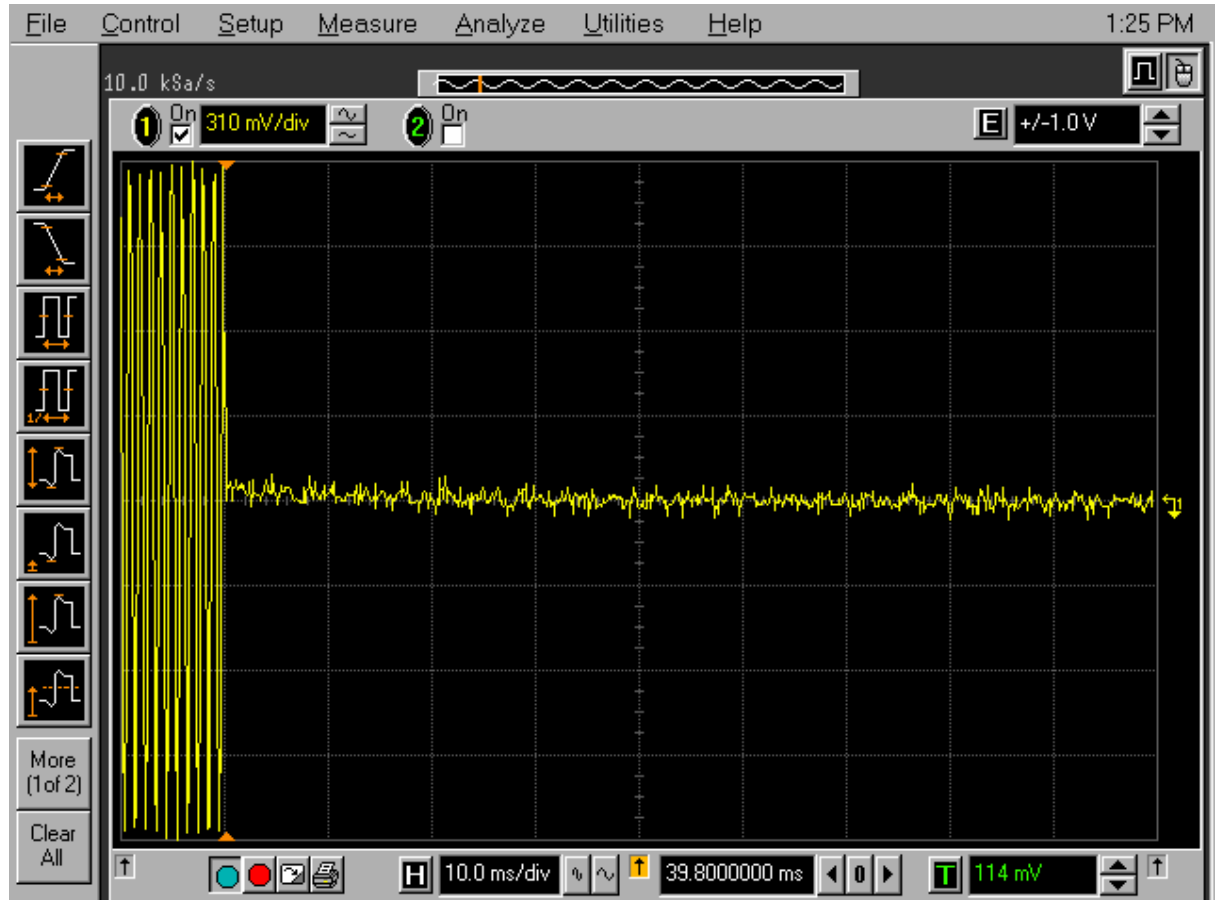

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	± 0.5	± 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

$$\{ X = 1 \text{ for continuous transmission } \Rightarrow 10\log(1/x) = 0 \text{ dB} \}$$

Figure 1.

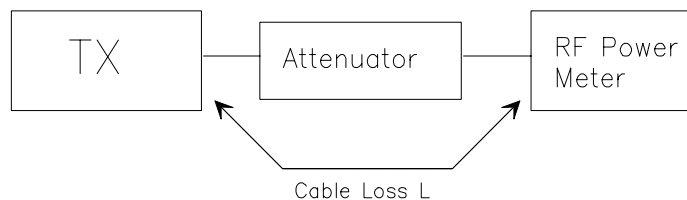

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency:	test frequency
Resolution BW:	100 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency:	equal to the signal source
Resolution BW:	10 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.:

Figure 2


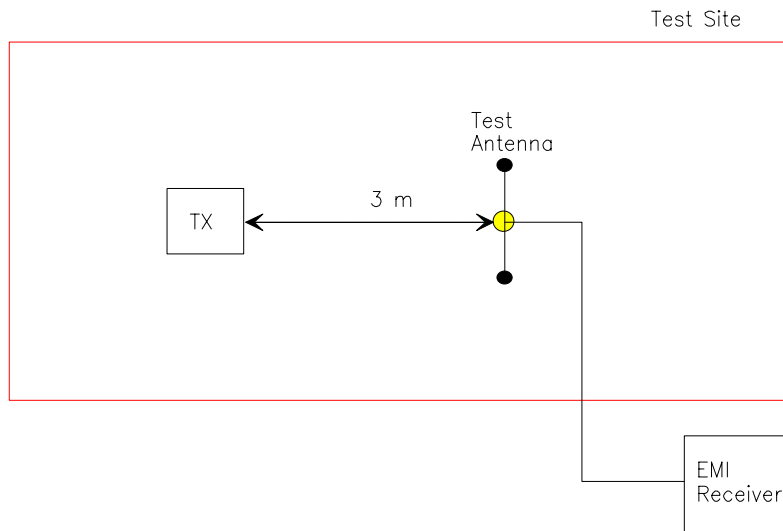


Figure 3

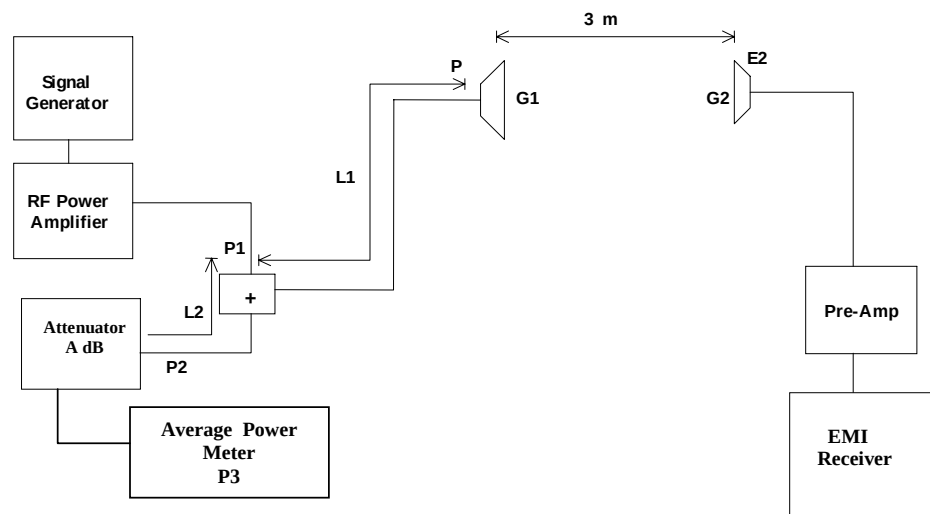

8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 kHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum, VBW $\geq$ RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC CFR 47, Para. 2.1057 - Frequency spectrum to be investigated:- The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.1051 - Spurious Emissions at Antenna Terminal:- The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

8.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 kHz tone at ± 12.5 kHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 kHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK464FCC90

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)