

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, MI 48109-2122
Tel: (734) 764-0500

Measured Radio Frequency Emissions
From

TRW Receiver Door Control
PNs: 89741-AA020 and 89741-02070

Report No. 415031-188
November 5, 2003

Copyright © 2003


For:
TRW Automotive Electronics
24175 Research Drive
Farmington Hills, MI 48335-2642

Contact:
Shawn Tracy
Shawn.tracy@trw.com
Tel: 248-442-5191
Fax: 248-478-7241
PO: pending

Measurements made by:

Valdis V. Liepa

Tests supervised by:
Report approved by:


Valdis V. Liepa
Research Scientist

Summary

Tests for compliance with FCC Regulations Part 15, Subpart B, and with Industry Canada Regulations, RSS-210, were performed on TRW 315 MHz Receiver. The device is subject to the Rules and Regulations as a Receiver. As a Digital Device it is exempt, but such measurements were made to assess the receiver's overall emissions.

In testing performed on November 21, 2002, the device tested in the worst case met the specifications for radiated emissions by 6.2 dB (see p. 6). Since the device is powered from an automotive 12-volt system, the line conductive emission tests do not apply.

1. Introduction

TRW 315 MHz Receiver was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 5, dated November, 2001. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

2. Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests.

Table 2.1. Test equipment.

Test Instrument	Eqpt Used	Manufacturer/Model
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard, 182T/8558B
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131
Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Power Meter		Hewlett-Packard, 432A
Power Meter		Anritsu, ML4803A/MP
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
S-Band Std. Gain Horn		S/A, Model SGH-2.6
C-Band Std. Gain Horn		University of Michigan, NRL design
XN-Band Std. Gain Horn		University of Michigan, NRL design
X-Band Std. Gain Horn		S/A, Model 12-8.2
X-band horn (8.2- 12.4 GHz)		Narda 640
X-band horn (8.2- 12.4 GHz)		Scientific Atlanta , 12-8.2, SN: 730
K-band horn (18-26.5 GHz)		FXR, Inc., K638KF
Ka-band horn (26.5-40 GHz)		FXR, Inc., U638A
U-band horn (40-60 GHz)		Custom Microwave, HO19
W-band horn(75-110 GHz)		Custom Microwave, HO10
G-band horn (140-220 GHz)		Custom Microwave, HO5R
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3
Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855
Ridge-horn Antenna (300-5000 MHz)		University of Michigan
Amplifier (5-1000 MHz)	X	Avantak, A11-1, A25-1S
Amplifier (5-4500 MHz)	X	Avantak
Amplifier (4.5-13 GHz)		Avantek, AFT-12665
Amplifier (6-16 GHz)		Trek
Amplifier (16-26 GHz)		Avantek
LISN (50 μ H)		University of Michigan
Signal Generator (0.1-2060 MHz)	X	Hewlett-Packard, 8657B
Signal Generator (0.01-20 GHz)		Hewlett-Packard

3. Configuration and Identification of Device Under Test

The DUT is a 315.0 MHz superheterodyne receiver, designed for onboard automobile security/convenience applications, and as such, it is powered from an automotive 12-volt DC source. The receiver is based on a single-chip receiver, with 325.7 MHz LO. The receiver is packaged in a plastic case approximately 2.25 x 2.75 x 1.25 inches, with attached metal mounting bracket to the case. Antenna is internal. For testing for radiated emissions, a 3-meter long section of generic harness was used, with power wires separated from the control/signal lines. In the receiver decoding and signal processing are performed by a micro.

The DUT was designed and manufactured by TRW Automotive Electronics Group, 24175 Research Drive, Farmington Hills, MI 48335-2642. It is identified as:

TRW Receiver Door Control
PN: 89741-AA020 (results also applicable to PN: 89741-02070)
SN: 27B-A
FCC ID: GQ43VT27B
IC: 1470A-104105B

There are two PNs for the receiver, the difference being only in the metal bracket that is used to mount the receiver in two different vehicles. We measured the -AA020 and since no emissions were found, there was no need to measure the other.

The receiver nominally operates in a pulsed mode. For testing it was modified for continuous operation and was then verified for operation by detecting a control from a companion transmitter.

3.1 Modifications Made

There were no modifications made to the DUT by this laboratory.

4. Emission Limits

For FCC the DUT falls under Part 15, Subpart B, "Unintentional Radiators". For Industry Canada the DUT falls under Receiver category and is subject to technical requirement of sections 7.1 to 7.4 in RSS-210. The pertinent test frequencies, with corresponding emission limits, are given in Tables 4.1 and 4.2 below.

4.1 Radiated Emission Limits

Table 4.1. Radiated Emission Limits (FCC: 15.33, 15.35, 15.109; IC: RSS-210, 7.3).

Freq. (MHz)	E _{lim} (3m) μ V/m	E _{lim} dB(μ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Quasi-Peak readings apply to 1000 MHz (120 kHz BW)
Average readings apply above 1000 MHz (1 MHz BW)

4.2 Conducted Emission Limits

Table 4.2. Conducted Emission Limits (FCC: 15.107; IC: RSS-210, 6.6).

Freq. (MHz)	μV	$\text{dB}(\mu\text{V})$
0.450 - 1.705	250	48.0
1.705 - 30.0	250	48.0

Note: Quasi-Peak readings apply here

4.3 Antenna Power Conduction Limits

$P_{\text{max}} = 2 \text{ nW}$; for frequency range see Table 4.1. (FCC: 15.111(a); IC: RSS-210, 7.2).

5. Emission Tests and Results

5.1 Anechoic Chamber Radiated Emission Tests

To familiarize with the radiated emission behavior of the DUT, it was studied and measured in the shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with turntable, antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

To study and test for radiated emissions, the DUT was powered by a laboratory power supply at 13.5 VDC. A 315 MHz CW signal was injected (radiated) from a nearby signal generator using a short wire antenna. The DUT was placed on the test table on each of the three axis. At each orientation, the table was rotated to obtain maximum signal for vertical and horizontal emission polarizations. This sequence was repeated throughout the required frequency range.

In the chamber we studied and recorded all the emissions using a ridge-horn antenna, which covers 200 MHz to 5000 MHz, up to 2 GHz. In scanning from 30 MHz to 2.0 GHz, there were no spurious emissions observed, not even the LO. Figures 5.1 and 5.2 show emissions measured 0-1000 MHz and 1000-2000 MHz, respectively. These measurements are made with a ridge-horn antenna at 3m, with spectrum analyzer in peak hold mode and the receiver rotated in all orientations. The measurements up to 1000 MHz (Fig. 5.1) are used for initial evaluation only, but those above 1000 MHz (Fig. 5.2) are used in final assessment for compliance.

5.2 Open Site Radiated Emission Tests

The DUT was then moved to the 3 meter Open Field Test Site where measurements were repeated up to 1000 MHz using a small bicone, or dipoles when the measurement is near the limit. The DUT was exercised as described in Sec. 5.1 above. The measurements were made with a spectrum analyzer using 120 kHz RBW and peak detection mode. Sometimes lower RBW are used to help identify the emissions. When appropriate, Quasi-Peak or average detection is used (see 5.0). The test set-up photographs are in Appendix (i.e., at end of this report).

The emissions from digital circuitry were measured using a standard bicones. These results are also presented in Table 5.1.

5.3 Computations and Results for Radiated Emissions

To convert the dBm's measured on the spectrum analyzer to $\text{dB}(\mu\text{V}/\text{m})$, we use expression

$$E_3(\text{dB}\mu\text{V}/\text{m}) = 107 + P_R + K_A - K_G$$

where P_R = power recorded on spectrum analyzer, dB, measured at 3m
 K_A = antenna factor, dB/m
 K_G = pre-amplifier gain, including cable loss, dB

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limit by more than 6.2 dB.

5.4 Conducted Emission Tests

These tests do not apply, since the DUT is powered from a 12-volt automotive system.

6. Other Measurements

6.1 Emission Spectrum Near Fundamental

The LO emissions are measured typically over 1 MHz span and usually with without injection signal. Here data were taken with a dipole antenna laid on top of the DUT and an LNA amp before the spectrum analyzer. A plot is shown in Figure 6.1. There we show that the LO could barely be detected.

6.2 Effect of Supply Voltage Variation

Since emission was barely detected, this test was not carried out.

6.3 Operating Voltage and Current

V = 13.3 VDC

I = 5.2 mADC (cont. on)

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, Michigan 48109-2122
(734) 7640500

Table 5.1 Highest Emissions Measured

Radiated Emission - RF											TRW S-het Rx; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBuV/m	E3lim dBuV/m	Pass dB	Comments
1	325.7	Dip	H	-97.0	Pk	19.2	20.1	9.1	46.0	36.9	max of all, noise; 10 kHz BW
2	325.7	Dip	V	-96.7	Pk	19.2	20.1	9.4	46.0	36.6	max of all, noise; 10 kHz BW
3	651.4	Dip	H	-76.6	Pk	25.5	16.7	39.2	46.0	6.8	max of all, noise; 10 kHz BW
4	651.4	Dip	V	-76.0	Pk	25.5	16.7	39.8	46.0	6.2	max of all, noise; 10 kHz BW
5	977.1	Dip	H	-96.9	Pk	29.2	14.1	25.2	54.0	28.8	max of all, noise; 10 kHz BW
6	977.1	Dip	V	-96.6	Pk	29.2	14.1	25.5	54.0	28.5	max of all, noise; 10 kHz BW
7	1303.0	Horn	H	-70.0	Pk	20.9	28.1	29.8	54.0	24.2	max of all, noise; 1 MHz BW
8	1629.0	Horn	H	-70.0	Pk	21.7	28.2	30.5	54.0	23.5	max of all, noise; 1 MHz BW
9	1950.0	Horn	H	-70.0	Pk	22.4	28.1	31.3	54.0	22.7	max of all, noise; 1 MHz BW
10											
11		NOTE: at 651 MHz there was a strong ambient signal									
12											
13											
14		All reciever orientations were measured; no signal was observed at 3 m distance,									
15		not even with the antenna on top of the DUT									
16											
Radiated Emission - Digital (Class B)											
1											
2											
3		Digital Emissions more than 20 dB below FCC Class B limits									
4											
5											
6											
7											
8											
9											
10											
11											
12											

Conducted Emissions							
#	Freq. MHz	Line Side	Det. Used	Vtest dBuV	Vlim dBuV	Pass dB	Comments
1							
2							Not applicable
3							

Meas. 11/04/2003; U of Mich.

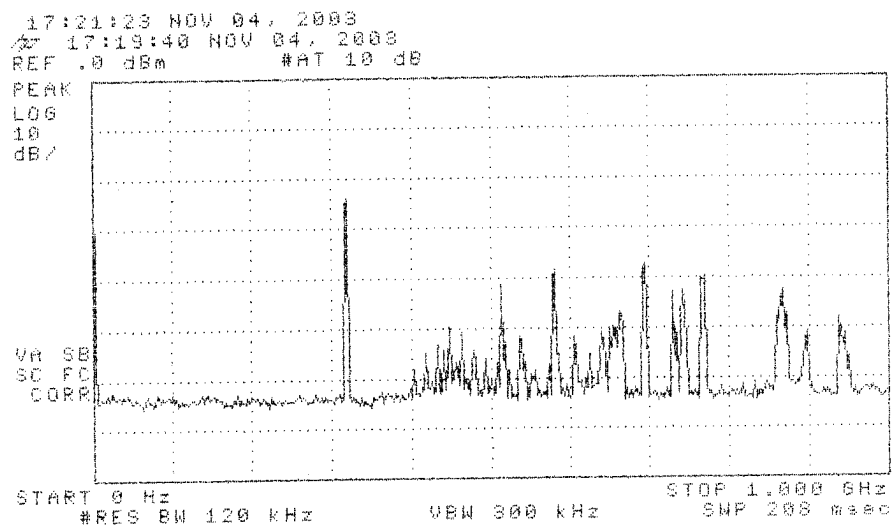
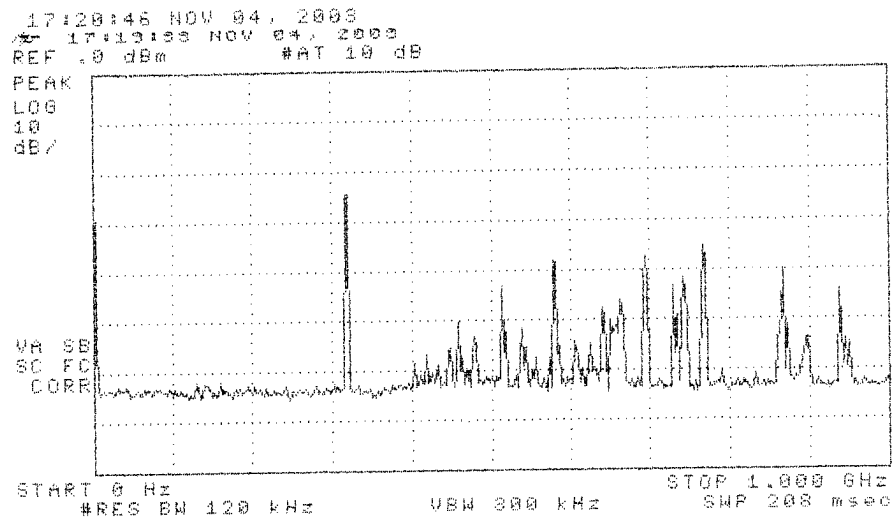


Figure 5.1. Emissions measured at 3 meters in anechoic chamber, 0-1000 MHz.
 (top) Receiver plus ambient
 (bottom) Ambient

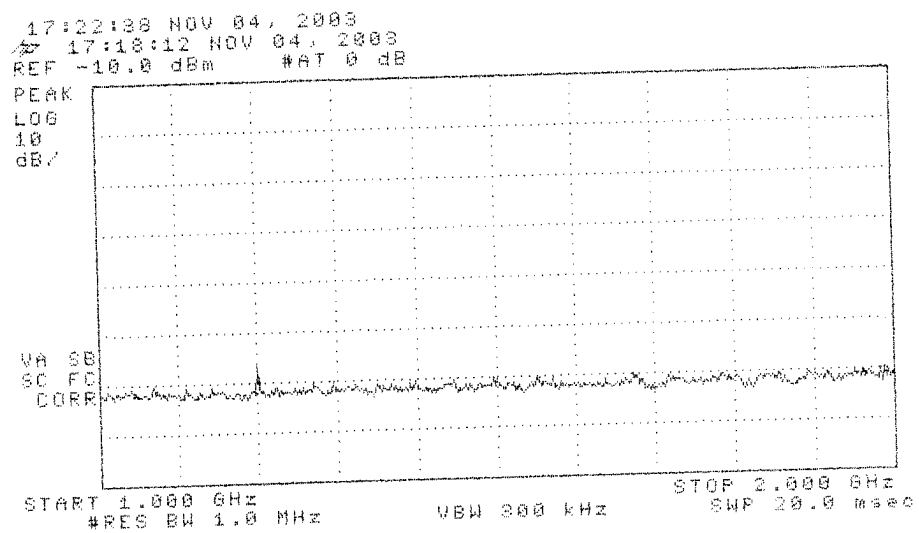
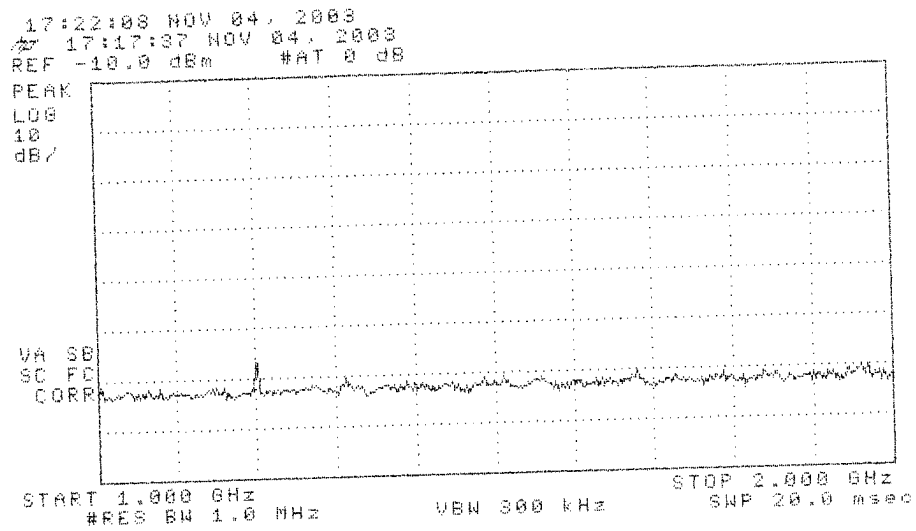


Figure 5.2. Emissions measured at 3 meters in anechoic chamber, 1000-2000 MHz.
 (top) Receiver plus ambient
 (bottom) Ambient

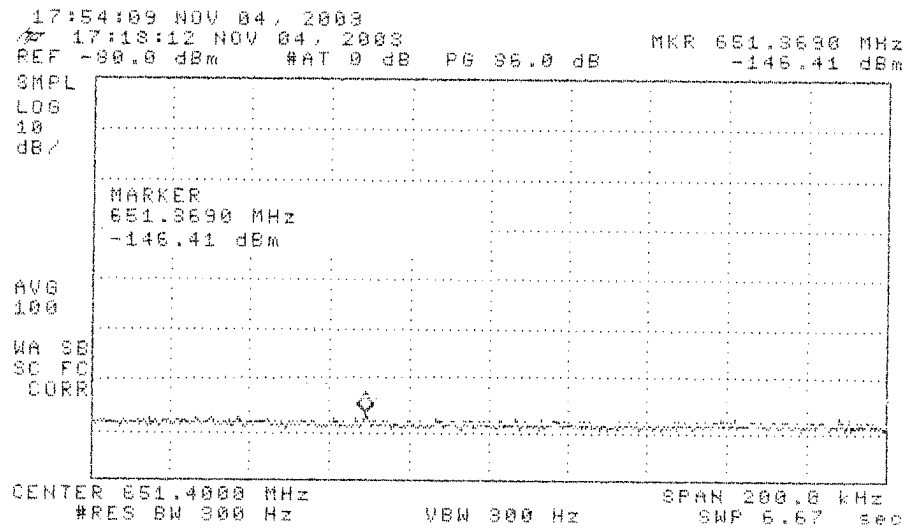



Figure 6.1. Receiver emission at 2xLO; note it's -146 dBm.

No measurement made; see Sec. 6.2.


Figure 6.2. Relative emission at "fundamental" vs. supply voltage.



DUT on OATS

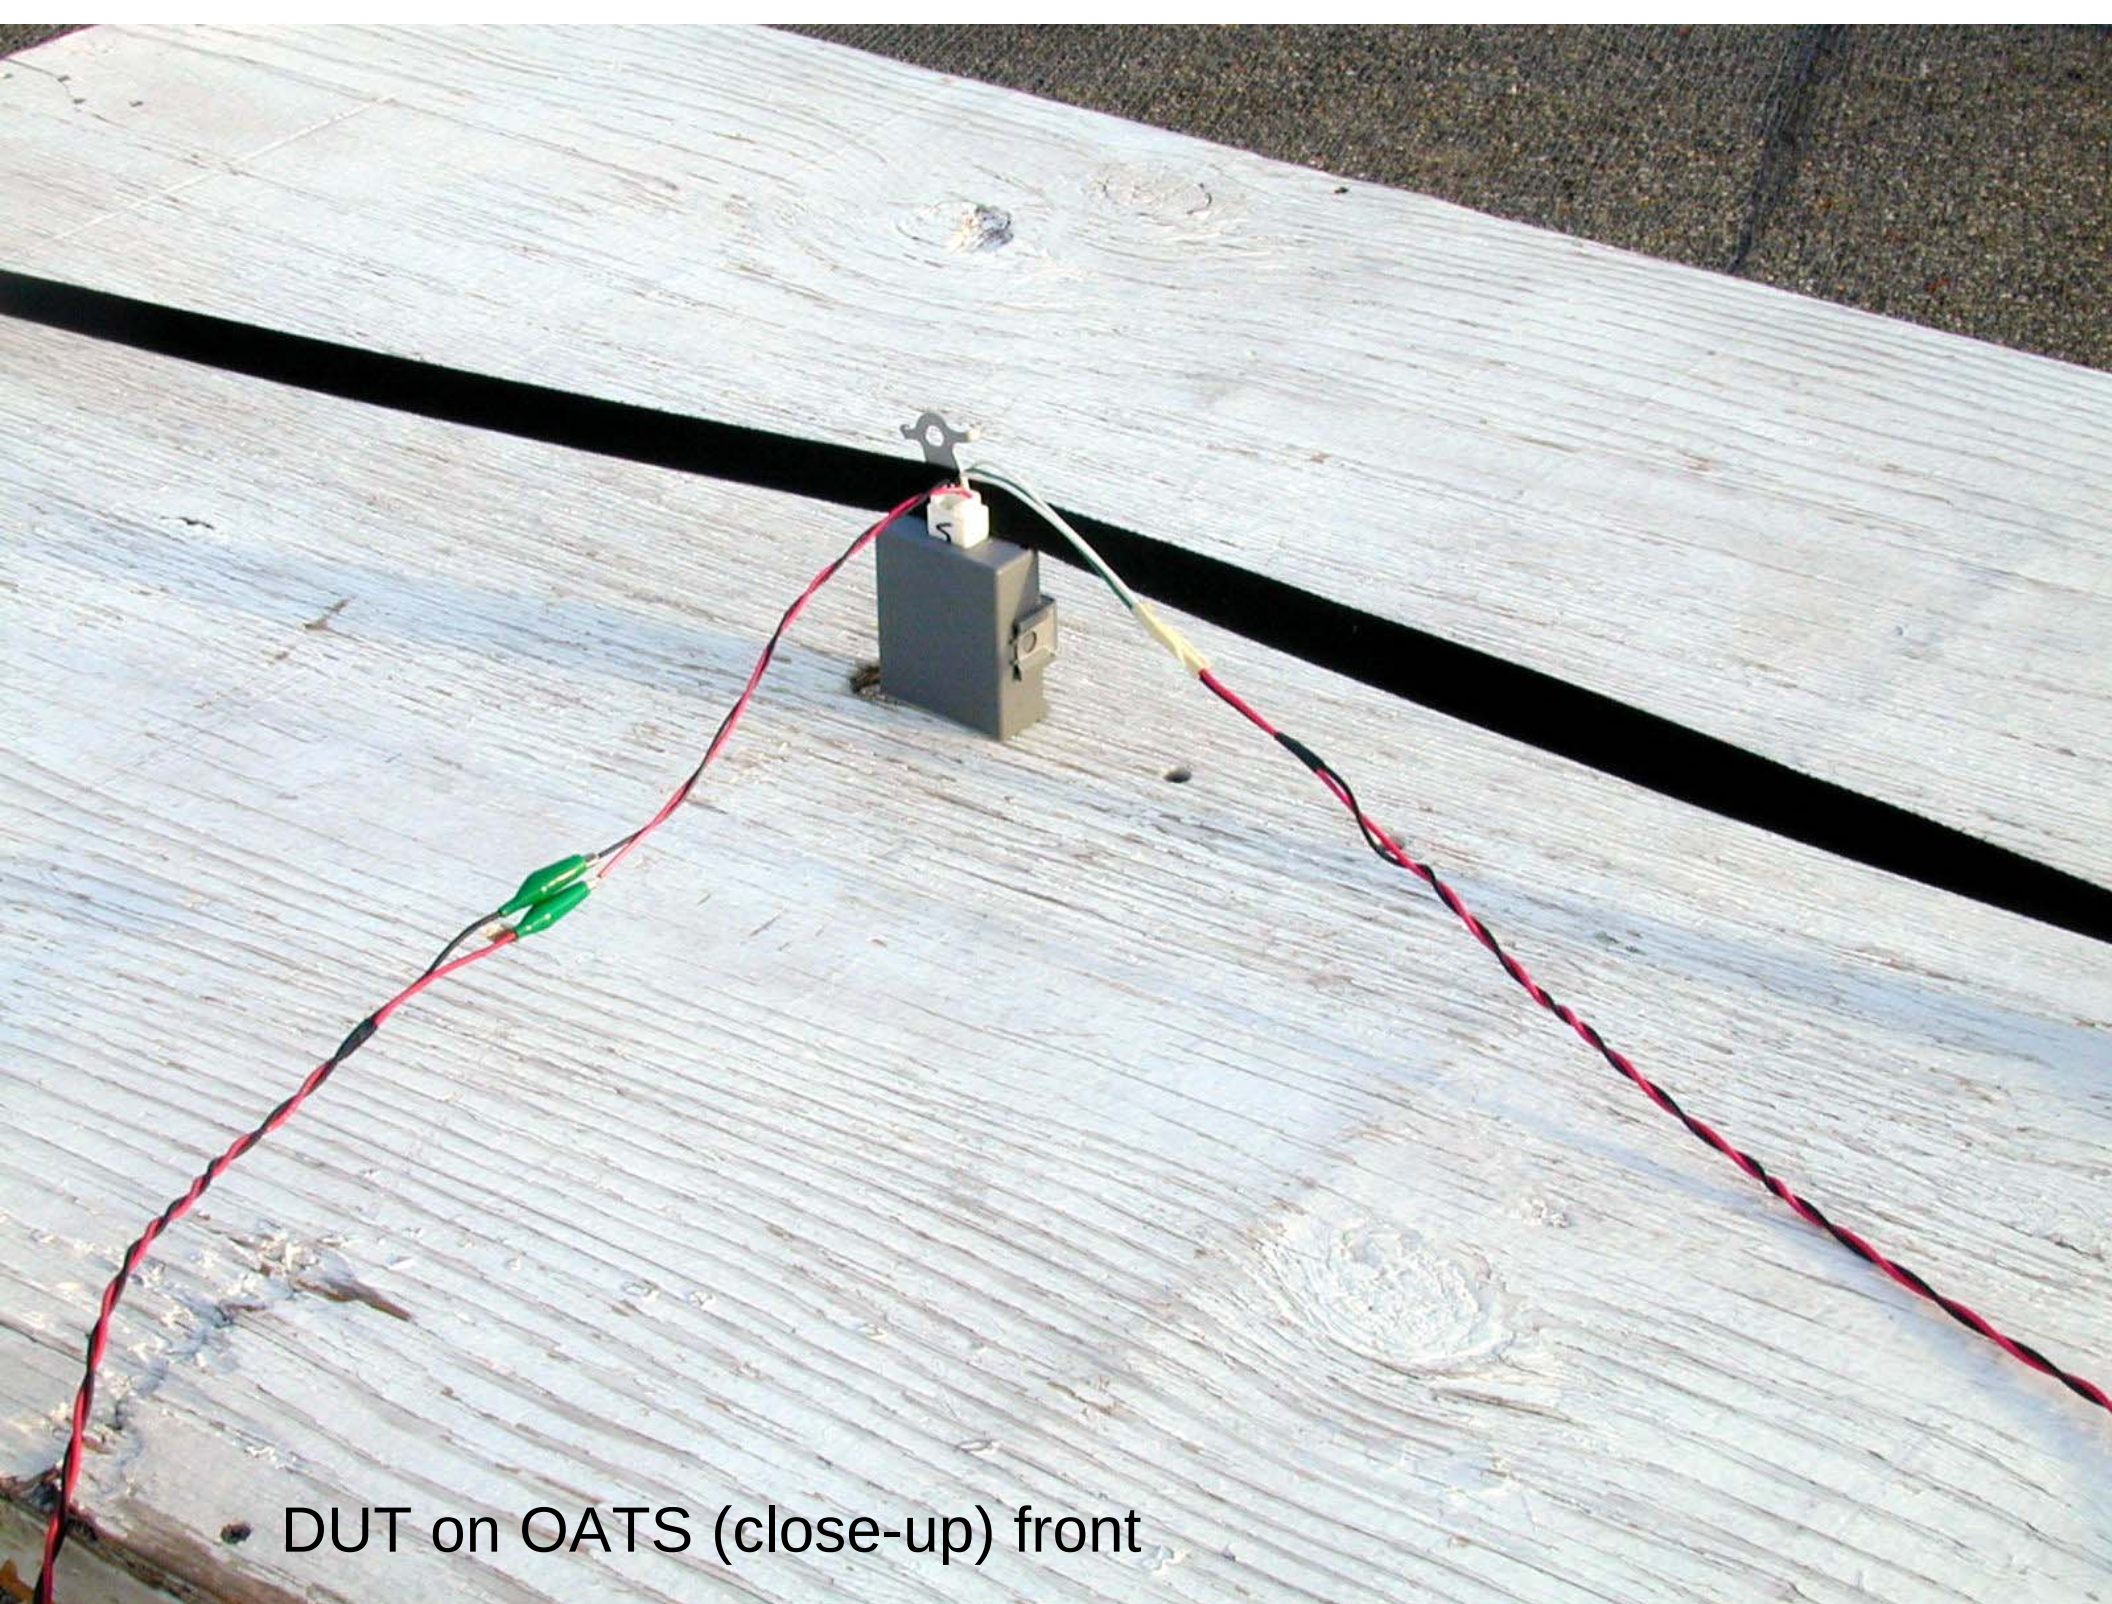

DUT on OATS (close-up) front

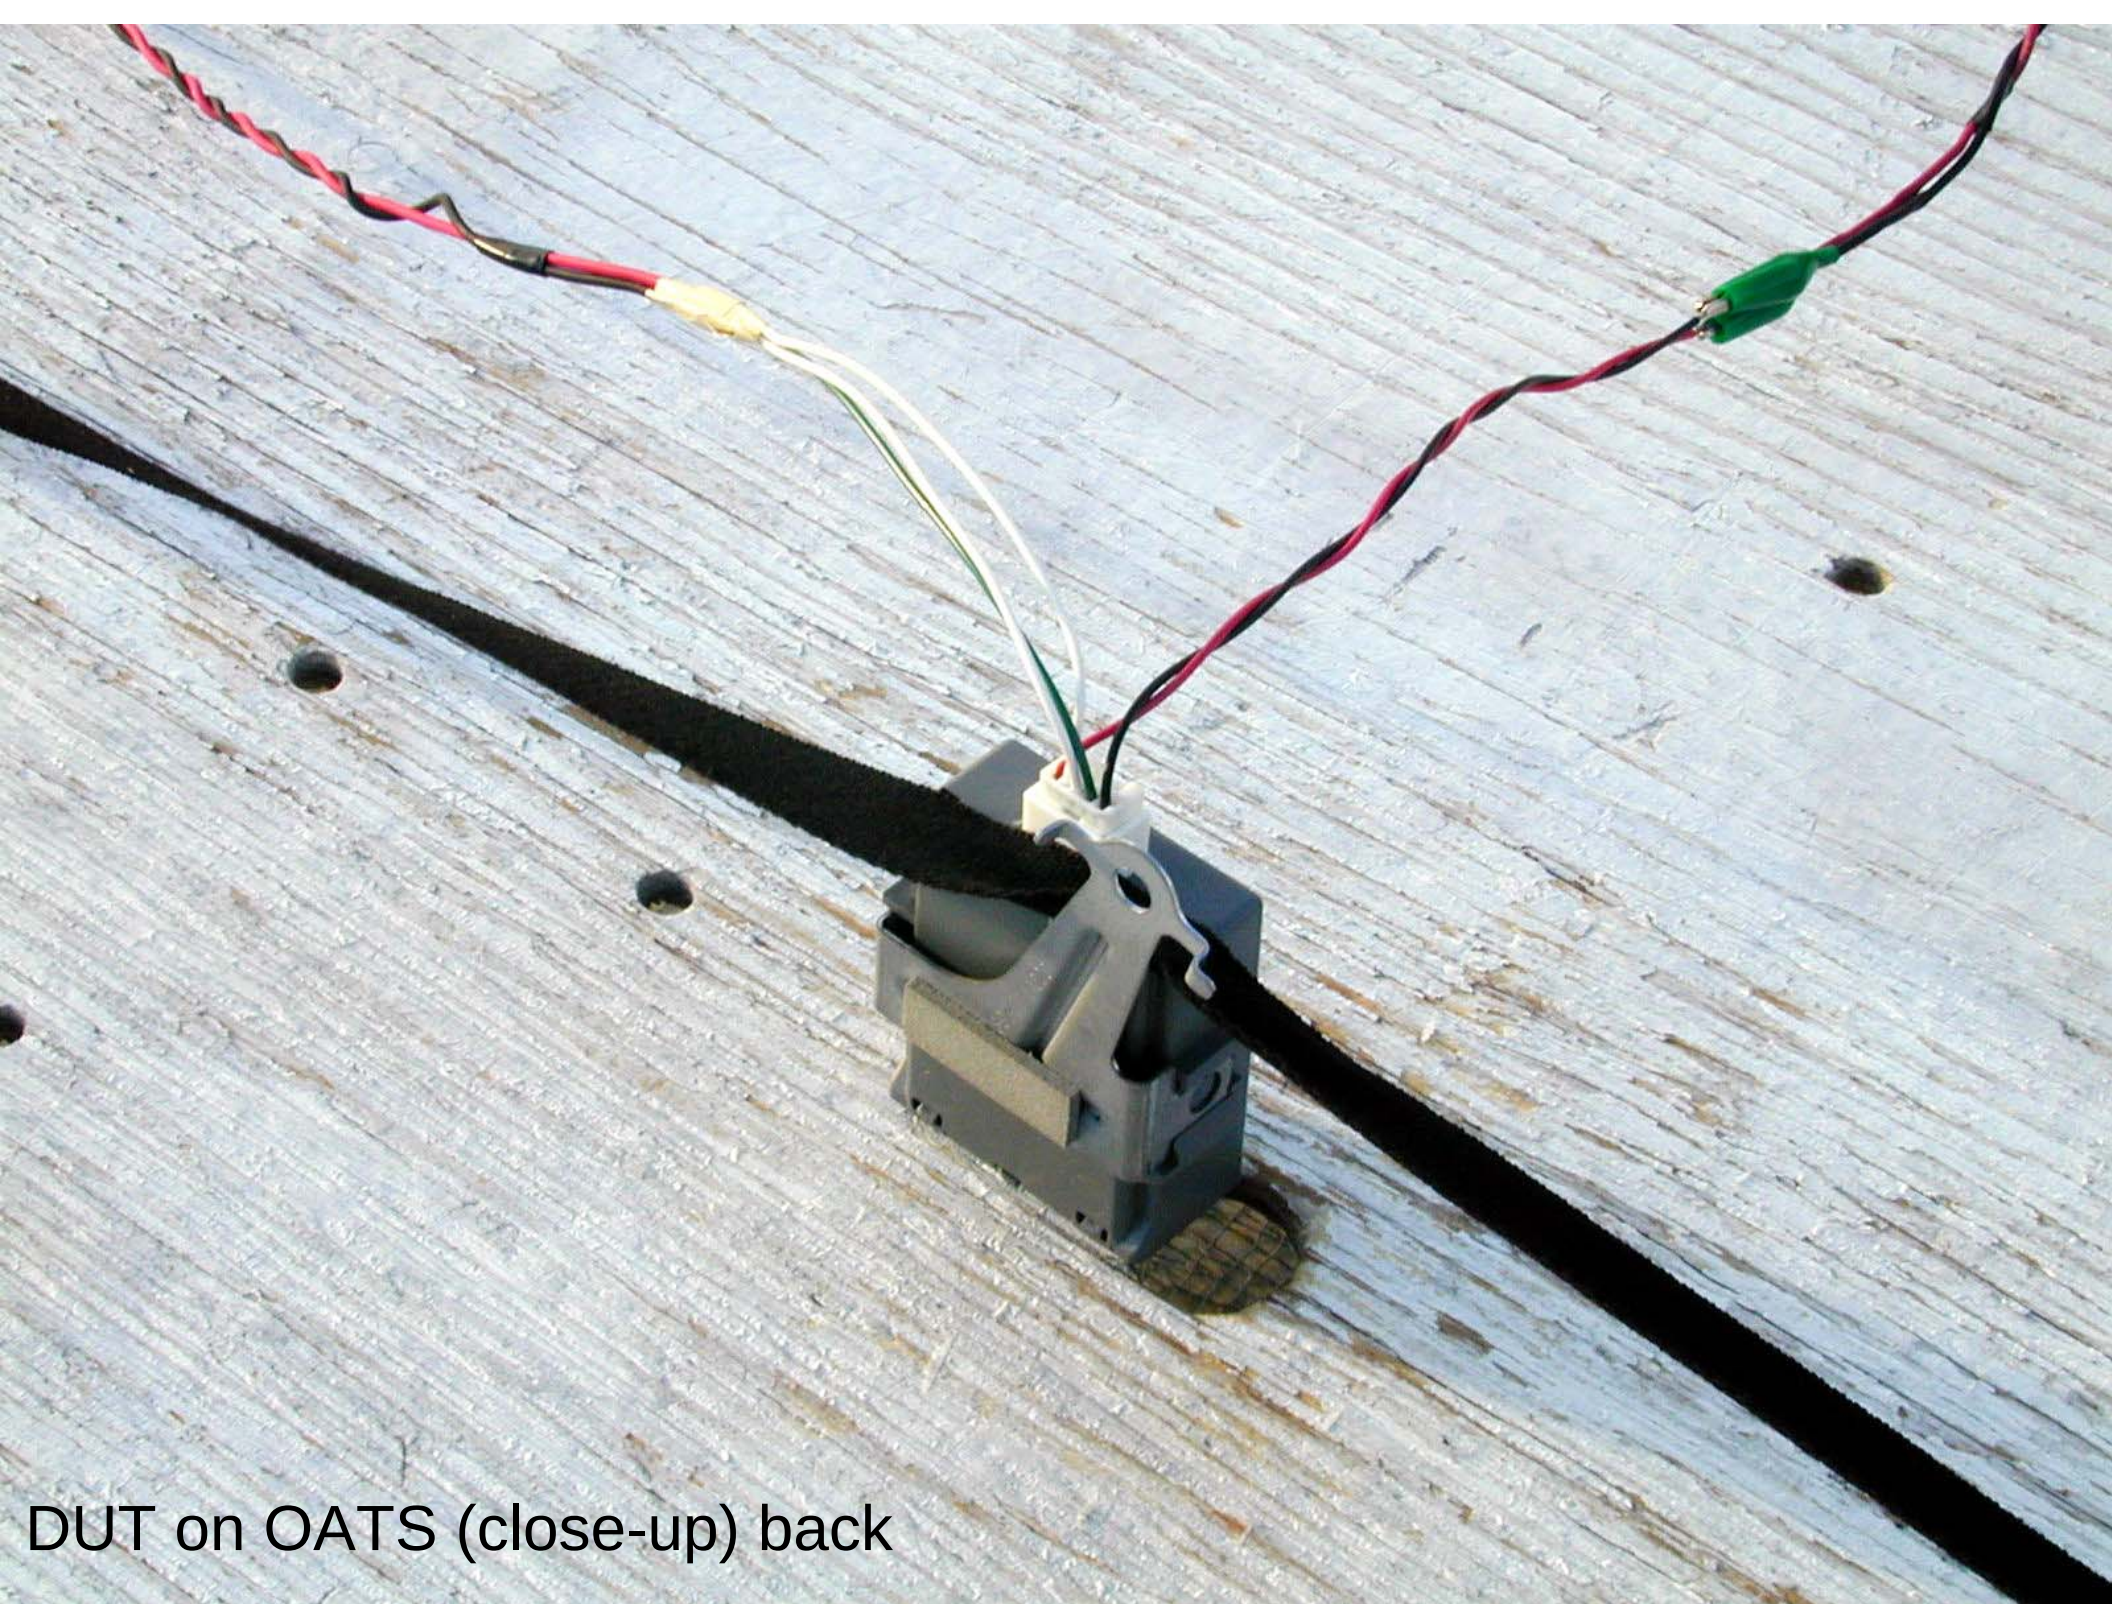

DUT on OATS (close-up) back