


RF TEST REPORT



Report No.: FCC_RF_SL15012901-AVE-010_UNII
Supersede Report No.: NONE

Applicant	:	Avery Dennison Retail Information Services LLC
Product Name	:	802.11abgn (1X1) + Bluetooth (2.1) module
Model No.	:	SDC-MSD40NBT
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	GU6-SDCMSD40NBT
IC ID	:	1502A-SDCMSD40NBT
Dates of test	:	February 4 to February 25, 2015
Issue Date	:	March 5, 2015
Test Result	:	☒ Pass ☐ Fail
Equipment complied with the specification [X] Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:

	
Teody Manansala	David Zhang
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
6.3	Host Photos - External	8
	Model 6057	8
	Model 6052	10
6.4	Host Photos – Internal	12
	Model 6057	12
	Model 6052	14
6.5	EUT Photos	16
6.6	Test Setup Photos	17
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	18
7.1	Supporting Equipment	18
7.2	Cabling Description	18
7.3	Test Software Description	18
8	TEST SUMMARY	19
9	MEASUREMENT UNCERTAINTY	20
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	21
10.1	Radiated Emissions below 1GHz	21
10.2	Radiated Spurious Emissions above 1GHz	25
	ANNEX A. TEST INSTRUMENT	32
	ANNEX B. SIEMIC ACCREDITATION	33

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL15012901-AVE-010_UNII	None	Original	03/05/2015

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Avery Dennison Retail Information Service LLC
Product: 802.11abgn (1X1) + Bluetooth (2.1) module
Model: SDC-MSD40NBT

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Avery Dennison Retail Information Service LLC
Applicant Address	:	170 Monarch Lane, Miamisburg, OH 45342 USA
Manufacturer Name	:	Avery Dennison Retail Information Service LLC
Manufacturer Address	:	170 Monarch Lane, Miamisburg, OH 45342 USA

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	802.11abgn (1X1) + Bluetooth (2.1) module
Model No.	SDC-MSD40NBT
Trade Name	Avery Dennison
Serial No.	N/A
Host Name	Handheld Scan-Print-Apply thermal barcode printer
Host Model	Pathfinder® 6057 and 6052
DC Input Power	7.4V Lithium-Ion
Adapter Input Power	N/A
Power Adapter SN	N/A
Product Hardware version	Rev. 12
Product Software version	3.03.11
Radio Hardware version	Rev. 12
Radio Software version	3.03.11
Test Software version	3.5.0.11
Date of EUT received	January 10, 2015
Equipment Class/ Category	DTS, UNII
Operating Frequencies	2412-2462MHz, 5180-5320MHz, 5500-5700MHz, 5745-5805MHz
Port/Connectors	x3USB, RJ45, x2Serial, Mini-Din

6.2 Radio Description

Spec for Radio

Radio Type	802.11b	802.11g	802.11a	802.11n-20M
Operating Frequency	2412-2462MHz	2412-2462MHz	5180-5320MHz 5500-5700MHz 5745-5805MHz	2412-2462MHz 5180-5320MHz 5500-5700MHz 5745-5805MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	20MHz	5MHz(2.4GHz), 20MHz (5GHz)
Number of Channels	11	11	23	11(2.4GH) 23 (5GHz)
Antenna Type	BlackChip Antenna			
Antenna Gain	1.7dBi (for 2.4GHz), 3dBi (for 5GHz)			
Antenna Connector Type	U. FL connector			

EUT Power Level Settings

Mode	Frequency	Power Setting
802.11-a	5180	16 dBm
802.11-a	5260	16 dBm
802.11-a	5320	16 dBm
802.11-a	5500	16 dBm
802.11-a	5580	16 dBm
802.11-a	5700	16 dBm
802.11-a	5745	16 dBm
802.11-a	5785	16 dBm
802.11-a	5805	16 dBm
802.11-n20	5180	16 dBm
802.11-n20	5260	16 dBm
802.11-n20	5320	16 dBm
802.11-n20	5500	16 dBm
802.11-n20	5580	16 dBm
802.11-n20	5700	16 dBm
802.11-n20	5745	16 dBm
802.11-n20	5785	16 dBm
802.11-n20	5805	16 dBm

6.3 Host Photos - External

Model 6057



Top View



Bottom View



Front View



Rear View



Left Side View



Right Side View



Battery –Top View



Battery –Bottom View

Model 6052



Top View



Bottom View



Front View



Rear View



Left Side View



Right Side View



Battery –Top View




Battery –Bottom View

6.4 Host Photos – Internal

Model 6057




Host – With Cover

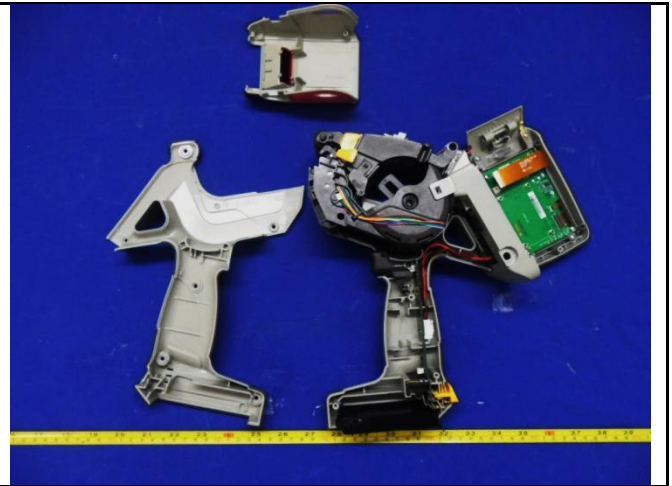


Host – Without Cover




LCD Display - Front View

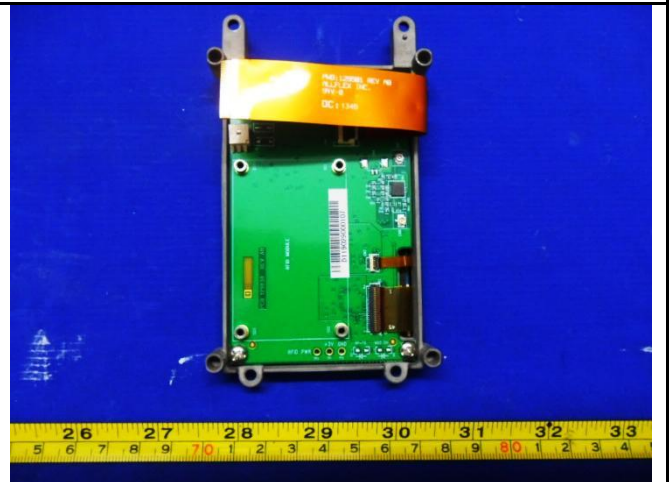


LCD Display - Rear View

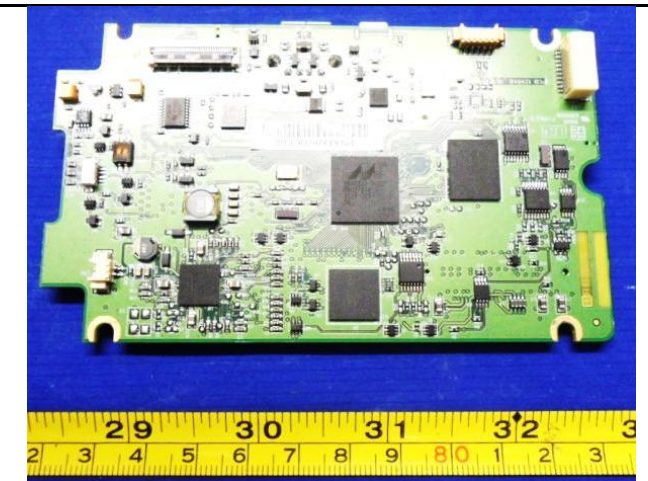


PCBA1 - Front View

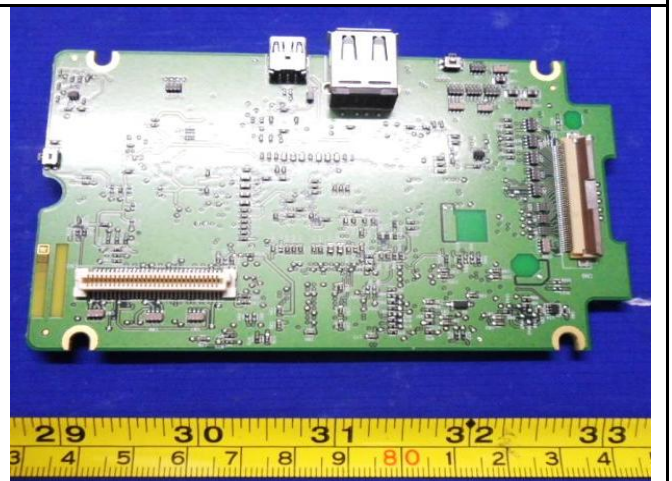


PCBA1 - Front View

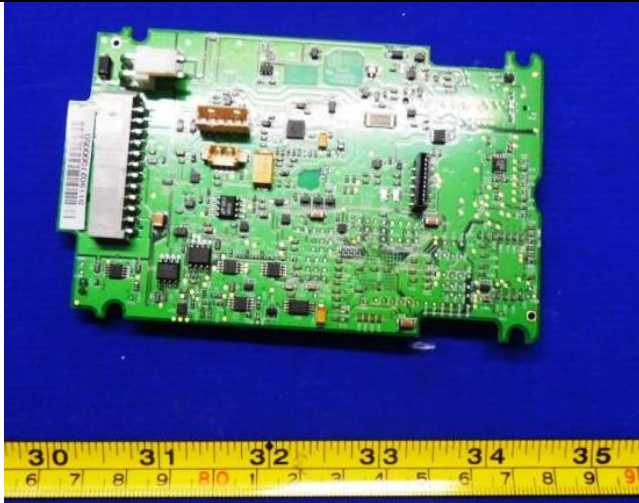


PCBA2 - Front View

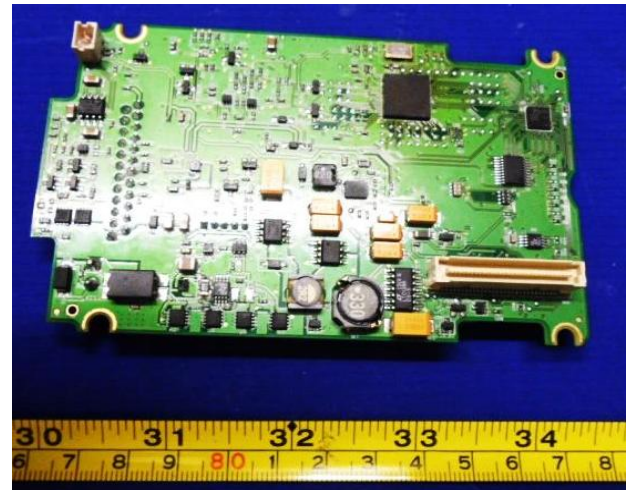

PCBA2 - Front View

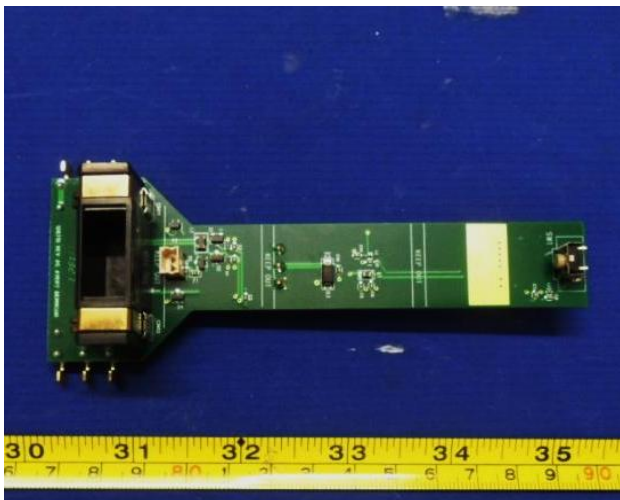


PCBA3 - Front View

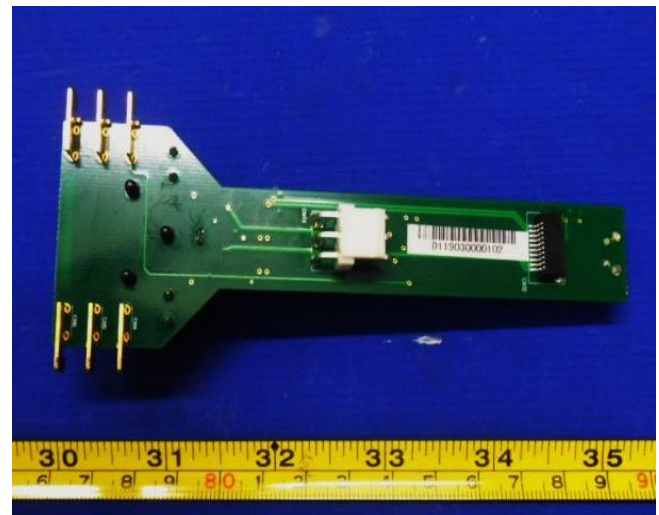

PCBA3 - Front View



PCBA3 - Front View

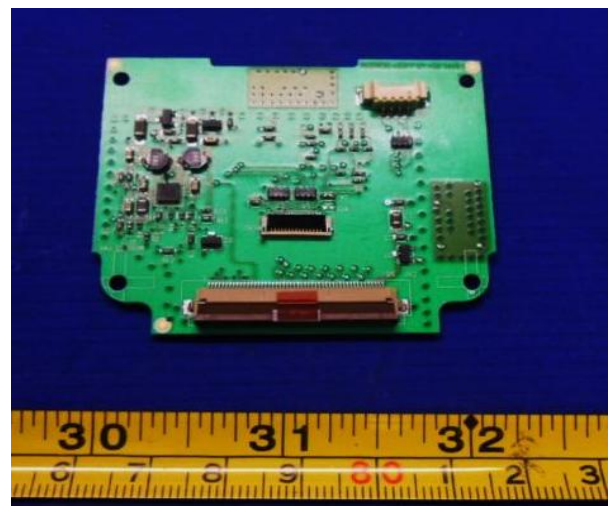


PCBA3 - Front View


Model 6052




Host – With Cover

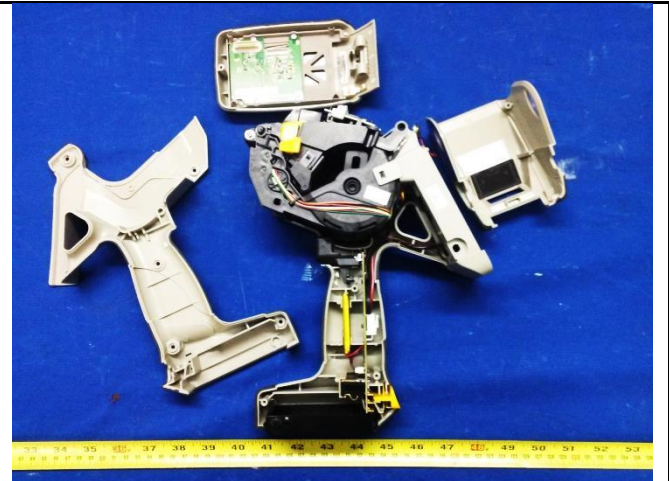


Host – Without Cover

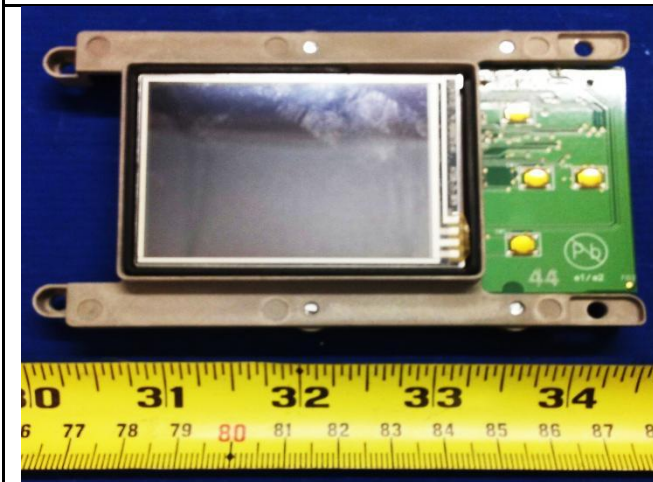


LCD Display - Front View

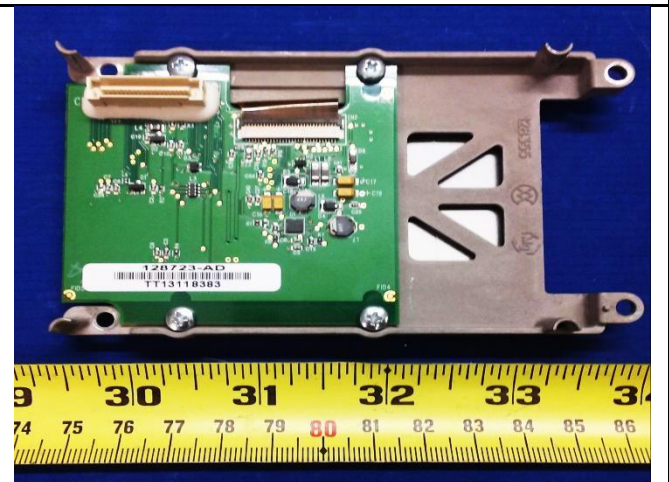


LCD Display - Rear View

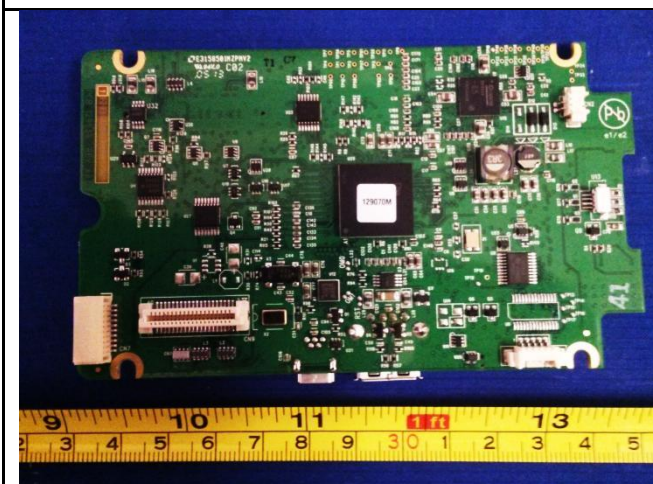


PCBA1 - Front View

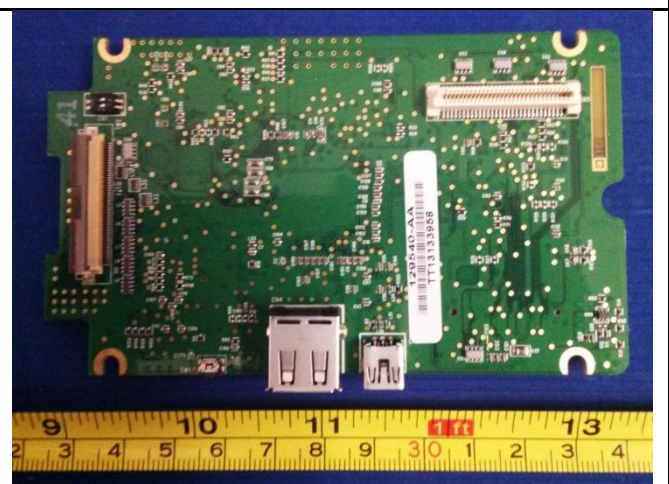


PCBA1 - Front View

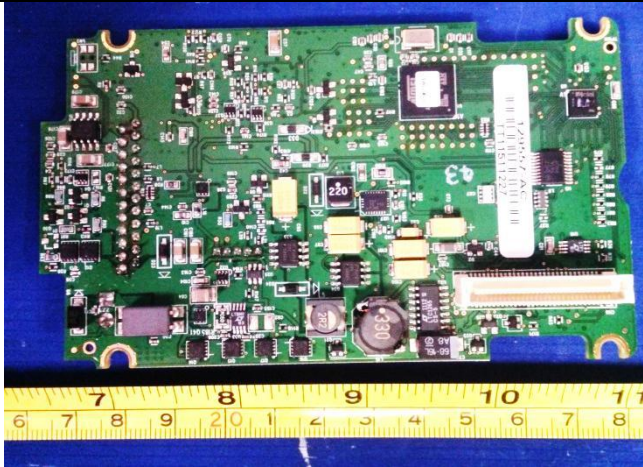


PCBA2 - Front View

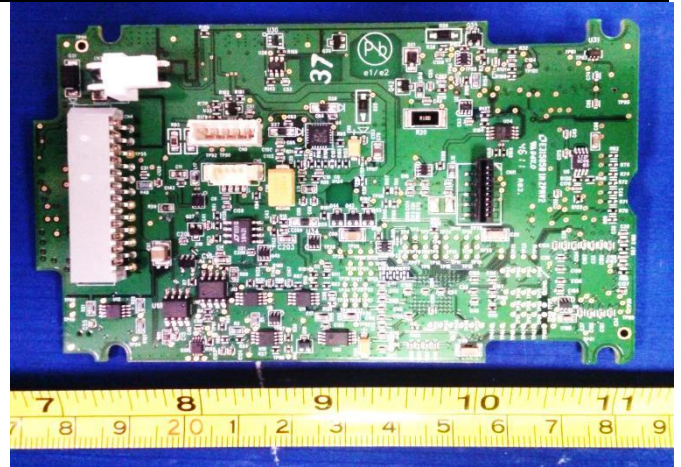

PCBA2 - Front View

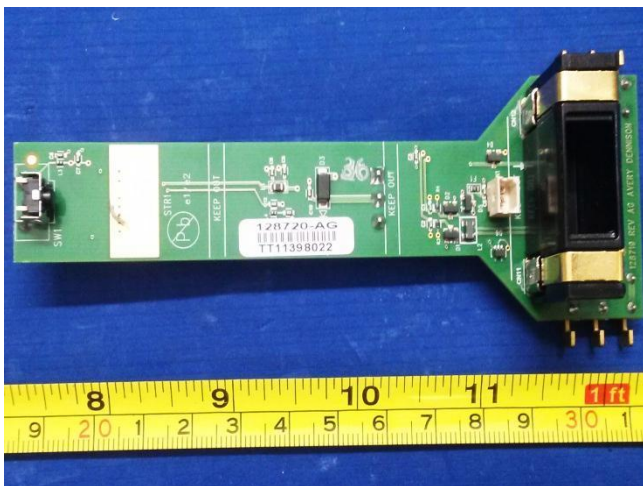


PCBA3 - Front View

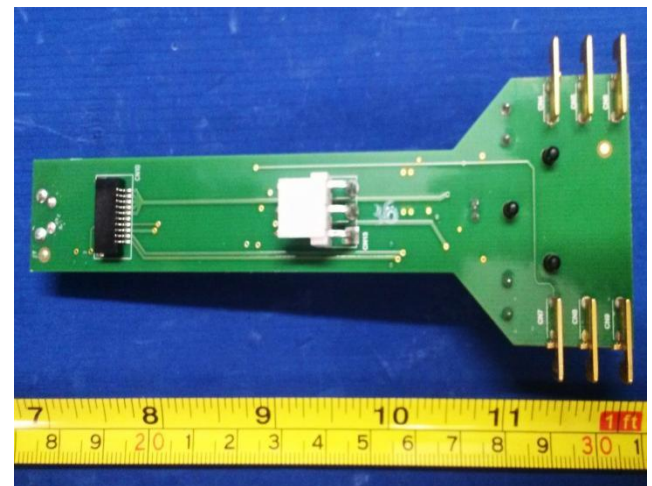

PCBA3 - Front View



PCBA3 - Front View

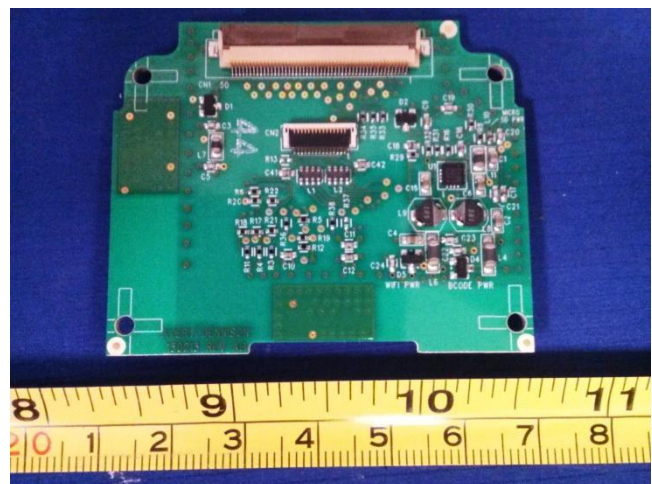


PCBA3 - Front View


6.5 EUT Photos



EUT – Top View

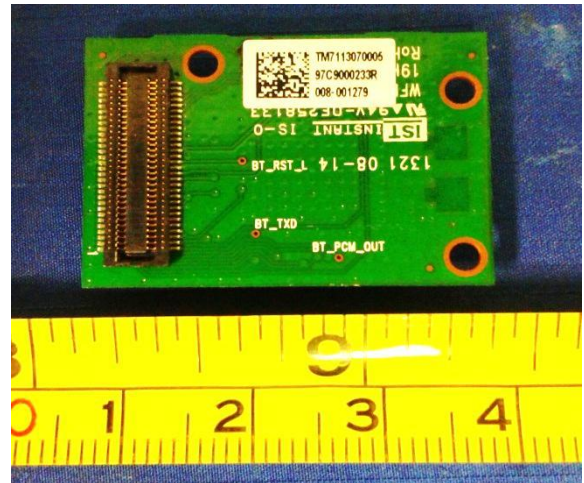


EUT – Bottom View

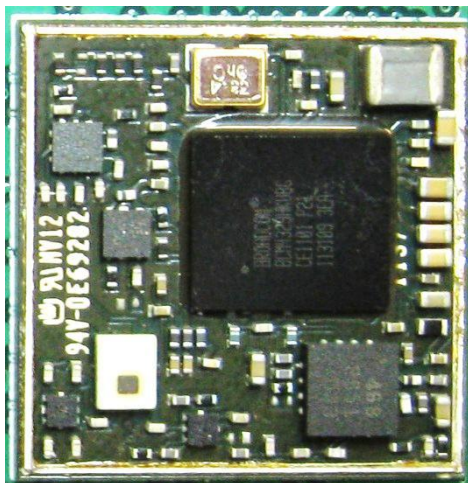


EUT – Top View without shielding

6.6 Test Setup Photos

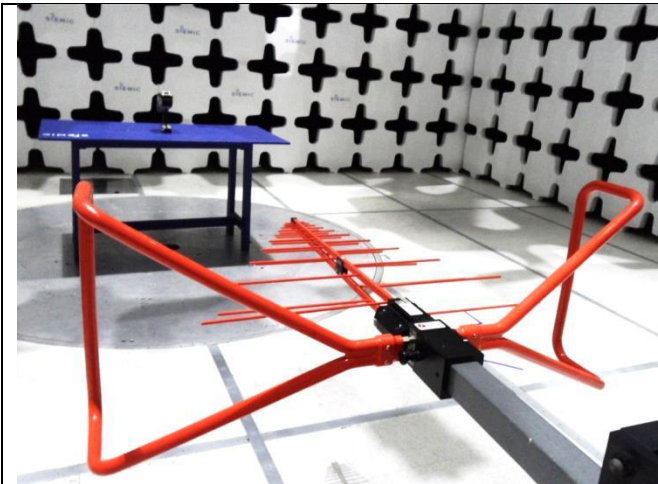

Radiated Emissions (<1GHz) – Front View

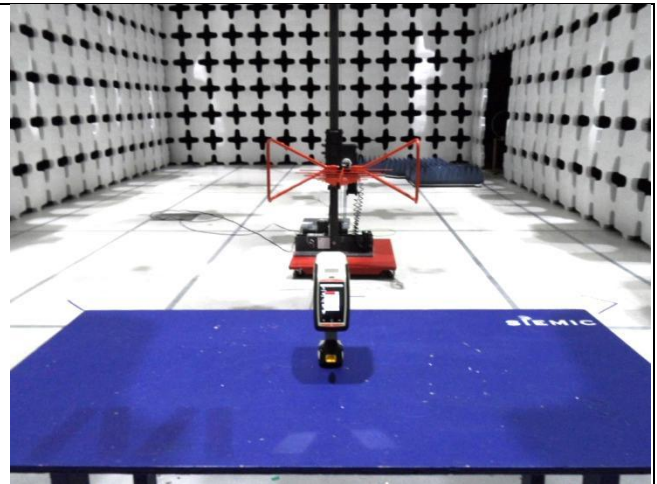


Radiated Emissions (<1GHz) – Rear View



Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View

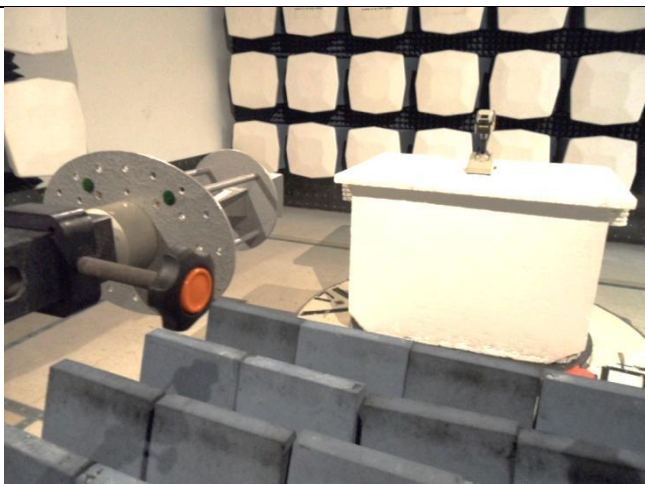

Radiated Emissions (>18GHz) – Front View



Radiated Emissions (>18GHz) – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
-	-	-	-	-	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
-	-	-	-	-	-	-	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	SRU software	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10: 2013 789033 D01 General UNII Test Procedures v01r03	☒ Pass ☐ N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.10: 2013	☐ Pass ☒ N/A

Test Item	Test standard		Test Method/Procedure		Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01		☐ Pass ☒ N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01		☐ Pass ☒ N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-		☐ Pass ☒ N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v01		☒ Pass ☐ N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01		☐ Pass ☒ N/A
Peak Excursion Ratio	FCC	15.407(a)(6)	789033 D02 General UNII Test Procedures New Rules v01		☐ Pass ☒ N/A
Frequency Stability	FCC	15.407 (g)	-		☐ Pass ☒ N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	-		☐ Pass ☒ N/A
User Manual	FCC	-	-		☐ Pass ☒ N/A

Remark	- All measurement uncertainties are not taken into consideration for all presented test result. - The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.
--------	---


9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

10 Measurements, Examination and Derived Results

10.1 Radiated Emissions below 1GHz

Requirement(s):

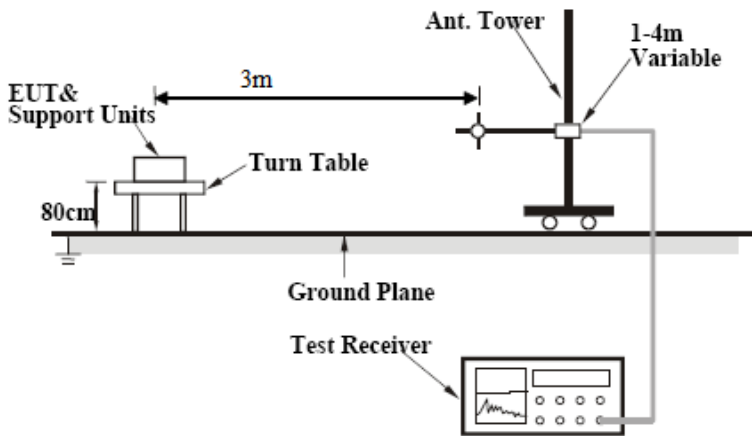
Spec	Requirement	Applicable										
47CFR§ 15.407(b) 15.209 (a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT , changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass ☐ Fail											

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			
Environmental Conditions:	Temp (°C):	26.1	Result	Pass
	Humidity (%)	47.5		
	Atmospheric (mbar):	1020		
Mains Power:	120VAC, 60Hz			
Tested by:	Teody Manansala			
Test Date:	November 18, 2014			
Remarks:	5GHz 11n40 5280MHz			

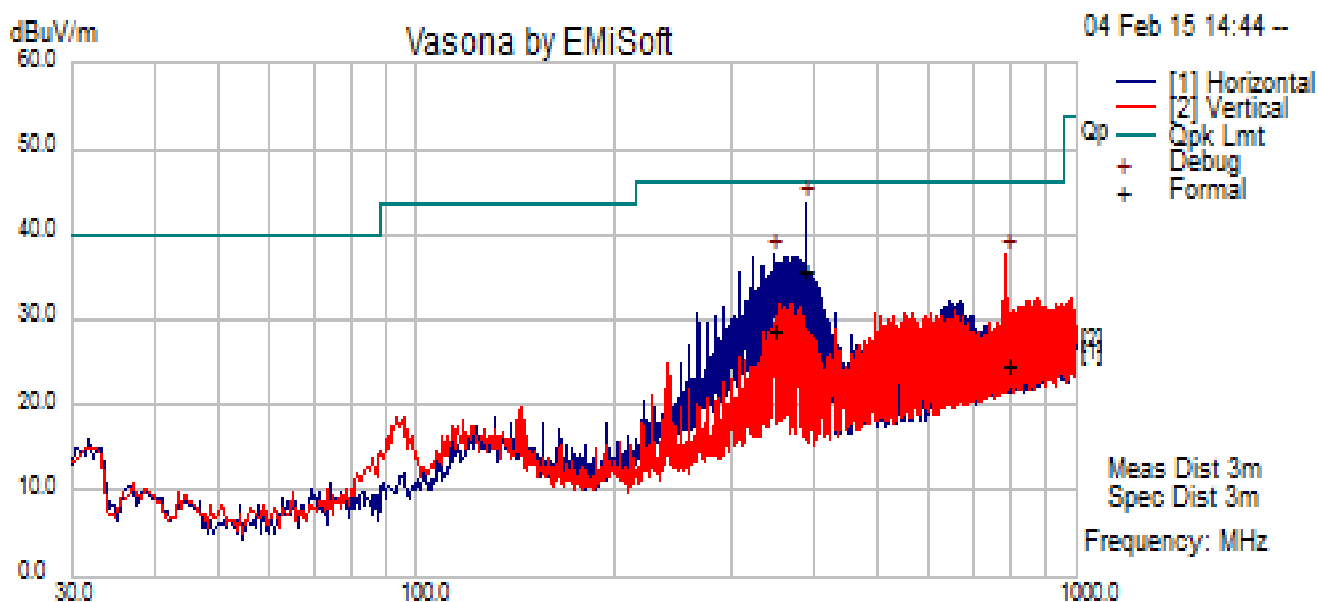


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
389.99	56.87	3.30	-24.37	35.80	Quasi Max	H	231.00	289.00	46.00	-10.20	Pass
347.92	50.47	3.17	-25.09	28.55	Quasi Max	H	255.00	277.00	46.00	-17.45	Pass
785.70	38.04	4.79	-18.07	24.76	Quasi Max	V	349.00	225.00	46.00	-21.24	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	below 1GHz			
Environmental Conditions:	Temp (°C):	26.1	Result	Pass
	Humidity (%)	47.5		
	Atmospheric (mbar):	1020		
Mains Power:	120VAC, 60Hz			
Tested by:	Teody Manansala			
Test Date:	November 18. 2014			
Remarks:	5GHz 11n40 5580MHz			

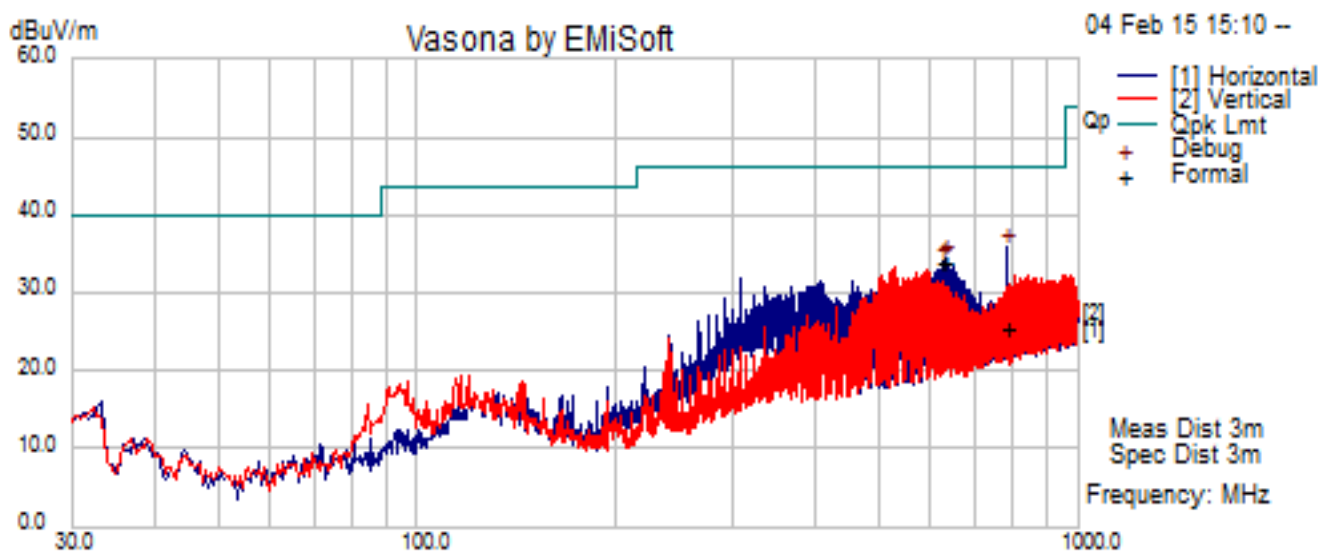


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
779.98	38.77	4.78	-17.99	25.55	Quasi Max	H	208.00	109.00	46.00	-20.45	Pass
631.99	49.57	4.28	-20.00	33.85	Quasi Max	H	199.00	89.00	46.00	-12.15	Pass
623.96	50.02	4.25	-20.38	33.90	Quasi Max	H	214.00	101.00	46.00	-12.10	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	below 1GHz				
Environmental Conditions:	Temp (°C):	26.1	Result	Pass	
	Humidity (%)	47.5			
	Atmospheric (mbar):	1020			
Mains Power:	120VAC, 60Hz				
Tested by:	Teody Manansala				
Test Date:	November 18. 2014				
Remarks:	5GHz 11n40 5785MHz				

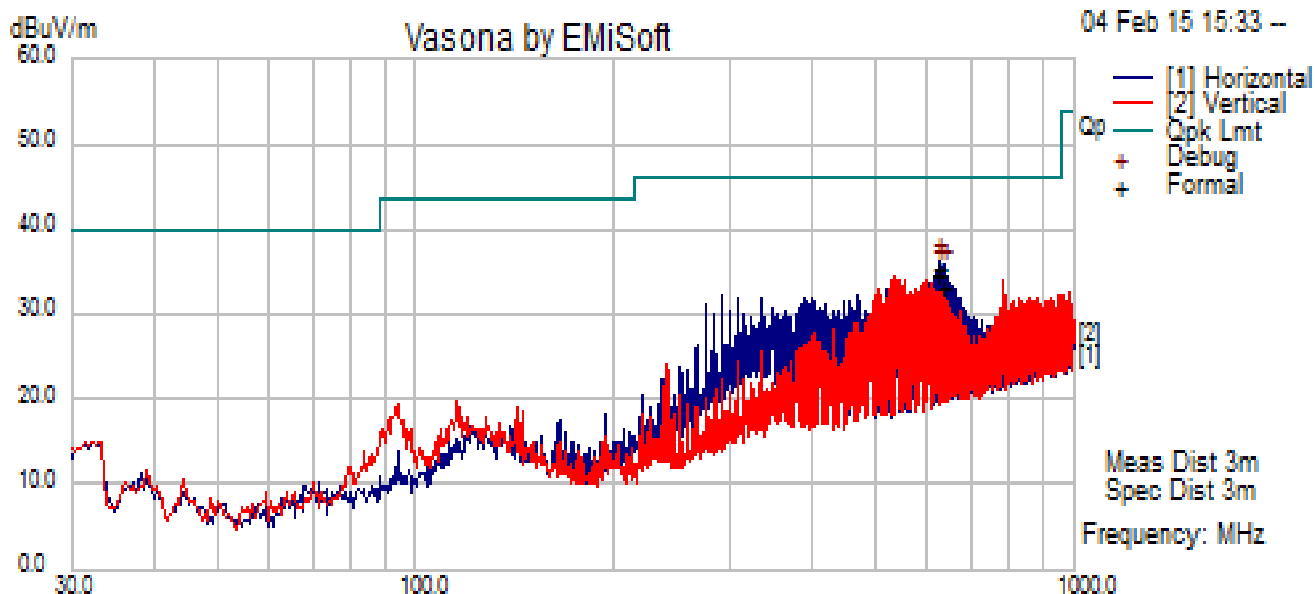


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
627.98	50.62	4.27	-20.17	34.72	Quasi Max	H	218.00	96.00	46.00	-11.28	Pass
636.00	48.65	4.29	-19.92	33.02	Quasi Max	H	190.00	82.00	46.00	-12.98	Pass
623.96	51.49	4.25	-20.38	35.36	Quasi Max	H	205.00	98.00	46.00	-10.64	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.2 Radiated Spurious Emissions above 1GHz

Requirement(s):

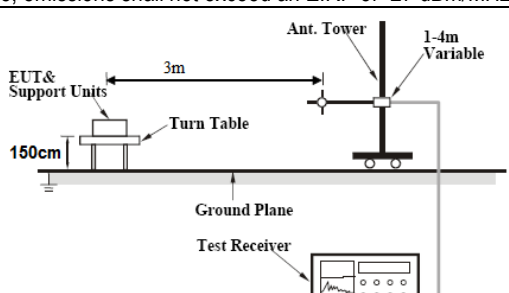Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☒
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	☐
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☐
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	☒
Test Setup			
Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - An average measurement was then made for that frequency point. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.		
Test Date	02/04/2015 to 02/25/2015	Environmental condition	Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. For spurious emission measurement, if the peak emission is below 54 dBuV/m average limit, the average value is not be measured. Both horizontal and vertical polarization have been verified.		
Result	☒ Pass ☐ Fail		


Equipment Setting

TEST	RBW	VBW	SPAN	Detector	SWEEP	Trace	NOTES
Radiated Spurious Emission	1MHz	3MHz	1GHz - 40 GHz	Peak	Auto	Max hold	PK Measurement
Radiated Spurious Emission	1MHz	10Hz	1GHz - 40 GHz	Peak	Auto	Max hold	Ave Measurement

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Radiated Restrcted Band Test Results (Above 1GHz)

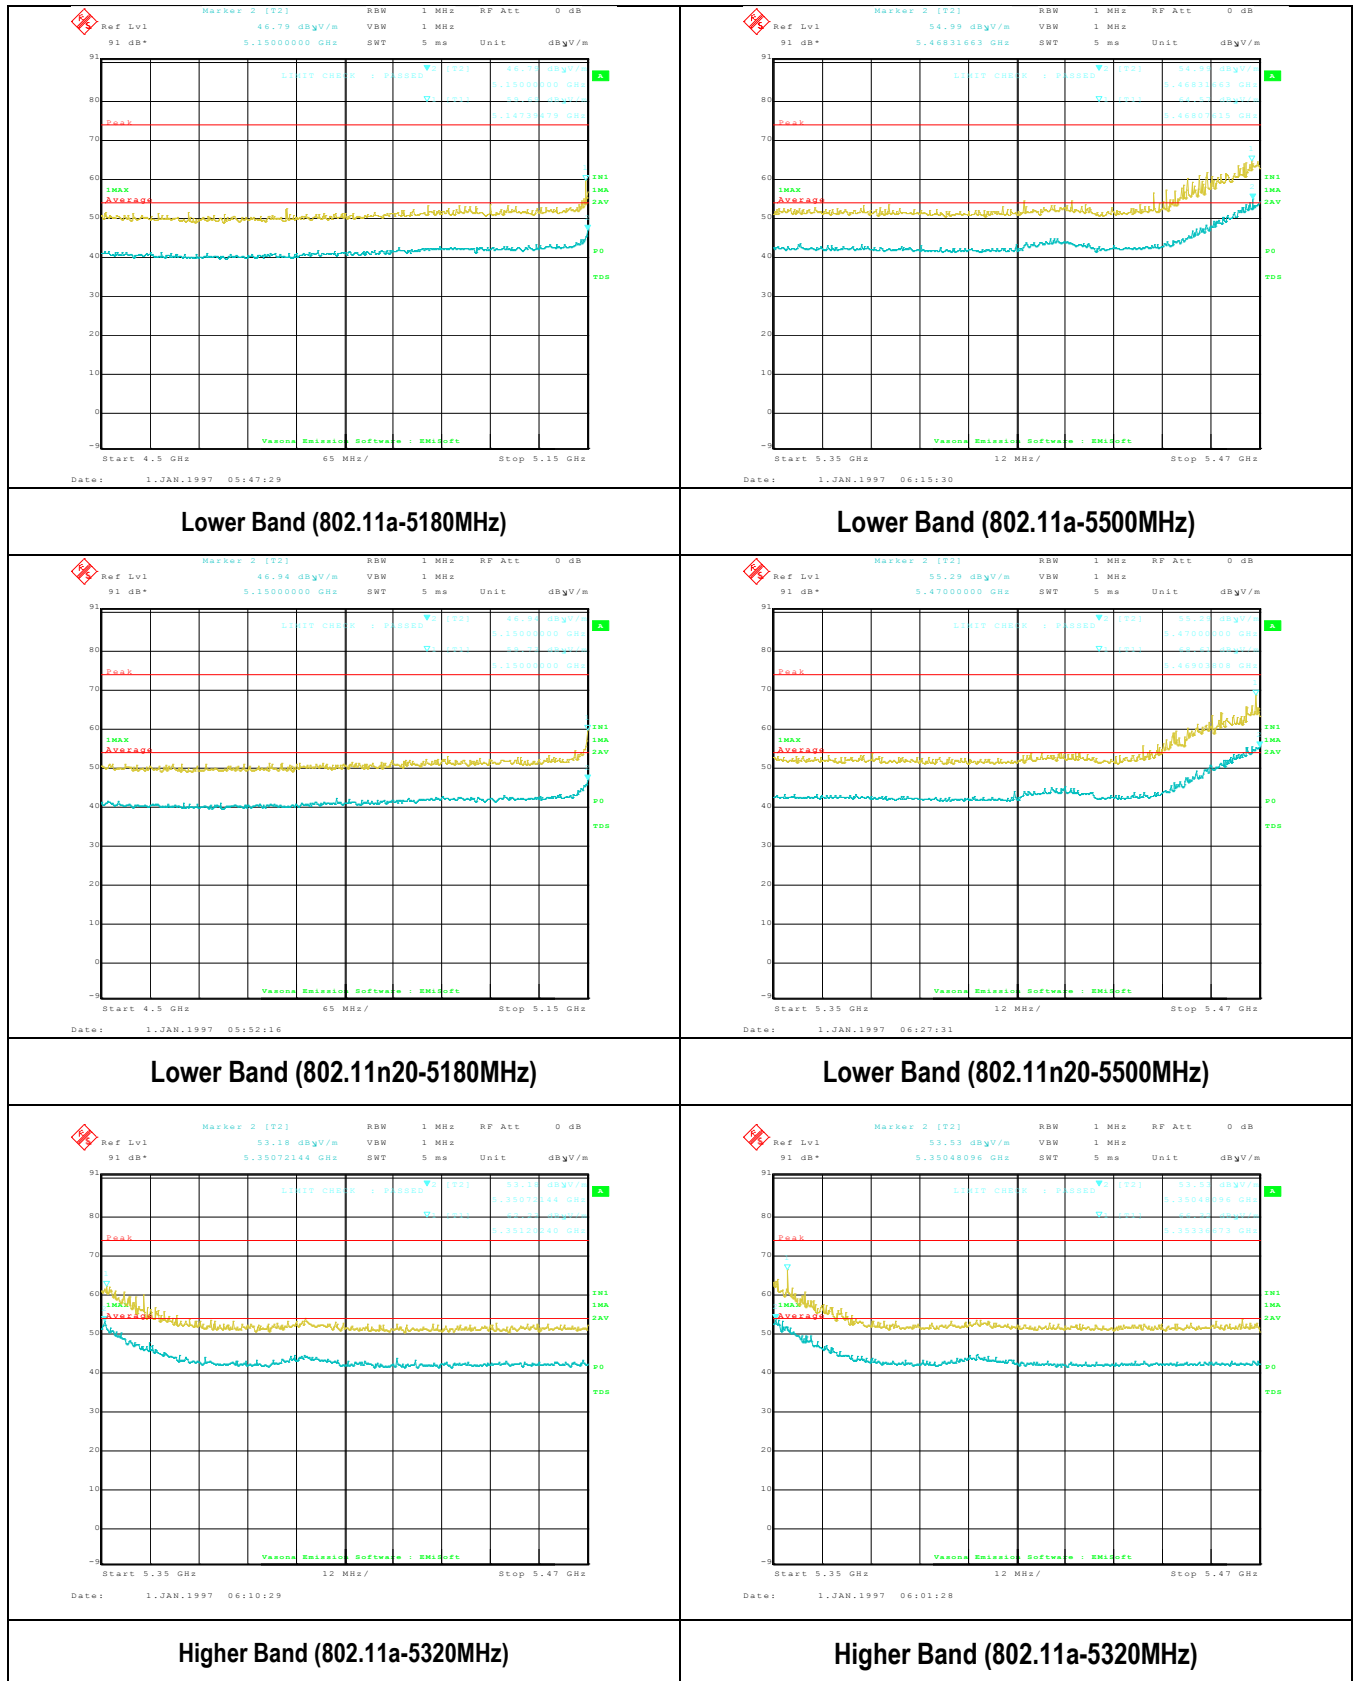

Radiated Spurious Emission Test Results (Above 1GHz)

Above 1GHz – 802.11a – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1020.69	45.76	2.45	9.64	57.86	Peak Max	V	180.00	263.00	74.00	-16.14	Pass
2095.23	43.11	3.70	11.18	57.98	Peak Max	H	221.00	132.00	74.00	-16.02	Pass
17681.87	40.91	13.00	10.58	64.50	Peak Max	H	274.00	212.00	74.00	-9.50	Pass
1020.69	31.79	2.45	9.64	43.89	Average Max	V	180.00	263.00	54.00	-10.11	Pass
2095.23	30.03	3.70	11.18	44.90	Average Max	H	221.00	132.00	54.00	-9.10	Pass
17681.87	27.16	13.00	10.58	50.74	Average Max	H	274.00	212.00	54.00	-3.26	Pass

Above 1GHz – 802.11a – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1021.30	44.83	2.45	9.64	56.93	Peak Max	H	146.00	37.00	74.00	-17.07	Pass
17743.24	40.50	13.00	10.65	64.15	Peak Max	H	178.00	163.00	74.00	-9.85	Pass
2061.56	43.39	3.57	11.28	58.24	Peak Max	H	123.00	168.00	74.00	-15.76	Pass
1021.30	31.80	2.45	9.64	43.90	Average Max	H	146.00	37.00	54.00	-10.10	Pass
17743.24	27.15	13.00	10.65	50.80	Average Max	H	178.00	163.00	54.00	-3.20	Pass
2061.56	29.98	3.57	11.28	44.83	Average Max	H	123.00	168.00	54.00	-9.17	Pass

Above 1GHz – 802.11a – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1031.48	44.97	2.46	9.63	57.06	Peak Max	H	279.00	164.00	74.00	-16.94	Pass
5316.81	44.46	6.46	9.69	60.61	Peak Max	H	205.00	132.00	74.00	-13.39	Pass
2114.96	43.10	3.77	11.11	57.99	Peak Max	V	209.00	210.00	74.00	-16.01	Pass
1031.48	31.85	2.46	9.63	43.94	Average Max	H	279.00	164.00	54.00	-10.06	Pass
5316.81	30.43	6.46	9.69	46.57	Average Max	H	205.00	132.00	54.00	-7.43	Pass
2114.96	29.84	3.77	11.11	44.72	Average Max	V	209.00	210.00	54.00	-9.28	Pass

Above 1GHz – 802.11a – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1009.50	45.63	2.45	9.66	57.74	Peak Max	V	205.00	119.00	74.00	-16.26	Pass
2108.37	43.64	3.75	11.13	58.53	Peak Max	V	287.00	335.00	74.00	-15.47	Pass
17800.00	39.96	13.00	10.71	63.67	Peak Max	V	275.00	114.00	74.00	-10.33	Pass
1009.50	32.10	2.45	9.66	44.21	Average Max	V	205.00	119.00	54.00	-9.79	Pass
2108.37	29.92	3.75	11.13	44.81	Average Max	V	287.00	335.00	54.00	-9.19	Pass
17800.00	26.90	13.00	10.71	50.61	Average Max	V	275.00	114.00	54.00	-3.39	Pass

Above 1GHz – 802.11a – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1008.06	45.37	2.45	9.66	57.48	Peak Max	V	251.00	42.00	74.00	-16.52	Pass
2067.16	43.52	3.59	11.26	58.38	Peak Max	H	135.00	336.00	74.00	-15.62	Pass
17716.87	40.50	13.00	10.62	64.12	Peak Max	H	197.00	313.00	74.00	-9.88	Pass
1008.06	32.08	2.45	9.66	44.19	Average Max	V	251.00	42.00	54.00	-9.81	Pass
2067.16	30.10	3.59	11.26	44.95	Average Max	H	135.00	336.00	54.00	-9.05	Pass
17716.87	27.35	13.00	10.62	50.97	Average Max	H	197.00	313.00	54.00	-3.03	Pass

Above 1GHz – 802.11a – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1012.49	46.02	2.45	9.66	58.13	Peak Max	H	234.00	317.00	74.00	-15.87	Pass
2106.29	43.64	3.74	11.14	58.53	Peak Max	H	251.00	356.00	74.00	-15.47	Pass
14889.06	43.47	13.79	7.39	64.64	Peak Max	V	116.00	147.00	74.00	-9.36	Pass
1012.49	32.55	2.45	9.66	44.66	Average Max	H	234.00	317.00	54.00	-9.34	Pass
2106.29	30.29	3.74	11.14	45.17	Average Max	H	251.00	356.00	54.00	-8.83	Pass
14889.06	29.60	13.79	7.39	50.77	Average Max	V	116.00	147.00	54.00	-3.23	Pass

Above 1GHz – 802.11a – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
2126.93	43.64	3.82	11.08	58.53	Peak Max	H	136.00	200.00	74.00	-15.47	Pass
1012.44	45.50	2.45	9.66	57.60	Peak Max	V	227.00	325.00	74.00	-16.40	Pass
17725.09	41.31	13.00	10.63	64.94	Peak Max	V	195.00	32.00	74.00	-9.06	Pass
2126.93	29.73	3.82	11.08	44.62	Average Max	H	136.00	200.00	54.00	-9.38	Pass
1012.44	32.27	2.45	9.66	44.37	Average Max	V	227.00	325.00	54.00	-9.63	Pass
17725.09	27.54	13.00	10.63	51.17	Average Max	V	195.00	32.00	54.00	-2.83	Pass

Above 1GHz – 802.11a – 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1005.75	45.63	2.44	9.67	57.74	Peak Max	H	210.00	291.00	74.00	-16.26	Pass
17737.28	40.91	13.00	10.64	64.55	Peak Max	V	234.00	114.00	74.00	-9.45	Pass
2046.96	44.34	3.51	11.33	59.18	Peak Max	H	245.00	277.00	74.00	-14.82	Pass
1005.75	32.49	2.44	9.67	44.61	Average Max	H	210.00	291.00	54.00	-9.39	Pass
17737.28	27.36	13.00	10.64	51.00	Average Max	V	234.00	114.00	54.00	-3.00	Pass
2046.96	30.11	3.51	11.33	44.96	Average Max	H	245.00	277.00	54.00	-9.04	Pass

Above 1GHz – 802.11a – 5805MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1005.93	46.28	2.44	9.67	58.40	Peak Max	V	162.00	171.00	74.00	-15.60	Pass
17829.84	40.35	13.00	10.74	64.09	Peak Max	H	187.00	272.00	74.00	-9.91	Pass
14615.09	43.33	13.31	8.11	64.74	Peak Max	V	278.00	66.00	74.00	-9.26	Pass
1005.93	32.46	2.44	9.67	44.57	Average Max	V	162.00	171.00	54.00	-9.43	Pass
17829.84	27.14	13.00	10.74	50.88	Average Max	H	187.00	272.00	54.00	-3.12	Pass
14615.09	29.63	13.31	8.11	51.04	Average Max	V	278.00	66.00	54.00	-2.96	Pass

Above 1GHz – 802.11n20 – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1030.95	45.76	2.46	9.63	57.85	Peak Max	H	149.00	345.00	74.00	-16.15	Pass
17692.22	40.37	13.00	10.60	63.96	Peak Max	H	172.00	28.00	74.00	-10.04	Pass
2182.87	42.70	4.02	10.91	57.63	Peak Max	H	101.00	327.00	74.00	-16.37	Pass
1030.95	32.06	2.46	9.63	44.14	Average Max	H	149.00	345.00	54.00	-9.86	Pass
17692.22	27.32	13.00	10.60	50.92	Average Max	H	172.00	28.00	54.00	-3.08	Pass
2182.87	29.82	4.02	10.91	44.76	Average Max	H	101.00	327.00	54.00	-9.24	Pass

Above 1GHz – 802.11n20 – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5258.54	44.86	6.42	9.65	60.93	Peak Max	H	165.00	44.00	74.00	-13.07	Pass
1021.16	45.63	2.45	9.64	57.73	Peak Max	V	154.00	220.00	74.00	-16.27	Pass
1983.36	42.99	3.31	11.35	57.65	Peak Max	V	187.00	93.00	74.00	-16.35	Pass
5258.54	33.19	6.42	9.65	49.26	Average Max	H	165.00	44.00	54.00	-4.74	Pass
1021.16	32.28	2.45	9.64	44.37	Average Max	V	154.00	220.00	54.00	-9.63	Pass
1983.36	29.63	3.31	11.35	44.29	Average Max	V	187.00	93.00	54.00	-9.71	Pass

Above 1GHz – 802.11n20 – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1027.07	45.37	2.46	9.63	57.46	Peak Max	V	160.00	284.00	74.00	-16.54	Pass
17742.87	40.23	13.00	10.65	63.88	Peak Max	H	170.00	201.00	74.00	-10.12	Pass
2161.87	43.62	3.95	10.97	58.54	Peak Max	H	101.00	168.00	74.00	-15.46	Pass
1027.07	32.19	2.46	9.63	44.28	Average Max	V	160.00	284.00	54.00	-9.72	Pass
17742.87	27.31	13.00	10.65	50.96	Average Max	H	170.00	201.00	54.00	-3.04	Pass
2161.87	29.93	3.95	10.97	44.85	Average Max	H	101.00	168.00	54.00	-9.15	Pass

Above 1GHz – 802.11n – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1020.20	45.63	2.45	9.65	57.73	Peak Max	V	301.00	170.00	74.00	-16.27	Pass
1999.92	42.57	3.33	11.48	57.37	Peak Max	H	270.00	131.00	74.00	-16.63	Pass
17358.07	40.33	12.72	9.97	63.02	Peak Max	H	264.00	130.00	74.00	-10.98	Pass
1020.20	32.28	2.45	9.65	44.38	Average Max	V	301.00	170.00	54.00	-9.62	Pass
1999.92	29.51	3.33	11.48	44.32	Average Max	H	270.00	131.00	54.00	-9.68	Pass
17358.07	27.10	12.72	9.97	49.79	Average Max	H	264.00	130.00	54.00	-4.21	Pass

Above 1GHz – 802.11n – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1031.75	45.63	2.46	9.63	57.72	Peak Max	V	276.00	334.00	74.00	-16.28	Pass
17809.10	40.35	13.00	10.71	64.07	Peak Max	V	167.00	360.00	74.00	-9.93	Pass
2081.21	43.38	3.65	11.22	58.25	Peak Max	V	143.00	34.00	74.00	-15.75	Pass
1031.75	32.06	2.46	9.63	44.14	Average Max	V	276.00	334.00	54.00	-9.86	Pass
17809.10	27.01	13.00	10.71	50.73	Average Max	V	167.00	360.00	54.00	-3.27	Pass
2081.21	30.27	3.65	11.22	45.14	Average Max	V	143.00	34.00	54.00	-8.86	Pass

Above 1GHz – 802.11n – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1003.83	45.89	2.44	9.67	58.01	Peak Max	H	169.00	252.00	74.00	-15.99	Pass
9819.71	41.10	11.66	8.10	60.86	Peak Max	H	277.00	4.00	74.00	-13.14	Pass
2164.16	44.17	3.96	10.96	59.09	Peak Max	V	238.00	99.00	74.00	-14.91	Pass
1003.83	32.73	2.44	9.67	44.85	Average Max	H	169.00	252.00	54.00	-9.15	Pass
9819.71	28.03	11.66	8.10	47.80	Average Max	H	277.00	4.00	54.00	-6.20	Pass
2164.16	29.95	3.96	10.96	44.87	Average Max	V	238.00	99.00	54.00	-9.13	Pass

Above 1GHz – 802.11n – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
2005.45	43.36	3.35	11.46	58.17	Peak Max	V	136.00	83.00	74.00	-15.83	Pass
1014.46	46.02	2.45	9.65	58.13	Peak Max	H	101.00	257.00	74.00	-15.87	Pass
17700.69	40.77	13.00	10.60	64.38	Peak Max	H	143.00	119.00	74.00	-9.62	Pass
2005.45	29.73	3.35	11.46	44.54	Average Max	V	136.00	83.00	54.00	-9.46	Pass
1014.46	32.22	2.45	9.65	44.32	Average Max	H	101.00	257.00	54.00	-9.68	Pass
17700.69	27.35	13.00	10.60	50.95	Average Max	H	143.00	119.00	54.00	-3.05	Pass

Above 1GHz – 802.11n – 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1000.69	45.89	2.44	9.68	58.01	Peak Max	V	177.00	263.00	74.00	-15.99	Pass
2190.65	43.21	4.05	10.89	58.15	Peak Max	H	283.00	271.00	74.00	-15.85	Pass
4081.42	40.75	5.90	11.87	58.52	Peak Max	V	235.00	274.00	74.00	-15.48	Pass
1000.69	32.53	2.44	9.68	44.65	Average Max	V	177.00	263.00	54.00	-9.35	Pass
2190.65	29.84	4.05	10.89	44.78	Average Max	H	283.00	271.00	54.00	-9.22	Pass
4081.42	26.89	5.90	11.87	44.66	Average Max	V	235.00	274.00	54.00	-9.34	Pass

Above 1GHz – 802.11n – 5805MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1069.68	44.70	2.48	9.57	56.75	Peak Max	H	104.00	92.00	74.00	-17.25	Pass
17761.26	41.31	13.00	10.67	64.97	Peak Max	V	228.00	221.00	74.00	-9.03	Pass
2042.97	44.07	3.50	11.34	58.90	Peak Max	V	280.00	75.00	74.00	-15.10	Pass
1069.68	31.65	2.48	9.57	43.70	Average Max	H	104.00	92.00	54.00	-10.30	Pass
17761.26	27.23	13.00	10.67	50.90	Average Max	V	228.00	221.00	54.00	-3.10	Pass
2042.97	30.07	3.50	11.34	44.91	Average Max	V	280.00	75.00	54.00	-9.09	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESHS10	830223/0009	04/08/2014	1 Year	04/08/2015	☐
Spectrum Analyzer	FSIQ7	825555/013	05/31/2014	1 Year	04/08/2015	☐
Schwarzbeck LISN	NNLK 8129	8129-190	08/11/2014	1 Year	08/11/2015	☐
CHASE LISN	MN2050B	1018	07/31/2014	1 Year	07/31/2015	☐
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	
Radiated Emissions						
R & S Receiver	ESIB 40	100179	05/24/2014	1 Year	05/24/2015	☒
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2014	1 Year	08/12/2015	☒
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/11/2014	1 Year	08/11/2015	☒
Horn Antenna (18-40 GHz)	AH-840	101013	08/11/2014	1 Year	08/11/2015	☒
Pre-Amplifier (100KHz-7GHz)	LPA-6-30	11140711	02/19/2015	1 Year	02/19/2016	☒
Microwave Preamplifier (18-40 GHz)	PA-840	181251	02/19/2015	1 Year	02/19/2016	☒
3 Meters SAC	3M	N/A	08/29/2014	1 Year	08/29/2015	☒
10 Meters SAC	10M	N/A	09/05/2014	1 Year	09/05/2015	☒
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	☒
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY50210206	05/30/2014	1 Year	05/30/2015	☐
Spectrum Analyzer	E4407B	US88441016	05/31/2014	1 Year	05/31/2015	☐
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	☐

Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2