

MEASUREMENT/TECHNICAL REPORT

APPLICANT: Chaplet Systems USA Inc.

MODEL NO.: M187

FCC ID: GXLKPM187

This report concerns (check one) : **Original Grant** ☒
 Class II Change ☐

Equipment type: Notebook PC

Deferred grant requested per 47CFR 0.457(d)(1)(ii)?

Yes ☐ No ☒ If yes, defer until: _____ (date)We, the undersigned, agree to notify the Commission by (date) _____ / _____ / _____ of the
intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?

Yes ☐ No ☒If no, assumed Part 15, Subpart B for unintentional radiator the new 47 CFR (10-1-90 Edition)
provision.**Report Prepared**by Testing House : **Neutron Engineering Inc.**

for Company Name: Chaplet Systems USA Inc.

Address: 252 North Wolfe Road, Sunnyvale, U.S.A.

Applicant Signature :


Taizen Chien / Manager

CERTIFICATION

We hereby certify that:

The test data , data evaluation , test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with CLASS B conducted and radiated emission limits of FCC Part 15, Subpart B/CISPR 22.

Prepared by : Sherry Kuo

Sherry Kuo

Reviewed by : Andy Chiu

Andy Chiu


Approved by : George Yao

George Yao

Issued Date : Sep. 22, 1998

Report No. : NEI-FCCB-98150

Company Stamp :



NEUTRON ENGINEERING INC.

20, Alley 50, Lane 119, Dong Hwu Rd.,

P.O. Box 6-158, Nei Hwu,

Taipei, Taiwan

TEL : (02) 2633-6872 FAX : (02) 2633-4578

Table of Contents

1. General Information	4
1-1 Product Description	4
1-2 Connecting I/O Port(s)	5
1-3 Related Submittal(s)/Grant(s)	5
1-4 Tested System Details	6
1-5 Test Methodology	7
1-6 Test Facility	7
2. Product Labeling	8
Figure 2-1 FCC ID Label	8
Figure 2-2 Location of Label on EUT	8
3. System Test Configuration	9
3-1 Justification	9
3-2 EUT Exercise Software	9
3-3 Special Accessories	10
3-4 Equipment Modifications	10
3-5 Configuration of Tested System	11
Figure 3-1 Configuration of Tested System	13
4. Block Diagram(s)	14
5. Conducted and Radiated Measurement Photos	15
Figure 5-1 Conducted Measurement Photos	15
Figure 5-2 Radiated Measurement Photos	16
6. Conducted Emission Datas	17
7. Radiated Emission Datas	21
7-1 Reaiated Emission Data	21
7-2 Field Strength Calculation	29
7-3 Correction Factor Table VS Frequency	30
8. Attachment	
Photos of Tested EUT	31
User's Manual	32

1. GENERAL INFORMATION

1-1. Product Description

The Chaplet System Inc. Model: M187 (referred to as the EUT in this report) is a Pentium Multimedia Notebook PC based on the Intel Pentium-II series MMO module microprocessor. The summarized features of EUT are described as following:

A. CPU Information

The EUT is designed to accept interchangeable CPU Processor which the user may purchase either together with a system or separately. At the time of testing, only Pentium-II 300 MMO of CPU was available for model M187 Notebook Computer System.

The following lists the CPU processor may by alternated:

CPU Processor	CPU Speed	Clock Speed/Osc Freq
Intel Pentium-II 300MMO	300 MHz	66 MHz
Intel Pentium-II 266MMO	266 MHz	66 MHz
Intel Pentium-II 233MMO	233 MHz	66 MHz

B. Storage Device:

- (1). Removable and user upgradable 2.5" Enhanced IDE hard disk drive (HDD)
- (2). 3.5" 1.44MB FDD.
- (3). A magic bay for swappable CD-ROM, DVD ROM, or ZIP device. At the time of testing, a CD-ROM drive was available for model M187.

C. LCD display panel

Supports LCD panel up to 13.3", 14.1" TFT with 64K color displaying compatible with SVGA or XGA (1024x768) resolution.

D. Power Supply

An AC/DC adaptor supplies DC voltage to computer. This adaptor has an autoswitching designation for any 100Vac~240Vac power input voltage.

Meantime, there are two types of AC/DC adaptor, model SYS2011-6019 and model F1700C, designed for computer. For compliance with testing, model SYS2011-6019 provides a permanently attached ferrite core on DC cord.

A more detailed and/or technical information is attached in **Attachment-G**

1-2. Connecting I/O Port(s)

- | | |
|----------------------|---|
| (1). Serial Port | : One provided for serial interface devices. |
| (2). Parallel | : One provided for centronic printer. |
| (3). PS/2 Port | : One provided for KB/Modem. |
| (4). USB Port | : Two provided for USB devices. |
| (5). VGA Port | : One provided for CRT Monitor. It supports max resolution mode up to 1024 × 768/65KHz. |
| (6). PCMCIA slot | : A PCMCIA slot provides the option of using one type III card or two type II card. |
| (7). MIDI/Game Port | : One provided for Joystick or MIDI adaptor. |
| (8). Audio Port | : Three provided for Audio Line In/Out devices such as Speaker, Microphone, Walkman,... etc. |
| (9). Video Port | : One composite video connector provided for external TV. |
| (10).Replicator Port | : Connects to an optional replicator. At the time of testing, the replicator was not available. |
| (11).Phone Jack | : One provided by an optional Fax/Modem Card. Connects to a phone line. |

1-3. Related Submittal(s)/Grant(s)

- (1). This submittal is an application for FCC ID: GXLKPM187 for the Chaplet Systems USA Inc. Notebook PC model M187 only.
- (2). Application for equipment authorizaiton grants for Fax/Modem Card, model FM300, presently available for Notebook PC model M187 was made at the same time as this submittal (see Sec. 1.4 for the proposed ID No. for this Fax/Modem Card). The Fax/Modem Card application was made with a separate test report and additional Form 731.

1-4. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
M187	GXLKPM187 (1)	Notebook PC	Shielded Power Cord
4500DC-E	GWGMULTI82	Monitor	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
HP2225C+	DSI6XU2225	Printer, Parallel I/F	Shielded Parallel Data Cable Un-Shielded Power Cord
AT-1200CK	E2O5OV1200CK	Modem, Serial I/F	Shielded Serial Data Cable Un-Shielded Power Cord
KT-V860	N/A	Walkman	Un-Shielded Audio Singal Cable
KA-309K	N/A	Microphone	
GRS-455	N/A	Speakers	
8257	N/A (4)	Joystick	Shielded Data Cable
PVM-1390	AK896APVM1390	TV Monitor	Unshielded Power Cable
KB-8923	28HKB-5923	PS/2 KB	Shielded Data Cable
BTC7932	N/A (3)	USB KB	Shielded Data Cable
MOSXT	N/A (3)	USB Mouse	Shielded Data Cable
FM300	GXLHFM300	Fax/Modem Card	Cableless

Notes:

(1) EUT submitted for grant.

(2) Monitor's video cable without ferrite core attached.

(3) Support equipment was authorized under Declaraation of Conformity.

(4) Non-digital circuitry passive add-on device.

1-5. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR 22. Radiated testing was performed at an antenna to EUT distance 10 meters.

1-6. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 5, All 2, Lane 220, Kang Lo St., Nei Hwu, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Feb.4,1998 Submitted to your office, and accepted in a letter dated March 28, 1998 (31040/SIT-1300F2).

3. System Test Configuration

3-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). A typical memory card was added in PCMCIA slot in addition a music CD disc was placed in CD-ROM drive compartment as the peripherals of PCMCIA and CD-ROM connection. Other peripherals of EUT external device connection such as keyboard, modem, printer, CRT monitor, TV as well as the Audio I/O jack, microphone, walkman and speakers were also contained in this system in order to comply with the ANSI C63.4/CISPR 22(1996) Rules requirement. Further, a twisted phone line (approx. 2 meters) terminated with a 600Ω resistor at one end as a dummy load was used to connect with the Fax/Modem card interface port. Moreover, the EUT provides two USB ports for interface with the USB interface standard devices, two USB devices (such as KB and Mouse) were connected respectively during the measuring.

Since the EUT is designed for an alternative AC/DC power adapter which is used to power the PC system, and two types of LCD Panel. Therefore, there are totally four versions of testing configuration (two types, model F1700C and model SYS2011-6019, of AC/DC adapter as well as two types of LCD Panel, 13.3" and 14.1") should be considered.

Further, the PC system's VGA controller supports simultaneous display output on the system's LCD and an external CRT monitor connected to the system. It supports resolution mode from $640 \times 480/31.5\text{KHz}$ to max. of $1024 \times 768/65\text{KHz}$. The RFI performance investigation was carried out by pre-scanning the resolution mode from $640 \times 480/31.5\text{KHz}$ to $1024 \times 768/65\text{KHz}$ for each of four versions of testing configuration.

Moreover, the EUT having a designation of alternative CPU processor of Intel Pentium-II Series with internal processor speed from 233MHz to 300MHz which operated with an external clock generator frequency on 66MHz. The EUT operated with CPU internal processor speed/external clock frequency setting under 300MHz/66MHz in conjunction with the VGA highest resolution mode of $1024 \times 768/65\text{KHz}$ was used to carry out the final testing for each of four versions of testing configuration.

3-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read from the storage device (DVD-ROM).
2. Send Voice to LINE- OUT device (Speakers).
3. Repeated form 1 to 2 continuously during to "H" pattern exercised each system component from 4 to 7 simultaneously.
4. Read (Write) from (to) the storage devices (HDD, FDD).
5. Send "H" pattern to the video port device (Monitor).
6. Send "H" pattern to the parallel port device (Printer).
7. Send "H" pattern to the Serial port device (Modem).
8. Repeated from 4 to 7 continuously.

As the Keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3-3. Special Accessories


A special AC power cord, two wires and non-shielded type, used for AC/DC adapter as normally supplied by the manufacturer to the end user. For compliance testing, the DC power supply cord shall be a shielded type. Also, if the AC/DC adapter (model SYS2011-6019) is supplied to the user, the DC cord shall have an additional ferrite core attached, but it is no need for model F1700C.

3-4. Equipment Modifications

In order to achieve in compliance with Class B levels, the following change(s) were made by NEUTRON test house during the compliance testing:

Please refer to the next page as the modifications described and cross reference of photos of tested EUT.

The above modifications will be implemented in all product models of this equipment.

Applicant Signature :**Date :**

Sep. 22, 1998

Type/Printed Name :

Jaizen Chien

Position :

Manager

Modification Report

Company: Chaplet Systems USA Inc.

Model No.: M187

Page 1 of 1


FCC ID: GXLKPM187

Date: Sep. 29, 1998

- A. Add a trorid core on the DC power line.
- B. Add a trorid cores on the LCD Data cable

All the above modification will be implemented and relayout in the mass production to meer the FCC Class B requirements.

Chaplet Systems USA Inc.



Taizen Chien

Manager

3.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described) was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Port Connected	FCC ID	Series No.	Note
E-1	Notebook PC	Chaplet	M187		GXLKPM187	N/A	EUT
E-2	Monitor	Optquest	4500DC-E	VGA Port	GWGMULTI82	3650200046	
E-3	Printer, Parallel I/F	HP	HP2225C+	Printer Port	DSI6XU2225	2927S50245	
E-4	Modem, Serial I/F	Datatronics	AT-1200CK	Com Port	E2O5OV1200CK	06-240088	
E-5	Keyboard	IBM	KB-8923	PS/2 Port	28HKB-5923	10155362	
E-6	Walkman	N/A	KT-V860	LINE IN	N/A	N/A	
E-7	Microphone	N/A	KA-309K	MIC IN	N/A	N/A	
E-8	Speakers	N/A	GRS-455	SPK OUT	N/A	N/A	
E-9	Joystick	N/A	8257	Game Port	N/A	N/A	
E-10	TV Set	SONY	PVM-1390	Video Port	AK896APVM1390	N/A	
E-11	USB KB	BTC	BTC7932	USB Port	N/A	174250001	
E-12	USB Mouse	PRIMAX	MOSXT	USB Port	N/A	N/A	
E-13	Fax/Modem Card	Chaplet	FM300		GXLHFM300	N/A	※

Remark:

- (1) Unless otherwise denoted as EUT in 'Remark' column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ※ in 'Remark' column, Neutron consigns the supporting equipment(s) to the tested system.


Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded	Ferrite Core	Detachable/Permanently	Length	Note
C-1	Video Cable	EUT -Monitor	Yes	No	Permanently attached on Monitor	150cm	
C-2	Centronics Cable	EUT -Printer	Yes	No	Detachable type	200cm	
C-3	PS/2 KB Cable	EUT -Keyboard	Yes	No	Permanently attached on PS/2 KB	200cm	
C-4	RS-232 Cable	EUT -Modem	Yes	No	Detachable type	120cm	
C-5	Walkman Cable	EUT-Walkman	No	No	Detachable type	180cm	
C-6	Microphone Cable	EUT-Microphone	No	No	Permanently attached on Mic	600cm	
C-7	Speaker Cable	EUT-Speakers	No	No	Detachable type	120cm	
C-8	Joystick Cable	EUT-Joystick	Yes	No	Permanently attached on Joystick	100cm	
C-9	USB KB Cable	EUT-USB KB	Yes	No	Permanently attached on USBKB	200cm	
C-10	Video Cable	EUT -TV	No	No	Detachable type	120cm	
C-11	USB Mouse Cable	EUT - USB Mouse	Yes	No	Permanently attached on USB Mouse	280cm	
C-12	Telephone Cable	EUT- dummy load	No	No	Detachable type	200cm	

Note:

- (1) Unless otherwise marked as ※ in 「Remark」 column, Neutron consigns the supporting equipment(s) to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.

Figure 3.1 Configuration of Tested System

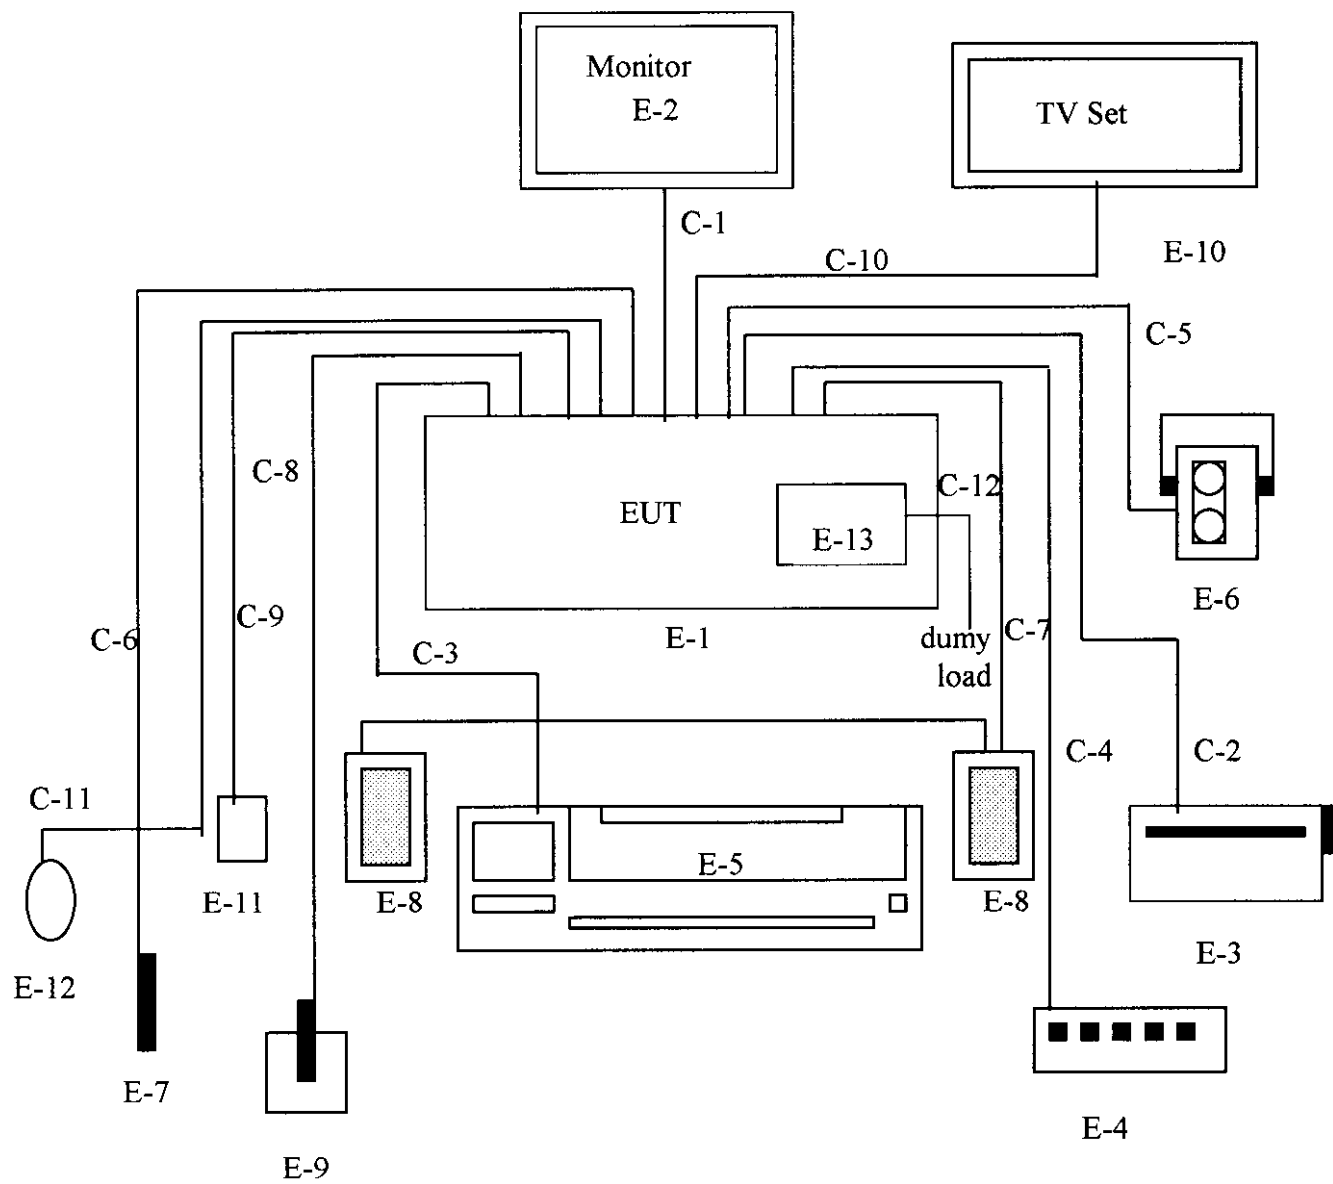

6. Conducted Emission Datas

- 6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test mode:1024*768/65KHZ Adaptor No. SYS2011-6019 14.1 panel
Judgement: Passed by -14.51 dB in mode of Line terminal 0.21 MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.15	Line	49.69	*	65.89	55.89	-16.20	(QP)
0.21	Line	48.82	*	63.33	53.33	-14.51	(QP)
0.31	Line	40.05	*	59.92	49.92	-19.87	(QP)
0.41	Line	34.13	*	57.59	47.59	-23.46	(QP)
11.93	Line	31.07	*	60.00	50.00	-28.93	(QP)
29.68	Line	39.53	*	60.00	50.00	-20.47	(QP)
0.15	Neutral	44.17	*	66.00	56.00	-21.83	(QP)
0.20	Neutral	48.91	*	63.45	53.45	-14.54	(QP)
0.31	Neutral	40.83	*	59.97	49.97	-19.14	(QP)
0.41	Neutral	33.58	*	57.59	47.59	-24.01	(QP)
11.56	Neutral	31.94	*	60.00	50.00	-28.06	(QP)
28.60	Neutral	37.13	*	60.00	50.00	-22.87	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=100KHz, VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz, VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review :

[Signature]

Test Personnel :

[Signature]

Date:

Sep. 18, 1998

6. Conducted Emission Datas

- 6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test mode: 1024*768/65KHZ Adaptor No. F1700C 14.1 panel
Judgement: Passed by -11.84 dB in mode of Line terminal 0.18 MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		Note
0.16	Line	49.77	*	65.41	55.41	-15.64	(QP)
0.18	Line	52.51	*	64.35	54.35	-11.84	(QP)
0.25	Line	43.61	*	61.79	51.79	-18.18	(QP)
4.62	Line	31.85	*	56.00	46.00	-24.15	(QP)
24.53	Line	34.19	*	60.00	50.00	-25.81	(QP)
0.16	Neutral	50.86	*	65.67	55.67	-14.81	(QP)
0.19	Neutral	49.33	*	64.04	54.04	-14.71	(QP)
0.51	Neutral	33.14	*	56.00	46.00	-22.86	(QP)
0.69	Neutral	31.22	*	56.00	46.00	-24.78	(QP)
15.72	Neutral	32.48	*	60.00	50.00	-27.52	(QP)
23.76	Neutral	34.59	*	60.00	50.00	-25.41	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=100KHz, VBW=100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz, VBW=10Hz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review :

Test Personnel :

Date:

Sep. 18, 1998

6. Conducted Emission Datas

6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test mode:1024*768/65KHZ Adaptor No. SYS2011-6019 13.3 panel
Judgement: Passed by -14.09 dB in mode of Netural terminal 0.21 MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		Note
0.15	Line	40.23	*	65.89	55.89	-25.66	(QP)
0.21	Line	47.53	*	63.33	53.33	-15.80	(QP)
0.31	Line	38.21	*	59.97	49.97	-21.76	(QP)
0.42	Line	32.82	*	57.51	47.51	-24.69	(QP)
3.22	Line	33.05	*	56.00	46.00	-22.95	(QP)
15.80	Line	40.19	*	60.00	50.00	-19.81	(QP)
0.15	Neutral	37.76	*	66.00	56.00	-28.24	(QP)
0.21	Neutral	49.24	*	63.33	53.33	-14.09	(QP)
0.31	Neutral	39.76	*	59.97	49.97	-20.21	(QP)
0.42	Neutral	34.32	*	57.51	47.51	-23.19	(QP)
3.84	Neutral	33.41	*	56.00	46.00	-22.59	(QP)
15.72	Neutral	39.16	*	60.00	50.00	-20.84	(QP)

Remark :

- (1) Reading inwhich marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz ◦ Reading inwhich marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz ◦
- (2) All readings are QP Mode value unless otherwise stated AVG in colum of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemd to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a " *" marked in AVG Mode colum of Interference Voltage Measured ◦
- (3) Measuring frequency range from 150KHz to 30MHz ◦

Review :

Test Personnel :

Date:

Sep. 20, 1998

6. Conducted Emission Datas

- 6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test mode: 1024*768/65KHZ Adaptor No. F1700C 13.3 panel
Judgement: Passed by -12.15 dB in mode of Neutral terminal 0.18 MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.15	Line	50.97	*	66.00	56.00	-15.03	(QP)
0.18	Line	50.95	*	64.72	54.72	-13.77	(QP)
0.23	Line	43.73	*	62.31	52.31	-18.58	(QP)
0.47	Line	36.01	*	56.53	46.53	-20.52	(QP)
4.50	Line	34.99	*	56.00	46.00	-21.01	(QP)
0.18	Neutral	52.57	*	64.72	54.72	-12.15	(QP)
0.23	Neutral	44.35	*	62.34	52.34	-17.99	(QP)
0.29	Neutral	38.14	*	60.55	50.55	-22.41	(QP)
4.72	Neutral	31.55	*	56.00	46.00	-24.45	(QP)
25.59	Neutral	37.99	*	60.00	50.00	-22.01	(QP)
28.60	Neutral	37.13	*	60.00	50.00	-22.87	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=100KHz, VBW=100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz, VBW=10Hz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review :

Test Personnel :

Date:

Sep. 17, 1998

7. Radiated Emission Datas

- 7.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No.SYS2011-6019 14.1 panel
Judgement: Passed by -2.88 dB in polarity of Horizon 197.65 MHz

Freq. (MHz)	Polar. H/V	Reading(RA) (dBuV)	Corr.Factor. (dB)	Corrected FS (dBuV)	Limits (QP) (dBuV/m)	Margins (dBuV/m)	Note (QP)
116.54	V	13.50	13.46	26.96	30.00	- 3.04	
125.40	H	13.60	13.32	26.92	30.00	- 3.08	
128.84	V	13.50	13.08	26.58	30.00	- 3.42	
133.50	H	13.50	12.69	26.19	30.00	- 3.81	
134.60	V	14.50	12.59	27.09	30.00	- 2.91	
197.65	H	8.40	18.72	27.12	30.00	- 2.88	
200.03	H	13.50	12.40	25.90	30.00	- 4.10	
200.40	V	13.50	12.39	25.89	30.00	- 4.11	
208.60	V	14.50	12.12	26.62	30.00	- 3.38	
209.80	H	14.80	12.09	26.89	30.00	- 3.11	
220.50	V	13.60	11.74	25.34	30.00	- 4.66	
420.50	H	14.30	18.33	32.63	37.00	- 4.37	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW=1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of Note . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review : Test Personnel : Date: Sep. 20, 1998

7. Radiated Emission Datas



7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaotor No. F1700C 14.1 panel
Judgement: Passed by -2.98 dB in polarity of Horizon 197.60 MHz

Freq. (MHz)	Polar. H/V	Reading(RA) (dBuV)	Corr.Factor. (dB)	Corrected FS (dBuV)	Limits (QP) (dBuV/m)	Margins (dBuV/m)	Note (QP)
116.20	V	13.50	13.45	26.95	30.00	- 3.05	
125.60	H	13.60	13.31	26.91	30.00	- 3.09	
128.50	V	13.50	13.10	26.60	30.00	- 3.40	
150.60	V	12.60	13.07	25.67	30.00	- 4.33	
171.60	H	9.00	16.74	25.74	30.00	- 4.26	
197.60	H	8.30	18.72	27.02	30.00	- 2.98	
200.50	V	14.50	12.38	26.88	30.00	- 3.12	
200.60	H	14.50	12.38	26.88	30.00	- 3.12	
204.30	H	13.50	12.26	25.76	30.00	- 4.24	
208.60	V	13.50	12.12	25.62	30.00	- 4.38	
220.80	V	12.60	11.73	24.33	30.00	- 5.67	
300.50	H	14.20	16.88	31.08	37.00	- 5.92	

Remark :

- (1) Reading inwhich marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in colum of^{ff} Note_J. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review :  Test Personnel :  Date: Sep. 20, 1998

7. Radiated Emission Datas

7.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. SYS2011-6019 13.3 panel
Judgement: Passed by -2.95 dB in polarity of Vertical 171.67 MHz

Freq. (MHz)	Polar. H/V	Reading(RA) (dBuV)	Corr.Factor. (dB)	Corrected FS (dBuV)	Limits (QP) (dBuV/m)	Margins (dBuV/m)	Note (QP)
47.83	H	13.60	12.07	25.67	30.00	- 4.33	
128.76	V	12.30	13.09	25.39	30.00	- 4.61	
133.17	H	14.00	12.71	26.71	30.00	- 3.29	
134.89	V	14.30	12.56	26.86	30.00	- 3.14	
171.60	H	10.00	16.74	26.74	30.00	- 3.26	
171.67	V	10.30	16.75	27.05	30.00	- 2.95	
200.03	V	13.00	12.40	25.40	30.00	- 4.60	
200.05	H	14.30	12.40	26.70	30.00	- 3.30	
208.40	V	14.70	12.13	26.83	30.00	- 3.17	
220.71	V	15.00	11.74	26.74	30.00	- 3.26	
254.60	H	18.90	13.98	32.88	37.00	- 4.12	
420.60	H	14.63	18.34	32.97	37.00	- 4.03	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW=1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review :

Test Personnel :

Date:

Sep. 20, 1998

7. Radiated Emission Datas

7.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. F1700C 13.3 panel

Judgement: Passed by -3.06 dB in polarity of Horizon 171.60 MHz

(MHz)	H/V	(dBuV)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(QP)
48.60	H	13.50	12.12	25.62	30.00	- 4.38	
128.60	V	12.31	13.10	25.41	30.00	- 4.59	
134.60	V	12.30	12.59	24.89	30.00	- 5.11	
149.60	H	12.50	12.96	25.46	30.00	- 4.54	
171.50	H	9.60	16.72	26.32	30.00	- 3.68	
171.60	V	10.20	16.74	26.94	30.00	- 3.06	
200.00	H	13.50	12.40	25.90	30.00	- 4.10	
208.40	H	14.60	12.13	26.73	30.00	- 3.27	
208.60	V	13.50	12.12	25.62	30.00	- 4.38	
220.21	H	13.40	11.75	25.15	30.00	- 4.85	
254.60	V	18.90	13.98	32.88	37.00	- 4.12	
420.60	V	14.30	18.34	32.64	37.00	- 4.36	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW=1MHz, Swp. Time = 0.3 sec./MHz °
- (2) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform °
- (3) Measuring frequency range from 30MHz to 1000MHz °
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table °

Review : A. J. (1) Test Personnel : Riley, Hsu Date: Sep. 20, 1998

7. Radiated Emission Datas (30MHz~1GHz)

- 7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. SYS2011-6019 14.1 panel
Judgement: Passed by -16.57 dB in polarity of Vertical 1837.65 MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
1000.00	H	6.19	24.63	30.81	54.00	-23.19	
1000.43	V	12.69	24.63	37.32	54.00	-16.68	
1092.45	V	9.98	25.74	35.72	54.00	-18.28	
1096.60	H	10.62	25.58	36.20	54.00	-17.80	
1306.99	V	5.52	26.91	32.43	54.00	-21.57	
1814.00	V	4.82	29.40	34.22	54.00	-19.78	
1835.80	H	7.27	29.28	36.55	54.00	-17.45	
1837.65	V	8.15	29.28	37.43	54.00	-16.57	

Remark :

- (1) Reading inwhich marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in colum of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform ◦
- (3) Measuring frequency range from 1000MHz to 3000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

Review : Test Personnel. : Date: Sep. 23, 1998

7. Radiated Emission Datas (30MHz~1GHz)

7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. F1700C 14.1 panel

Judgement: Passed by -16.57 dB in polarity of Horizontal 1837.98 MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
1000.78	H	7.77	24.63	32.40	54.00	-21.60	
1001.43	V	11.80	24.63	36.43	54.00	-17.57	
1091.40	V	8.60	25.74	34.34	54.00	-19.66	
1097.44	H	9.85	25.58	35.43	54.00	-18.57	
1175.65	H	3.67	26.22	29.89	54.00	-24.11	
1307.90	V	4.52	26.91	31.43	54.00	-22.57	
1811.00	V	4.05	29.40	33.45	54.00	-20.55	
1836.78	V	7.50	29.28	36.78	54.00	-17.22	
1837.98	H	8.15	29.28	37.43	54.00	-16.57	

Remark :

- (1) Reading inwhich marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in colum of Note . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform .
- (3) Measuring frequency range from 1000MHz to 3000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review : A. J. U. C. Test Personnel : K. L. H. Lau Date: Sep. 23, 1998

7. Radiated Emission Datas (30MHz~1GHz)

- 7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. SYS2011-6019 13.3 panel

Judgement: Passed by -16.57 dB in polarity of Horizontal 1837.90 MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
1000.43	V	11.38	24.63	36.01	54.00	-17.99	
1000.44	H	4.82	24.63	29.45	54.00	-24.55	
1090.44	V	8.16	25.74	33.90	54.00	-20.10	
1096.44	H	9.72	25.58	35.30	54.00	-18.70	
1175.60	H	3.56	26.22	29.78	54.00	-24.22	
1307.30	V	4.21	26.91	31.12	54.00	-22.88	
1834.43	V	5.15	29.28	34.43	54.00	-19.57	
1837.90	H	8.15	29.28	37.43	54.00	-16.57	

Remark :

- (1) Reading inwhich marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in colum of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform .
- (3) Measuring frequency range from 1000MHz to 3000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review : A. G. C. Test Personnel : K. H. C. / S. C. Date: Sep. 23, 1998

7. Radiated Emission Datas (30MHz~1GHz)

7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test mode: 1024*768/65KHZ Adaptor No. F1700C 13.3 panel
Judgement: Passed by -16.79 dB in polarity of Horizon 1835.77 MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
1000.32	V	10.80	24.63	35.43	54.00	-18.57	
1000.34	H	5.81	24.63	30.44	54.00	-23.56	
1090.43	V	7.69	25.74	33.43	54.00	-20.57	
1096.77	H	10.98	25.58	36.56	54.00	-17.44	
1306.65	V	3.85	26.91	30.76	54.00	-23.24	
1810.24	V	3.01	29.40	32.41	54.00	-21.59	
1835.76	V	5.05	29.28	34.33	54.00	-19.67	
1835.77	H	7.93	29.28	37.21	54.00	-16.79	

Remark :

- (1) Reading inwhich marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in colum of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform ◦
- (3) Measuring frequency range from 1000MHz to 3000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

Review : A. J. C. Test Personnel : Rika P. L. Date: Sep. 23, 1998

7-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CF - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dB and a Cable Factor of 1.1 dBuV. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CF - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV/m)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m as:

$$\text{Log}^{-1} \left[(32.0 \text{ dBuV/m}) / 20 \right] = 39.8 \text{ (uV/m)}$$

7-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.20
35.00	10.80	0.00
40.00	11.20	0.40
45.00	11.50	0.40
50.00	11.30	0.90
55.00	10.50	0.00
60.00	9.90	0.00
65.00	8.70	0.20
70.00	7.60	0.00
75.00	6.40	0.50
80.00	6.10	0.10
85.00	7.00	0.80
90.00	8.00	0.30
95.00	10.00	0.40
100.00	11.20	0.60
110.00	12.60	0.60
120.00	13.00	0.60
130.00	12.50	0.50
140.00	12.00	0.20
150.00	12.00	1.00
160.00	13.20	1.20
170.00	14.80	1.60
180.00	16.30	1.90
190.00	17.00	1.90
200.00	17.30	1.40
225.00	10.50	1.10
250.00	11.70	2.00
275.00	12.80	2.40
300.00	14.50	2.40
325.00	14.00	1.90
350.00	14.20	2.40
375.00	14.60	2.90
400.00	15.10	2.70
450.00	16.20	3.20
500.00	17.60	3.70
550.00	17.80	3.90
600.00	18.40	4.30
650.00	19.50	4.00
700.00	20.80	4.10
750.00	20.50	5.30
800.00	21.10	5.90
850.00	22.40	5.80
900.00	23.50	5.50
950.00	24.00	6.30
1000.00	24.80	5.20

8. Photos of Tested EUT:

- | | |
|--------------------|--|
| 1. Photo # 1 - 2 | Front View |
| 2. Photo # 3 - 4 | Rear View |
| 3. Photo # 5 - 6 | Side View |
| 4. Photo # 7 | Front View |
| 5. Photo # 8 - 24 | Unit Partially Disassembled |
| 6. Photo # 28 - 33 | 14.1" Panel Unit Partially Disassembled |
| 7. Photo # 34 - 39 | 13.1" Panel Unit Partially Disassembled |
| 8. Photo # 40 - 45 | Power Supply (SYS 2011-6019) Unit Partially Disassembled |
| 9. Photo # 46 - 51 | Power Supply (F1700C) Unit Partially Disassembled |