
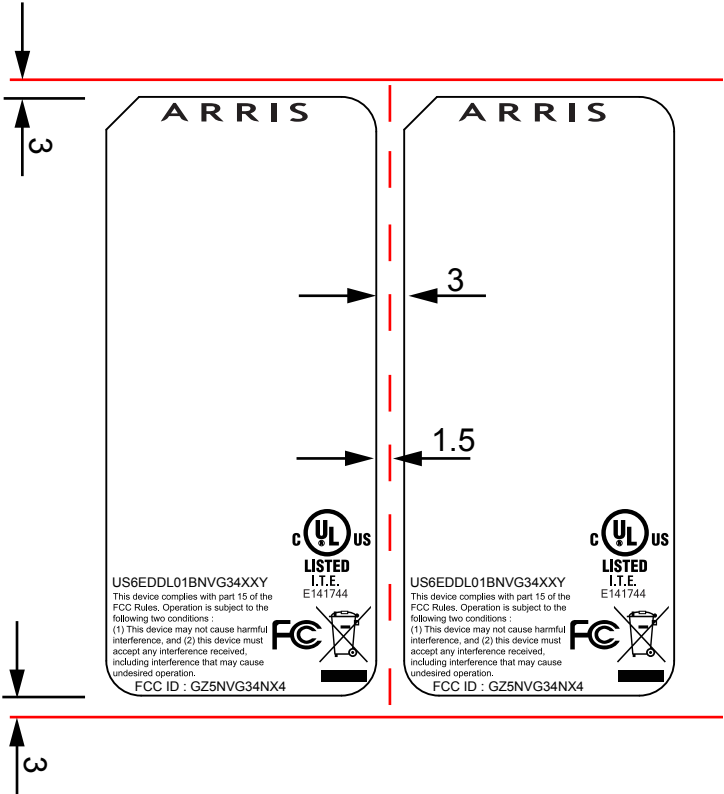


VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2014/09/12	First Release	Rason
01			2014/10/09	Modify the size	Rason

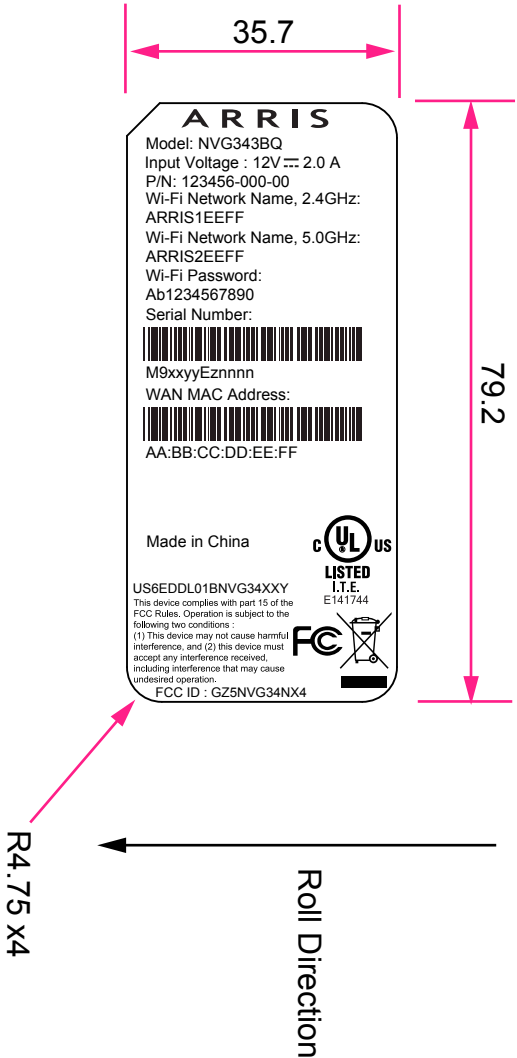

- Notes:
1. Size: 106*49.5 mm
 2. Material: Flexcon 21944E (See Tab-1)

METERIAL MAKER	Flexcon
MODEL NO	21944E
SURFACE MATERIAL THICKNESS (mm)	0.05 ± 10%
ADHESIVE NO	Arcylic
ADHESIVE THICKNESS (mm)	0.02
TOTAL THICKNESS (mm)	0.07 ± 10%

TAB-1

3. Adhesive (背膠種類): Arcylic
4. Adhesive thickness (厚度及公差): 0.07 +/- 10%
5. Adhesive to steel (180度鋼粘著力): 1.0min kg/25mm
6. Initial Tack (初粘力): 6min #/boll
7. Release Power (90度剝離力): 7±3 kg/25mm
8. Holding power (持粘力/保持力): 1min hr/kg/20mm
9. Package Styles: Reel or sheet
10. This part must comply with ROHS.

MATERIAL(SPEC)										SCALE	1:1
FINISH										SHEET	1/1
See Notes										PART NAME	
										HON HAI PRECISION IND. CO., LTD.	
										CNSBG	
										FOXCOWN	
										LABEL SAFETY 79.2*35.7mm REV.01 U62L033.10 GP	
										DESIGNED	
										Rason	
										APPROVED	
										Tim	