

VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2014/09/12	First Release	Rason
01			2014/10/09	Modify the size	Rason

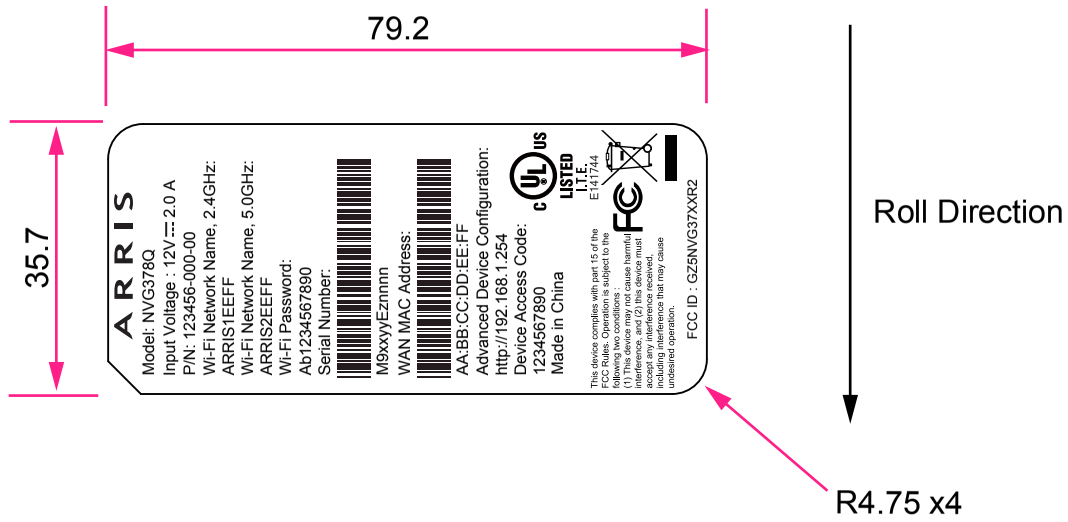

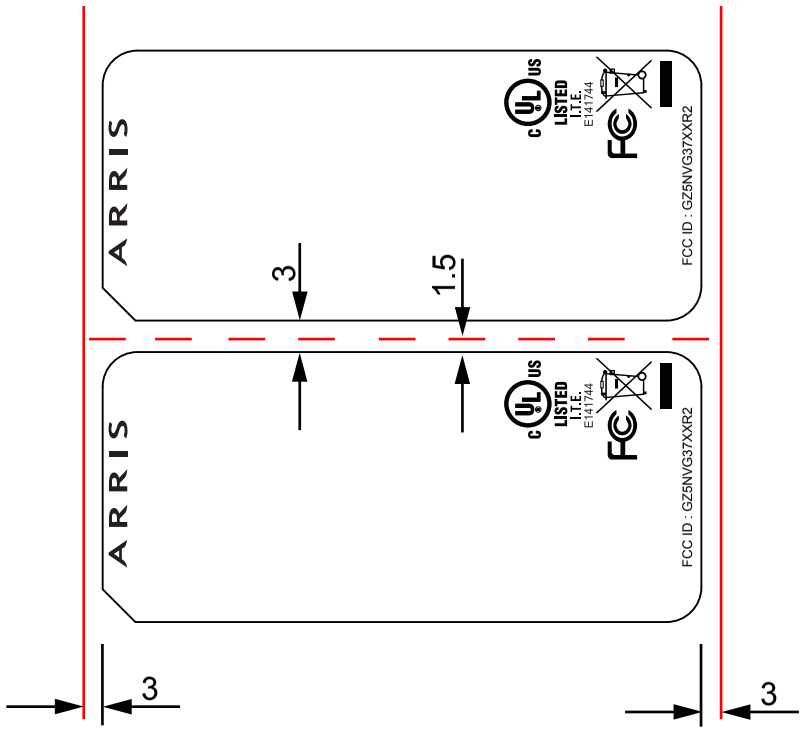

Notes:
1. Size: 106*49.5 mm
2. Material: Flexcon 21944E (See Tab-1)

METERIAL MAKER	Flexcon
MODEL NO	21944E
SURFACE MATERIAL THICKNESS (mm)	0.05 ± 10%
ADHESIVE NO	Arcylic
ADHESIVE THICKNESS (mm)	0.02
TOTAL THICKNESS (mm)	0.07 ± 10%

TAB-1

3. Adhesive (背膠種類): Arcylic
4. Adhesive thickness (厚度及公差): 0.07 +/- 10%
5. Adhesive to steel (180度鋼粘著力): 1.0min kg/25mm
6. Initial Tack (初粘力): 6min #/boll
7. Relese Power (90度剝離力): 7±3 kg/25mm
8. Holding power (持粘力/保持力): 1min hr/kg/20mm
9. Package Styles: Reel or sheet
10. This part must comply with ROHS.

MATERIAL(SPEC.)	See Notes	SCALE	1:1
FINISH	See Notes	SHEET	1/1

Select								*		UNIT
DIM. \TOL.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	MM
0~6	0.05	0.05	0.10	/	/	/	/	0.20		
6~30	0.10	0.15	0.20	0.50	0.50	3.00	/	0.20		SIZE
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		A3
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50		VIEW
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80		TRI_ ANGLE
DRAFT TOLERANCE			±0.20 °		CRITICAL DIM. MARK				*	

FOXCONN
HON HAI PRECISION IND. CO., LTD.
CNSBG

PART NAME		
LABEL SAFETY 79.2*35.7mm REV.01 U62L036.00 GP		
MODEL	PART NO.	DESIGNED
U62L036.00	500.XXXXX.005	Rason
CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
		Tim