


1. Mic .AF IN will modulate the RF signal after the dealing with pre-amplifier,compressor, pre-emphasisor step by step ,then,multiply teh RF signal before radiated via the antenna,

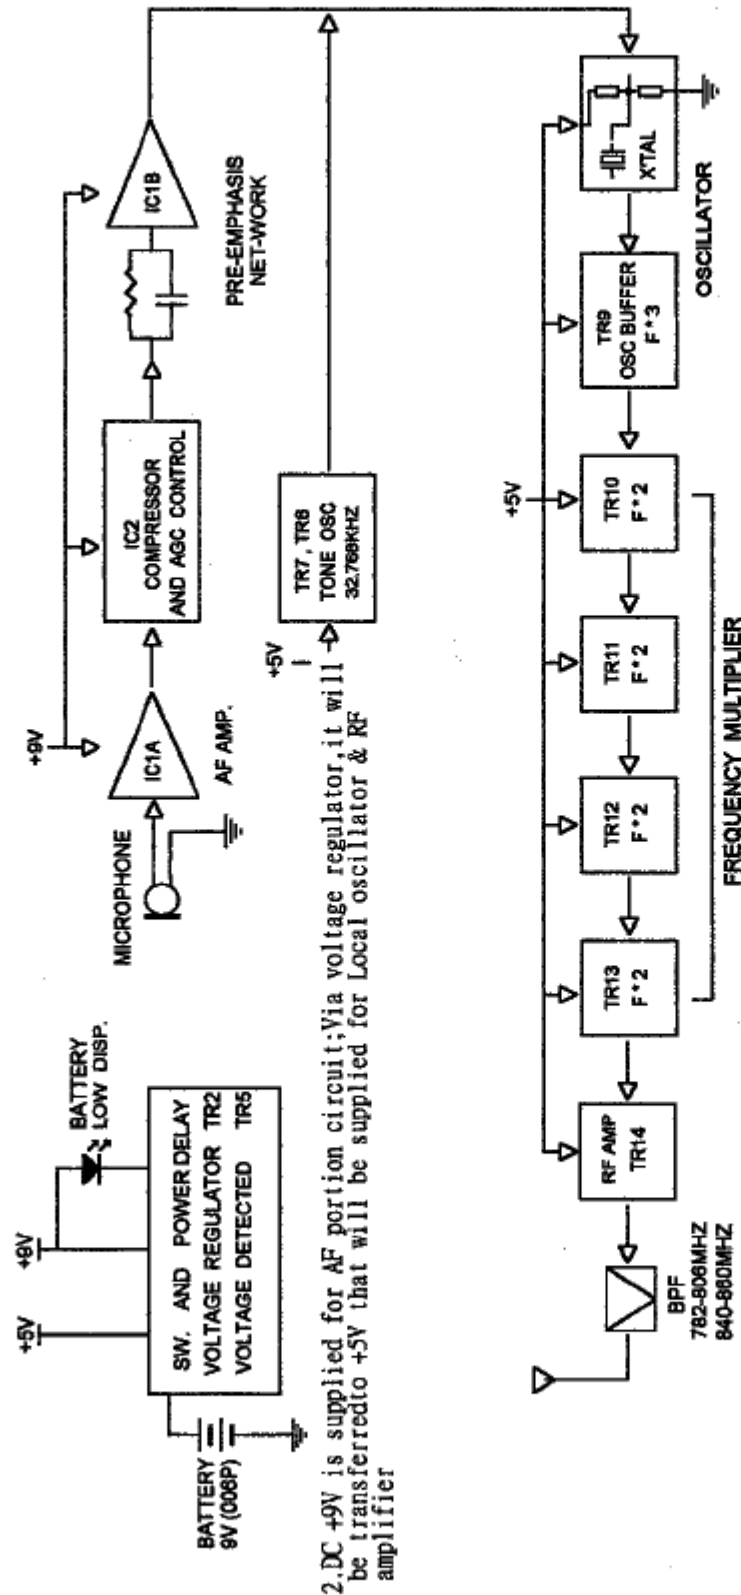

2. DC +9V is supplied for AF portion circuit; Via voltage regulator, it will be transferred to +5V that will be supplied for Local oscillator & RF amplifier

Title			
UB-10	Block Diagram	Revision	2001 0103
Rev	Number	Rev	Number
A4			
Date	2-AUG-2001	Sheet	1 of 1
File	C:\Program Files\Design Explorer 99\SEI\UB-10\UB-10.DESIGN		