

TABLE OF CONTENTS LIST

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.

FCC ID: H38WT-203P

TEST REPORT:

PAGE	1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....TECHNICAL DESCRIPTION CONTINUED AND RF POWER OUTPUT
PAGE	3.....RF POWER OUTPUT CONTD. & MODULATION CHARACTERISTICS
PAGE	4.....OCCUPIED BANDWIDTH
PAGE	5.....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	6.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	7.....FREQUENCY STABILITY
PAGE	8.....CERTIFICATION OF TECHNICAL DATA
PAGE	9.....LIST OF TEST EQUIPMENT

EXHIBITS:

EXHIBIT	1.....POWER OF ATTORNEY LETTER
EXHIBIT	2.....FCC ID LABEL SAMPLE AND SKETCH OF LOCATION
EXHIBIT	3A.....EXTERNAL FRONT & REAR VIEW PHOTOGRAPH
EXHIBIT	3B.....EXTERNAL SIDE VIEW PHOTOGRAPH
EXHIBIT	3C.....EXTERNAL TOP VIEW PHOTOGRAPH
EXHIBIT	3D.....INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT	3E.....INTERNAL SOLDER SIDE PHOTOGRAPH
EXHIBIT	4.....BLOCK DIAGRAM
EXHIBIT	5.....SCHEMATIC
EXHIBIT	6A-6E.....PARTS LIST
EXHIBIT	7A-7D.....CRYSTAL SPECIFICATION
EXHIBIT	8A-8G.....USER'S MANUAL
EXHIBIT	9.....OCCUPIED BANDWIDTH PLOT - NO TONE
EXHIBIT	10.....OCCUPIED BANDWIDTH PLOT - 2500 Hz TONE
EXHIBIT	11.....OCCUPIED BANDWIDTH PLOT - 15 kHz TONE
EXHIBIT	12A.....MODULATION LIMITING PLOT - 300 Hz
EXHIBIT	12B.....MODULATION LIMITING PLOT - 1000 Hz
EXHIBIT	12C.....MODULATION LIMITING PLOT - 3000 Hz
EXHIBIT	12D.....AUDIO FREQUENCY RESPONSE PLOT

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.

FCC ID: H38WT-203P

DATE: AUGUST 27, 1999

REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.983 (a,b,c) SEKAKU ELECTRON INDUSTRY CO., LTD. will manufacture the H38WT-203P in quantity, for use under FCC RULES PART 74.801, LOW POWER AUXILIARY STATIONS.

2.983 (d) TECHNICAL DESCRIPTION

(1) Type of Emission: 150KF3E

Bn = 2M + 2DK

M = 1000

D = 60.0KHz (Peak Deviation)

K = 1

Bn = 2(1K) + 2(60.0K)(1) = 2K + 120.0K = 122.0KHz

M = 15,000

D = 60KHz

K = 1

Bn = 2(15K) + 2(60K) = 30 + 120 = 150KHz

74.861(e)(5) ALLOWED AUTHORIZED BANDWIDTH = 200KHz.

(2) Frequency Range: Part 74: 161.625-161.775 & 174-216MHz

TEST FREQ = 174.10MHz.

(3) Power Range and Controls: UNIT has no power controls.

(4) Maximum Output Power Rating: 2.0 MilliWatts ERP.

(5) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

9.0V BATTERY

Vce = 8.9 Volts

Ice = 1.6mA.

(6) Function of each electron tube or semiconductor device or other active circuit device:

SEE EXHIBIT #: 6A-6E

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5. The block diagram is included as EXHIBIT 4. The part list is included EXHIBIT 6A-6E.

DATE: AUGUST 27, 1999

REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: 1

2.983(d) (8) Instruction book. The instruction manual is included as last item in this report.

(9) Tune-up procedure. The tune-up procedure is given in page .

(10) Description of all circuitry and devices provided for determining and stabilizing frequency.

The transmitter frequency is controlled by a crystal, the crystal specifications are included in PAGE 7A-7E.

(11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power. There are no devices or circuitry to limit the power, since this is a low power device. The interstage coupling between TR1, TR2, TR3, TR4, and TR6 as well as the low pass filter made up of L2, VC1, C26, L3, VC2, C28, L4, L6, VC3, & C29 suppress the harmonics.

Limiting Modulation:

The transmitter audio circuitry is contained in IC2. The modulation limiting is also provided by IC1B.

Limiting Power:

There is no provision for limiting power.

(12) Digital modulation. This unit does not use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF_power_output.

ERP was measured by the method described later in this report. The input power to the final stage was measured with a 9.0V supply connected in place of the 1.5V battery.

INPUT POWER: FOR 9.0 V OPERATION
 $(8.9V)(0.0016A) = 14.3\text{milliWatts}$

OUTPUT POWER: FOR 9.0 V OPERATION
4.0 mWATTS ERP

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.

FCC ID: H38WT-203P

DATE: AUGUST 27, 1999


REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: 2

2.989(c) Occupied bandwidth: Using TIA/EIA 2.2.10 aAcoustic Microphone Sensitivity test procedure to determine if the UUT could be put into modulation limiting and limiting could not be reached, the maximum deviation was only +40KHz. Using this test procedure the frequency of maximum sensitivity was determined to be 500Hz.


a.

Test procedure diagram
OCCUPIED BANDWIDTH MEASUREMENT

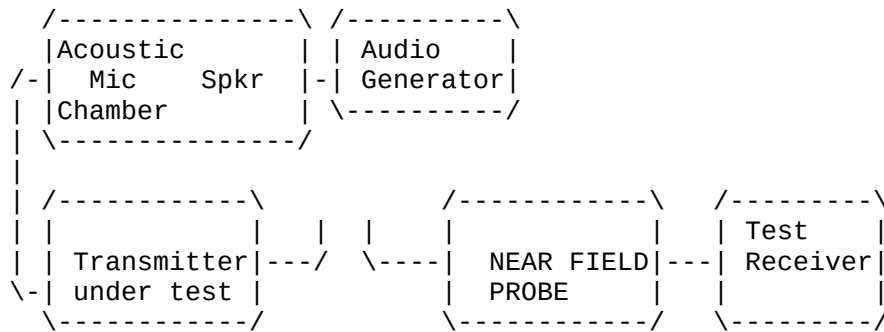

b. Since the UUT could not be put into modulation limiting with an acoustic coupling a dummy microphone was used to connect to the UUT and a test procedure similar to TIA/EIA-603 S2.2.11 was used to measure the occupied bandwidth. Plots were made of the frequency of maximum sensitivity, at 10KHz and at the highest frequency for the UUT. Data in the plots show that all sidebands beyond the authorized bandwidth are less than 0.5% of the unmodulated carrier. The plot show the transmitter modulated with 10,000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Test procedure diagram
OCCUPIED BANDWIDTH MEASUREMENT

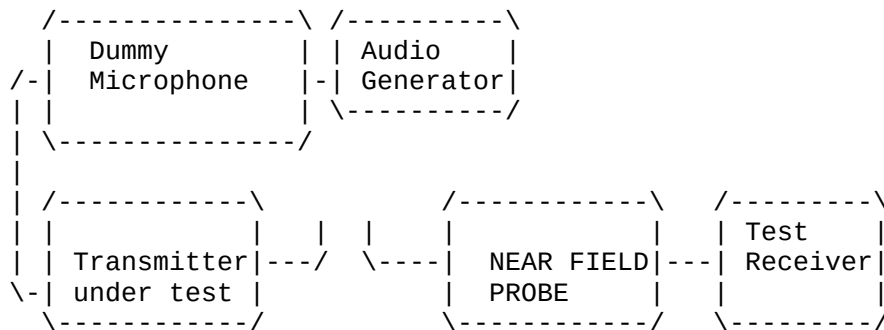

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

2.993(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(0.02) = 43 - 17.0 = 26.9 \text{ dB}$$

TEST DATA:

EMISSION FREQUENCY MHZ	METER READING @ 3m dBuV	COAX LOSS dB	ACF	FIELD STRENGTH dB	ATT. LEVEL dBuV/m	MARGIN dB	ANT.
174.10	81.50	0.90	17.02	99.42	0.00	0.00	H
348.10	24.40	1.40	15.49	41.29	58.13	28.14	H
522.00	6.70	1.60	19.48	27.78	71.65	41.66	H

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 operated into its own built-in antenna at a height of 1.5 meters above the ground plane. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 RGA 180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th LANE, GAINESVILLE, FL. 32605.

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.


FCC ID: H38WT-203P

DATE: AUGUST 27, 1999

REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: 5

Method of Measuring Radiated Spurious Emissions

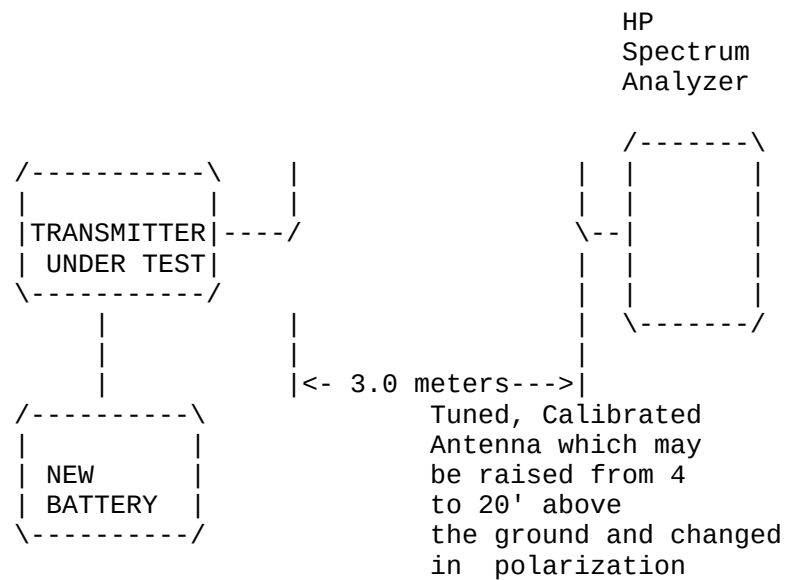

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.

FCC ID: H38WT-203P

DATE: AUGUST 27, 1999

REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: 6

2.995(a)(b)(d) Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 194.810 000MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
-30	194.801 920	-41.47
-20	194.802 200	-40.44
-10	194.803 650	-32.59
0	194.804 780	-26.79
10	194.806 150	-19.76
20	194.808 930	- 5.49
30	194.811 620	+ 8.31
40	194.812 990	+15.34
50	194.812 130	+10.93

25c END BATT. Volt(3.0)= 2.25VDC 194.810 210 + 1.07

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -42.45 to +10.93 ppm. The maximum frequency variation at the battery end-point was +1.72 ppm.

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.

FCC ID: H38WT-203P

DATE: AUGUST 27, 1999

REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT

PAGE: 7

- 2.983(f) Photo or Drawing of Label:
See Exhibit 2.
- 2.983(g) Photos of Equipment:
See Exhibit 3A-3E.
- 2.997 Frequency Spectrum Investigated The Spectrum was
investigated from 0.400 to at least the tenth
harmonic of the fundamental.
- 2.999 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance
with EIA specifications and the FCC requirements.
- 2.909 Certification of Technical Data by Engineers

We, the undersigned, certify that the enclosed
measurements and enclosed data are true and
correct.

S.S. Sanders
Engineer

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.
FCC ID: H38WT-203P
DATE: AUGUST 27, 1999
REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT
PAGE: 8

LIST OF TEST EQUIPMENT

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.
FCC ID: H38WT-203P

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP
8449B - OPT H02 Cal. 7/6/99
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 10/30/98
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: SEKAKU ELECTRON INDUSTRY CO., LTD.
FCC ID: H38WT-203P
DATE: AUGUST 27, 1999
REPORT #: F:\CUS\S\SEK\SEK316T9\SEK316T9.RPT
PAGE: 9