



Report No.: 05080752
Receiving mode
(Right Speaker, Ch2)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

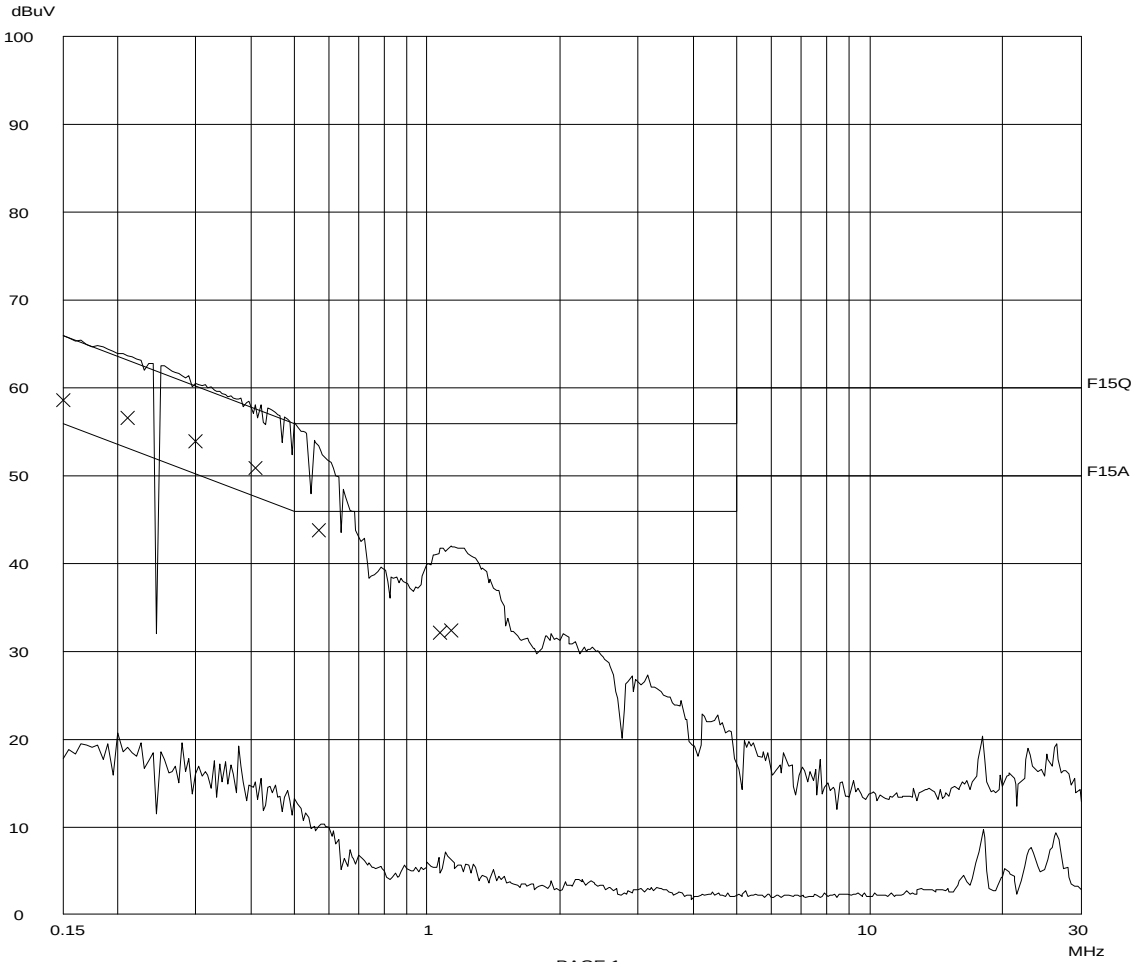

Report No.: 05080752
Receiving mode
(Right Speaker, Ch2)
AC mains

Tested By: Hong, Report No.: 0508075

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	58.6	66.0
0.21000	56.5	63.2
0.30000	53.9	60.2
0.41000	50.9	57.7
0.57000	43.8	56.0
1.07000	32.1	56.0
1.13000	32.3	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

* limit



Report No.: 05080752
Receiving mode
(Right Speaker, Ch3)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

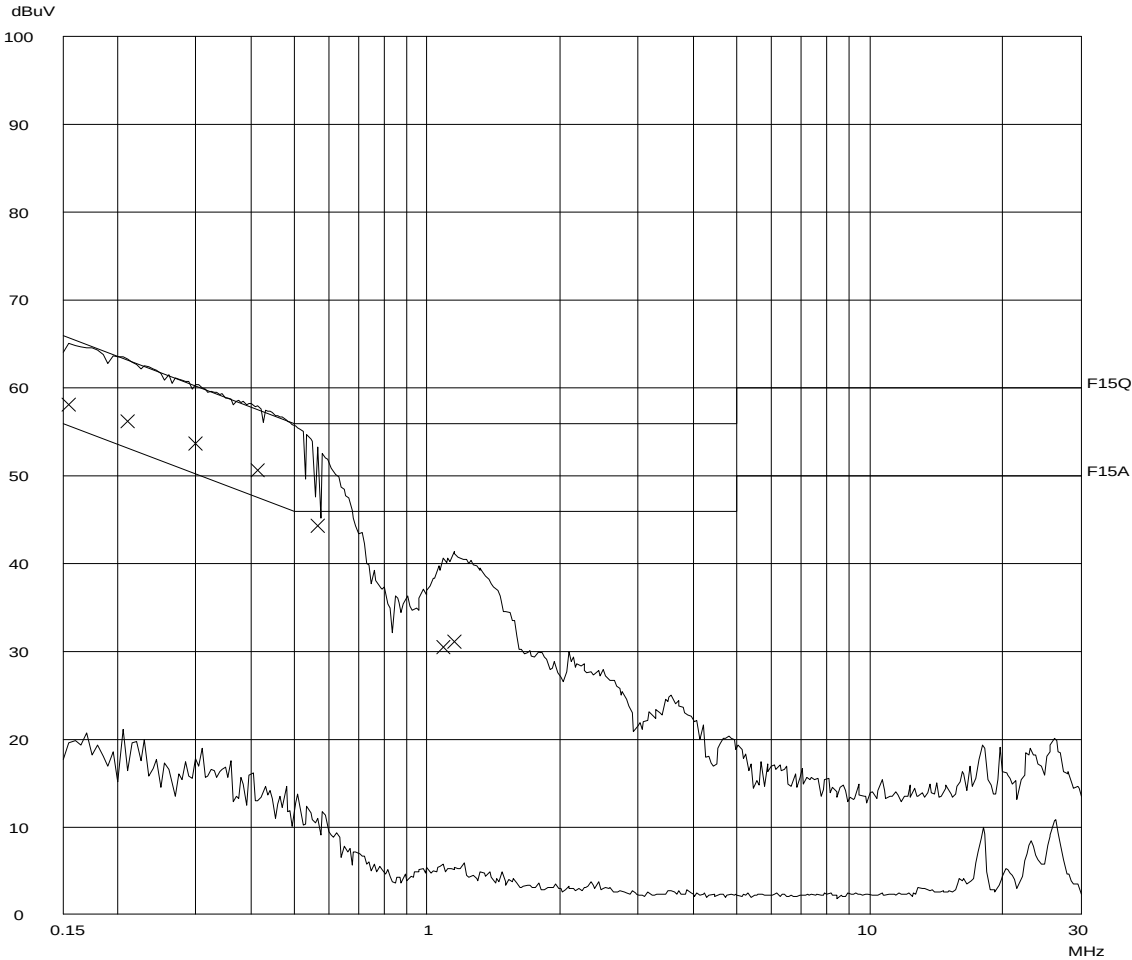

Report No.: 05080752
Receiving mode
(Right Speaker, Ch3)
AC mains

Tested By: Hong, Report No.: 0508075

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15500	58.0	65.7
0.21000	56.2	63.2
0.30000	53.6	60.2
0.41500	50.5	57.6
0.56500	44.3	56.0
1.09000	30.5	56.0
1.15000	31.0	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

* limit



Report No.: 05080752
Receiving mode
(Left Speaker, Ch2)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

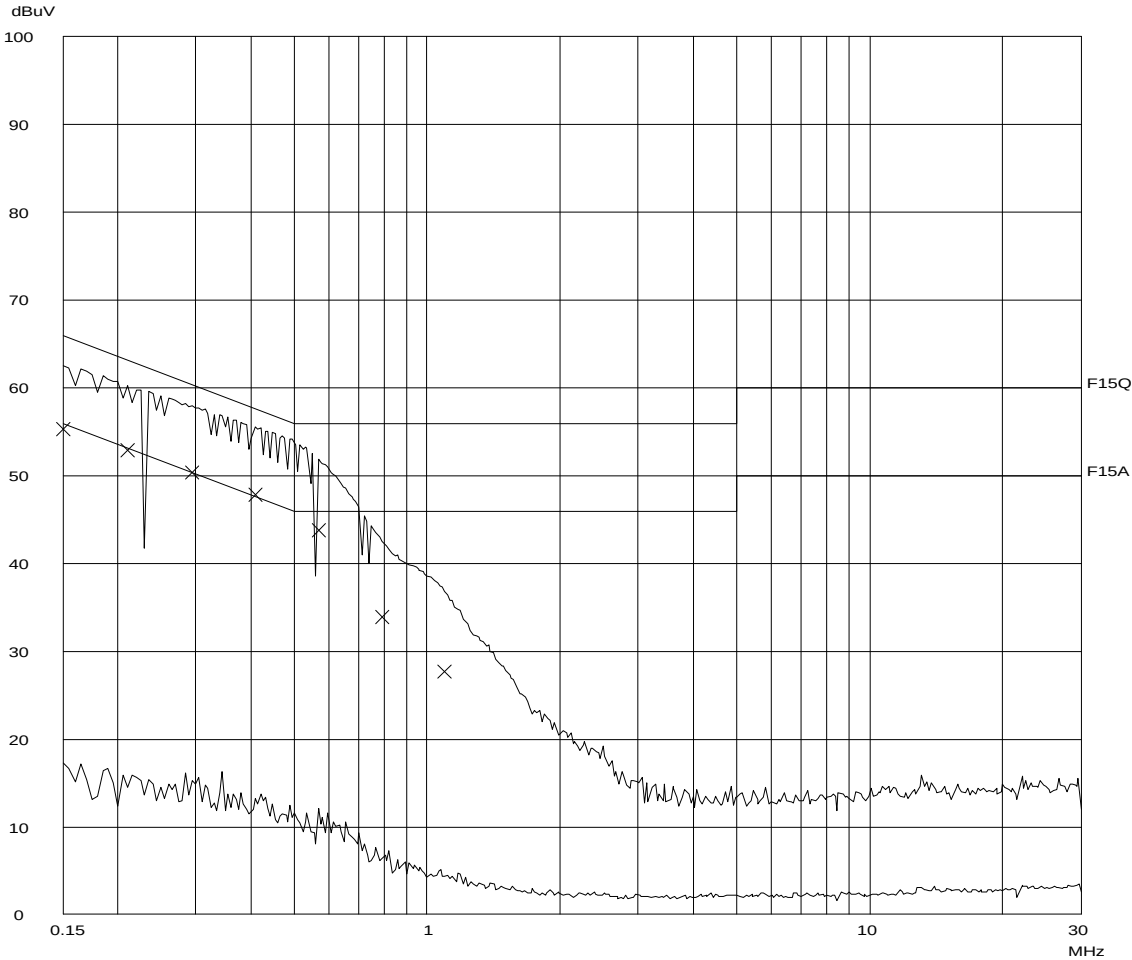

Report No.: 05080752
Receiving mode
(Left Speaker, Ch2)
AC mains

Tested By: Hong, Report No.: 0508075

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	55.3	66.0
0.21000	52.9	63.2
0.29500	50.3	60.3
0.41000	47.8	57.7
0.57000	43.7	56.0
0.79000	33.8	56.0
1.09500	27.7	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

* limit



Report No.: 05080752
Receiving mode
(Left Speaker, Ch3)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

|----- Frequencies -----| |----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

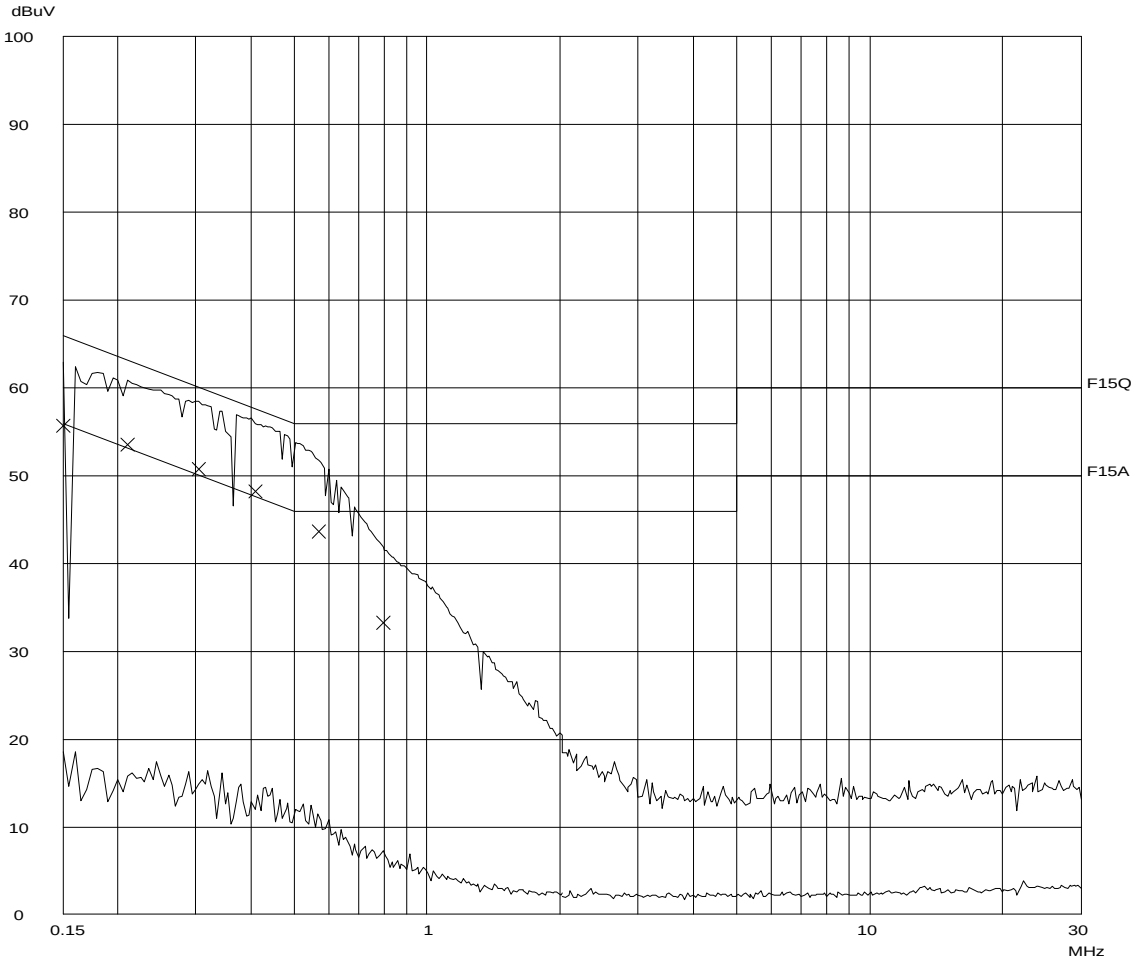

Report No.: 05080752
Receiving mode
(Left Speaker, Ch3)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	55.6	66.0
0.21000	53.5	63.2
0.30500	50.7	60.1
0.41000	48.2	57.7
0.57000	43.6	56.0
0.79500	33.2	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

no Results

* limit



Report No.: 05080752
Charging mode
(Right Speaker)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

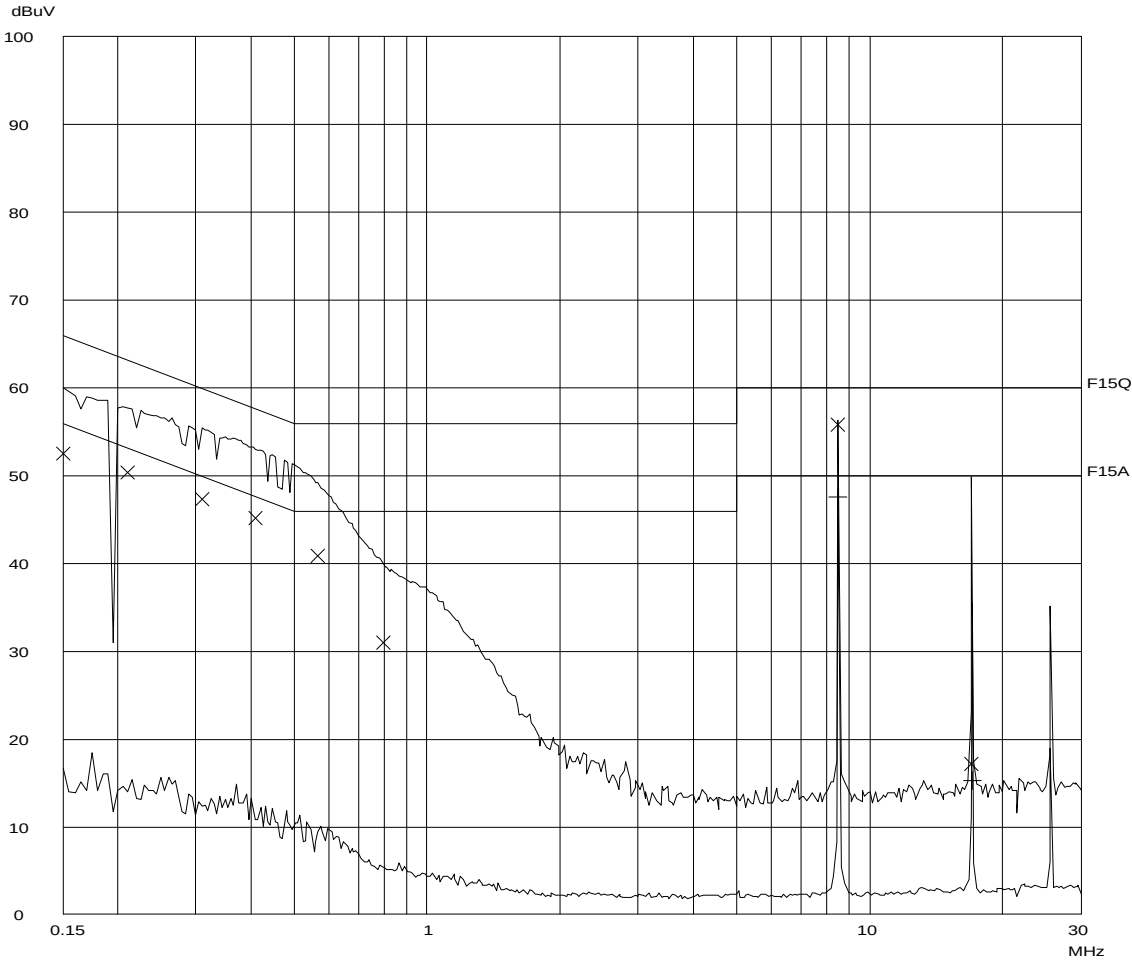

Report No.: 05080752
 Charging mode
 (Right Speaker)
 AC mains

Tested By: Hong, Report No.: 0508075

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.15000	52.5	66.0
0.21000	50.3	63.2
0.31000	47.3	60.0
0.41000	45.1	57.7
0.56500	40.9	56.0
0.79500	30.9	56.0
8.50000	55.8	60.0
17.01000	17.1	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
8.50000	47.5	50.0
17.03500	15.2	50.0

* limit



Report No.: 05080752
Charging mode
(Left Speaker)
AC mains

Tested By:Hong, Report No.:0508075

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

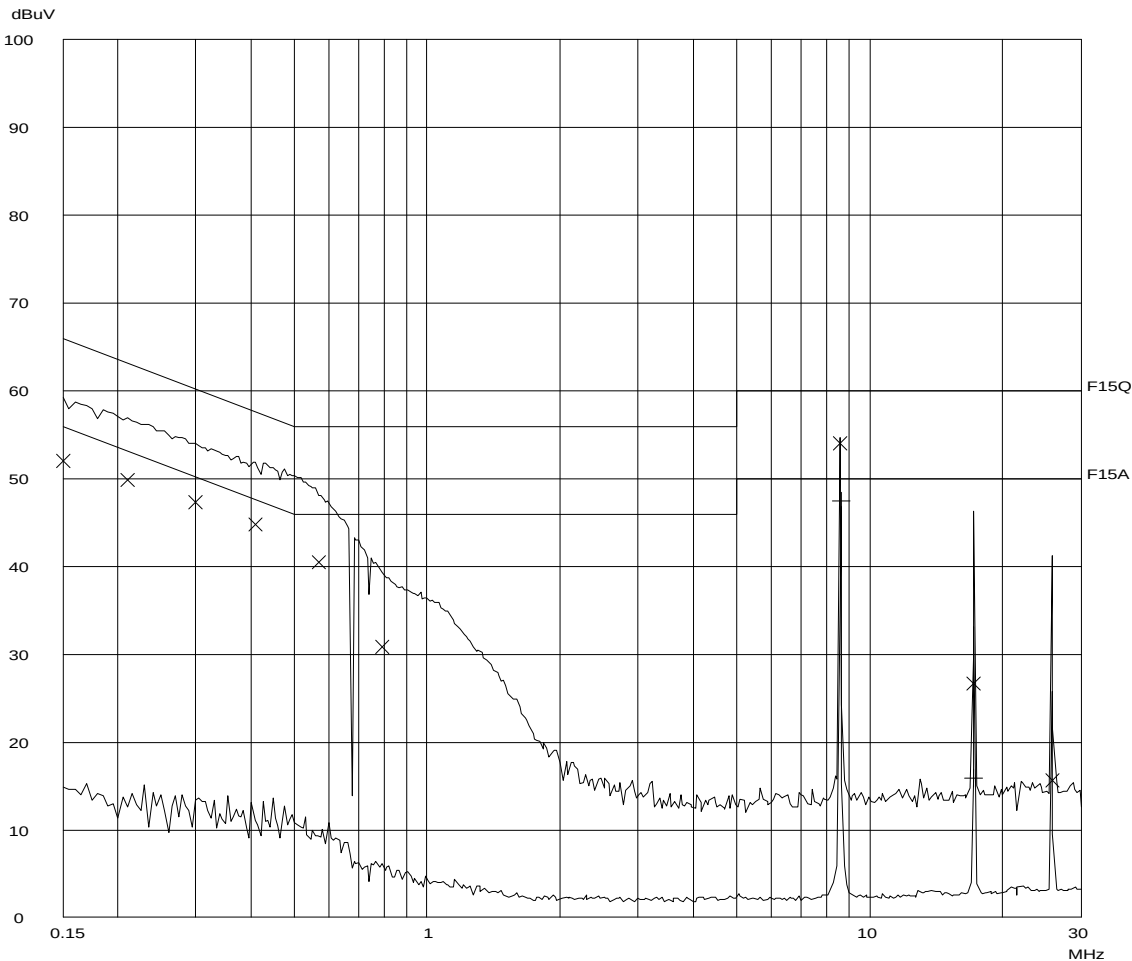

Report No.: 05080752
Charging mode
(Left Speaker)
AC mains

Tested By: Hong, Report No.: 0508075

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	52.0	66.0
0.21000	49.8	63.2
0.30000	47.3	60.2
0.41000	44.7	57.7
0.57000	40.4	56.0
0.79000	30.8	56.0
8.59000	54.0	60.0
17.19000	26.6	60.0
25.84000	15.6	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

8.60500	47.4	50.0
17.19500	15.9	50.0

* limit