


MARK	ISSUE	DATE	REVER	DCN NO.
1				
2				

Label location

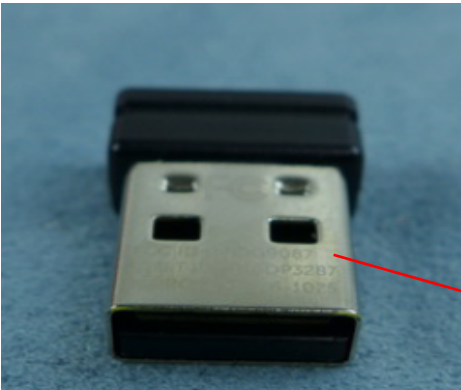

FCC ID:H4IDG9088

FC

IC:4491A-DG9088

Model :
SD-9088
RATING:
5V= 100mA

MADE IN
CHINA

10

- Notes:
- 1. Material: SUS304+SWIC(plated with nickel)
 - 2.3D surface and curve refer to Pro/E file.
 - 3.CTA=Critical to assemble(01~03)
 - 4. the part is according to the latest version version"HS-301" of LITEON.
 - 5. Unspecified tolerance:

SELECT V		V		
DIM. LEVEL	A	B	C	D
~ 5	±0.03	±0.05	±0.08	±0.10
5 ~ 10	±0.05	±0.08	±0.10	±0.15
10 ~ 50	±0.08	±0.10	±0.15	±0.20
50 ~ 100	±0.10	±0.15	±0.20	±0.25
100 ~	±0.10	±0.15	±0.20	±0.25

6. Test1:Salt Spray test specification:
concentration of sodium Chloride solution:
40~60 g/l pH value;6.5~7.2
Pressure of air supply:0.7~1.8kgf/cm²
Spray rate:1.0~2.0ml/80cm²-hr Temp.
of pressure tank:47+/-1 C/Temp. of salt
tank:35+/-1 . Temp. of test tank:35+/-1C/
Humidity of test tank:85%RH
Test Time:8hrs
Sample size for 5 units
Analysis/Observation:
the test samples cosmetic check can
pacc after salt spray 8 hours test

PART NO	DESCRIPTION	QTY	MAT'L	TRETING	REMARK
SCALE: free	TOLERANCE : UNSPECIFIED .XXX + 0.05 .XX + 0.1 .X + 0.15 + 0.25 ANGLE ± 0.5°	LITEON® SILITEK ELECTRONICS(DONGGUAN)CO.,LTD DONGGUAN LITE-ON COMPUTER CO., LTD.			
UNIT: mm		TITLE: SD9088			
DRAWN:		SHEET 1 OF 1 DRAWING NO:			
DESIGER:					
CHECKED:					
APPROVED:					

