

FCC Test Report

Product Name	TUF GAMING M4 WIRELESS
Model No.	P306
FCC ID	H4IP306

Applicant	Lite-on Technology Corp.
Address	16F,392,Ruey Kuang Road,Neihu ,11492 Taipei, Taiwan

Date of Receipt	Jul. 29, 2021
Issued Date	Sep. 03, 2021
Report No.	2171179R-RFUSOTHV06
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Sep. 03, 2021

Report No.: 2171179R-RFUSOTHV06




Product Name	TUF GAMING M4 WIRELESS
Applicant	Lite-on Technology Corp.
Address	16F,392,Ruey Kuang Road,Neihu ,11492 Taipei, Taiwan
Manufacturer	Lite-on Technology Corp.
Model No.	P306
FCC ID	H4IP306
EUT Rated Voltage	DC 1.5V (Power by battery)
EUT Test Voltage	DC 1.5V (Power by battery)
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :




(Senior Project Specialist / Joanne Lin)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Test System.....	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Equipment	9
1.7. Uncertainty	10
2. Conducted Emission	11
2.1. Test Setup	11
2.2. Limits	11
2.3. Test Procedure	12
2.4. Test Result of Conducted Emission.....	13
3. Radiated Emission	14
3.1. Test Setup	14
3.2. Limits	15
3.3. Test Procedure	16
3.4. Test Result of Radiated Emission.....	17
4. Band Edge	31
4.1. Test Setup	31
4.2. Limits	31
4.3. Test Procedure	32
4.4. Test Result of Band Edge	33
5. Duty Cycle	37
5.1. Test Setup	37
5.2. Test Result of Duty Cycle.....	38
6. EMI Reduction Method During Compliance Testing	39
Appendix 1: EUT Test Photographs	
Appendix 2: Product Photos-Please refer to the file: 2171179R-Product Photos	

Revision History

Report No.	Version	Description	Issued Date
2171179R-RFUSOTHV06	V1.0	Initial issue of report.	2021-09-03

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	TUF GAMING M4 WIRELESS
Trade Name	ASUS
Model No.	P306
FCC ID	H4IP306
Frequency Range	2403-2480MHz
Channel Number	78CH
Type of Modulation	GFSK
Antenna Type	Ceramic Chip Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Walsin	RFECA3216060A1T	Ceramic Chip Antenna	2 dBi for 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2403 MHz	Channel 21: 2423 MHz		Channel 41: 2443 MHz		Channel 61: 2463 MHz	
Channel 02:	2404 MHz	Channel 22: 2424 MHz		Channel 42: 2444 MHz		Channel 62: 2464 MHz	
Channel 03:	2405 MHz	Channel 23: 2425 MHz		Channel 43: 2445 MHz		Channel 63: 2465 MHz	
Channel 04:	2406 MHz	Channel 24: 2426 MHz		Channel 44: 2446 MHz		Channel 64: 2466 MHz	
Channel 05:	2407 MHz	Channel 25: 2427 MHz		Channel 45: 2447 MHz		Channel 65: 2467 MHz	
Channel 06:	2408 MHz	Channel 26: 2428 MHz		Channel 46: 2448 MHz		Channel 66: 2468 MHz	
Channel 07:	2409 MHz	Channel 27: 2429 MHz		Channel 47: 2449 MHz		Channel 67: 2469 MHz	
Channel 08:	2410 MHz	Channel 28: 2430 MHz		Channel 48: 2450 MHz		Channel 68: 2470 MHz	
Channel 09:	2411 MHz	Channel 29: 2431 MHz		Channel 49: 2451 MHz		Channel 69: 2471 MHz	
Channel 10:	2412 MHz	Channel 30: 2432 MHz		Channel 50: 2452 MHz		Channel 70: 2472 MHz	
Channel 11:	2413 MHz	Channel 31: 2433 MHz		Channel 51: 2453 MHz		Channel 71: 2473 MHz	
Channel 12:	2414 MHz	Channel 32: 2434 MHz		Channel 52: 2454 MHz		Channel 72: 2474 MHz	
Channel 13:	2415 MHz	Channel 33: 2435 MHz		Channel 53: 2455 MHz		Channel 73: 2475 MHz	
Channel 14:	2416 MHz	Channel 34: 2436 MHz		Channel 54: 2456 MHz		Channel 74: 2476 MHz	
Channel 15:	2417 MHz	Channel 35: 2437 MHz		Channel 55: 2457 MHz		Channel 75: 2477 MHz	
Channel 16:	2418 MHz	Channel 36: 2438 MHz		Channel 56: 2458 MHz		Channel 76: 2478 MHz	
Channel 17:	2419 MHz	Channel 37: 2439 MHz		Channel 57: 2459 MHz		Channel 77: 2479 MHz	
Channel 18:	2420 MHz	Channel 38: 2440 MHz		Channel 58: 2460 MHz		Channel 78: 2480 MHz	
Channel 19:	2421 MHz	Channel 39: 2441 MHz		Channel 59: 2461 MHz			
Channel 20:	2422 MHz	Channel 40: 2442 MHz		Channel 60: 2462 MHz			

Note:

1. The EUT is a TUF GAMING M4 WIRELESS with a built-in Bluetooth V5.1 and 2.4G wireless transceiver, this report is for 2.4G wireless.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.

Test Mode	Mode 1: Transmit
	Mode 2: Normal mode


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Notebook PC	DELL	Latitude 5501	N/A
2	Test Fixture	Mercury	MCS-73 LV	N/A	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Shielded, 1.8m
B	Signal Cable	Non-shielded, 0.25m

1.3. Configuration of Test System

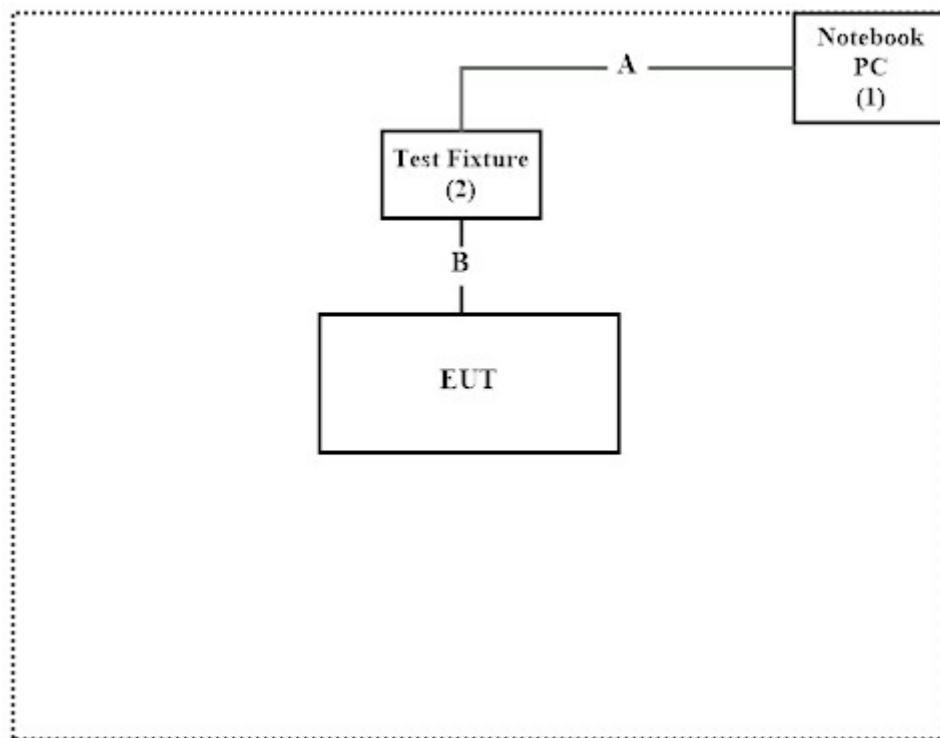

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software "Terminal ver. 1.93b" on the Notebook PC.
- (3) Configure the test mode and the test channel
- (4) Start the continuous transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	63.1 °C
	Humidity (%RH)	10~90 %	22.7 %
Conductive	Temperature (°C)	10~40 °C	22 °C
	Humidity (%RH)	10~90 %	55 %

USA : **FCC Registration Number: TW0033**

Canada : **IC Registration Number: 26930**

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan,
R.O.C.
Phone number : +886-3-275-7255
Fax number : +866-3-327-5505
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /SH1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
	EMI Test Receiver	R&S	ESR7	101601	2021.01.04	2022.01.03
	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
	Two-Line V-Network	R&S	ENV216	101307	2021.05.04	2022.05.03
	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

For Conducted measurements /SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	Anritsu	ML2496A	1548002	2021.02.24	2022.02.23
X	Wideband Power Sensor	Anritsu	MA2411B	1531023	2021.02.24	2022.02.23
X	Wideband Power Sensor	Anritsu	MA2411B	1531022	2021.02.24	2022.02.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /966-1 / 966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2021.09.04	2022.09.03
X	Horn Antenna	ETS-Lindgren	3117	00203761	2020.11.23	2021.11.22
	Horn Antenna	Com-Power	AH-840	101087	2020.06.08	2021.06.07
X	Pre-Amplifier	EMCI	EMC001330	980254	2021.01.20	2022.01.19
X	Pre-Amplifier	EMCI	EMC051835SE	980312	2021.02.24	2022.02.23
	Pre-Amplifier	EMCI	EMC05820SE	980308	2020.09.18	2021.09.17
	Pre-Amplifier	EMCI	EMC184045SE	980369	2021.04.27	2022.04.26
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101115	2021.02.03	2022.02.02
X	Coaxial Cable	SGH, EMCI	HA800 , SGH18	HY2103-001C	2021.03.03	2022.03.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Band Edge	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

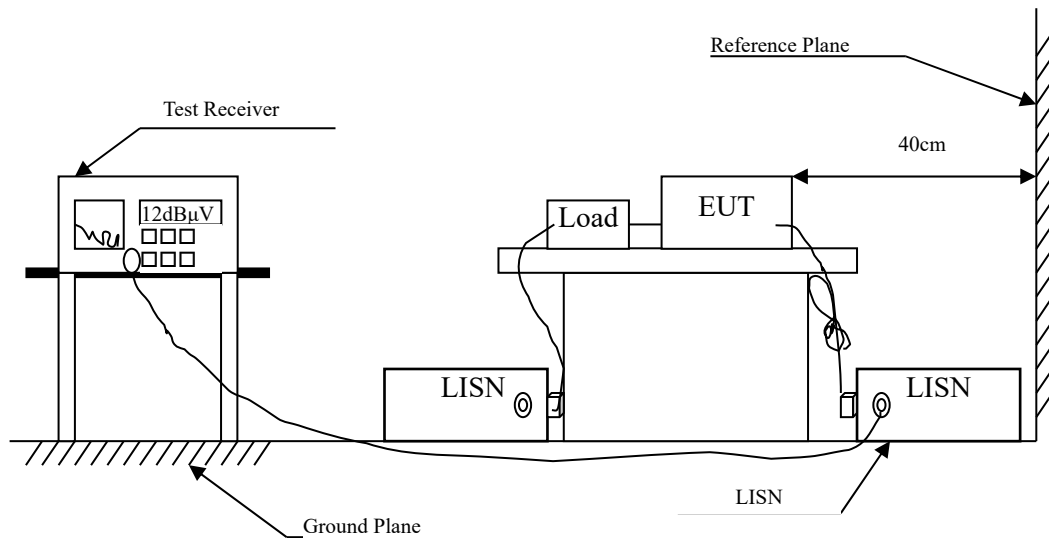

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


2.4. Test Result of Conducted Emission

Owing to the DC operation of EUT, this test item is not performed.


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30MHz

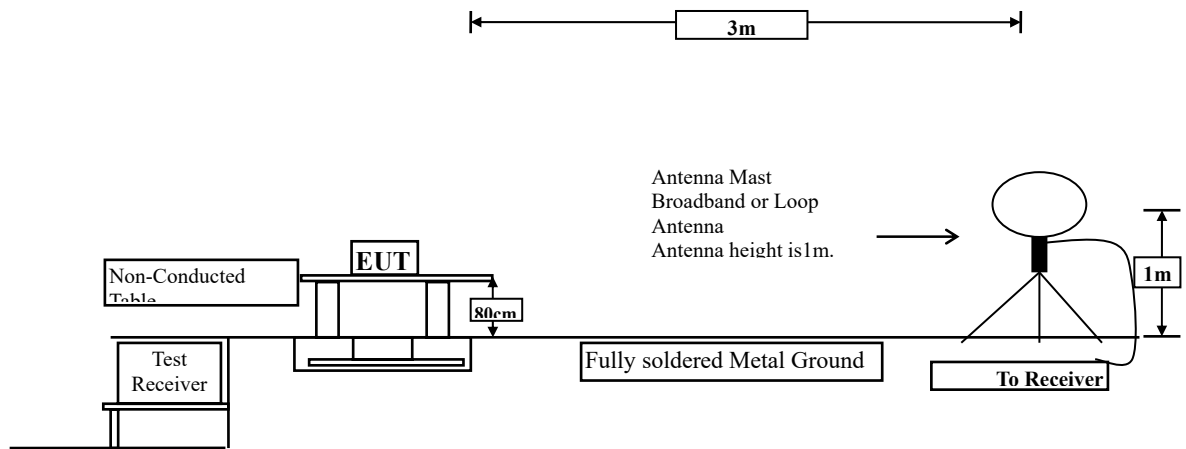

Radiated Emission Below 1GHz

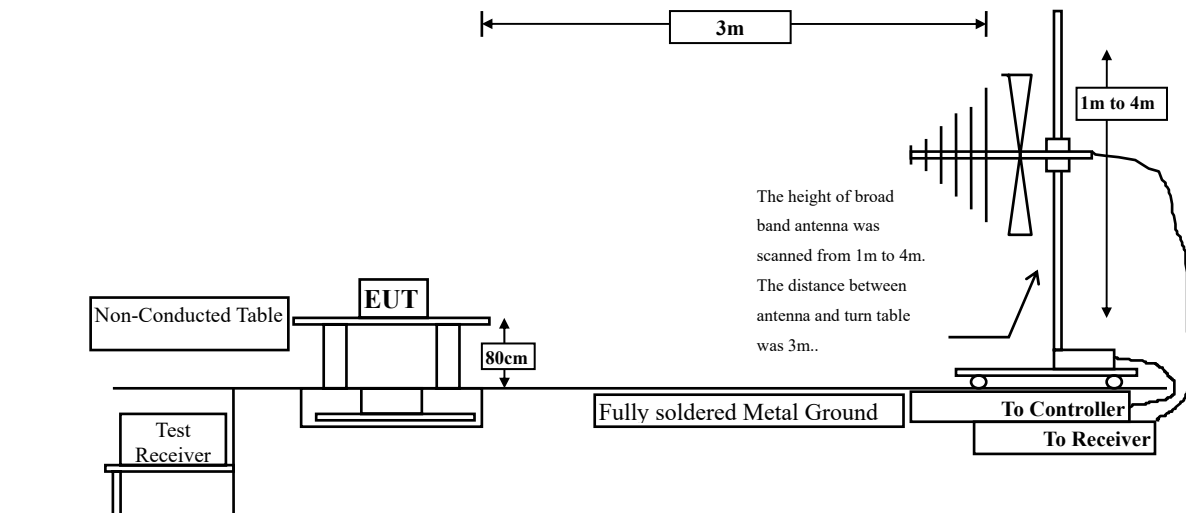

Radiated Emission Above 1GHz

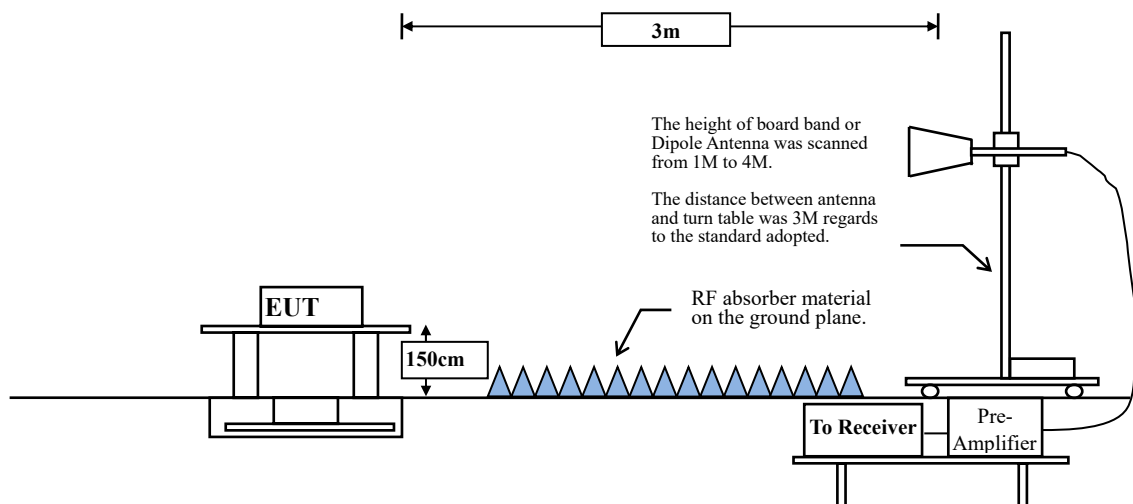

3.2. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBμV /m @3m)	(uV/m @3m)	(dBμV /m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54
24000-24250	250	108	2500	68

Remarks : 1. RF Voltage (dBμV /m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV /m) = 20 log E field strength (uV/m)

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level.

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.


The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Test Result of Radiated Emission

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Horizontal_X-Axis

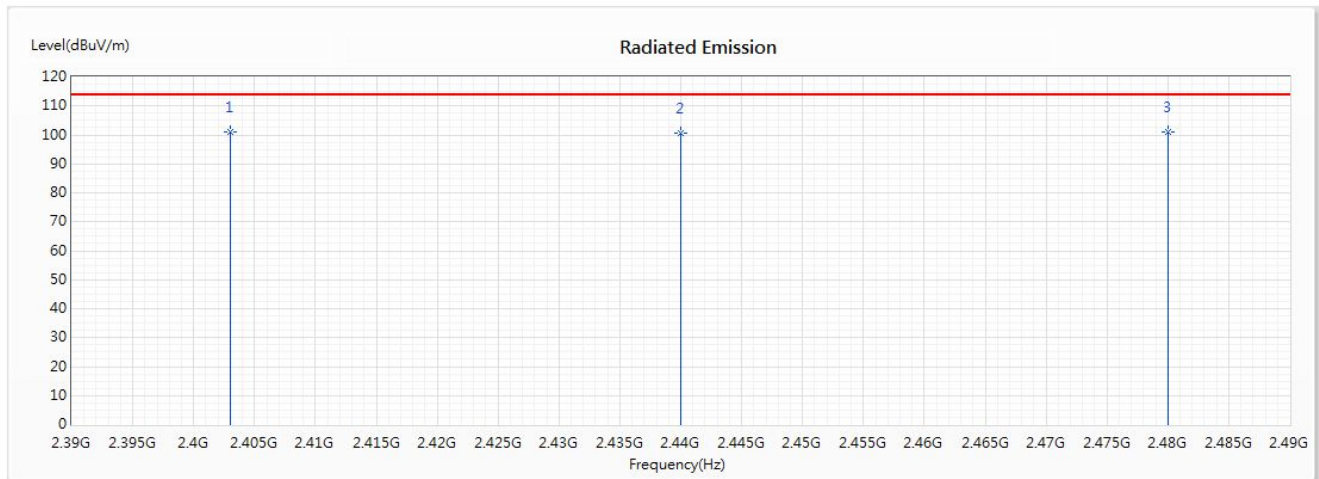

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	2403.000	101.10	114.00	-12.90	90.75	10.35	PK
2	2440.000	100.66	114.00	-13.34	90.14	10.52	PK
3	2480.000	100.92	114.00	-13.08	90.11	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Average Measurement (dBuV/m)	Margin (dB)	Average Limit (dBuV/m)
2403.000	101.100	-24.258	76.842	-17.158	94.000
2440.000	100.660	-24.258	76.402	-17.598	94.000
2480.000	100.920	-24.258	76.662	-17.338	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Vertical_X-Axis

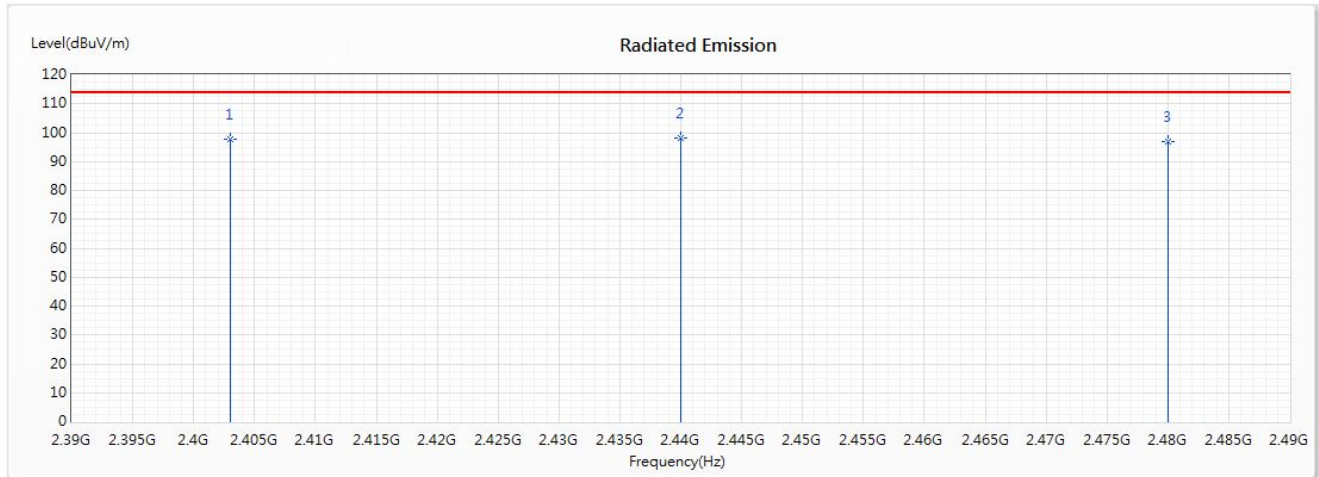

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2403.000	97.88	114.00	-16.12	87.53	10.35	PK
* 2	2440.000	97.96	114.00	-16.04	87.44	10.52	PK
3	2480.000	96.80	114.00	-17.20	85.99	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)
2403.000	97.880	-24.258	73.622	-20.378	94.000
2440.000	97.960	-24.258	73.702	-20.298	94.000
2480.000	96.800	-24.258	72.542	-21.458	94.000

Note:

1. AVG Measurement = Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Horizontal_Y-Axis

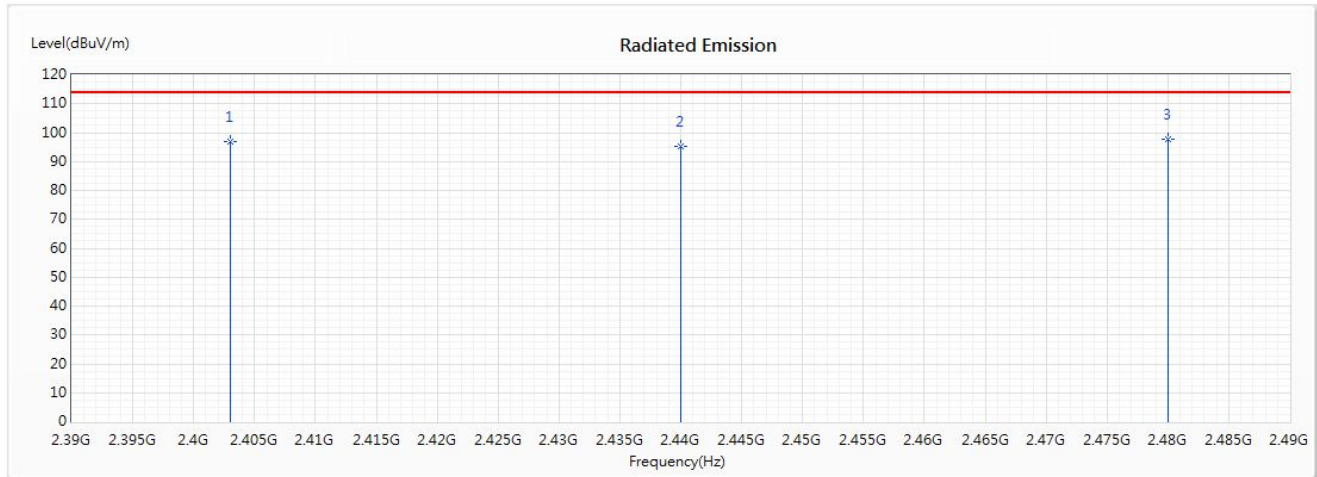

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2403.000	96.82	114.00	-17.18	86.47	10.35	PK
2	2440.000	95.27	114.00	-18.73	84.75	10.52	PK
* 3	2480.000	97.91	114.00	-16.09	87.10	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)
2403.000	96.820	-24.258	72.562	-21.438	94.000
2440.000	95.270	-24.258	71.012	-22.988	94.000
2480.000	97.910	-24.258	73.652	-20.348	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Vertical_Y-Axis

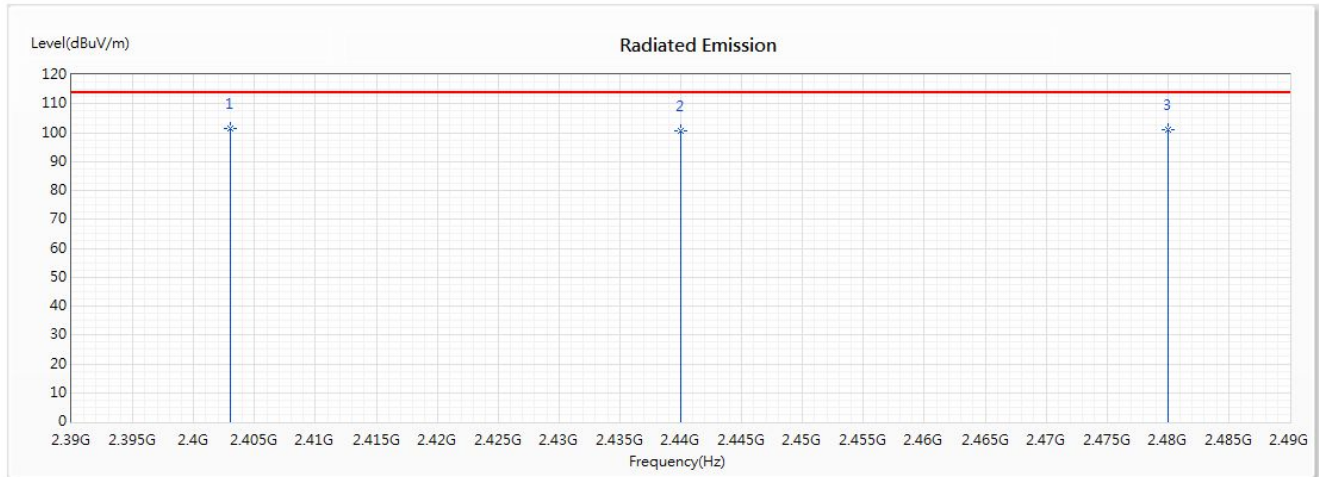

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	2403.000	101.35	114.00	-12.65	91.00	10.35	PK
2	2440.000	100.46	114.00	-13.54	89.94	10.52	PK
3	2480.000	101.09	114.00	-12.91	90.28	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)
2403.000	101.350	-24.258	77.092	-16.908	94.000
2440.000	100.460	-24.258	76.202	-17.798	94.000
2480.000	101.090	-24.258	76.832	-17.168	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Horizontal_Z-Axis

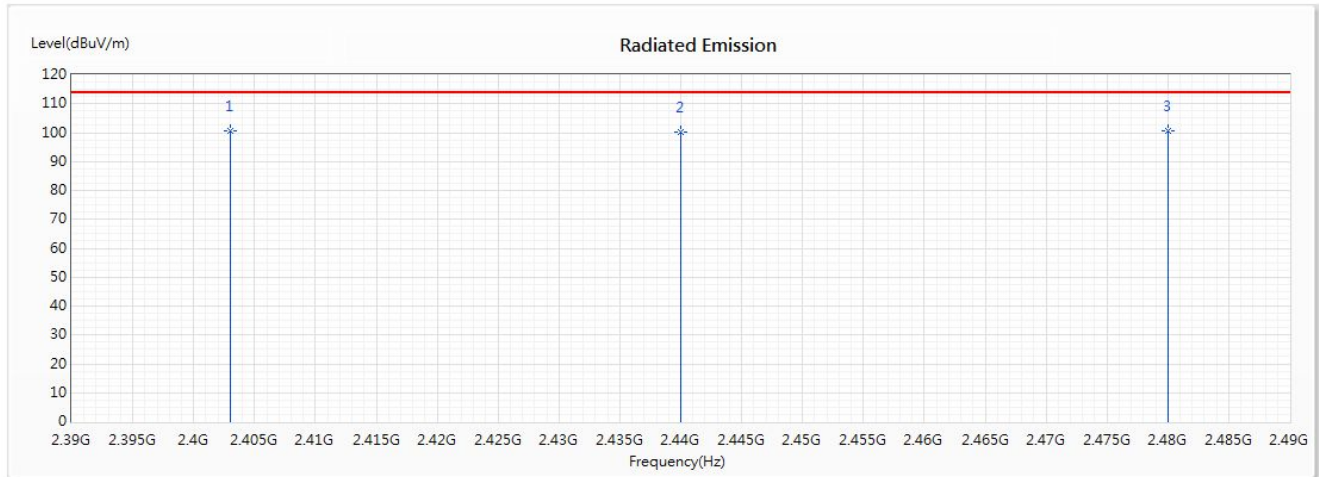

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	2403.000	100.52	114.00	-13.48	90.17	10.35	PK
2	2440.000	100.32	114.00	-13.68	89.80	10.52	PK
3	2480.000	100.45	114.00	-13.55	89.64	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)
2403.000	100.520	-24.258	76.262	-17.738	94.000
2440.000	100.320	-24.258	76.062	-17.938	94.000
2480.000	100.450	-24.258	76.192	-17.808	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit

Vertical_Z-Axis

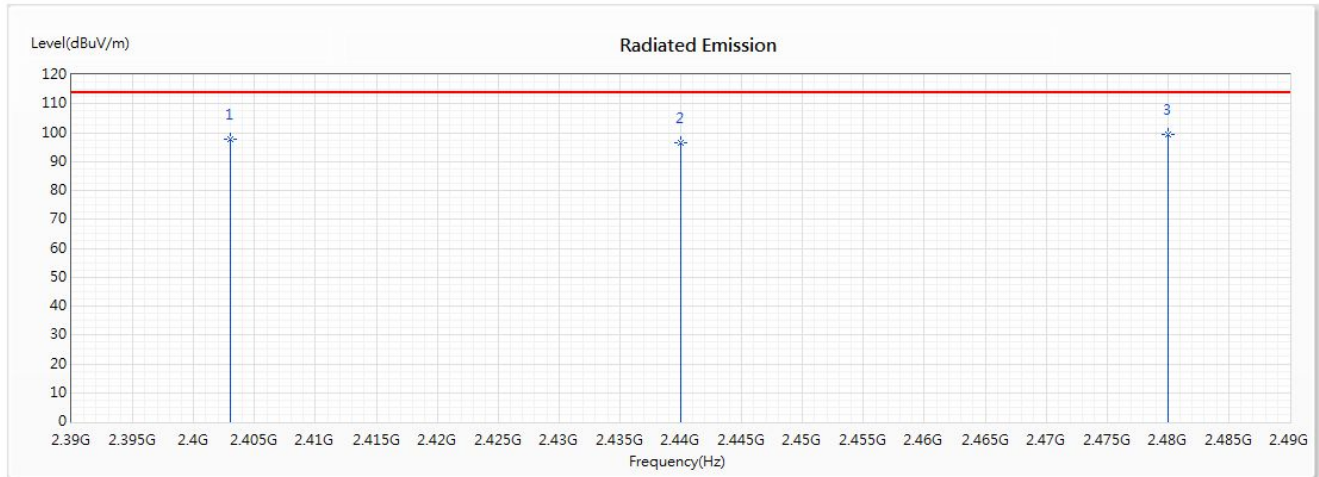

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2403.000	97.66	114.00	-16.34	87.31	10.35	PK
2	2440.000	96.47	114.00	-17.53	85.95	10.52	PK
* 3	2480.000	99.23	114.00	-14.77	88.42	10.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)
2403.000	97.660	-24.258	73.402	-20.598	94.000
2440.000	96.470	-24.258	72.212	-21.788	94.000
2480.000	99.230	-24.258	74.972	-19.028	94.000

Note:

1. AVG Measurement = Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2403MHz)

Horizontal

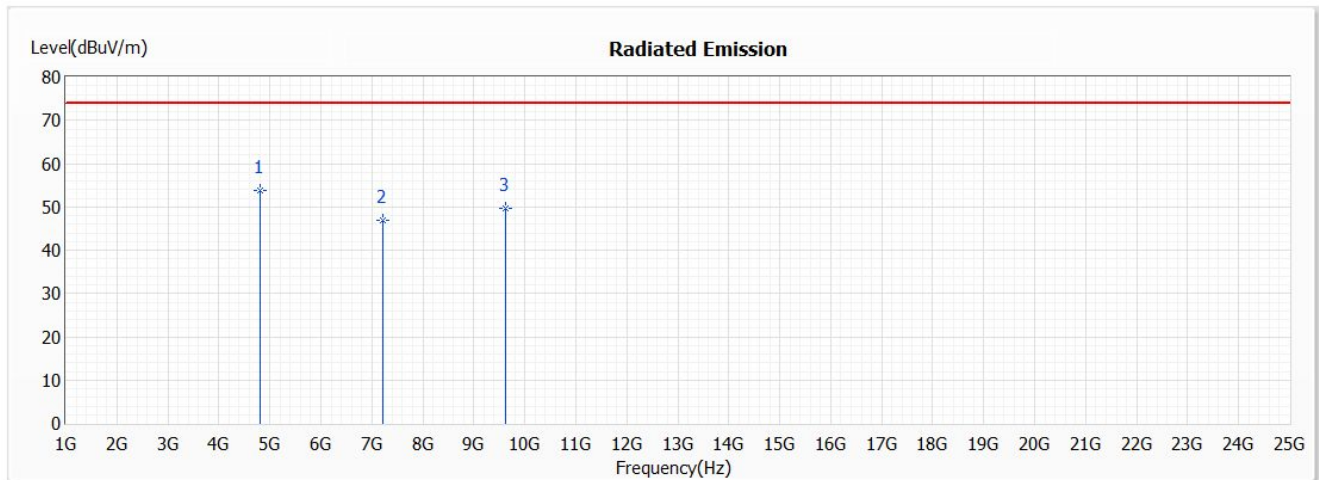

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4806.000	53.76	74.00	-20.24	57.23	-3.47	PK
2	7209.000	46.88	74.00	-27.12	46.28	0.60	PK
3	9612.000	49.64	74.00	-24.36	47.16	2.48	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
------------------	-------------------------------	----------------------------	----------------------------------	--------------	-------------------------	----------------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2403MHz)

Vertical

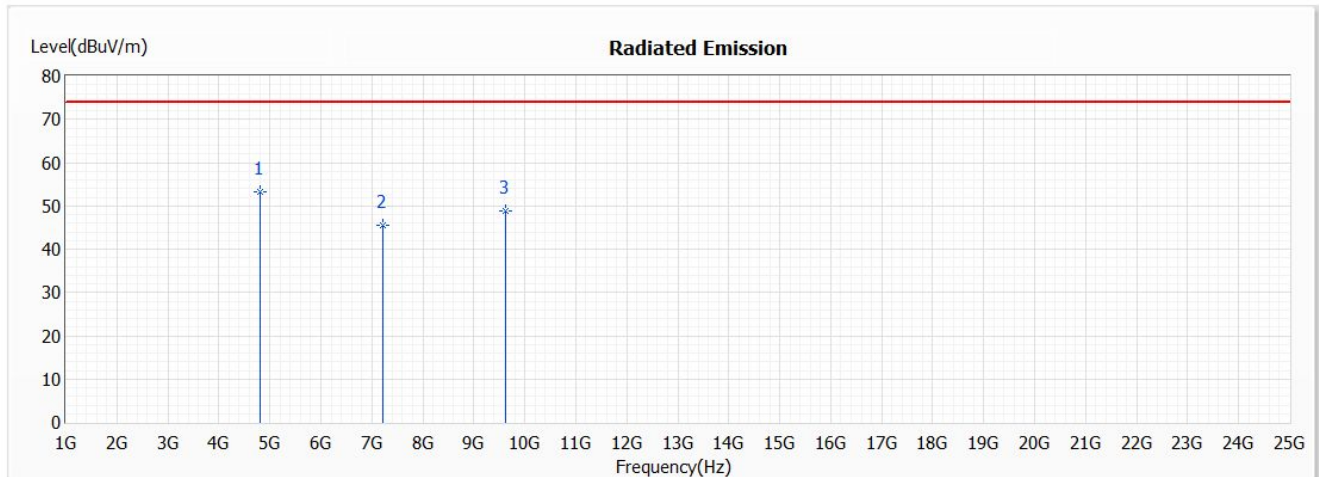

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4806.000	53.37	74.00	-20.63	56.84	-3.47	PK
2	7209.000	45.39	74.00	-28.61	44.79	0.60	PK
3	9612.000	48.71	74.00	-25.29	46.23	2.48	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---	---	---	---	---	74.000	54.000


Average Detector:

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2440MHz)

Horizontal

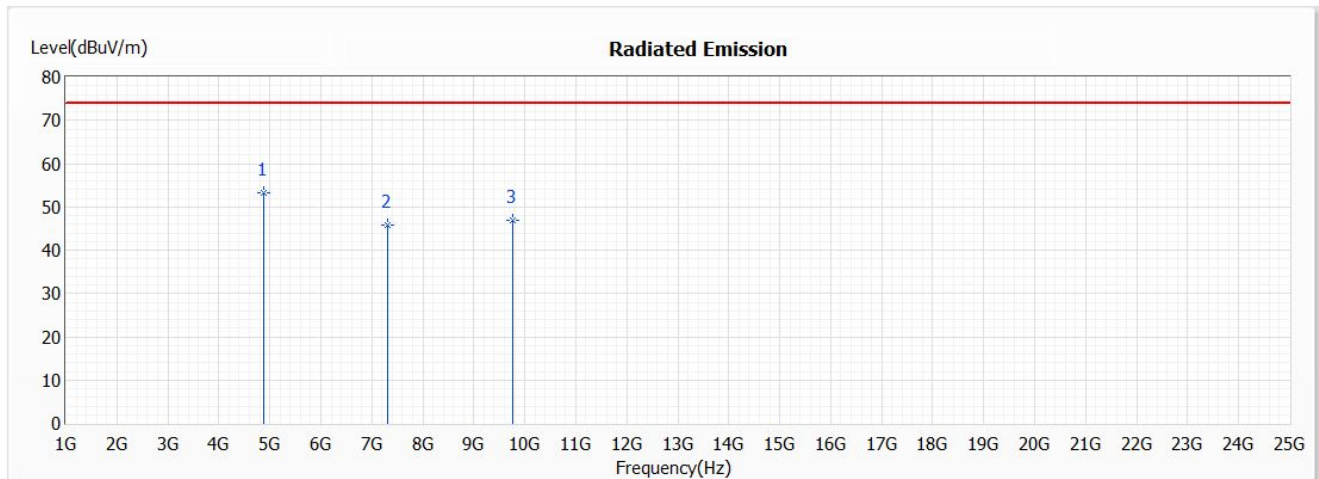

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4880.000	53.12	74.00	-20.88	56.50	-3.38	PK
2	7320.000	45.89	74.00	-28.11	45.25	0.64	PK
3	9760.000	46.97	74.00	-27.03	44.36	2.61	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency	Peak Measurement	Duty Cycle Factor	Average Measurement	Margin	Peak Limit	Average Limit
MHz	dBμV/m	dB	dBμV/m	dB	dBμV/m	dBμV/m

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2440MHz)

Vertical

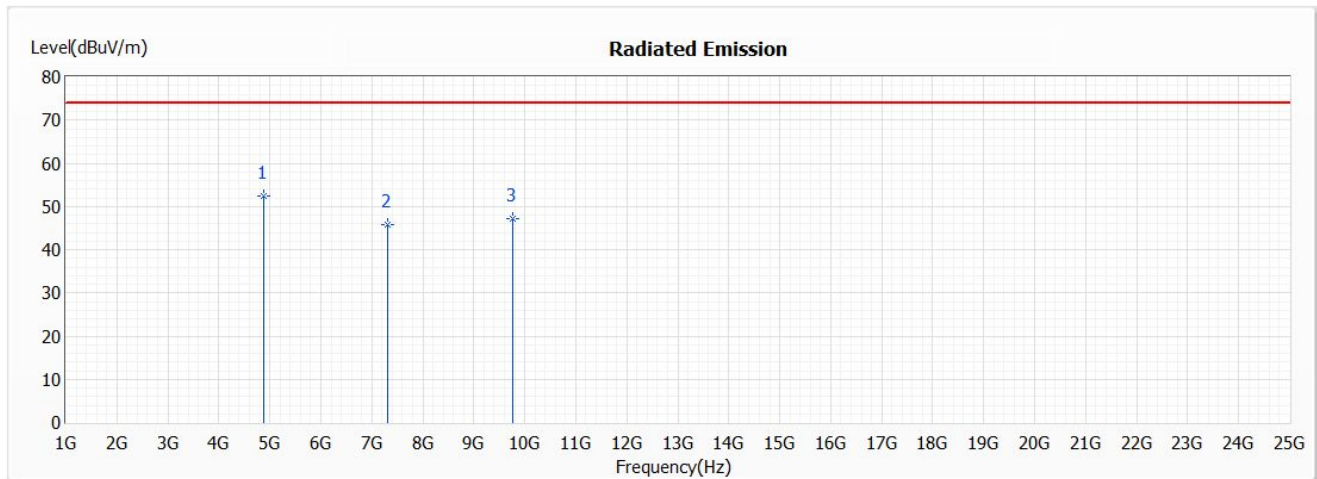

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4880.000	52.50	74.00	-21.50	55.88	-3.38	PK
2	7320.000	45.82	74.00	-28.18	45.18	0.64	PK
3	9760.000	47.06	74.00	-26.94	44.45	2.61	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency	Peak Measurement	Duty Cycle Factor	Average Measurement	Margin	Peak Limit	Average Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m	dB μ V/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2480MHz)

Horizontal

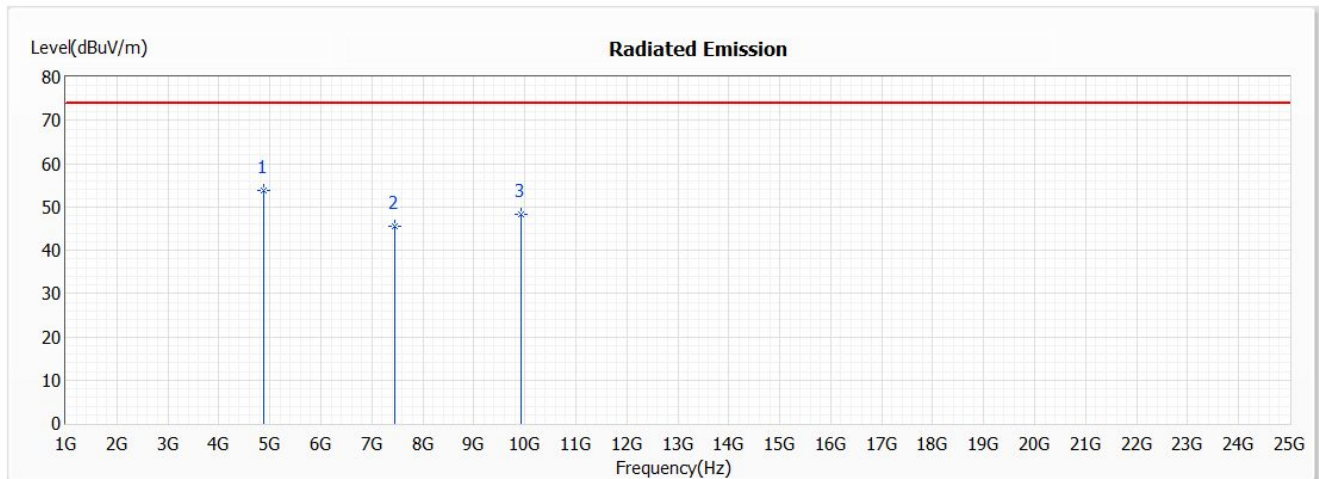

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4960.000	53.67	74.00	-20.33	57.05	-3.38	PK
2	7440.000	45.63	74.00	-28.37	45.03	0.60	PK
3	9920.000	48.17	74.00	-25.83	45.33	2.84	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2480MHz)

Vertical

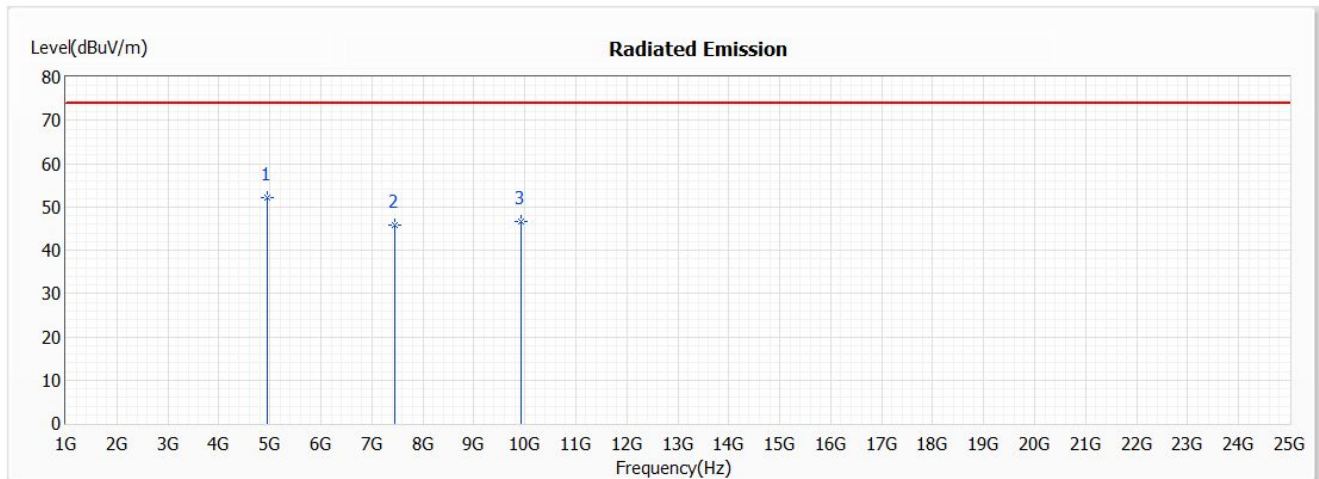

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4960.000	52.07	74.00	-21.93	55.25	-3.18	PK
2	7440.000	45.84	74.00	-28.16	45.24	0.60	PK
3	9920.000	46.62	74.00	-27.38	43.78	2.84	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : General Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2440MHz)

Horizontal

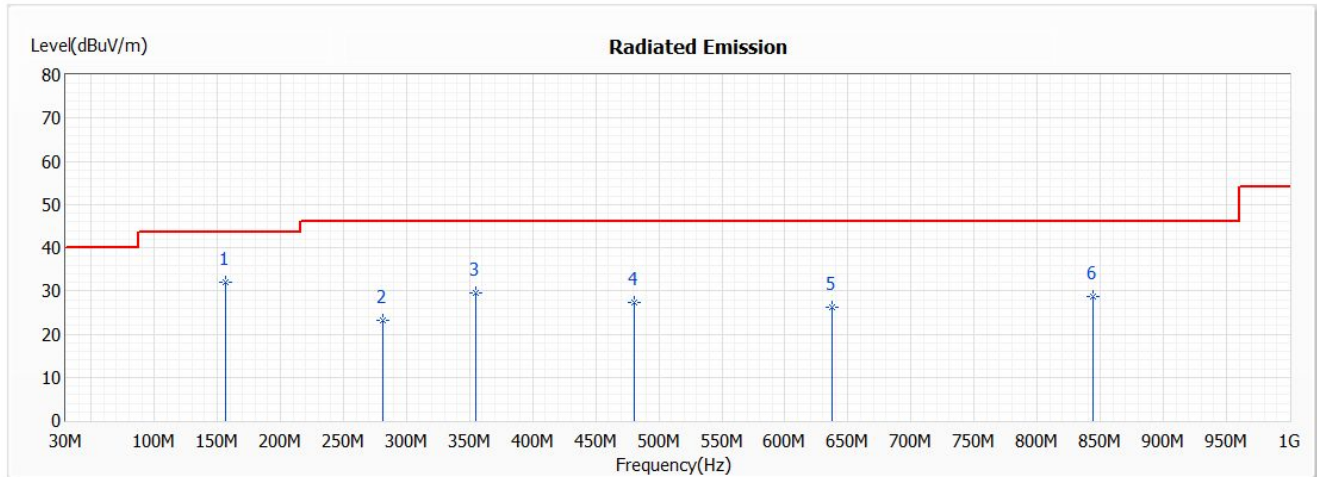


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	156.100	31.89	43.50	-11.61	42.22	-10.33	QP
2	281.230	23.18	46.00	-22.82	33.37	-10.19	QP
3	354.950	29.42	46.00	-16.58	37.86	-8.44	QP
4	480.080	27.36	46.00	-18.64	32.85	-5.49	QP
5	637.220	26.33	46.00	-19.67	29.03	-2.70	QP
6	843.830	28.72	46.00	-17.28	28.79	-0.07	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TUF GAMING M4 WIRELESS
 Test Item : General Radiated Emission Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2440MHz)

Vertical

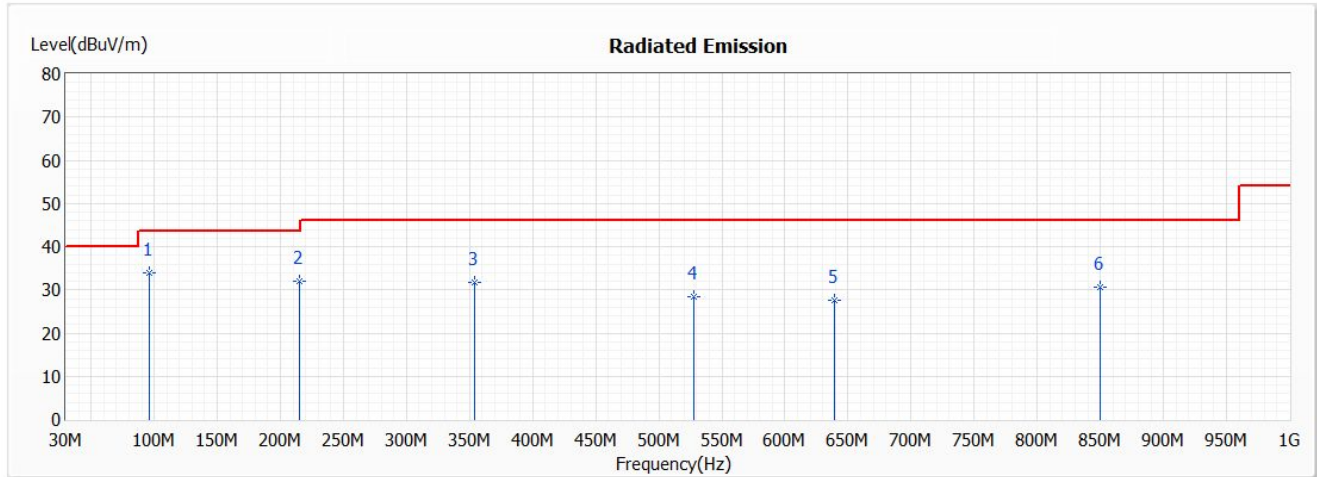

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	95.960	33.82	43.50	-9.68	50.40	-16.58	QP
2	215.270	31.93	43.50	-11.57	44.87	-12.94	QP
3	353.980	31.78	46.00	-14.22	40.24	-8.46	QP
4	527.610	28.38	46.00	-17.62	32.84	-4.46	QP
5	639.160	27.56	46.00	-18.44	30.22	-2.66	QP
6	849.650	30.58	46.00	-15.42	30.55	0.03	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

RF Radiated Measurement:

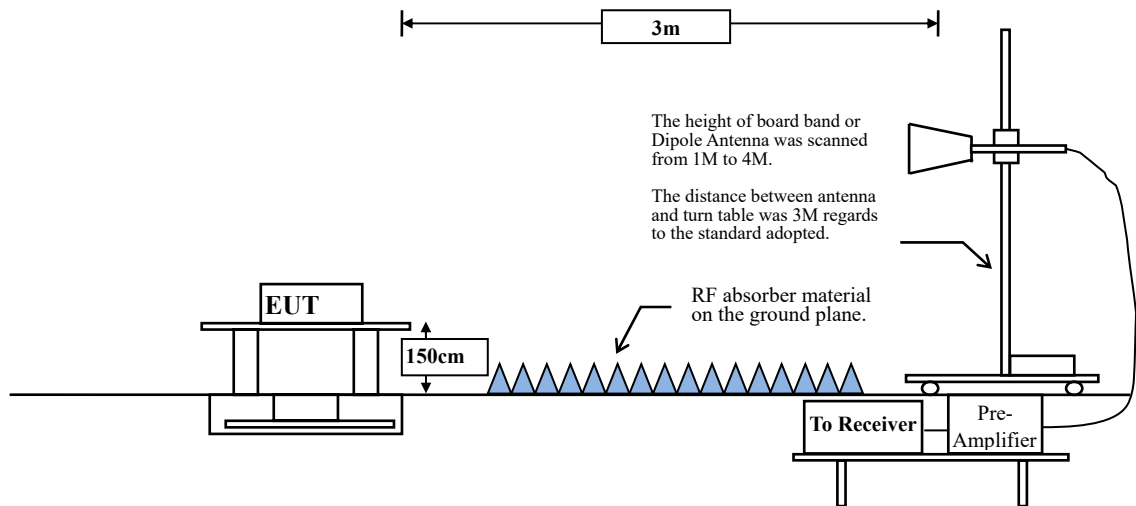

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV /m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Test Result of Band Edge

Product : TUF GAMING M4 WIRELESS
 Test Item : Band Edge Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2403MHz)

Horizontal

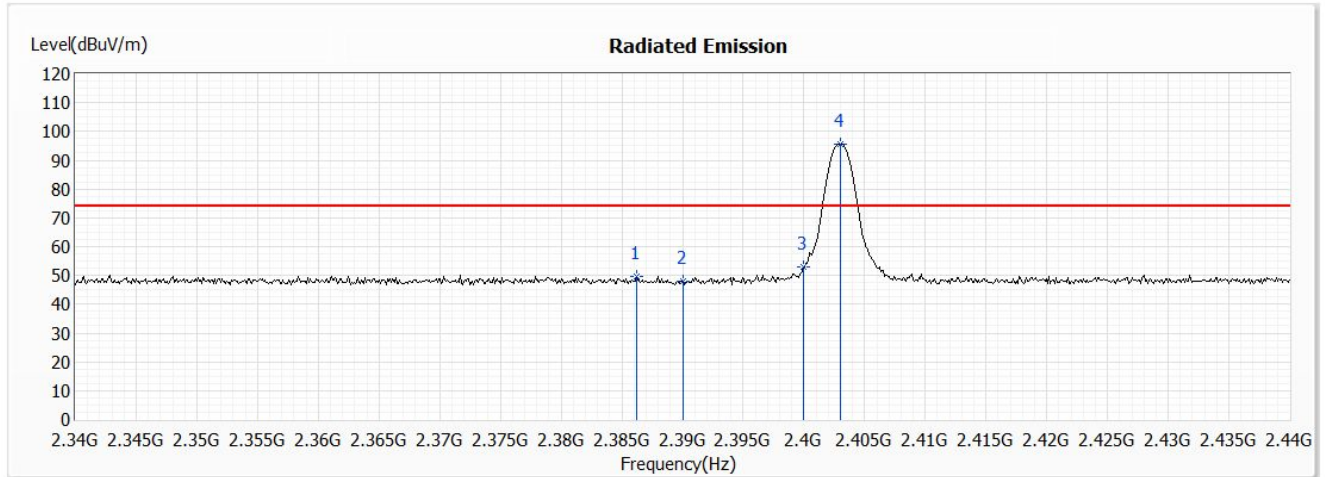

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.200	49.66	74.00	-24.34	39.30	10.36	PK
2	2390.000	47.97	74.00	-26.03	37.62	10.35	PK
3	2400.000	52.97	74.00	-21.03	42.63	10.34	PK
4	2403.000	95.79	--	--	85.44	10.35	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
2386.200	49.660	-24.258	25.402	-28.598	54.000	Pass
2390.000	47.970	-24.258	23.712	-30.288	54.000	Pass
2400.000	52.970	-24.258	28.712	-25.288	54.000	Pass
2403.000	95.790	-24.258	71.532	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Band Edge Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2403MHz)

Vertical

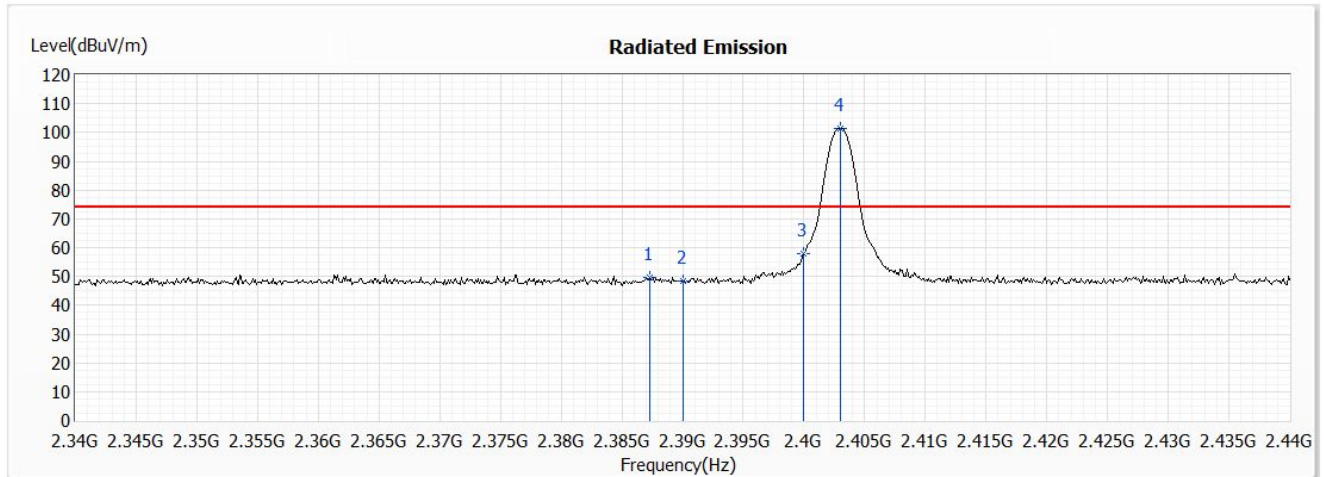

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2387.300	49.72	74.00	-24.28	39.36	10.36	PK
2	2390.000	48.28	74.00	-25.72	37.93	10.35	PK
3	2400.000	57.80	74.00	-16.20	47.46	10.34	PK
4	2403.000	101.55	--	--	91.20	10.35	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
2387.300	49.720	-24.258	25.462	-28.538	54.000	Pass
2390.000	48.280	-24.258	24.022	-29.978	54.000	Pass
2400.000	57.800	-24.258	33.542	-20.458	54.000	Pass
2403.000	101.550	-24.258	77.292	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Band Edge Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2480MHz)

Horizontal

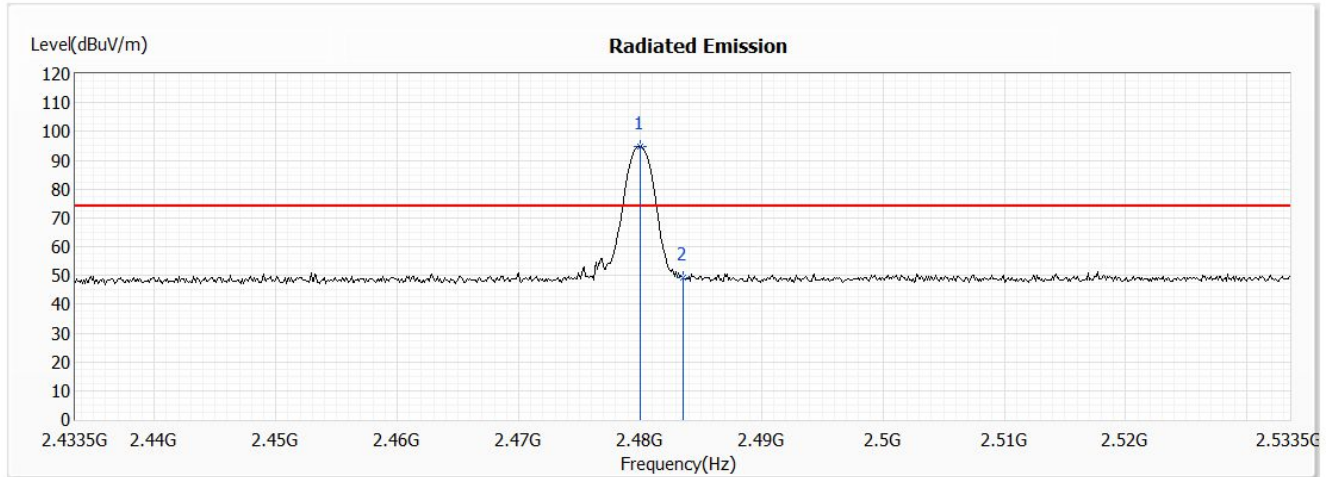

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2480.000	94.82	--	--	84.01	10.81	PK
2	2483.500	49.15	74.00	-24.85	38.31	10.84	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
2480.000	94.820	-24.258	70.562	--	--	Pass
2483.500	49.150	-24.258	24.892	-29.108	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : TUF GAMING M4 WIRELESS
 Test Item : Band Edge Data
 Test Date : 2021/08/18
 Test Mode : Mode 1: Transmit (2480MHz)

Vertical

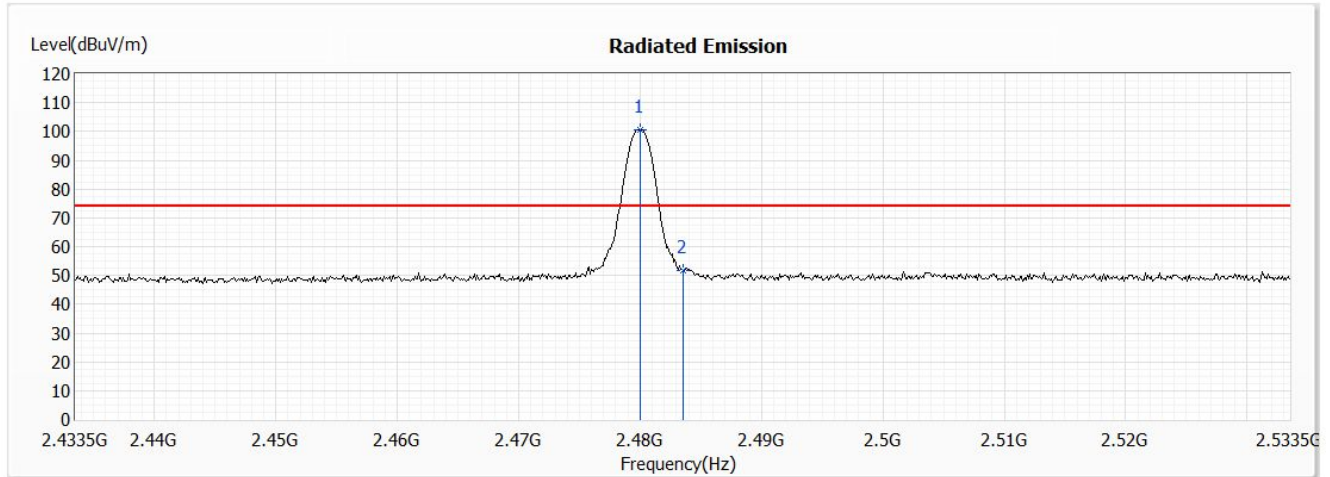

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2480.000	100.73	--	--	89.92	10.81	PK
2	2483.500	51.92	74.00	-22.08	41.08	10.84	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
2480.000	100.730	-24.258	76.472	--	--	Pass
2483.500	51.920	-24.258	27.662	-26.338	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.



5. Duty Cycle

5.1. Test Setup

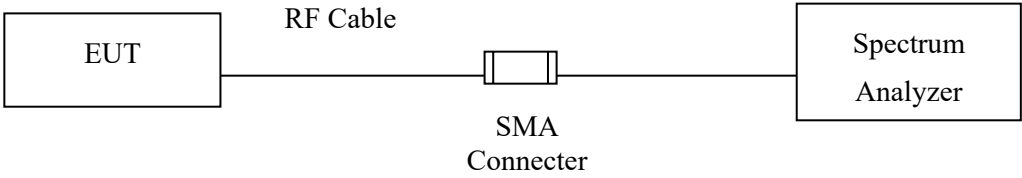

5.2. Test Result of Duty Cycle

Product : TUF GAMING M4 WIRELESS
 Test Item : Duty Cycle Data
 Test Mode : Mode 2: Normal mode

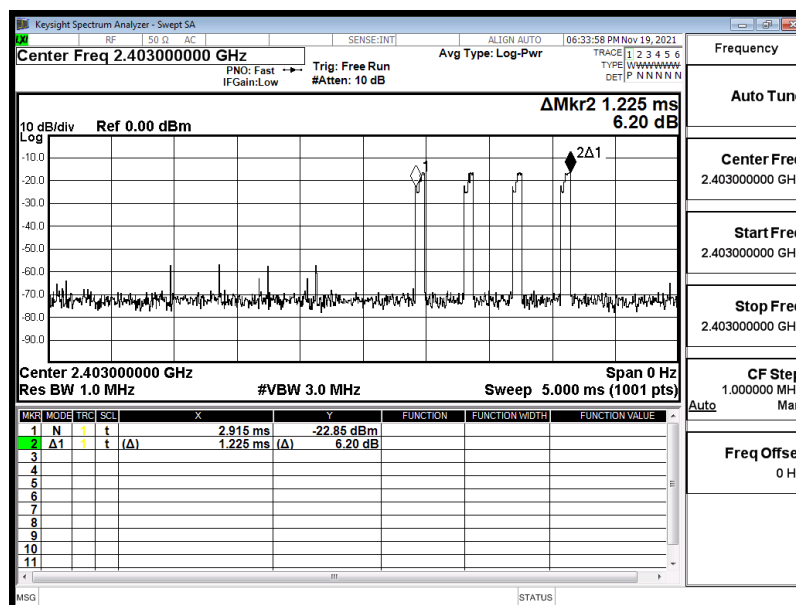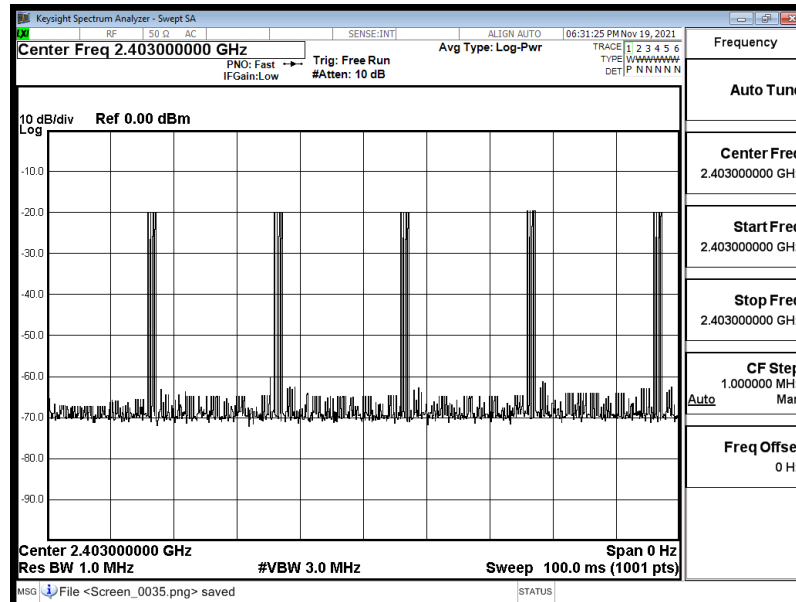

Time on of 100ms= 6.125ms (1.225*5ms)

Duty Cycle= 6.125ms / 100ms= 0.06125

Duty Cycle correction factor= 20 LOG 0.06125= -24.258 dB

Duty Cycle correction factor	-24.258 dB
------------------------------	------------

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.