



JQA File No. : 400-60185

Issue Date : September 1, 2006

Page 1 of 65

## **EMI TEST REPORT**

JQA File No. : 400-60185

Model No. : BT/SD Board

Type of Equipment : BT/SD Board

Regulations Applied : CFR 47 FCC Rules and Regulations Part 15  
: Industry Canada RSS-210(Issue 6) and RSS-Gen(Issue 1)

FCC ID : H5P-FC200BTSD  
IC : 6050AFC200BT

Applicant : TOPCON CORPORATION

Address : 75-1, Hasunuma-cho, Itabashi-ku, Tokyo, 174-8580 Japan

Manufacturer : Nagano Japan Radio Co., Ltd.

Address : 1163, Inesato-Cho, Nagano-Shi, Nagano, 381-2288 Japan

Received date of EUT : June 12, 2006

**Test Result : Passed**

Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.

The test results only respond to the tested sample. This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

## **TABLE OF CONTENTS**

|                                                 | Page           |
|-------------------------------------------------|----------------|
| <b>1 Documentation</b>                          |                |
| 1.1 Test Regulation                             | <u>4</u>       |
| 1.2 General Information                         | <u>4 - 5</u>   |
| 1.3 Test Condition                              | <u>6 - 12</u>  |
| 1.4 EUT Modifications / Deviation from Standard | <u>13</u>      |
| 1.5 Test results                                | <u>14 - 15</u> |
| 1.6 Summary                                     | <u>16</u>      |
| 1.7 Test Configuration / Operation of EUT       | <u>17</u>      |
| 1.8 EUT Arrangement (Drawing)                   | <u>18</u>      |
| 1.9 Preliminary Test and Test-setup (Drawings)  | <u>19 - 27</u> |
| 1.10 EUT Arrangement (Photographs)              | <u>28 - 32</u> |

## 2 Test Data

|                                                     |                |
|-----------------------------------------------------|----------------|
| 2.1 Channel Separation                              | <u>33</u>      |
| 2.2 Minimum Hopping Channel                         | <u>34 - 35</u> |
| 2.3 Occupied Bandwidth                              | <u>36 - 38</u> |
| 2.4 Dwell Time                                      | <u>39</u>      |
| 2.5 Peak Output Power (Conduction)                  | <u>40</u>      |
| 2.6 Peak Output Power (Radiation)                   | <u>N/A</u>     |
| 2.7 Peak Power Density (Conduction)                 | <u>41 - 43</u> |
| 2.8 Peak Power Density (Radiation)                  | <u>N/A</u>     |
| 2.9 Spurious Emissions (Conduction)                 | <u>44 - 48</u> |
| 2.10 Spurious Emissions (Radiation)                 | <u>49 - 56</u> |
| 2.11 AC Power Line Conducted Emissions              | <u>57</u>      |
| 2.12 RF Exposure Compliance                         | <u>N/A</u>     |
| 2.13 Spurious Emissions for Receiver (Radiation)    | <u>58 - 60</u> |
| 2.14 AC Power Line Conducted Emissions for Receiver | <u>61</u>      |

## 3 Appendix

|                       |                |
|-----------------------|----------------|
| Test instruments List | <u>62 - 65</u> |
|-----------------------|----------------|

## **1. DOCUMENTATION**

### **1.1 TEST REGULATION**

FCC Rules and Regulations Part 15 Subpart B and C Radiated Spurious Emissions,  
Industry Canada IC RSS-210 (Issue 6) and RSS-Gen (Issue 1)

#### **Test procedure :**

The tests were performed with reference to the FCC Public Notice DA 00-705, released  
March 30, 2000. The test set-up was made in accordance to the general provisions of  
ANSI C63.4-2003.

### **1.2 GENERAL INFORMATION**

#### **1.2.1 Test facility :**

JQA Safety & EMC Center EMC Engineering Department is recognized under  
ISO/IEC 17025 by NVLAP and VLAC.

- 1) Test Facility located at EMC Engineering Dept. Testing Div. :
  - No.2 and 3 Anechoic Chambers (3 meters Site).
  - Shielded Enclosure.

Open Area Test Site Industry Canada No.: 2079-7

- 2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary  
Laboratory accreditation Program for satisfactory compliance established in title  
15, Part 285 Code of Federal Regulations.  
NVLAP Lab Code : 200189-0 (Effective through : June 30, 2007)

**1.2.2 Description of the Equipment Under Test (EUT) :**

- |                                      |                                                             |
|--------------------------------------|-------------------------------------------------------------|
| 1) Type of Equipment                 | : BT/SD Board                                               |
| 2) Product Type                      | : Pre-production                                            |
| 3) Category                          | : Spread Spectrum Transmitter(FHSS)                         |
| 4) EUT Authorization                 | : Certification                                             |
| 5) FCC ID                            | : H5P-FC200BTSD                                             |
| IC                                   | : 6050AFC200BT                                              |
| 6) Trade Name                        | : TOPCON                                                    |
| 7) Model No.                         | : BT/SD Board                                               |
| 8) Operating Frequency Range         | : 2402 MHz - 2480 MHz                                       |
| 9) Highest Frequency Used in the EUT | : 2480 MHz                                                  |
| 10) RF Output Power                  | : -3.04dBm(measured value)                                  |
| 11) Serial No.                       | : None                                                      |
| 12) Date of Manufacture              | : None                                                      |
| 13) Power Rating                     | : 3.3VDC                                                    |
| 14) EUT Grounding                    | : None                                                      |
| 15) Antenna Type                     | : Integral Internal antenna<br>(not accessible to the user) |
| 16) Antenna Gain                     | : +2.04 dBi                                                 |

**1.2.3 Definitions for symbols used in this test report :**

- x   - indicates that the listed condition, standard or equipment is applicable for this report.
- indicates that the listed condition, standard or equipment is not applicable for this report.

### 1.3 TEST CONDITION

#### 1.3.1 The measurement of Channel Separation

  x   - was performed.  
      - was not applicable.

**Used test instruments :**

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | 13                                                |
| Spectrum Analyzer | N/A                                               |
| Cable             | 48                                                |
| Attenuator        | 80                                                |
| Antenna           | N/A                                               |
| DC Power Supply   | 77                                                |

#### 1.3.2 The measurement of Minimum Hopping Channel

  x   - was performed.  
      - was not applicable.

**Used test instruments :**

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | 13                                                |
| Spectrum Analyzer | N/A                                               |
| Cable             | 48                                                |
| Attenuator        | 80                                                |
| Antenna           | N/A                                               |
| DC Power Supply   | 77                                                |

#### 1.3.3 The measurement of Occupied Bandwidth

  x   - was performed.  
      - was not applicable.

**Used test instruments :**

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | 13                                                |
| Spectrum Analyzer | N/A                                               |
| Cable             | 48                                                |
| Attenuator        | 80                                                |
| Antenna           | N/A                                               |
| DC Power Supply   | 77                                                |

#### 1.3.4 The measurement of Dwell Time

  x   - was performed.  
      - was not applicable.

##### Used test instruments :

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | 13                                                |
| Spectrum Analyzer | N/A                                               |
| Cable             | 48                                                |
| Attenuator        | 80                                                |
| Antenna           | N/A                                               |
| DC Power Supply   | 77                                                |

#### 1.3.5 The measurement of Peak Output Power and Density (Conduction)

  x   - was performed.  
      - was not applicable.

##### Used test instruments :

| Type                    | Number of test instruments<br>(Refer to Appendix) |
|-------------------------|---------------------------------------------------|
| Test Receiver           | 13                                                |
| Spectrum Analyzer       | N/A                                               |
| Cable                   | 48                                                |
| Attenuator              | 80                                                |
| Antenna                 | N/A                                               |
| Digitizing Oscilloscope | 163                                               |
| RF Detector             | 85                                                |
| Signal Generator        | 60                                                |
| DC Power Supply         | 77                                                |

### 1.3.6 The measurement of Peak Output Power and Density (Radiation)

- ☐ - was performed in the following test site.  
☒ - was not applicable.

#### Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- ☐ - No. A site (3 meters)  
☐ - No. B site (3 meters)

#### Validation of Site Attenuation :

- 1) Last Confirmed Date : N/A  
2) Interval : N/A

#### Used test instruments :

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | N/A                                               |
| Spectrum Analyzer | N/A                                               |
| Cable             | N/A                                               |
| Attenuator        | N/A                                               |
| Antenna           | N/A                                               |
| Power Meter       | N/A                                               |
| Power Sensor      | N/A                                               |
| Signal Generator  | N/A                                               |
| DC Power Supply   | N/A                                               |

### 1.3.7 The measurement of Spurious Emissions (Conduction)

☒ - was performed.  
☐ - was not performed.

#### Used test instruments :

| Type              | Number of test instruments<br>(Refer to Appendix) |
|-------------------|---------------------------------------------------|
| Test Receiver     | 13                                                |
| Spectrum Analyzer | N/A                                               |
| Cable             | 48                                                |
| Attenuator        | 80                                                |
| DC Power Supply   | 77                                                |

### 1.3.8 The measurement of Spurious Emissions (Radiation)(9 kHz - 30 MHz)

☒ - was performed in the following test site.  
☐ - was not applicable.

#### Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

☒ - Anechoic Chamber No. A (3 meters)  
☐ - Anechoic Chamber No. B (3 meters)

#### Validation of Site Attenuation :

1) Last Confirmed Date : N/A  
2) Interval : N/A

#### Used test instruments :

| Type            | Number of test instruments<br>(Refer to Appendix) |
|-----------------|---------------------------------------------------|
| Test Receiver   | 13                                                |
| Cable           | 43                                                |
| Antenna         | 21                                                |
| DC Power Supply | 77                                                |

### 1.3.9 The measurement of Spurious Emissions (Radiation) (30 MHz - 1000 MHz)

- x   - was performed in the following test site.  
      - was not applicable.

#### Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- x   - Anechoic Chamber No. A (3 meters)  
      - Anechoic Chamber No. B (3 meters)

#### Validation of Site Attenuation :

- 1) Last Confirmed Date :March, 2006  
2) Interval :1 year

#### Used test instruments :

| Type            | Number of test instruments<br>(Refer to Appendix) |
|-----------------|---------------------------------------------------|
| Test Receiver   | 11                                                |
| Cable           | 38                                                |
| Antenna         | 26, 28                                            |
| RF Amplifier    | N/A                                               |
| DC Power Supply | 77                                                |

### 1.3.10 The measurement of Spurious Emissions (Radiation) (Above 1000 MHz)

- x   - was performed in the following test site.  
      - was not applicable.

#### Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- x   - No. A site (3 meters)  
      - No. B site (3 meters)

#### Validation of Site Attenuation :

- 1) Last Confirmed Date :March, 2006  
2) Interval :1 year

#### Used test instruments :

| Type               | Number of test instruments<br>(Refer to Appendix) |
|--------------------|---------------------------------------------------|
| Test Receiver      | 13                                                |
| Spectrum Analyzer  | N/A                                               |
| Cable              | 48, 50                                            |
| Antenna            | 30, 32                                            |
| RF Amplifier       | 57                                                |
| Band Reject Filter | 78                                                |
| High Pass Filter   | 79                                                |
| DC Power Supply    | 77                                                |

### 1.3.11 The measurement of AC Power Line Conducted Emissions

- x   - was performed in the following test site.  
      - was not applicable.

#### Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- x   - Shielded Enclosure  
      - Anechoic Chamber No. A (portable Type)

#### Used test instruments :

| Type                | Number of test instruments<br>(Refer to Appendix) |
|---------------------|---------------------------------------------------|
| Test Receiver       | 10                                                |
| Spectrum Analyzer   | 19                                                |
| Cable               | 40                                                |
| AMN(for EUT)        | 33                                                |
| AMN(for Peripheral) | N/A                                               |
| Termination         | N/A                                               |

**1.4 EUT MODIFICATION / Deviation from Standard****1.4.1 EUT MODIFICATION**

- x   - No modifications were conducted by JQA to achieve compliance to Class B levels.  
      - To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :

Date :

Typed Name :

Position :

Signatory : \_\_\_\_\_

**1.4.2 Deviation from Standard:**

- x   - No deviations from the standard described in clause 1.1.  
      - The following deviations were employed from the standard described in clause 1.1:

\_\_\_\_\_  
\_\_\_\_\_

## 1.5 TEST RESULTS

|                                                                                                         |                                                |                                                        |
|---------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------|
| <b>Channel Separation</b><br>[§15.247(a)(1)], [A8.1(2)]<br>The requirements are<br>Remarks :            | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Minimum Hopping Channel</b><br>[§15.247(a)(1)(iii)], [A8.1(4)]<br>The requirements are<br>Remarks:   | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Occupied Bandwidth</b><br>[§15.247(a)(2)], [A8.2(1)]<br>The requirements are<br>Remarks:             | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT performed<br><u>   </u> - NOT PASSED  |
| <b>Dwell Time</b><br>[§15.247(a)(1)(iii)/(g)], [A8.1(4)]<br>The requirements are<br>Remarks:            | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Peak Output Power (Conduction)</b><br>[§15.247(b)(3)], [A8.4(4)]<br>The requirements are<br>Remarks: | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Peak Output Power (Radiation)</b><br>[§15.247(b)(1)], [A8.4(2)]<br>The requirements are<br>Remarks:  | <u>   </u> - Applicable<br><u>   </u> - PASSED | <u> x </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Peak Power Density (Conduction)</b><br>[§15.247(d)], [A8.2(2)]<br>The requirements are<br>Remarks:   | <u> x </u> - Applicable<br><u> x </u> - PASSED | <u>   </u> - NOT Applicable<br><u>   </u> - NOT PASSED |
| <b>Peak Power Density (Radiation)</b><br>[§15.247(d)], [A8.2(2)]<br>The requirements are<br>Remarks:    | <u>   </u> - Applicable<br><u>   </u> - PASSED | <u> x </u> - NOT Applicable<br><u>   </u> - NOT PASSED |

|                                                                                       |                            |                                |
|---------------------------------------------------------------------------------------|----------------------------|--------------------------------|
| <b>Spurious Emissions (Conduction)</b><br>[§15.247(c)], [A8.5]                        | <u>  x  </u> - Applicable  | <u>      </u> - NOT performed  |
| The requirements are                                                                  | <u>  x  </u> - PASSED      | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |
| <b>Spurious Emissions (Radiation)</b><br>[§15.247(c), §15.35(b), §15.209(a)], [A8.5]  | <u>  x  </u> - Applicable  | <u>      </u> - NOT Applicable |
| The requirements are                                                                  | <u>  x  </u> - PASSED      | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |
| <b>AC Power Line Conducted Emissions</b><br>[§15.207(a)], [7.2.2]                     | <u>  x  </u> - Applicable  | <u>      </u> - NOT Applicable |
| The requirements are                                                                  | <u>  x  </u> - PASSED      | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |
| <b>RF Exposure Compliance</b><br>[§15.247(i)], [5.5]                                  | <u>      </u> - Applicable | <u>  x  </u> - NOT Applicable  |
| The requirements are                                                                  | <u>      </u> - PASSED     | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |
| <b>Spurious Emissions for Receiver</b><br><b>(Radiation)</b> [§15.109(a)], [6(a)]     | <u>  x  </u> - Applicable  | <u>      </u> - NOT Applicable |
| The requirements are                                                                  | <u>  x  </u> - PASSED      | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |
| <b>AC Power Line Conducted Emissions</b><br><b>for Receiver</b> [§15.107(a)], [7.2.2] | <u>  x  </u> - Applicable  | <u>      </u> - NOT Applicable |
| The requirements are                                                                  | <u>  x  </u> - PASSED      | <u>      </u> - NOT PASSED     |
| Remarks:                                                                              |                            |                                |

## 1.6 SUMMARY

### General Remarks :

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart B, Subpart C, and IC RSS-210 issue 6 and RSS-Gen issue 1 under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items which are required by the applied regulation is indicated under the test result.

### Test Result :

The "as received" sample;

- x - fulfill the test requirements of the regulation mentioned on clause 1.1.
- \_\_\_ - fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- \_\_\_ - doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : June 12, 2006

End of testing : August 31, 2006

### 1.7.1 JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved by:

Issued by:



Takaharu Hada  
Manager  
Testing Division  
JQA EMC Engineering Dept.



Shigeru Osawa  
Assistant Manager  
Testing Division  
JQA EMC Engineering Dept.

## 1.8 TEST CONFIGURATION / OPERATION OF EUT

### 1.8.1 Test Configuration

The equipment under test (EUT) consists of :

| Symbol | Item        | Manufacturer                 | Model No.   | FCC ID/IC                     | Serial No. |
|--------|-------------|------------------------------|-------------|-------------------------------|------------|
| A      | BT/SD Board | Nagano Japan Radio Co., Ltd. | BT/SD Board | H5P-FC200BTSD<br>6050AFC200BT | None       |

The measurement was carried out with the following support equipment connected :

| Symbol | Item               | Manufacturer       | Model No. | FCC ID/IC | Serial No. |
|--------|--------------------|--------------------|-----------|-----------|------------|
| B      | Especially Circuit | TOPCON CORPORATION | -         | None      | None       |
| C      | Field Controller   | TOPCON CORPORATION | FC-200    | None      | None       |
| D      | AC Adapter         | TOPCON CORPORATION | AC-11     | None      | None       |

Type of Cable :

| Symbol | Description | Identification<br>(Manufacturer etc.) | Connector<br>Shielded<br>YES / NO | Cable<br>Shielded<br>YES / NO | Ferrite<br>Core | Length<br>(m) |
|--------|-------------|---------------------------------------|-----------------------------------|-------------------------------|-----------------|---------------|
| 1      | DC Cable    | -                                     | NO                                | NO                            | NO              | 2.00          |
| 2(*1)  | DC Cable    | -                                     | NO                                | NO                            | YES             | 1.25          |
| 3(*1)  | AC Cable    | -                                     | NO                                | NO                            | NO              | 2.00          |

Note (\*1):The cable is for the AC Adapter.

### 1.7.2 Operating condition

Power supply Voltage : 3.3VDC operate with the DC Power Supply

The tests have been carried out the following mode.

- 1) TX mode ( 0ch: 2402 MHz)
- 2) TX mode (39ch: 2441 MHz)
- 3) TX mode (78ch: 2480 MHz)
- 4) RX mode

The Packet type under the tests is DH1 by the applicant request.

Used application to controlled : Blue Test(The detail is as follows.)

Transport type : BCSP

Serial port : com1

Baud rate : 115200

Frequency : 2402 MHz, 2441 MHz and 2480 MHz


Power set of TX mode : 50

### 1.7.3 Generating and Operating frequency of EUT


2402 MHz to 2480 MHz

## 1.8 EUT ARRANGEMENT (DRAWINGS)

### (a) For the all test(except the AC Power Line Conducted Emissions)

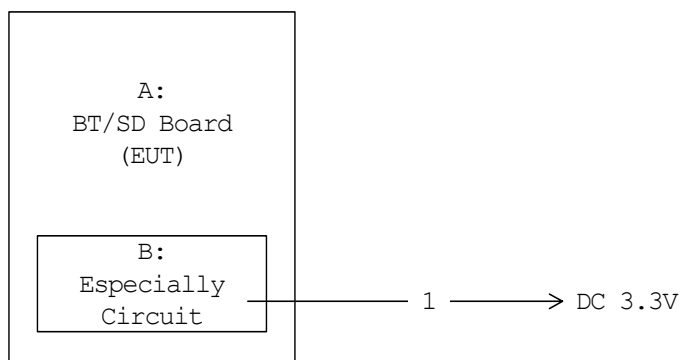

### (b) For the AC Power Line Conducted Emissions

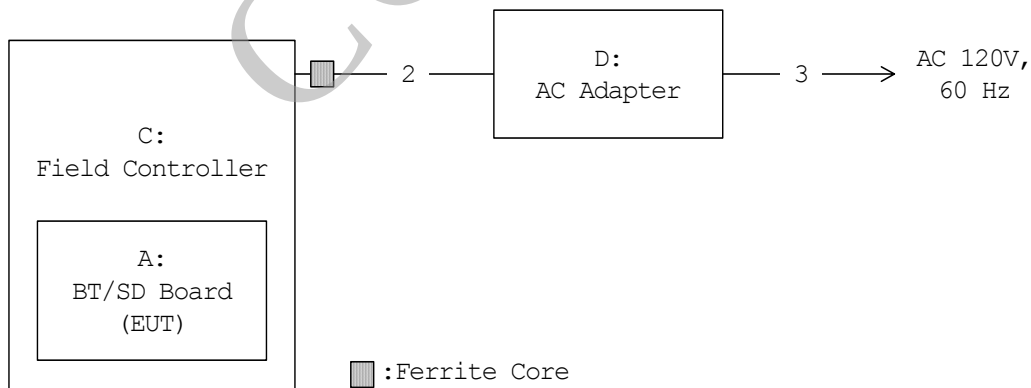

## 1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

### 1.9.1 Channel Separation

The EUT have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span


Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

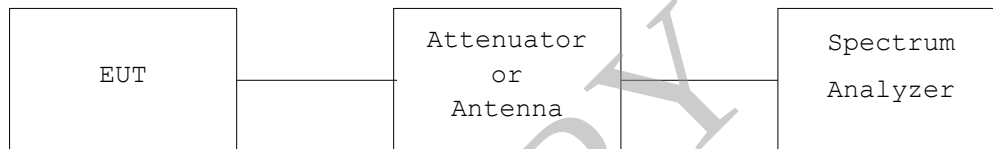

### 1.9.2 Minimum Hopping Channel

The EUT have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq 1\%$  of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.3 Occupied Bandwidth

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 6 dB or 20 dB bandwidth, centered on a channel

RBW  $\geq$  1% of the 6 dB or 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB or 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB or 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.4 Dwell Time

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW  $\leq$  Channel Separation

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measurement setup is same as sub-clause 1.9.1.

### 1.9.5 Peak Output Power (Conduction)

In case of conducted measurements, the transmitter shall be connected to the measuring equipment via a suitable attenuator. The measurement shall be performed using normal operation of the equipment with the test modulation applied.

The test procedure shall be as follows;

(step 1):

- using a suitable means, the output of the transmitter shall be coupled to a diode detector;
- the output of the diode detector shall be connected to the vertical channel of an oscilloscope;
- the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal;
- The observed value shall be recorded as "A" (in dBm);

(step 2):

- the transmitter shall be replaced by a signal generator. The output frequency of the signal shall be made equal to the centre of the frequency range occupied by the transmitter;
- the signal generator shall be unmodulated. The output power of the signal generator shall be raised to a level such that the deviation of the Y-trace of the oscilloscope reaches level A, as indicated in step 1;
- The signal generator output level shall be recorded;

The measurement shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range.

#### **1.9.6 Peak Power Density (Conduction)**

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a channel

RBW = Specified Value

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

Measurement setup is same as sub-clause 1.9.1.

#### **1.9.7 Peak Output Power and Peak Power Density (Radiation)**

The radiated power output and the field strength of the transmitter radiation were measured at the distance at 3 meters away from the transmitter under test which was placed on a turntable 0.8 meter in height. The receiving antenna was oriented for vertical polarization and raised or lowered through 1 to 4 meters until the maximum signal level was detected on the measuring instrument. The transmitter under test was rotated through 360° until the maximum signal was received. The measurement was repeated with the receiving antenna in the horizontal polarization.

The transmitter was removed and replaced with the antenna. The center of the antenna was placed approximately at the same location as the center of the transmitter. The antenna was fed with a signal generator, and the output level of the signal generator was adjusted to obtain the previously recorded maximum reading at the particular frequency and recorded. This procedure was repeated with the receiving antenna and the antenna in the orthogonal polarization.

The input power into the antenna was measured using the power meter. The level of the emissions in dBm(EIRP) were calculated from the following formula:

$$\text{Transmitter Power [dBm] (EIRP)} = (\text{Meter Reading of Power Meter}) + (\text{Antenna Gain [dBi]})$$

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a channel

RBW : Greater than the 20 dB bandwidth of the emission being measured  
or Specified Value

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

### **1.9.8 Spurious Emission (Conduction)**

#### **Band-edge Compliance of RF Conducted Emissions**

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### **Spurious RF Conducted Emissions**

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


Measurement setup is same as sub-clause 1.9.1.

### 1.9.9 Radiated Emission ( 9 kHz - 30 MHz ) :

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

#### - Side View -

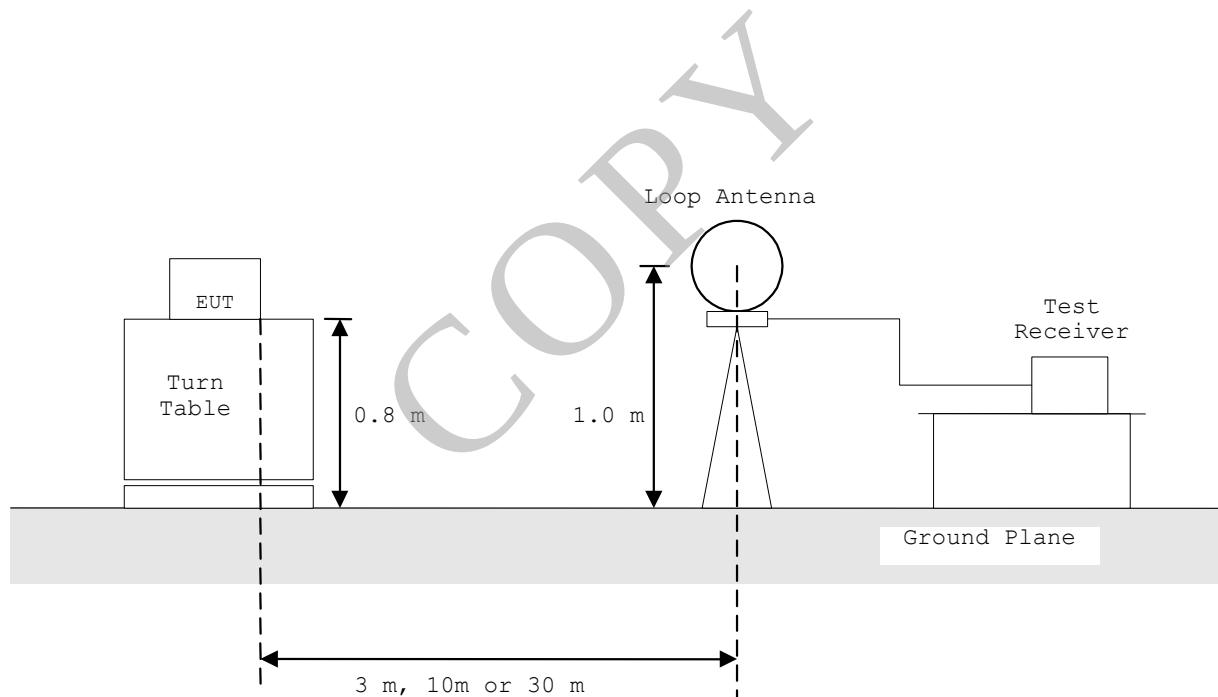


### 1.9.10 Radiated Emission ( 30 MHz - 1000 MHz ) :

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

### Anechoic Chamber

- Side View -

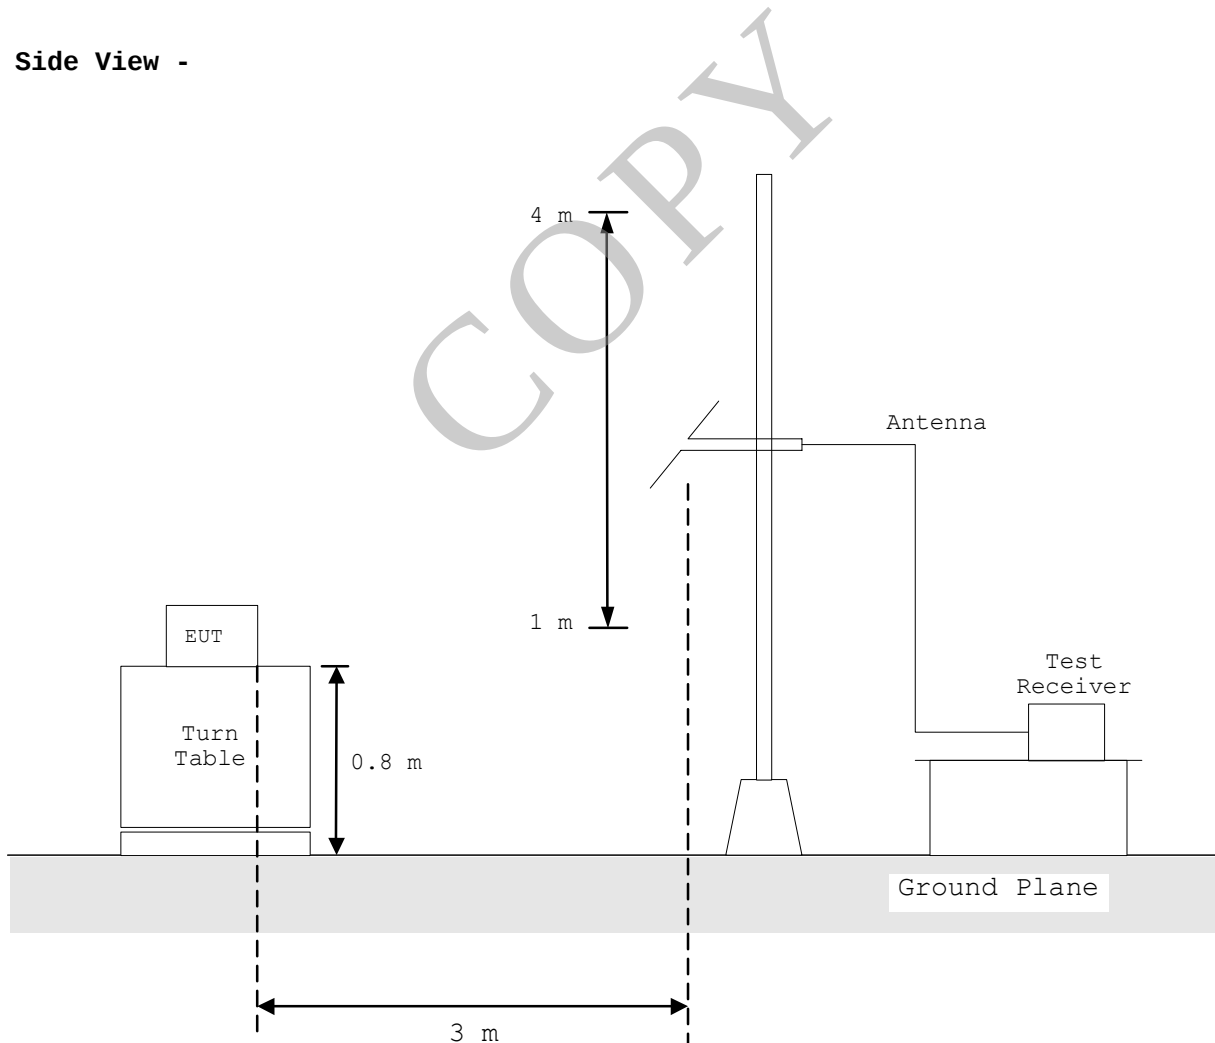


### 1.9.11 Radiated Emission (Above 1 GHz) :

According to description of ANSI C63.4-2003 sec.13.1.4, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

### Anechoic Chamber

#### - Side View -

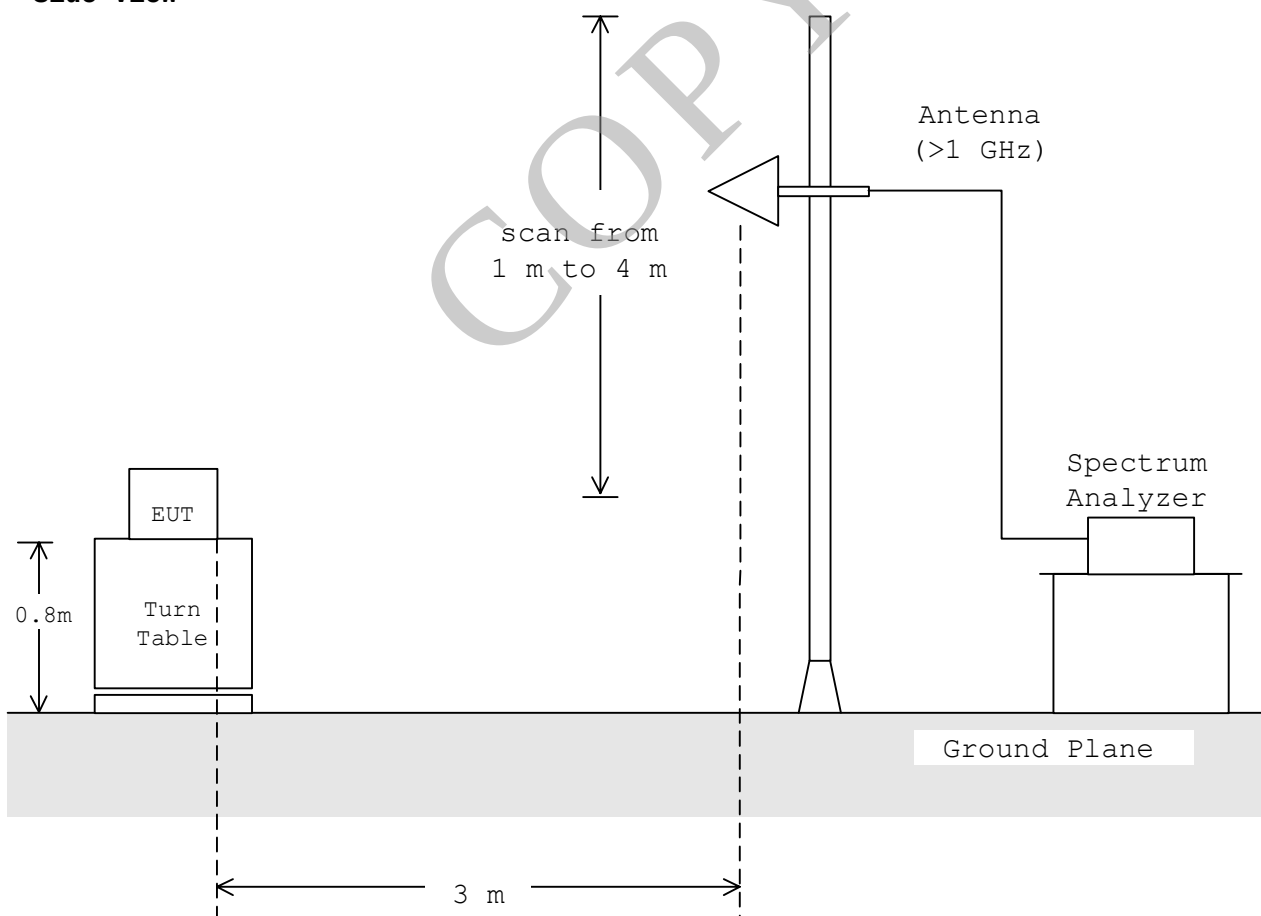


### 1.9.12 AC Power Line Conducted Emission ( 150 kHz - 30 MHz ) :

According to description of ANSI C63.4-2003 sec.13.1.3, the AC power line preliminary conducted emissions measurements were carried out. The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

### Shielded Enclosure

#### - Side View -

Vertical  
Ground  
Plane

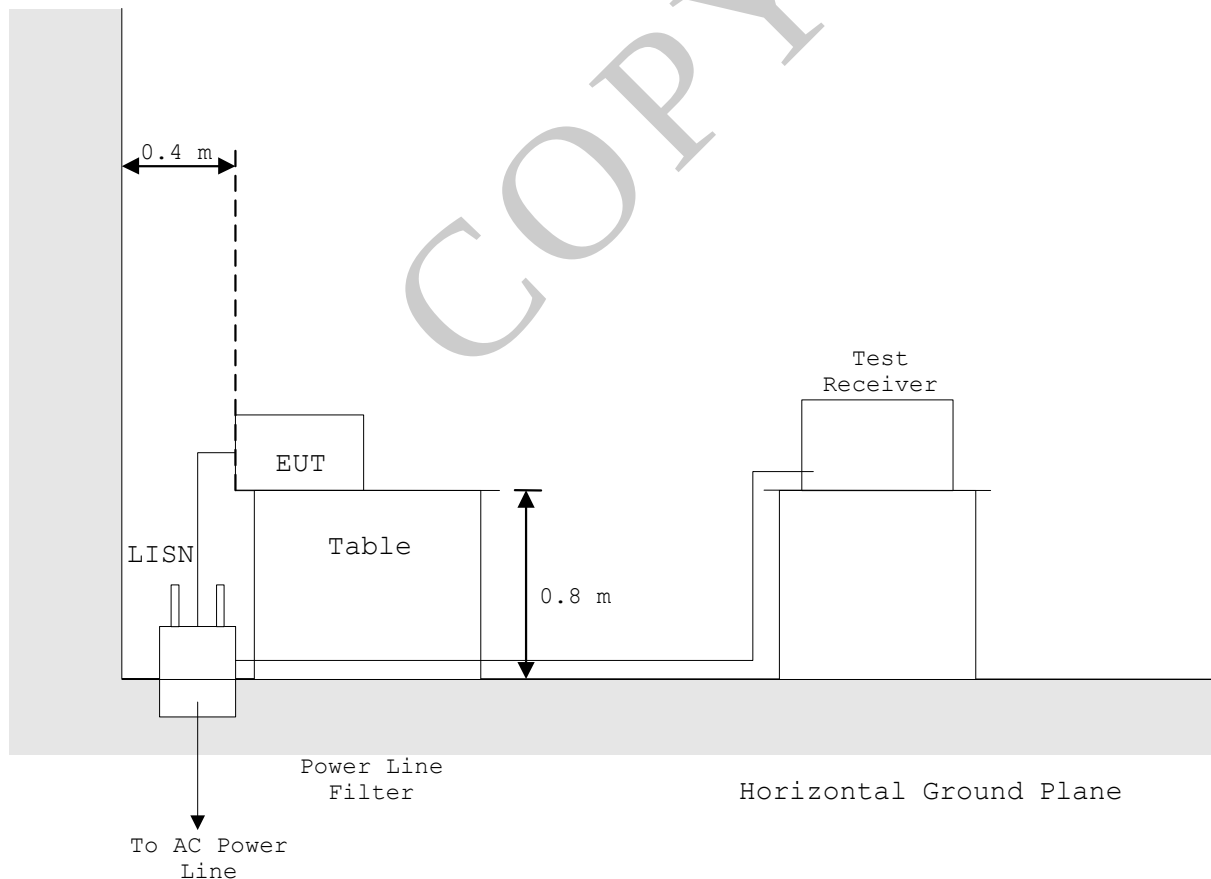

## **1.10 TEST ARRANGEMENT (PHOTOGRAPHS)**

### **PHOTOGRAPHS OF THE CONDUCTED TEST**



**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Front view (X axis) -



- Rear view (X axis) -

# **PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission




- Front view (Y axis) -



- Rear view (Y axis) -

**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission

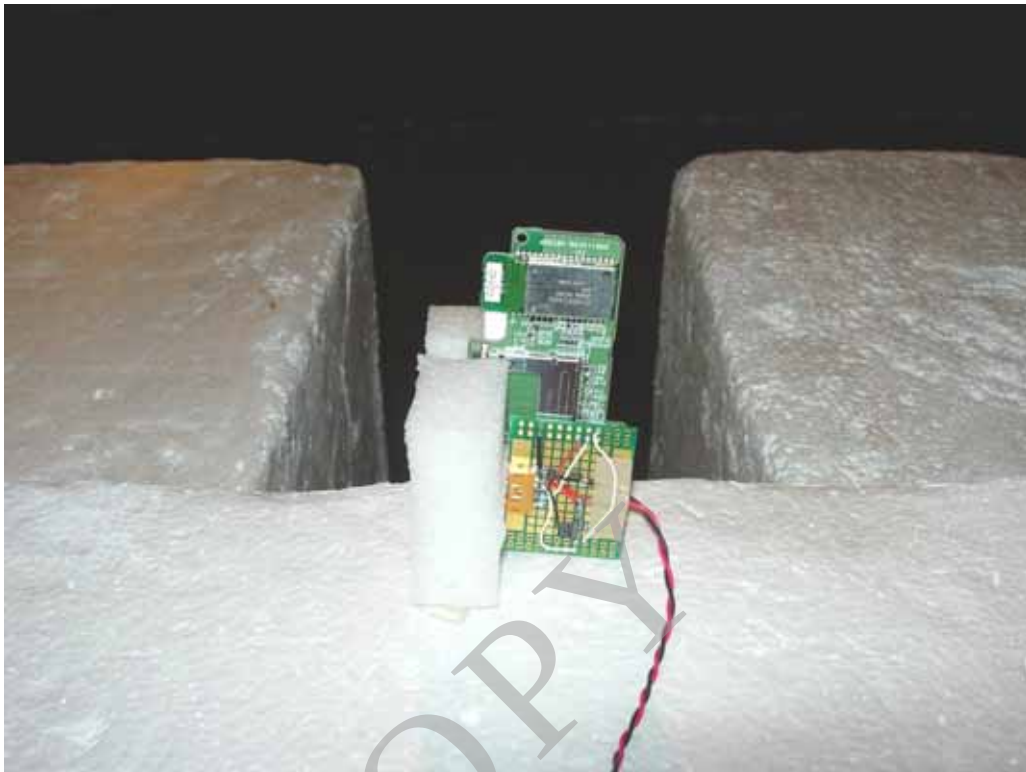

- Front view (Z axis) -



- Rear view (Z axis) -

# **PHOTOGRAPHS OF EUT CONFIGURATION FOR AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission



- Front view -



- Side View -


## 2. TEST DATA

### 2.1 Channel Separation

Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

Mode of EUT : Hopping (Packet type: DH1)  
 Test Port : Temporary antenna connector

Channel Separation (kHz) Limit  
 1004.008 25 kHz or 20 dB bandwidth of hopping channel

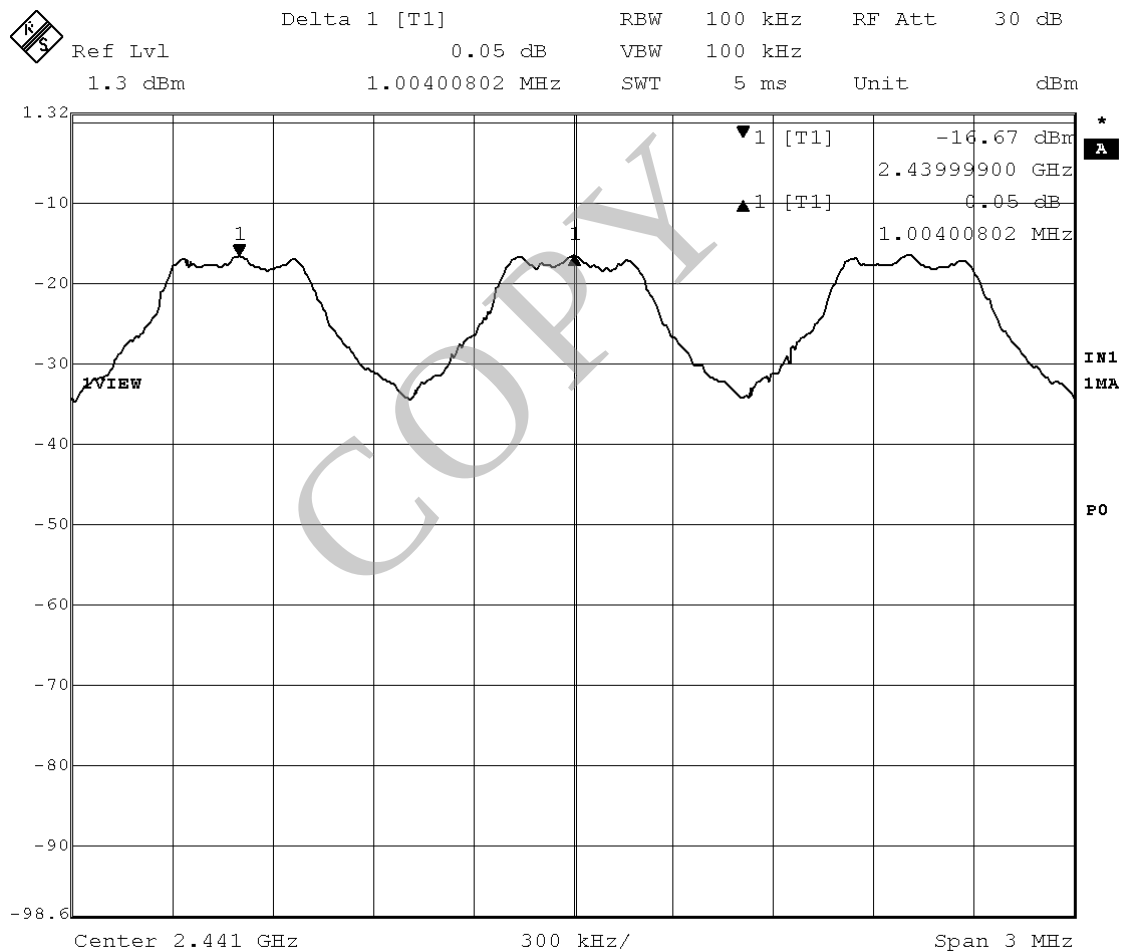


Tested by :


*K. Miura*  
 Katsunori Miura  
 Testing Engineer

## 2.2 Minimum Hopping Channel

Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Temporary antenna connector

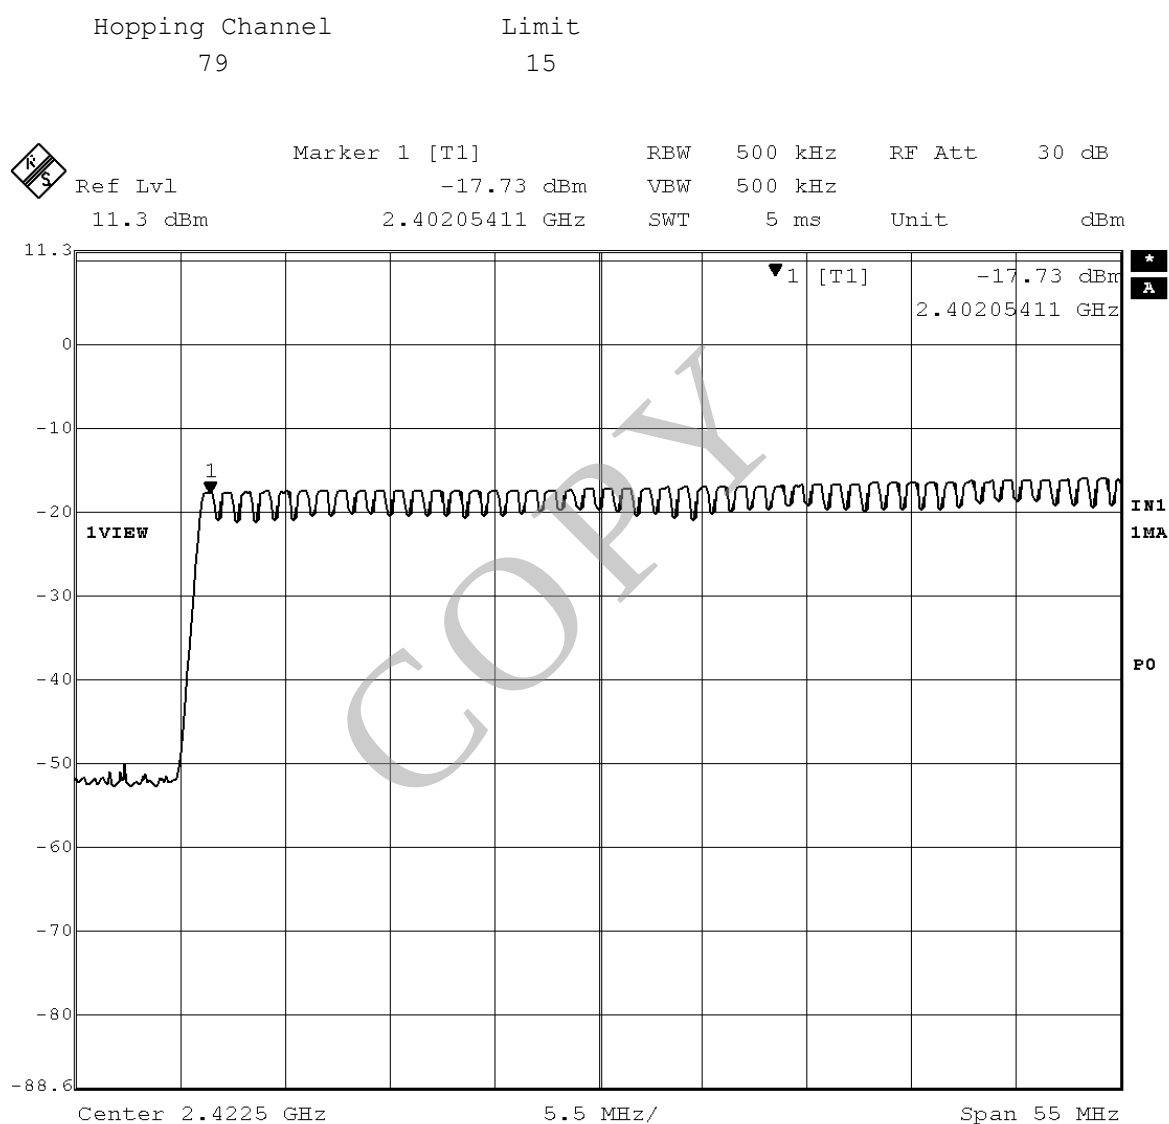

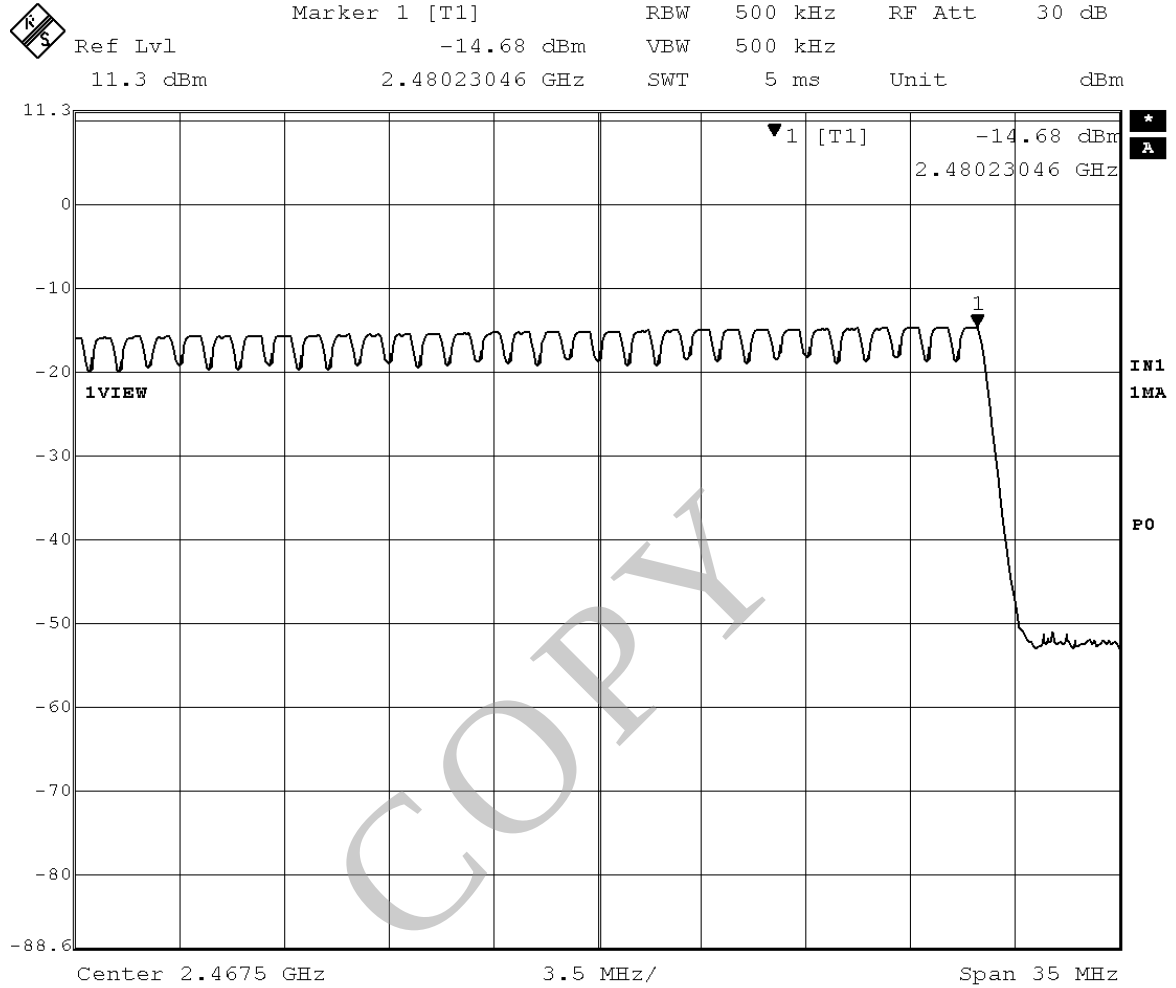

Tested by :

*K. Miura*  
 Katsunori Miura  
 Testing Engineer

## 2.3 Occupied Bandwidth

Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

Mode of EUT : TX (0ch: 2402 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector

| Bandwidth<br>(kHz) | Limit<br>(kHz) |
|--------------------|----------------|
| 721.4              | N/A            |



Mode of EUT : TX (39ch: 2441 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector


|           |       |
|-----------|-------|
| Bandwidth | Limit |
| (kHz)     | (kHz) |
| 721.4     | N/A   |



Mode of EUT : TX (78ch: 2480 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector

|           |       |
|-----------|-------|
| Bandwidth | Limit |
| (kHz)     | (kHz) |
| 721.4     | N/A   |

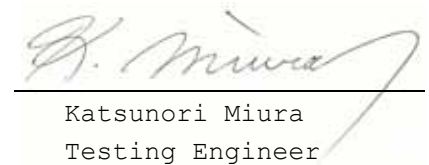

Tested by :   
 Katsunori Miura  
 Testing Engineer


## 2.4 Dwell Time

Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Temporary antenna connector

| Dwell Time<br>(ms) | Limit             |
|--------------------|-------------------|
| 142.4              | 400 ms per 31.6 s |

Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625  $\mu$ s with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So the system has each channel 10.1266 times per second and so for 31.6 seconds the system have 320.0 times of appearance. Each tx-time per appearance is 0.4449 ms.  
 Dwell time = 320.0 \* 0.4449 = 142.4 ms

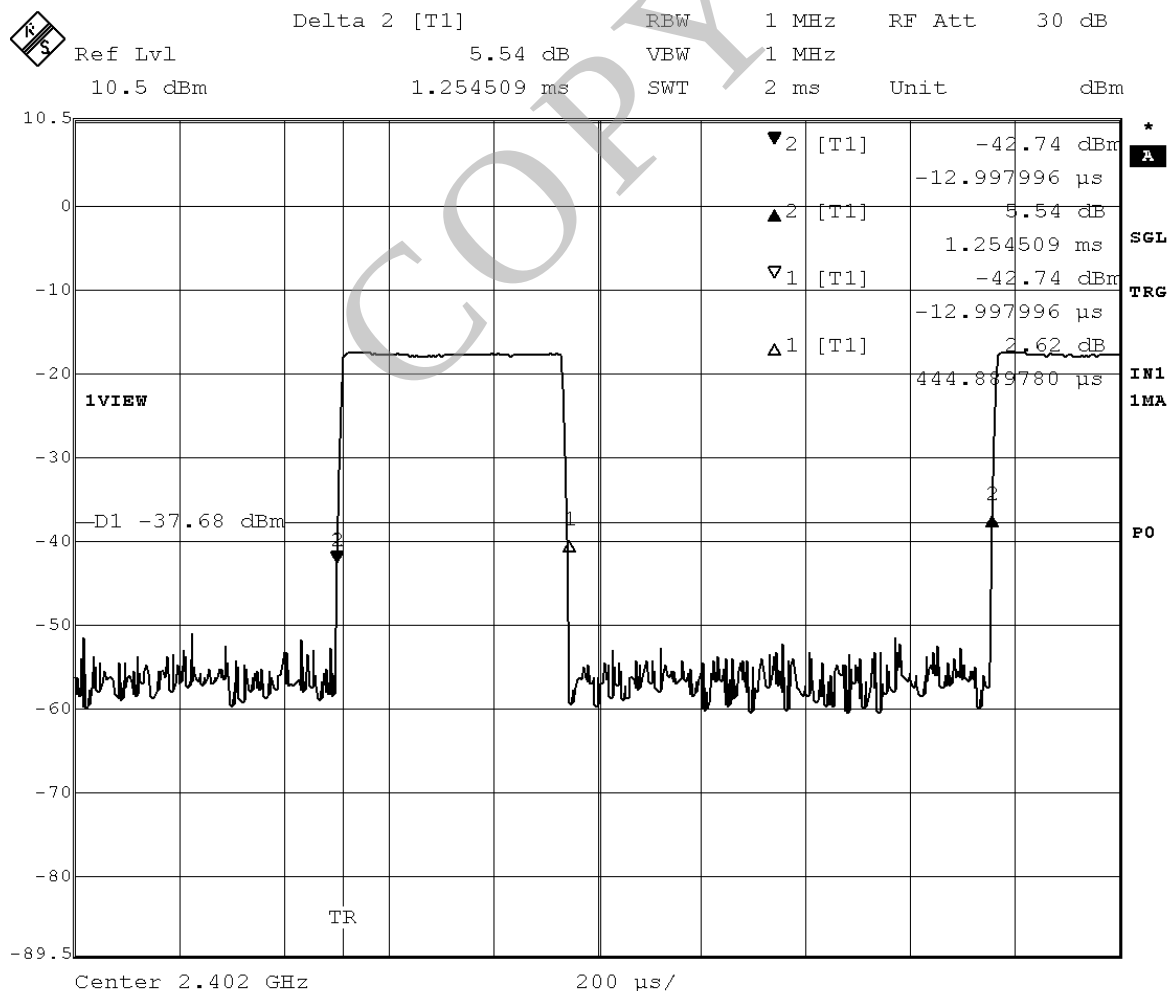

Tested by :

*K. Miura*  
 Katsunori Miura  
 Testing Engineer

## 2.5 Peak Output Power (Conduction)

Date : June 21, 2006  
Temp.: 25 °C Humi.: 60 %Test Port : Temporary antenna connector  
Packet Type: DH1

| Mode of EUT   | Cable Loss<br>(dB) | Att. Loss<br>(dB) | Meter<br>Reading<br>(dBm) | Peak Power<br>(dBm) | Limit<br>(dBm) |
|---------------|--------------------|-------------------|---------------------------|---------------------|----------------|
| TX (2402 MHz) | 1.8                | 10.08             | -17.73                    | -5.85               | 30             |
| TX (2441 MHz) | 1.8                | 10.08             | -16.55                    | -4.67               | 30             |
| TX (2480 MHz) | 1.8                | 10.08             | -14.92                    | -3.04               | 30             |

Note : 1) Rated Supply Voltage : 3.3 VDC

2) A sample calculation was made at 2402 MHz.

$$CL + AL + MR = 1.8 + 10.08 - 17.73 = -5.85 \text{ (dBm)}$$

CL : Cable Loss

AL : Attenuator Loss

MR : Meter Reading

Tested by :

  
Katsunori Miura  
Testing Engineer

## 2.6 Peak Output Power (Radiation)


Not Applicable

## 2.7 Peak Power Density (Conduction)

Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

Mode of EUT : TX (0ch: 2402 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector


| Cable Loss | Att. Loss | Meter Reading | Peak Power | Limit |
|------------|-----------|---------------|------------|-------|
| (dB)       | (dB)      | (dBm)         | (dBm)      | (dBm) |
| 2.20       | 10.08     | -28.87        | -16.59     | 8     |

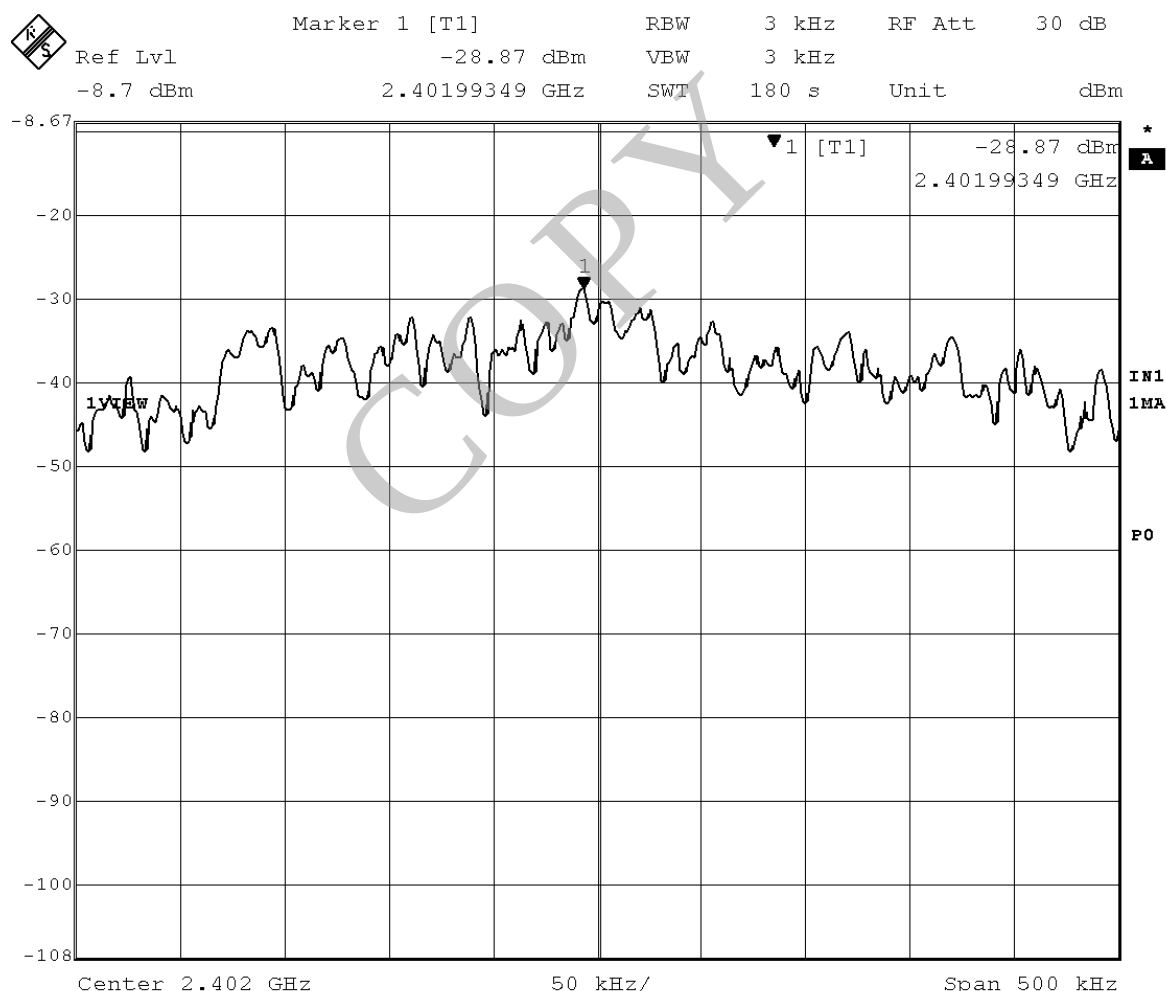

Mode of EUT : TX (39ch: 2441 MHz, Packet type: DH1)


Test Port : Temporary antenna connector

| Cable Loss | Att. Loss | Meter Reading | Peak Power | Limit |
|------------|-----------|---------------|------------|-------|
| (dB)       | (dB)      | (dBm)         | (dBm)      | (dBm) |
| 2.20       | 10.08     | -27.79        | -15.51     | 8     |

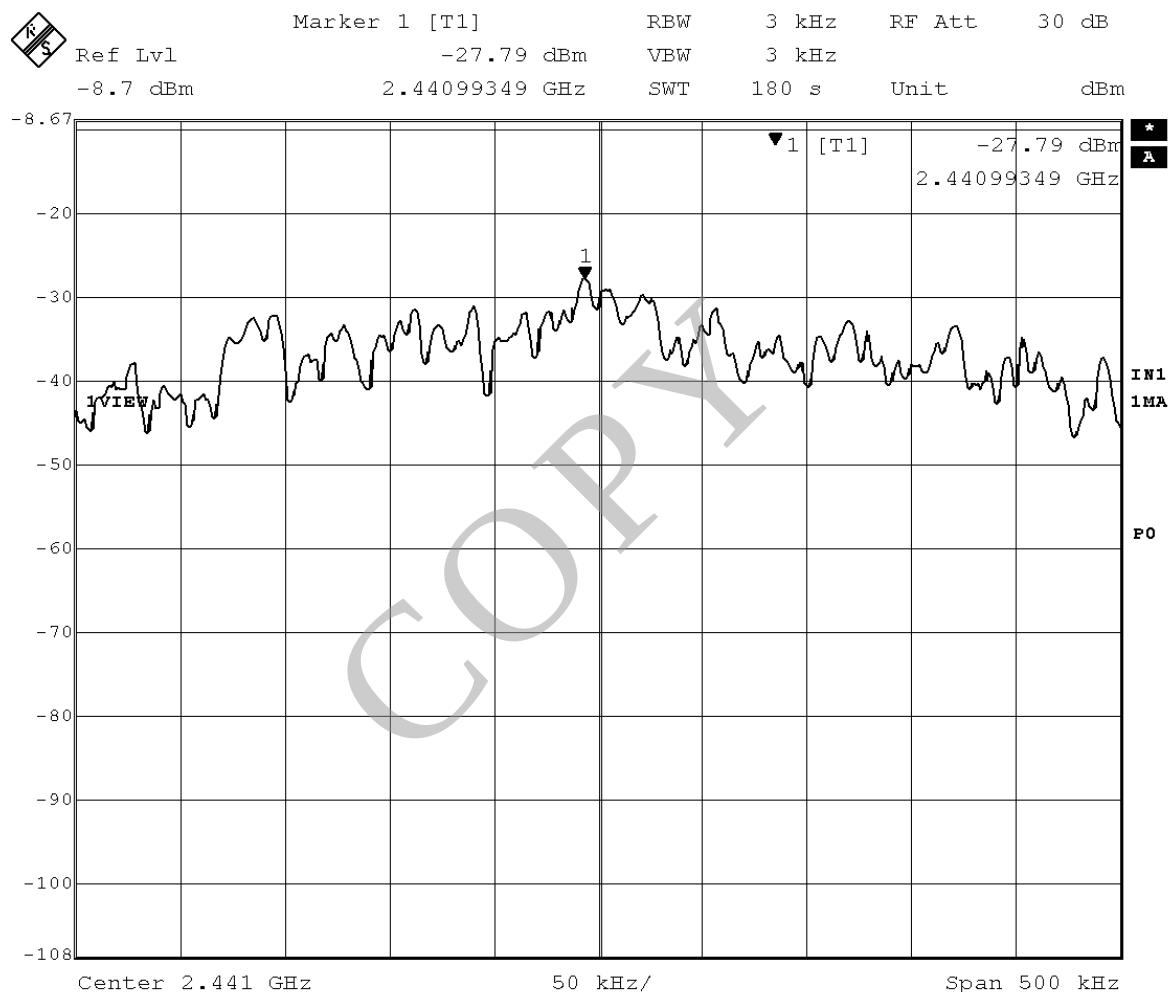

Mode of EUT : TX (78ch: 2480 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector

| Cable Loss | Att. Loss | Meter Reading | Peak Power | Limit |
|------------|-----------|---------------|------------|-------|
| (dB)       | (dB)      | (dBm)         | (dBm)      | (dBm) |
| 2.20       | 10.08     | -26.10        | -13.82     | 8     |

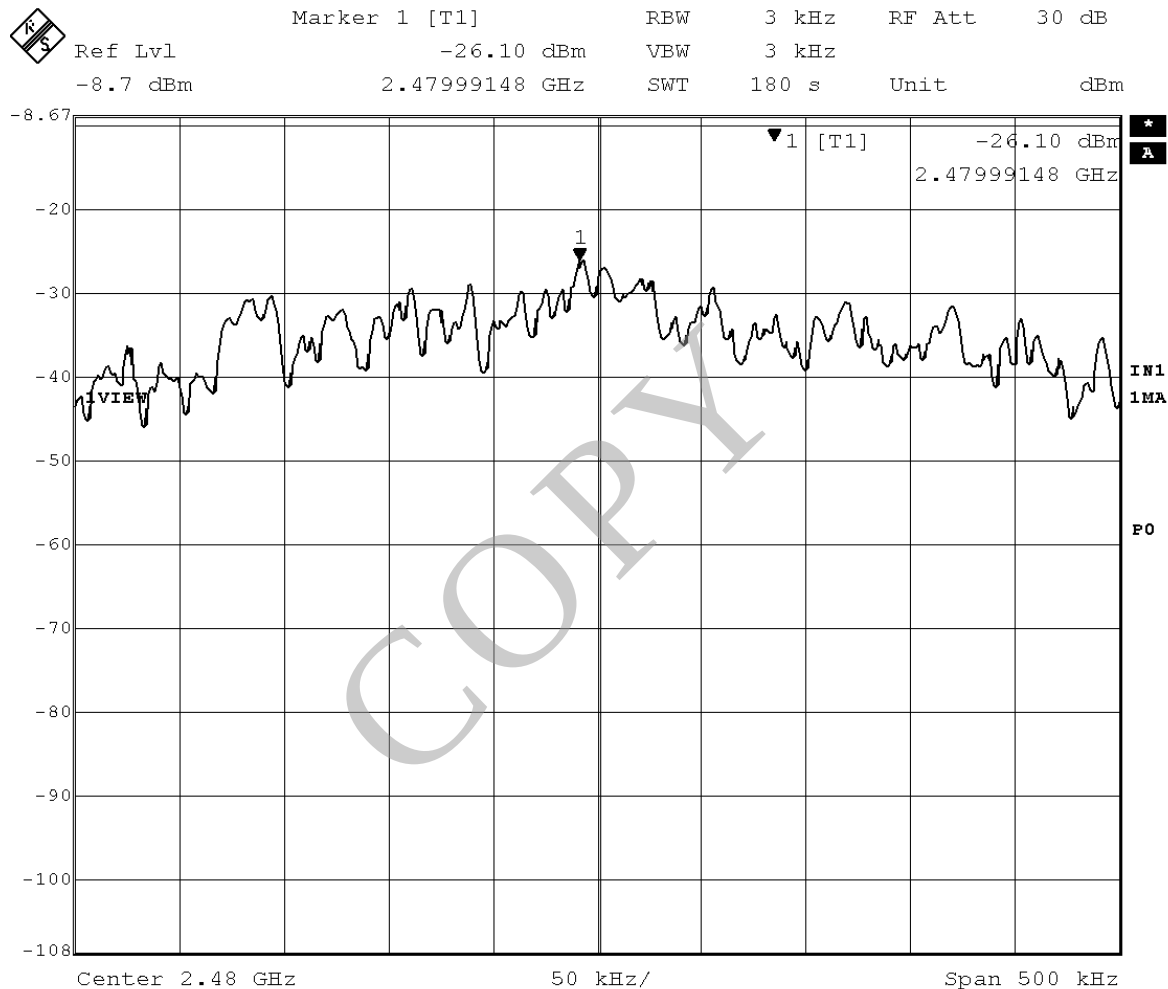

Note : 1) A sample calculation was made.

$$CL + AL + MR = 2.20 + 10.08 - 28.87 = -16.59 \text{ (dBm)}$$

CL : Cable Loss

AL : Attenuator Loss

MR : Meter Reading

2) Measuring Instruments Setting :

| Detector Function | Resolution Bandwidth |
|-------------------|----------------------|
| Peak              | 3 kHz                |

Tested by :

*K. Miura*  
 Katsunori Miura  
 Testing Engineer

## 2.8 Peak Power Density (Radiation)


Not Applicable

## 2.9 Spurious Emissions (Conduction)


Date : June 21, 2006  
 Temp.: 25 °C Humi.: 60 %

### 2.9.1 Band Edge Compliance

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Temporary antenna connector

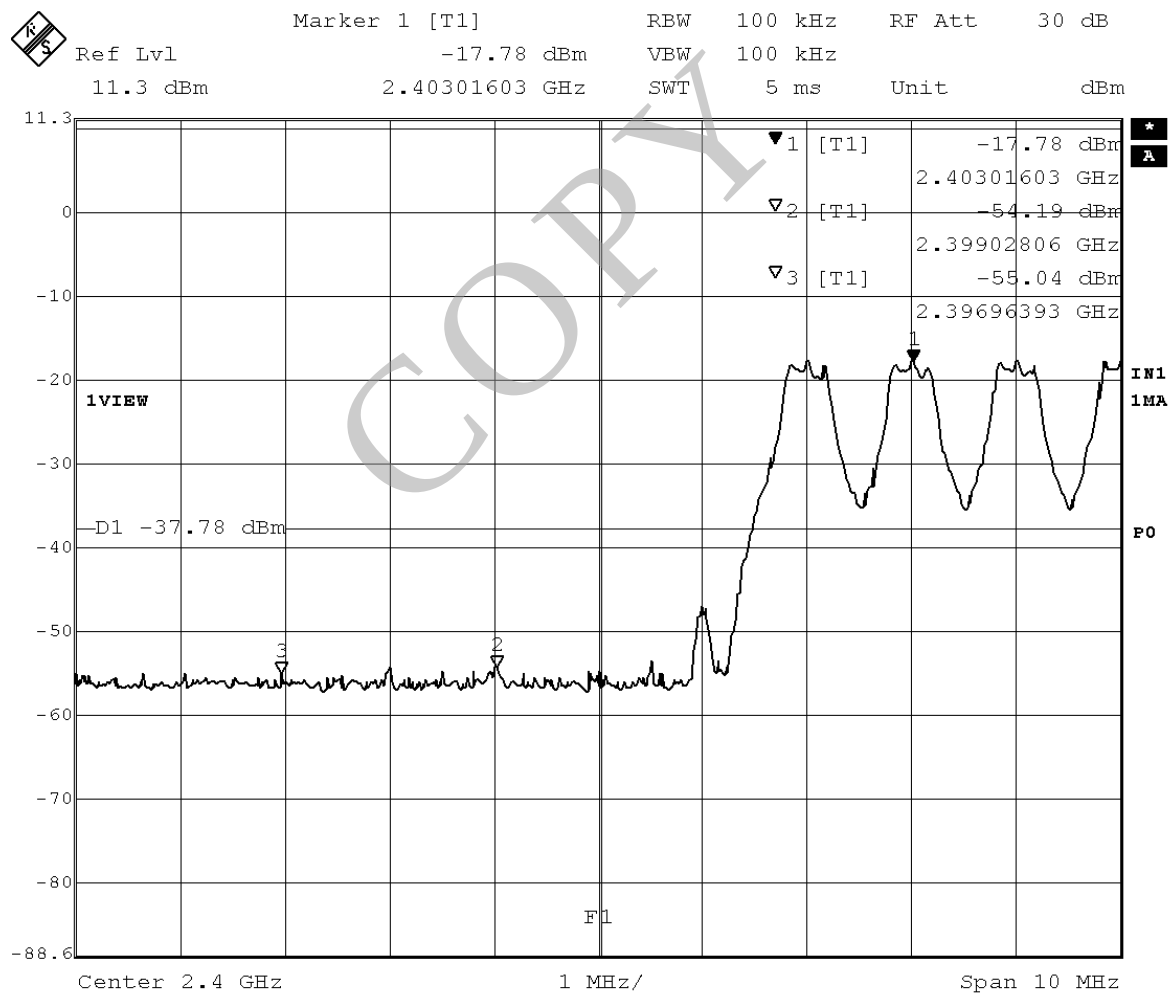

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Temporary antenna connector

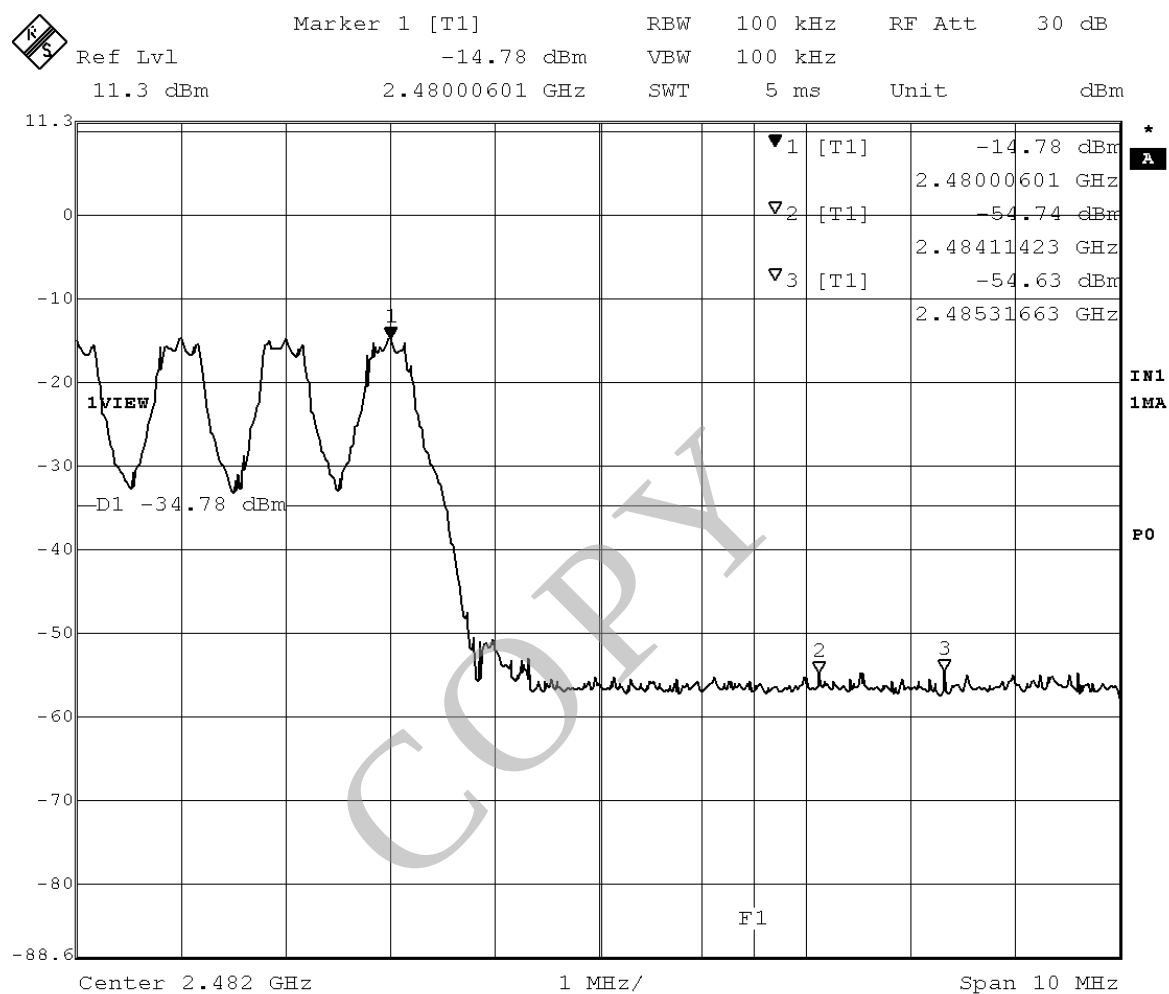


## 2.9.2 Other Spurious Emissions

Mode of EUT : TX (0ch: 2402 MHz, Packet type: DH1)


Test Port : Temporary antenna connector

No spurious emissions of the EUT in the range 20 dB below the limit.

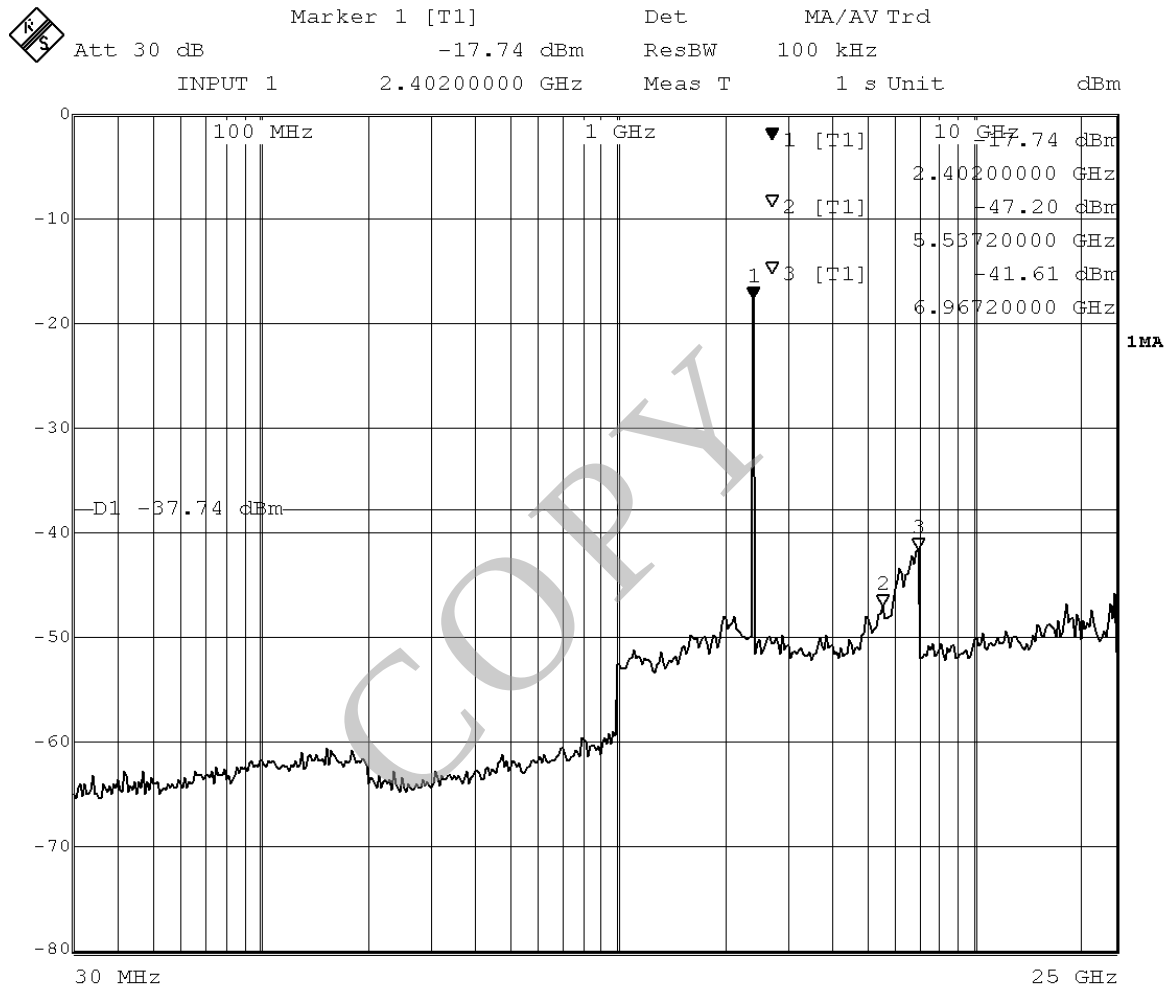


Mode of EUT : TX (39ch: 2441 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector

No spurious emissions of the EUT in the range 20 dB below the limit.

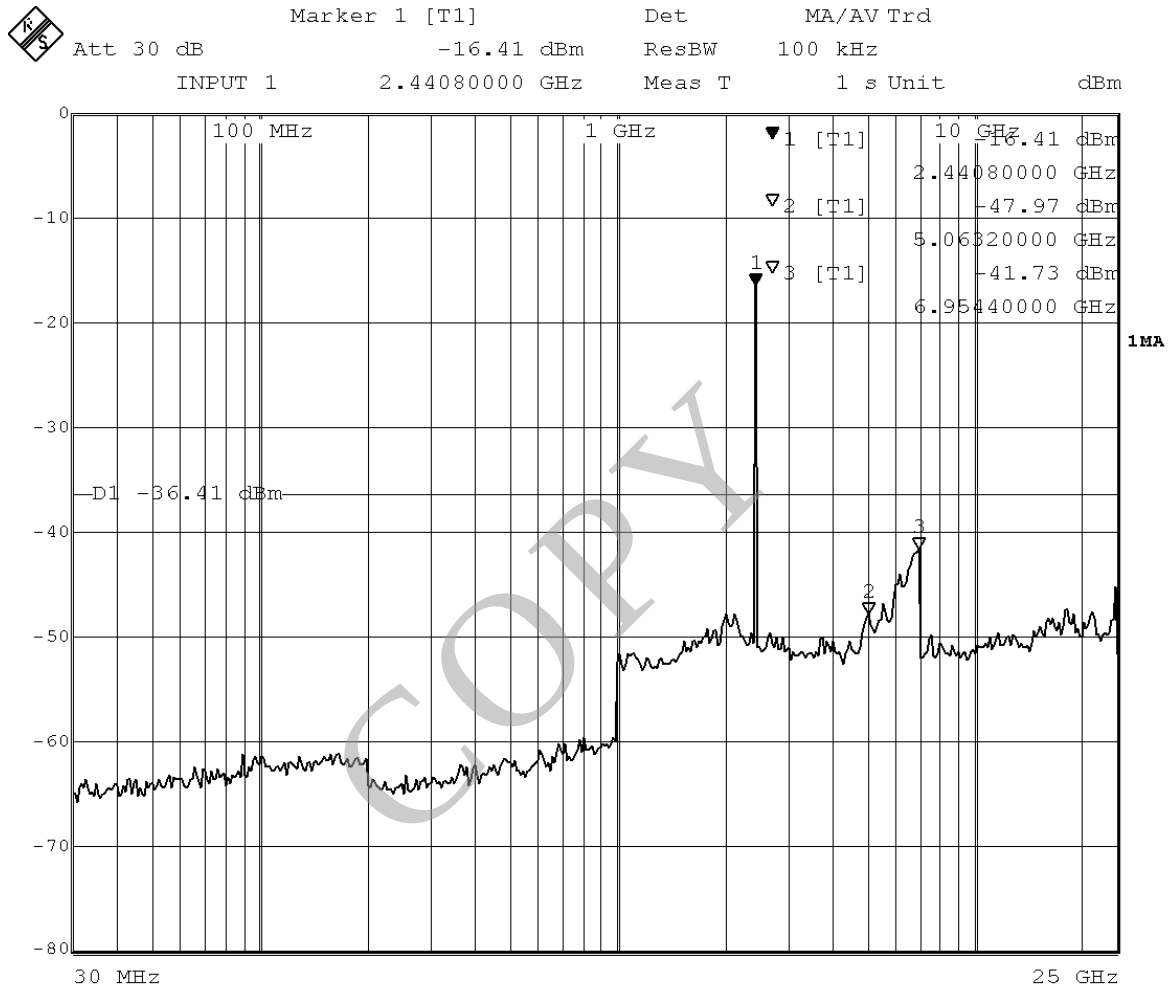

Mode of EUT : TX (78ch: 2480 MHz, Packet type: DH1)  
 Test Port : Temporary antenna connector

No spurious emissions of the EUT in the range 20 dB below the limit.

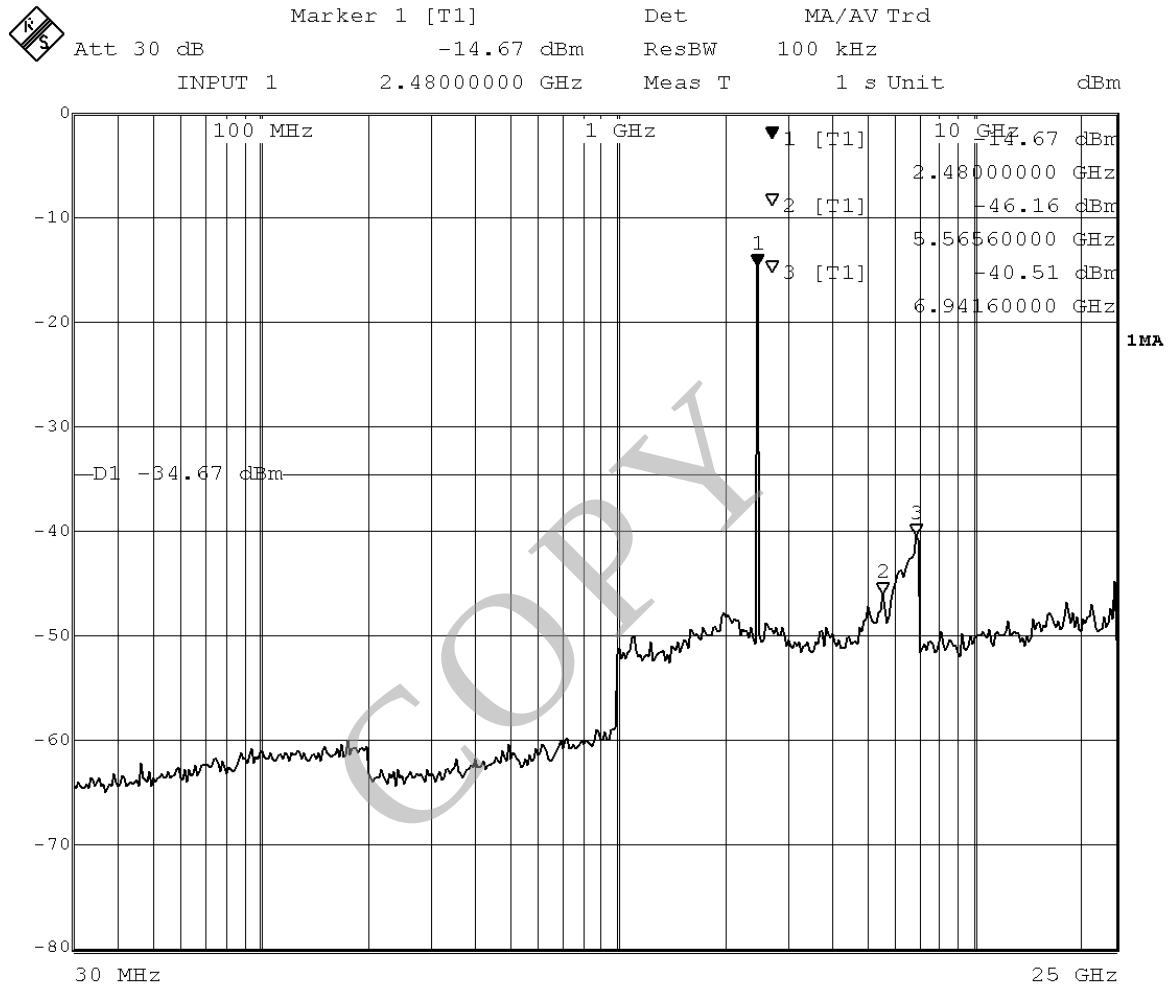

Tested by :


*K. Mira*  
 Katsunori Mira  
 Testing Engineer

## 2.10 Spurious Emissions (Radiation)


### 2.10.1 Band Edge Compliance

Date : June 13, 2006  
 Temp.: 23 °C Humi.: 52 %

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Enclosure  
 Antenna Polarization: Horizontal

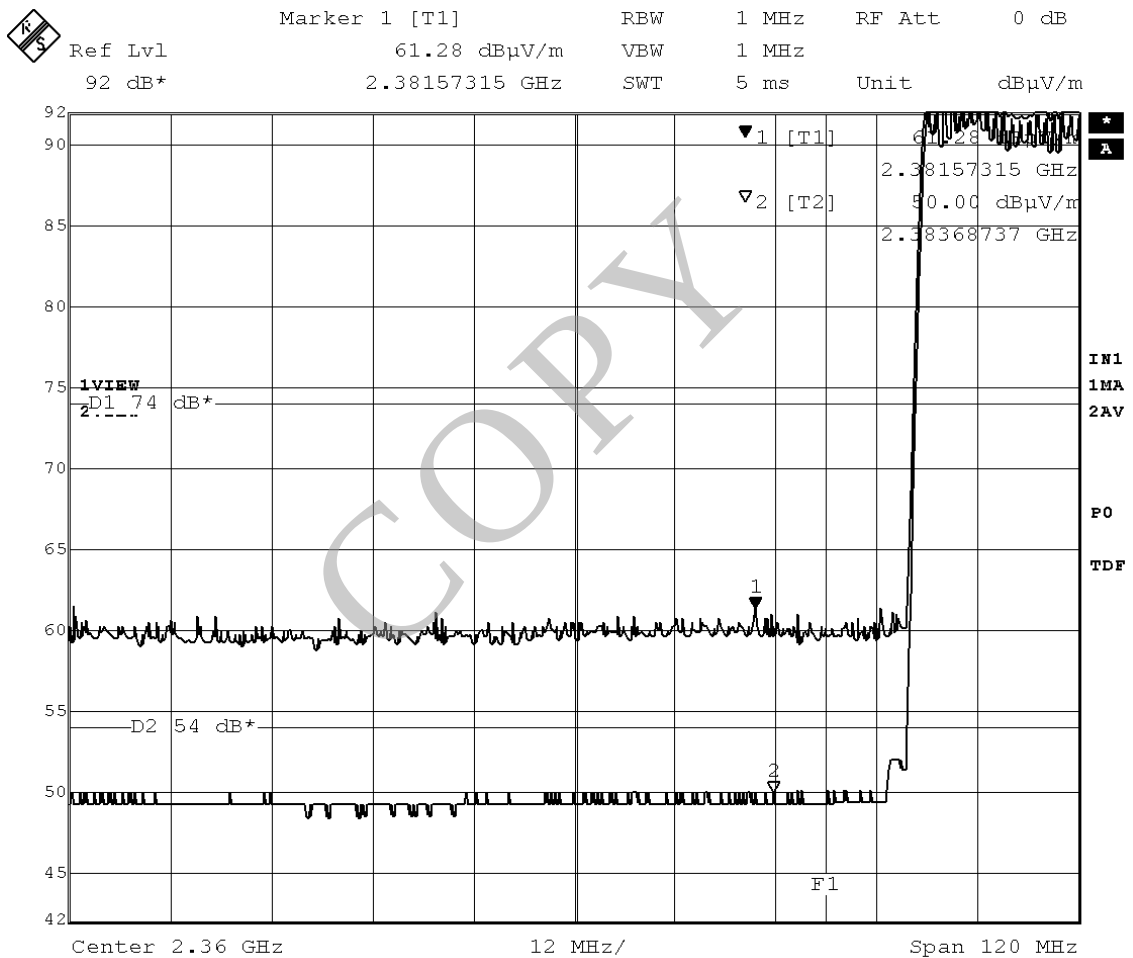


Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

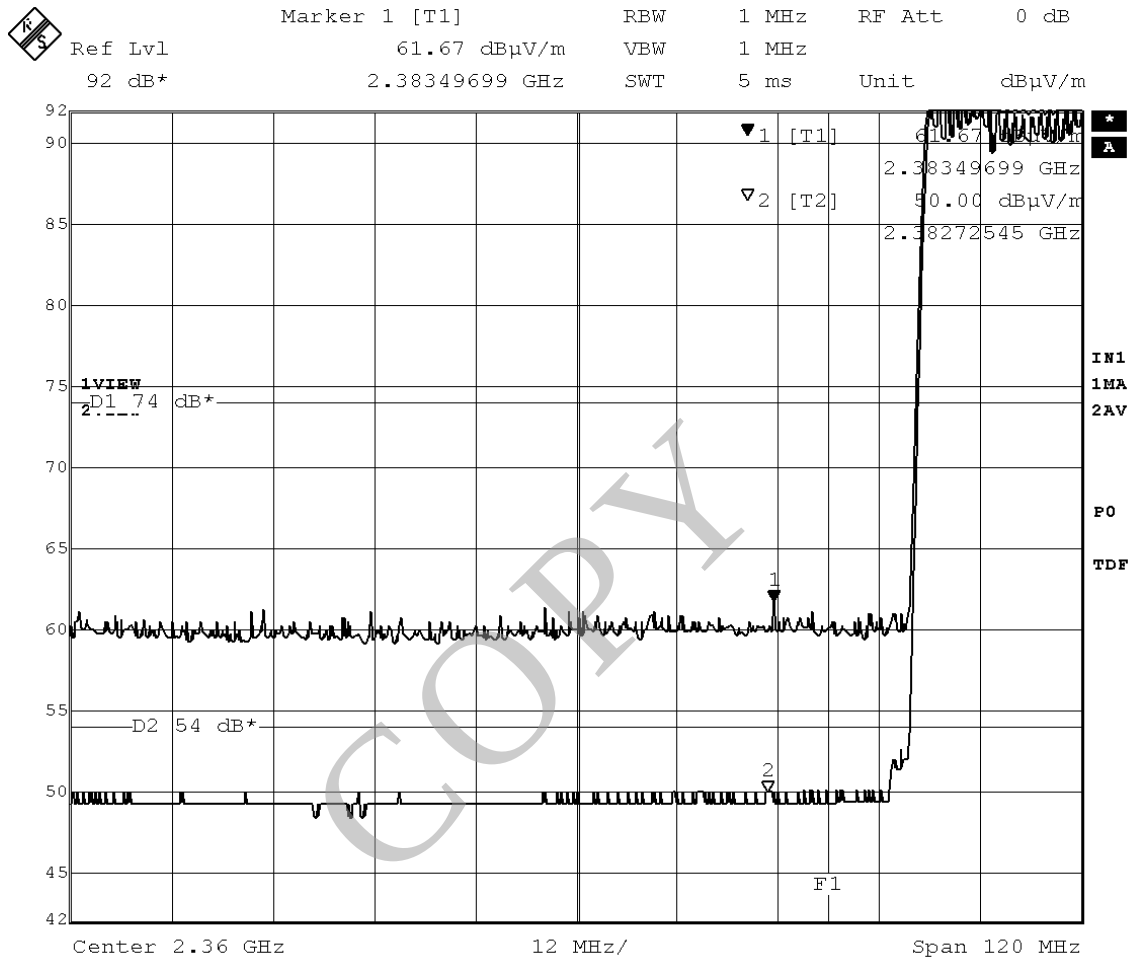


Mode of EUT : Hopping(Packet type: DH1)

Test Port : Enclosure

Antenna Polarization: Horizontal

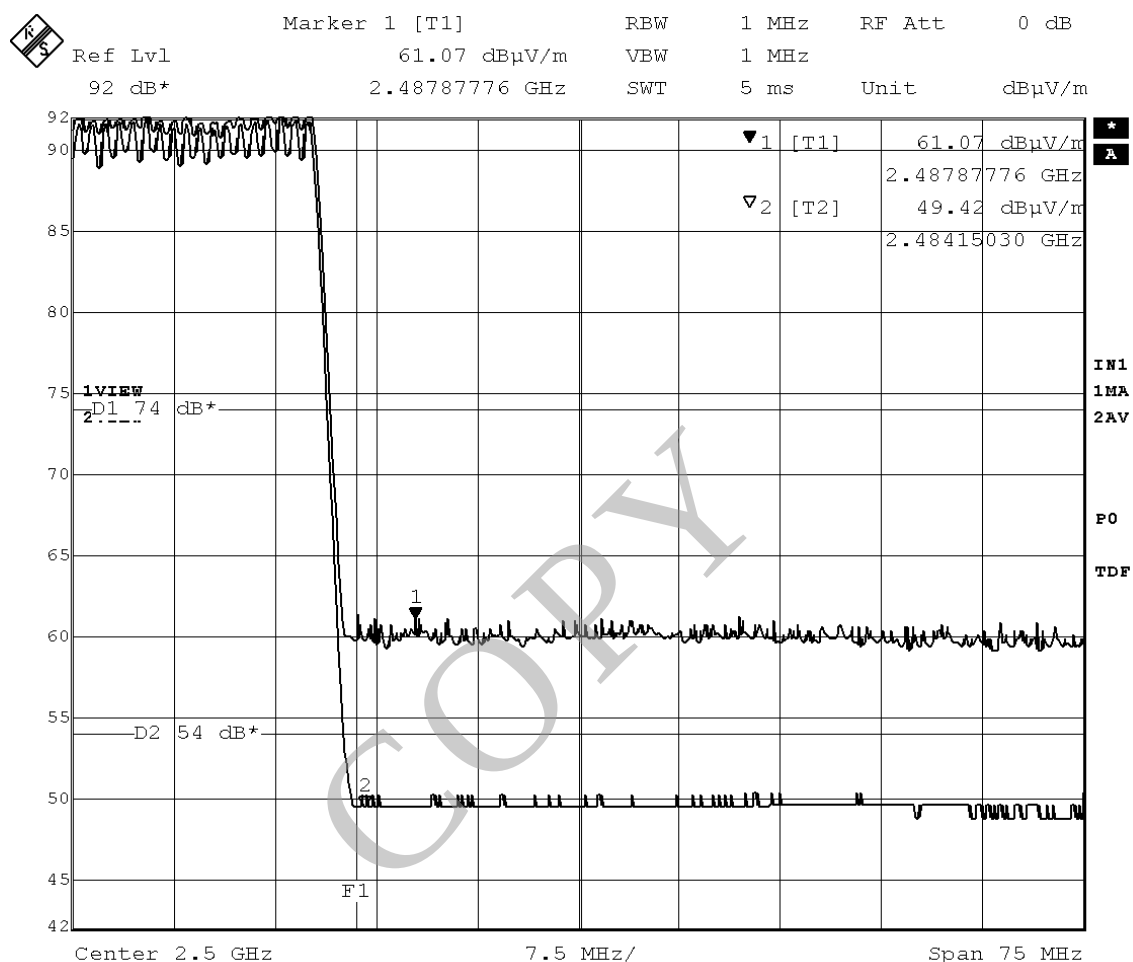

Mode of EUT : Hopping(Packet type: DH1)  
 Test Port : Enclosure  
 Antenna Polarization: Vertical

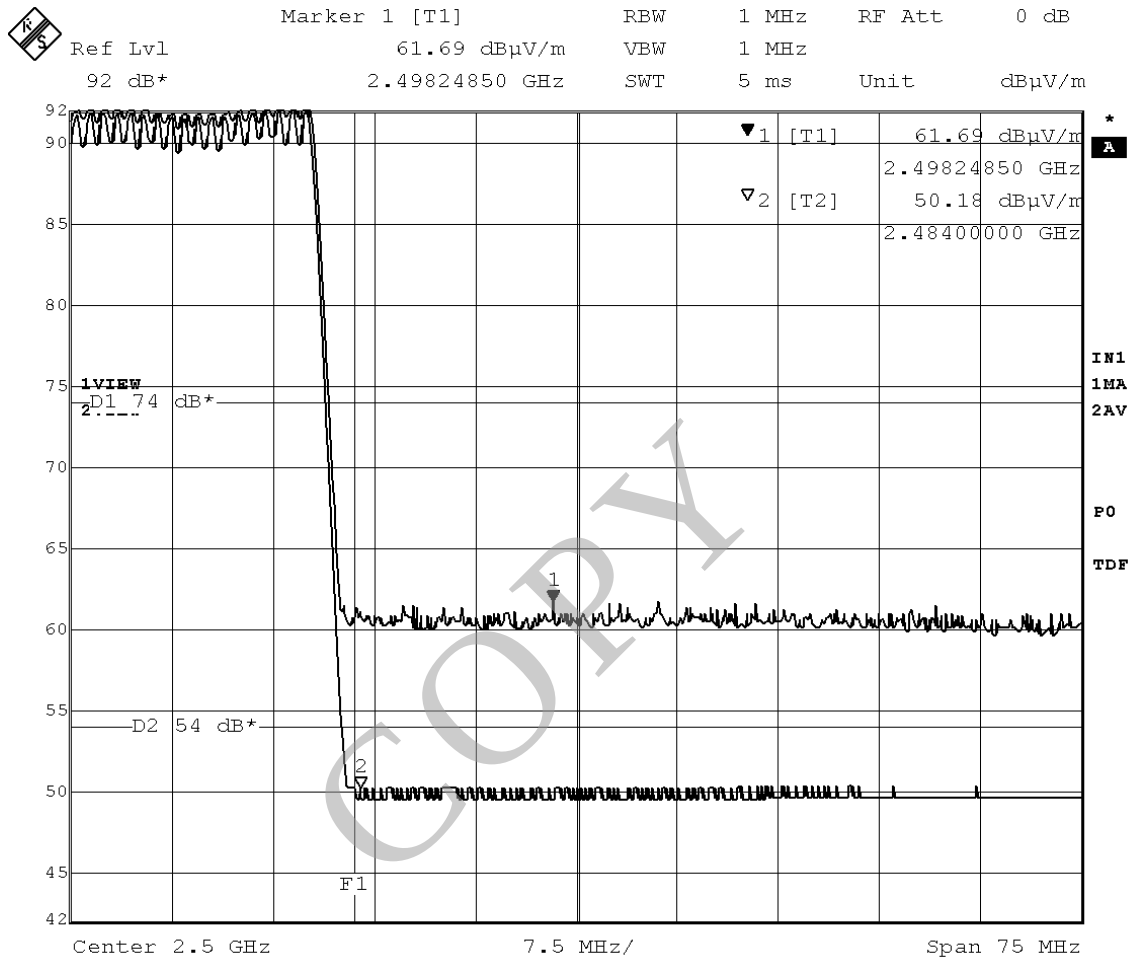

Tested by : B. Miura  
 Katsunori Miura  
 Testing Engineer

## 2.10.2 Other Spurious Emissions

### 2.10.2.1 Spurious Emissions in the frequency range from 9 kHz to 30 MHz

Date : June 13, 2006  
Temp.: 25 °C Humi.: 60 %

Test Port : Enclosure

Mode of EUT : The one packet type (DH1) have been investigated and the worst  
Channel (78ch: 2480 MHz) has been listed.

No spurious emissions in the range 20 dB below the limit.

COPY

## 2.10.2.2 Spurious Emissions in the frequency range from 30 MHz to 1000 MHz

Date : June 13, 2006

Temp.: 25 °C Humi.: 60 %

Test Port : Enclosure

Mode of EUT : The one packet type (DH1) have been investigated and the worst Channel (78ch: 2480 MHz) has been listed.

| Frequency<br>(MHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polarization | Meter Reading<br>(dBuV) |    |      | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |      | Margins<br>(dB) |      |
|--------------------|-----------------------|------------------------------|--------------|-------------------------|----|------|--------------------|------|-----------------------------|------|-----------------|------|
|                    |                       |                              |              | QP                      | AV | Peak | QP/AV              | Peak | QP/AV                       | Peak | QP/AV           | Peak |
| 144.01             | 0.0                   | 15.5                         | H            | 7.8                     | -  | -    | 43.5               | -    | 23.3                        | -    | 20.2            | -    |
| 192.02             | 0.0                   | 17.6                         | H            | 11.4                    | -  | -    | 43.5               | -    | 29.0                        | -    | 14.5            | -    |
| 240.02             | 0.0                   | 19.3                         | H            | 6.5                     | -  | -    | 46.0               | -    | 25.8                        | -    | 20.2            | -    |
| 288.02             | 0.0                   | 20.9                         | H            | 4.7                     | -  | -    | 46.0               | -    | 25.6                        | -    | 20.4            | -    |
| 304.01             | 0.0                   | 18.2                         | H            | 11.8                    | -  | -    | 46.0               | -    | 30.0                        | -    | 16.0            | -    |
| 336.02             | 0.0                   | 18.1                         | H            | 15.3                    | -  | -    | 46.0               | -    | 33.4                        | -    | 12.6            | -    |
| 352.01             | 0.0                   | 18.3                         | H            | 5.7                     | -  | -    | 46.0               | -    | 24.0                        | -    | 22.0            | -    |

Notes :

- 1) The spectrum was checked from 30 MHz to 1000 MHz.
- 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
- 3) The symbol of "<" means "or less".
- 4) The symbol of ">" means "or greater".
- 5) A sample calculation(QP/AV) was made at 144.01 (MHz).

$$PA + Cf + Mr = 0 + 15.5 + 7.8 = 23.3 \text{ (dBuV/m)}$$

PA = Peak to Average Factor(P-A Factor)

Cf = Correction Factor

Mr = Meter Reading

- 6) Measuring Instrument Setting :

| <u>Detector function</u> | <u>Resolution Bandwidth</u> | <u>Video Bandwidth</u> |
|--------------------------|-----------------------------|------------------------|
| Quasi-peak(QP)           | 120 kHz                     | -                      |

### 2.10.2.3 Spurious Emissions in the frequency above 1000 MHz

Date : June 13, 2006

Temp.: 25 °C Humi.: 60 %

Test Port : Enclosure

Mode of EUT : TX (0ch: 2402 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polariza-<br>tion | Meter Reading<br>(dBuV) |        | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |        | Margins<br>(dB) |        |
|--------------------|-----------------------|------------------------------|-------------------|-------------------------|--------|--------------------|------|-----------------------------|--------|-----------------|--------|
|                    |                       |                              |                   | AV                      | Peak   | AV                 | Peak | AV                          | Peak   | AV              | Peak   |
| 1.2010             | 0.0                   | -3.0                         | V                 | 40.3                    | 45.6   | 54.0               | 74.0 | 37.3                        | 42.6   | 16.7            | 31.4   |
| 3.6030             | 0.0                   | 5.1                          | V                 | < 28.0                  | < 41.0 | 54.0               | 74.0 | < 33.1                      | < 46.1 | > 20.9          | > 27.9 |
| 4.8040             | 0.0                   | 7.4                          | V                 | < 28.0                  | < 41.0 | 54.0               | 74.0 | < 35.4                      | < 48.4 | > 18.6          | > 25.6 |

Mode of EUT : TX (39ch: 2441 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polariza-<br>tion | Meter Reading<br>(dBuV) |        | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |        | Margins<br>(dB) |        |
|--------------------|-----------------------|------------------------------|-------------------|-------------------------|--------|--------------------|------|-----------------------------|--------|-----------------|--------|
|                    |                       |                              |                   | AV                      | Peak   | AV                 | Peak | AV                          | Peak   | AV              | Peak   |
| 1.2205             | 0.0                   | -2.9                         | H                 | 45.4                    | 48.3   | 54.0               | 74.0 | 42.5                        | 45.4   | 11.5            | 28.6   |
| 3.6615             | 0.0                   | 5.2                          | H                 | < 28.0                  | < 41.0 | 54.0               | 74.0 | < 33.2                      | < 46.2 | > 20.8          | > 27.8 |
| 4.8820             | 0.0                   | 7.5                          | V                 | 28.2                    | < 41.0 | 54.0               | 74.0 | 35.7                        | < 48.5 | 18.3            | > 25.5 |

Mode of EUT : TX (78ch: 2480 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polariza-<br>tion | Meter Reading<br>(dBuV) |        | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |        | Margins<br>(dB) |        |
|--------------------|-----------------------|------------------------------|-------------------|-------------------------|--------|--------------------|------|-----------------------------|--------|-----------------|--------|
|                    |                       |                              |                   | AV                      | Peak   | AV                 | Peak | AV                          | Peak   | AV              | Peak   |
| 1.2400             | 0.0                   | -4.5                         | V                 | 45.1                    | 48.2   | 54.0               | 74.0 | 40.6                        | 43.7   | 13.4            | 30.3   |
| 3.3080             | 0.0                   | 5.7                          | V                 | < 28.0                  | < 41.0 | 54.0               | 74.0 | < 33.7                      | < 46.7 | > 20.3          | > 27.3 |
| 4.9600             | 0.0                   | 9.1                          | V                 | 28.9                    | < 41.0 | 54.0               | 74.0 | 38.0                        | < 50.1 | 16.0            | > 23.9 |

- Notes :
- 1) The spectrum was checked from 1.0 GHz to 26.5 GHz.
  - 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
  - 3) The symbol of "<" means "or less".
  - 4) The symbol of ">" means "or greater".
  - 5) A sample calculation (Peak) was made at 1.201 (GHz).  
$$PA + Cf + Mr = 0 + -3 + 45.6 = 42.6 \text{ (dBuV/m)}$$

PA = Peak to Average Factor (P-A Factor)  
Cf = Correction Factor  
Mr = Meter Reading
  - 6) Measuring Instrument Setting :

| <u>Detector function</u> | <u>Resolution Bandwidth</u> | <u>Video Bandwidth</u> |
|--------------------------|-----------------------------|------------------------|
| Average (AV)             | 1 MHz                       | 10 Hz                  |
| Peak                     | 1 MHz                       | 1 MHz                  |

Tested by :

  
Katsunori Miura  
Testing Engineer

## 2.11 AC Power Line Conducted Emissions

Date : August 31, 2006

Temp.: 23 °C Humi.: 57 %

| Frequency<br>(MHz) | LISN<br>Factor<br>(dB) | Meter Reading (dBuV) |      |        |      | Limits<br>(dBuV) |      | Emission Level<br>(dBuV) |      | Margins<br>(dB) |      |
|--------------------|------------------------|----------------------|------|--------|------|------------------|------|--------------------------|------|-----------------|------|
|                    |                        | V-A                  |      | V-B    |      |                  |      |                          |      |                 |      |
|                    |                        | Q.P                  | AVE  | Q.P    | AVE  | Q.P              | AVE  | Q.P                      | AVE  | Q.P             | AVE  |
| 0.15               | 0.3                    | 54.5                 | 31.5 | 54.5   | 31.5 | 66.0             | 56.0 | 54.8                     | 31.8 | 11.2            | 24.2 |
| 0.18               | 0.3                    | 51.0                 | -    | 51.0   | -    | 64.5             | 54.5 | 51.3                     | -    | 13.2            | -    |
| 0.22               | 0.2                    | 47.5                 | -    | 47.5   | -    | 62.8             | 52.8 | 47.7                     | -    | 15.1            | -    |
| 0.70               | 0.1                    | 18.4                 | -    | 17.5   | -    | 56.0             | 46.0 | 18.5                     | -    | 37.5            | -    |
| 1.00               | 0.1                    | < 10.0               | -    | < 10.0 | -    | 56.0             | 46.0 | < 10.1                   | -    | > 45.9          | -    |
| 3.00               | 0.2                    | < 10.0               | -    | < 10.0 | -    | 56.0             | 46.0 | < 10.2                   | -    | > 45.8          | -    |
| 5.97               | 0.2                    | 12.0                 | -    | 10.5   | -    | 60.0             | 50.0 | 12.2                     | -    | 47.8            | -    |
| 8.00               | 0.3                    | < 10.0               | -    | < 10.0 | -    | 60.0             | 50.0 | < 10.3                   | -    | > 49.7          | -    |
| 10.86              | 0.3                    | 14.0                 | -    | 12.0   | -    | 60.0             | 50.0 | 14.3                     | -    | 45.7            | -    |
| 12.75              | 0.4                    | 14.0                 | -    | 14.0   | -    | 60.0             | 50.0 | 14.4                     | -    | 45.6            | -    |
| 16.22              | 0.4                    | 13.5                 | -    | 12.5   | -    | 60.0             | 50.0 | 13.9                     | -    | 46.1            | -    |
| 21.98              | 0.5                    | 18.4                 | -    | 14.0   | -    | 60.0             | 50.0 | 18.9                     | -    | 41.1            | -    |
| 30.00              | 0.7                    | 21.5                 | -    | 21.0   | -    | 60.0             | 50.0 | 22.2                     | -    | 37.8            | -    |

- Notes : 1) The spectrum was checked from 0.15 MHz to 30 MHz.  
 2) The cable loss is included in the LISN factor.  
 3) The symbol of "<" means "or less".  
 4) The symbol of ">" means "or greater".  
 5) The symbol of "-" means "Not applicable".  
 6) V-A : One end & Ground V-B : The other end & Ground  
 7) Q.P : Quasi-peak AVE : Average  
 8) A sample calculation was made at 0.15 (MHz).  
 $Lf + Mr = 0.3 + 54.5 = 54.8 \text{ (dBuV)}$   
 Lf = LISN Factor  
 Mr = Meter Reading

Tested by :

  
 Katsunori Miura  
 Testing Engineer

## 2.12 RF Exposure Compliance

Not Applicable

## 2.13 Spurious Emissions for Receiver (Radiation)

### 2.13.1 Spurious Emissions in the frequency range from 30 MHz to 1000 MHz

Date : June 13, 2006  
 Temp.: 25 °C Humi.: 60 %

Test Port : Enclosure

Mode of EUT : The one packet type (DH1) have been investigated and the worst Channel (78ch: 2480 MHz) has been listed.

| Frequency<br>(MHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polarization | Meter Reading<br>(dBuV) |    |      | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |      | Margins<br>(dB) |      |
|--------------------|-----------------------|------------------------------|--------------|-------------------------|----|------|--------------------|------|-----------------------------|------|-----------------|------|
|                    |                       |                              |              | QP                      | AV | Peak | QP/AV              | Peak | QP/AV                       | Peak | QP/AV           | Peak |
| 144.00             | 0.0                   | 15.5                         | H            | 8.3                     | -  | -    | 43.5               | -    | 23.8                        | -    | 19.7            | -    |
| 192.00             | 0.0                   | 17.6                         | H            | 10.0                    | -  | -    | 43.5               | -    | 27.6                        | -    | 15.9            | -    |
| 240.01             | 0.0                   | 19.3                         | H            | 6.7                     | -  | -    | 46.0               | -    | 26.0                        | -    | 20.0            | -    |
| 288.00             | 0.0                   | 20.9                         | H            | 5.3                     | -  | -    | 46.0               | -    | 26.2                        | -    | 19.8            | -    |
| 304.02             | 0.0                   | 18.2                         | H            | 11.0                    | -  | -    | 46.0               | -    | 29.2                        | -    | 16.8            | -    |
| 336.00             | 0.0                   | 18.1                         | H            | 14.6                    | -  | -    | 46.0               | -    | 32.7                        | -    | 13.3            | -    |
| 352.00             | 0.0                   | 18.3                         | H            | 5.5                     | -  | -    | 46.0               | -    | 23.8                        | -    | 22.2            | -    |

- Notes :
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
  - 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
  - 3) The symbol of "<" means "or less".
  - 4) The symbol of ">" means "or greater".
  - 5) A sample calculation(QP/AV) was made at 144 (MHz).

$$PA + Cf + Mr = 0 + 15.5 + 8.3 = 23.8 \text{ (dBuV/m)}$$

PA = Peak to Average Factor(P-A Factor)

Cf = Correction Factor

Mr = Meter Reading

- 6) Measuring Instrument Setting :

|                          |                             |                        |
|--------------------------|-----------------------------|------------------------|
| <u>Detector function</u> | <u>Resolution Bandwidth</u> | <u>Video Bandwidth</u> |
| Quasi-peak(QP)           | 120 kHz                     | -                      |

## 2.13.2 Spurious Emissions in the frequency above 1000 MHz

Date : June 13, 2006  
 Temp.: 25 °C Humi.: 60 %

Test Port : Enclosure

Mode of EUT : RX (0ch: 2402 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polarization | Meter Reading<br>(dBuV) |      | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |      | Margins<br>(dB) |      |
|--------------------|-----------------------|------------------------------|--------------|-------------------------|------|--------------------|------|-----------------------------|------|-----------------|------|
|                    |                       |                              |              | AV                      | Peak | AV                 | Peak | AV                          | Peak | AV              | Peak |
| 1.2004             | 0.0                   | -4.8                         | H            | 42.2                    | 45.9 | 54.0               | 74.0 | 37.4                        | 41.1 | 16.6            | 32.9 |
| 2.4004             | 0.0                   | 2.2                          | V            | 39.6                    | 44.5 | 54.0               | 74.0 | 41.8                        | 46.7 | 12.2            | 27.3 |

Mode of EUT : RX (39ch: 2441 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polarization | Meter Reading<br>(dBuV) |      | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |      | Margins<br>(dB) |      |
|--------------------|-----------------------|------------------------------|--------------|-------------------------|------|--------------------|------|-----------------------------|------|-----------------|------|
|                    |                       |                              |              | AV                      | Peak | AV                 | Peak | AV                          | Peak | AV              | Peak |
| 1.2196             | 0.0                   | -4.6                         | V            | 44.9                    | 47.8 | 54.0               | 74.0 | 40.3                        | 43.2 | 13.7            | 30.8 |
| 2.4396             | 0.0                   | 2.3                          | V            | 38.7                    | 43.9 | 54.0               | 74.0 | 41.0                        | 46.2 | 13.0            | 27.8 |

Mode of EUT : RX (78ch: 2480 MHz, Packet type: DH1)

| Frequency<br>(GHz) | P-A<br>Factor<br>(dB) | Correction<br>Factor<br>(dB) | Polarization | Meter Reading<br>(dBuV) |      | Limits<br>(dBuV/m) |      | Emission Levels<br>(dBuV/m) |      | Margins<br>(dB) |      |
|--------------------|-----------------------|------------------------------|--------------|-------------------------|------|--------------------|------|-----------------------------|------|-----------------|------|
|                    |                       |                              |              | AV                      | Peak | AV                 | Peak | AV                          | Peak | AV              | Peak |
| 1.2388             | 0.0                   | -4.5                         | V            | 45.5                    | 48.7 | 54.0               | 74.0 | 41.0                        | 44.2 | 13.0            | 29.8 |
| 2.4788             | 0.0                   | 2.3                          | V            | 38.8                    | 44.5 | 54.0               | 74.0 | 41.1                        | 46.8 | 12.9            | 27.2 |


- Notes :
- 1) The spectrum was checked from 1.0 GHz to 26.5 GHz.
  - 2) The cable loss, amp. gain and antenna factor are included in the correction factor.
  - 3) The symbol of "<" means "or less".
  - 4) The symbol of ">" means "or greater".
  - 5) A sample calculation (Peak) was made at 1.2004 (GHz).  
$$PA + Cf + Mr = 0 + -4.8 + 45.9 = 41.1 \text{ (dBuV/m)}$$
  
PA = Peak to Average Factor (P-A Factor)  
Cf = Correction Factor

Mr = Meter Reading

6) Measuring Instrument Setting :

| <u>Detector function</u> | <u>Resolution Bandwidth</u> | <u>Video Bandwidth</u> |
|--------------------------|-----------------------------|------------------------|
| Average (AV)             | 1 MHz                       | 10 Hz                  |
| Peak                     | 1 MHz                       | 1 MHz                  |

Tested by :

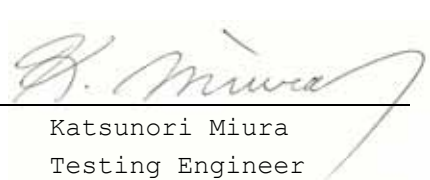  
Katsunori Miura  
Testing Engineer

## 2.14 AC Power Line Conducted Emissions for Receiver

Date : August 31, 2006

Temp.: 23 °C Humi.: 57 %

| Frequency<br>(MHz) | LISN<br>Factor<br>(dB) | Meter Reading (dBuV) |      |        |      | Limits<br>(dBuV) |      | Emission Level<br>(dBuV) |      | Margins<br>(dB) |      |
|--------------------|------------------------|----------------------|------|--------|------|------------------|------|--------------------------|------|-----------------|------|
|                    |                        | V-A                  |      | V-B    |      | Q.P              | AVE  | Q.P                      | AVE  | Q.P             | AVE  |
|                    |                        | Q.P                  | AVE  | Q.P    | AVE  |                  |      |                          |      |                 |      |
| 0.15               | 0.3                    | 55.4                 | 31.5 | 55.2   | 31.7 | 66.0             | 56.0 | 55.7                     | 32.0 | 10.3            | 24.0 |
| 0.18               | 0.3                    | 51.2                 | -    | 51.2   | -    | 64.5             | 54.5 | 51.5                     | -    | 13.0            | -    |
| 0.22               | 0.2                    | 47.0                 | -    | 47.3   | -    | 62.8             | 52.8 | 47.5                     | -    | 15.3            | -    |
| 0.70               | 0.1                    | 18.0                 | -    | 17.6   | -    | 56.0             | 46.0 | 18.1                     | -    | 37.9            | -    |
| 1.00               | 0.1                    | < 10.0               | -    | < 10.0 | -    | 56.0             | 46.0 | < 10.1                   | -    | > 45.9          | -    |
| 3.00               | 0.2                    | < 10.0               | -    | < 10.0 | -    | 56.0             | 46.0 | < 10.2                   | -    | > 45.8          | -    |
| 5.97               | 0.2                    | 12.7                 | -    | < 10.0 | -    | 60.0             | 50.0 | 12.9                     | -    | 47.1            | -    |
| 8.00               | 0.3                    | < 10.0               | -    | < 10.0 | -    | 60.0             | 50.0 | < 10.3                   | -    | > 49.7          | -    |
| 10.86              | 0.3                    | 14.0                 | -    | 12.0   | -    | 60.0             | 50.0 | 14.3                     | -    | 45.7            | -    |
| 12.75              | 0.4                    | 12.0                 | -    | 14.5   | -    | 60.0             | 50.0 | 14.9                     | -    | 45.1            | -    |
| 16.22              | 0.4                    | 13.2                 | -    | 13.5   | -    | 60.0             | 50.0 | 13.9                     | -    | 46.1            | -    |
| 21.98              | 0.5                    | 19.1                 | -    | 14.9   | -    | 60.0             | 50.0 | 19.6                     | -    | 40.4            | -    |
| 30.00              | 0.7                    | 21.7                 | -    | 21.7   | -    | 60.0             | 50.0 | 22.4                     | -    | 37.6            | -    |


- Notes : 1) The spectrum was checked from 0.15 MHz to 30 MHz.  
 2) The cable loss is included in the LISN factor.  
 3) The symbol of "<" means "or less".  
 4) The symbol of ">" means "or greater".  
 5) The symbol of "-" means "Not applicable".  
 6) V-A : One end & Ground V-B : The other end & Ground  
 7) Q.P : Quasi-peak AVE : Average  
 8) A sample calculation was made at 0.15 (MHz).  

$$L_f + M_r = 0.3 + 55.4 = 55.7 \text{ (dBuV)}$$
  

$$L_f = \text{LISN Factor}$$
  

$$M_r = \text{Meter Reading}$$

Tested by :

  
 Katsunori Miura  
 Testing Engineer

# Appendix

## Test Instruments List

COPY

31-Aug-2006

| No                             | Type               | Model | Manufacturer | Serial | ID           | Last Cal. | Interval |
|--------------------------------|--------------------|-------|--------------|--------|--------------|-----------|----------|
| <b><u>Test Facilities:</u></b> |                    |       |              |        |              |           |          |
| 1                              | Anechoic Chamber A | -     | TDK          | -      | 800-01-502E0 | Mar 2006  | 1 Year   |
| 2                              | Anechoic Chamber B | -     | TDK          | -      | 800-01-503E0 | Mar 2006  | 1 Year   |
| 3                              | Shield Room A      | -     | TDK          | -      | 800-01-501E0 | -         | -        |
| 4                              | Shield Room B      | -     | Ray Proof    | -      | 800-01-010E0 | -         | -        |
| 5                              | Shield Room C      | -     | TDK          | -      | 800-01-504E0 | -         | -        |
| 6                              | Shield Room D      | -     | Emerson      | -      | 800-01-022E0 | -         | -        |
| 7                              | Shield Room E      | -     | TDK          | -      | 800-01-505E0 | -         | -        |

**Measuring Instruments:**

|     |                      |              |                 |                           |              |          |        |
|-----|----------------------|--------------|-----------------|---------------------------|--------------|----------|--------|
| 10  | Test Receiver        | ESHS10       | Rohde & Schwarz | 835871/004                | 119-01-505E0 | Apr 2006 | 1 Year |
| 11  | Test Receiver        | ESVS10       | Rohde & Schwarz | 826148/002                | 119-03-504E0 | Apr 2006 | 1 Year |
| 12  | Test Receiver        | ESVS10       | Rohde & Schwarz | 832699/001                | 119-03-506E0 | Apr 2006 | 1 Year |
| 13  | Test Receiver        | ESI26        | Rohde & Schwarz | 100043                    | 119-04-511E0 | Aug 2006 | 1 Year |
| 14  | Spectrum Analyzer    | R3182        | Advantest       | 120600581                 | 122-02-521E0 | Mar 2006 | 1 Year |
| 15  | Spectrum Analyzer    | 8566B        | Hewlett Packard | 2140A01091                | 122-02-501E0 | Oct 2005 | 1 Year |
| 16  | RF Pre-selector      | 85685A       | Hewlett Packard | 2648A00522                | 122-02-503E0 | Oct 2005 | 1 Year |
| 17  | Spectrum Analyzer    | 8566B        | Hewlett Packard | 2747A05855                | 122-02-517E0 | Apr 2006 | 1 Year |
| 18  | RF Pre-selector      | 85685A       | Hewlett Packard | 2901A00933                | 122-02-519E0 | Apr 2006 | 1 Year |
| 19  | Spectrum Analyzer    | R3132        | Advantest       | 120500072                 | 122-02-520E0 | Sep 2005 | 1 Year |
| 20  | Spectrum Analyzer    | R3132        | Advantest       | 150400998                 | 122-02-523E0 | Jul 2006 | 1 Year |
| 65  | Power Meter          | 436A         | Hewlett Packard | 1725A01930                | 100-02-501E0 | Apr 2006 | 1 Year |
| 66  | Power Sensor         | 8482A        | Hewlett Packard | 1551A01013                | 100-02-501E0 | Apr 2006 | 1 Year |
| 67  | Power Sensor         | 8485A        | Hewlett Packard | 2942A08969                | 100-04-021E0 | Apr 2006 | 1 Year |
| 68  | FM Linear Detector   | MS61A        | Anritsu         | M77486                    | 123-02-008E0 | Oct 2005 | 1 Year |
| 69  | Level Meter          | ML422C       | Anritsu         | M87571                    | 114-02-501E0 | Jun 2006 | 1 Year |
| 70  | Measuring Amplifier  | 2636         | B & K           | 1614851                   | 082-01-502E0 | May 2006 | 1 Year |
| 75  | Frequency Counter    | 53131A       | Hewlett Packard | 3546A11807                | 102-02-075E0 | May 2006 | 1 Year |
| 83  | FFT Analyzer         | R9211C       | Advantest       | 02020253                  | 122-02-506E0 | Jun 2006 | 1 Year |
| 84  | Noise Meter          | MN-446       | Meguro          | 53030478                  | 082-01-144E0 | Apr 2006 | 1 Year |
| 86  | Peak Power Analyzer  | 8990A/84815A | Hewlett Packard | 3220A00486/<br>3227A00118 | 100-02-016E0 | Apr 2006 | 1 Year |
| 163 | Digital Oscilloscope | 54502A       | Hewlett Packard | 2934A05573                | 121-02-502E0 | May 2006 | 1 Year |
| 165 | Multimeter           | VOAC7413     | Iwatsu Electric | 0267973                   | 114-02-502E0 | Apr 2006 | 1 Year |

**Antennas:**

|    |                   |           |                  |             |              |          |        |
|----|-------------------|-----------|------------------|-------------|--------------|----------|--------|
| 21 | Loop Antenna      | HFH2-Z2   | Rohde & Schwarz  | 881058/62   | 119-05-033E0 | Jun 2006 | 1 Year |
| 22 | Dipole Antenna    | KBA-511   | Kyoritsu         | 0-170-1     | 119-05-506E0 | Oct 2005 | 1 Year |
| 23 | Dipole Antenna    | KBA-511A  | Kyoritsu         | 0-201-13    | 119-05-504E0 | Oct 2005 | 1 Year |
| 24 | Dipole Antenna    | KBA-611   | Kyoritsu         | 0-147-14    | 119-05-507E0 | Oct 2005 | 1 Year |
| 25 | Dipole Antenna    | KBA-611   | Kyoritsu         | 0-170-1     | 119-05-505E0 | Oct 2005 | 1 Year |
| 26 | Biconical Antenna | BBA9106   | Schwarzbeck      | VHA91031150 | 119-05-111E0 | Nov 2005 | 1 Year |
| 27 | Biconical Antenna | BBA9106   | Schwarzbeck      | -           | 119-05-078E0 | Nov 2005 | 1 Year |
| 28 | Log-peri. Antenna | UHALP9107 | Schwarzbeck      | -           | 119-05-079E0 | Nov 2005 | 1 Year |
| 29 | Log-peri. Antenna | UHALP9107 | Schwarzbeck      | -           | 119-05-110E0 | Nov 2005 | 1 Year |
| 30 | Log-peri. Antenna | HL025     | Rohde & Schwarz  | 340182/015  | 119-05-100E0 | Jan 2006 | 1 Year |
| 31 | Horn Antenna      | 3115      | EMC Test Systems | 6442        | 119-05-514E0 | Jan 2006 | 2 Year |
| 32 | Horn Antenna      | 3116      | EMC Test Systems | 2547        | 119-05-515E0 | May 2006 | 2 Year |

31-Aug-2006

| No                        | Type                 | Model                  | Manufacturer                | Serial     | ID           | Last Cal. | Interval |
|---------------------------|----------------------|------------------------|-----------------------------|------------|--------------|-----------|----------|
| <b><u>Cables:</u></b>     |                      |                        |                             |            |              |           |          |
| 38                        | RF Cable             | 5D-2W                  | Fujikura                    | -          | 155-21-001E0 | Feb 2006  | 1 Year   |
| 39                        | RF Cable             | 5D-2W                  | Fujikura                    | -          | 155-21-002E0 | Feb 2006  | 1 Year   |
| 40                        | RF Cable             | 3D-2W                  | Fujikura                    | -          | 155-21-005E0 | Apr 2006  | 1 Year   |
| 41                        | RF Cable             | 3D-2W                  | Fujikura                    | -          | 155-21-006E0 | Apr 2006  | 1 Year   |
| 42                        | RF Cable             | 3D-2W                  | Fujikura                    | -          | 155-21-007E0 | Apr 2006  | 1 Year   |
| 43                        | RF Cable             | RG213/U                | Rohde & Schwarz             | -          | 155-21-010E0 | Apr 2006  | 1 Year   |
| 44                        | RF Cable(10m)        | S 04272B               | Suhner                      | -          | 155-21-011E0 | May 2006  | 1 Year   |
| 45                        | RF Cable(1.5m 18GHz) | S 04272B               | Suhner                      | -          | 155-21-012E0 | May 2006  | 1 Year   |
| 46                        | RF Cable(1m 18GHz)   | SUCOFLEX               | Suhner                      | -          | 155-21-013E0 | May 2006  | 1 Year   |
| 47                        | RF Cable(1m N)       | S 04272B               | Suhner                      | -          | 155-21-015E0 | Jun 2006  | 1 Year   |
| 48                        | RF Cable(1m 26GHz)   | SUCOFLEX<br>104E       | Suhner                      | 14543/4E   | 155-21-016E0 | Dec 2005  | 1 Year   |
| 49                        | RF Cable(4m 26GHz)   | SUCOFLEX               | Suhner                      | 190630     | 155-21-017E0 | Dec 2005  | 1 Year   |
| 50                        | RF Cable(10m)        | F130-S1S1-394          | MEGA PHASE                  | 10510      | 155-21-018E0 | Dec 2005  | 1 Year   |
| 51                        | RF Cable(7m)         | 3D-2W                  | Fujikura                    | -          | 155-21-009E0 | Apr 2006  | 1 Year   |
| 52                        | RF Cable(7m)         | RG223/U                | Suhner                      | -          | 155-21-021E0 | May 2006  | 1 Year   |
| <b><u>Networks:</u></b>   |                      |                        |                             |            |              |           |          |
| 33                        | LISN                 | KNW-407                | Kyoritsu                    | 8-833-6    | 149-04-052E0 | Apr 2006  | 1 Year   |
| 34                        | LISN                 | KNW-407                | Kyoritsu                    | 8-855-2    | 149-04-055E0 | Apr 2006  | 1 Year   |
| 35                        | LISN                 | KNW-407                | Kyoritsu                    | 8-1130-6   | 149-04-062E0 | Apr 2006  | 1 Year   |
| 36                        | LISN                 | KNW-242C               | Kyoritsu                    | 8-837-13   | 149-04-054E0 | Apr 2006  | 1 Year   |
| 37                        | Absorbing Clamp      | MDS21                  | Luthi                       | 03293      | 119-06-506E0 | Aug 2006  | 1 Year   |
| 164                       | LISN                 | KNW-403D               | Kyoritsu                    | 8-1474-3   | 149-04-059E0 | Apr 2006  | 1 Year   |
| <b><u>Amplifiers:</u></b> |                      |                        |                             |            |              |           |          |
| 53                        | AF Amplifier         | P-500L                 | Accuphase                   | BOY806     | 127-01-501E0 | Feb 2006  | 1 Year   |
| 54                        | RF Amplifier         | WJ-6882-814            | Watkins-Johnson             | 0414       | 127-04-017E0 | Jun 2006  | 1 Year   |
| 55                        | RF Amplifier         | WJ-5315-556            | Watkins-Johnson             | 106        | 127-04-006E0 | Jun 2006  | 1 Year   |
| 56                        | RF Amplifier         | WJ-5320-307            | Watkins-Johnson             | 645        | 127-04-005E0 | Jun 2006  | 1 Year   |
| 57                        | RF Amplifier         | JS4-00102600-<br>28-5A | MITEQ                       | 669167     | 127-04-502E0 | Apr 2006  | 1 Year   |
| <b><u>Generators:</u></b> |                      |                        |                             |            |              |           |          |
| 58                        | Function Generator   | 3325B                  | Hewlett Packard             | 2847A03284 | 118-08-124E0 | Jul 2006  | 1 Year   |
| 59                        | Function Generator   | VP-7422A               | Matsushita<br>Communication | 050351E122 | 118-08-503E0 | Jul 2006  | 1 Year   |
| 60                        | Signal Generator     | 8664A                  | Hewlett Packard             | 3035A00140 | 118-03-014E0 | May 2006  | 1 Year   |
| 61                        | Signal Generator     | 8664A                  | Hewlett Packard             | 3438A00756 | 118-04-502E0 | May 2006  | 1 Year   |
| 62                        | Signal Generator     | 6061A                  | Gigatronics                 | 5130593    | 118-04-024E0 | Mar 2006  | 1 Year   |

|                |                   |               |                 |            |              | 31-Aug-2006 |          |
|----------------|-------------------|---------------|-----------------|------------|--------------|-------------|----------|
| No             | Type              | Model         | Manufacturer    | Serial     | ID           | Last Cal.   | Interval |
| <b>Others:</b> |                   |               |                 |            |              |             |          |
| 63             | Termination(50)   | -             | Suhner          | -          | 154-06-501E0 | Jan 2006    | 1 Year   |
| 64             | Termination(50)   | -             | Suhner          | -          | 154-06-502E0 | Jan 2006    | 1 Year   |
| 71             | Microphone        | 4134          | B & K           | 1253497    | 147-01-502E0 | May 2006    | 1 Year   |
| 72             | Preamplifier      | 2639          | B & K           | 1268763    | 127-01-504E0 | -           | -        |
| 73             | Pistonphone       | 4220          | B & K           | 1165008    | 147-02-501E0 | Mar 2006    | 1 Year   |
| 74             | Artificial Mouth  | 4227          | B & K           | 1274869    | -            | -           | -        |
| 76             | Oven              | -             | Ohnishi         | -          | 023-02-018E0 | -           | -        |
| 77             | DC Power Supply   | 6628A         | Hewlett Packard | 3224A00284 | 072-05-503E0 | Jun 2006    | 1 Year   |
| 78             | Band RejectFilter | BRM12294      | Micro-tronics   | 003        | 149-01-501E0 | Jan 2006    | 1 Year   |
| 79             | High Pass Filter  | F-100-4000-5- | RLC Electronics | 0149       | 149-01-502E0 | Feb 2006    | 1 Year   |
| 80             | Attenuator        | 43KC-10       | Anritsu         | -          | 148-03-506E0 | Feb 2006    | 1 Year   |
| 81             | Attenuator        | 43KC-20       | Anritsu         | -          | 148-03-507E0 | Feb 2006    | 1 Year   |
| 82             | Attenuator        | 355D          | Hewlett Packard | 219-10782  | 148-03-065E0 | Apr 2006    | 1 Year   |
| 85             | RF Detector       | 75KC-50       | Anritsu         | 305002     | 100-02-506E0 | Jul 2006    | 1 Year   |