


PLOT #39


Date: Jan. 05, 2000
Tested by: Hung Trinh

KAVAL TELECOM INC.
BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T-806-884 MHz
Tx Freq.: 806 MHz, RF Output at antenna: 0.31 Watts
Modulation: RF In at level of -34 dBm @ 806 MHz, FM Modulated with 2.5 kHz
Sine Wave signal, Freq. Dev.: 4 kHz

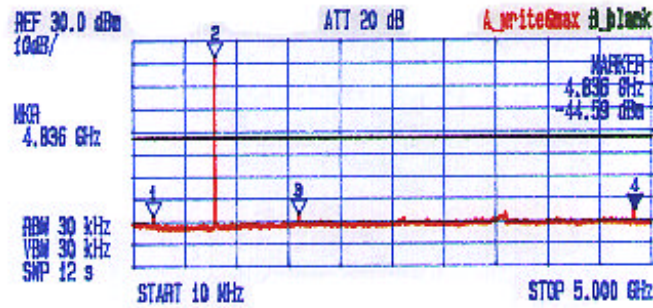

*** Multi Marker List ***


No. 1:	202 MHz	-47.34 dBm	A
No. 2:	801 MHz	23.22 dBm	A
No. 3:	1.607 GHz	-46.28 dBm	A
No. 4:	4.836 GHz	-44.59 dBm	A

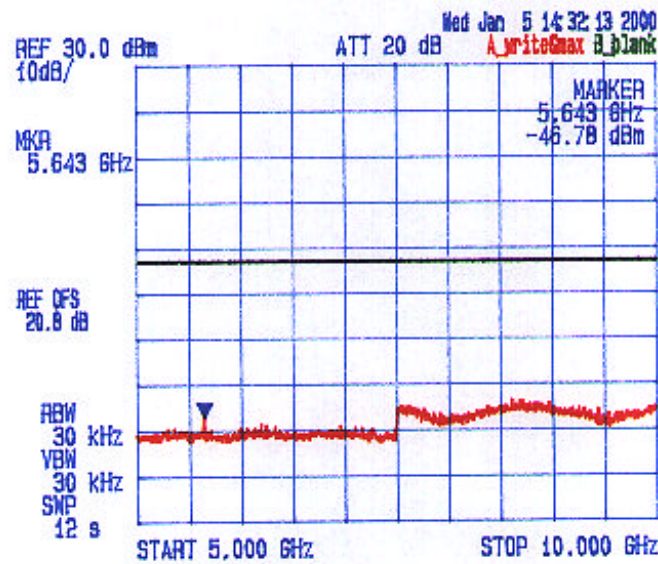

PLOT #40


Date: Jan. 5, 2000
Tested by: Hung Trinh

KAVAL TELECOM INC.
BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T- 800 - 834 MHz
Tx Freq.: 800 MHz, RF Output at antenna: 0.3 Watts
Modulation: RF In at level of -34 dBm @ 800 MHz, FM Modulated with an external 9600 b/s random data, Freq. Dev.: 4 kHz

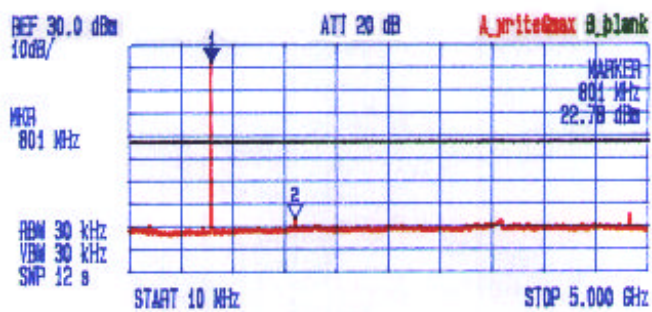

*** Multi Marker List ***


No.	Freq	Power	Label
No. 1:	801 MHz	22.78 dBm	A
No. 2:	1.607 GHz	-46.31 dBm	A

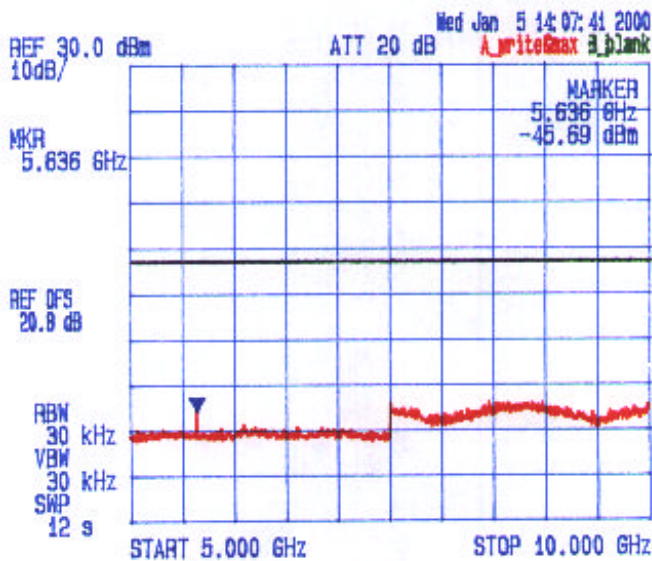

PLOT #41


Date: Jan. 5, 2000
Tested by: Hung Trinh

KAVAL TELECOM INC.
BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T- 806-824 MHz
Tx Freq: 815 MHz, RF Output at antenna 0.43 Watts
Modulation: RF In at level of -34 dBm @ 815 MHz, FM Modulated with 2.5 kHz
Sine Wave signal, Freq. Dev.: 4 kHz

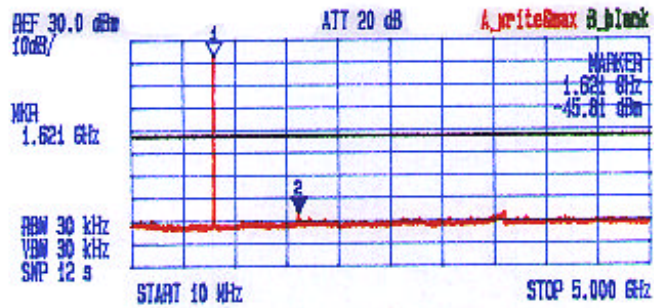

*** Multi Marker List ***

No. 1:	808 MHz	23.31 dBm	A
No. 2:	1.621 GHz	-45.81 dBm	A
No. 3:			
No. 4:			
No. 5:			
No. 6:			
No. 7:			
No. 8:			

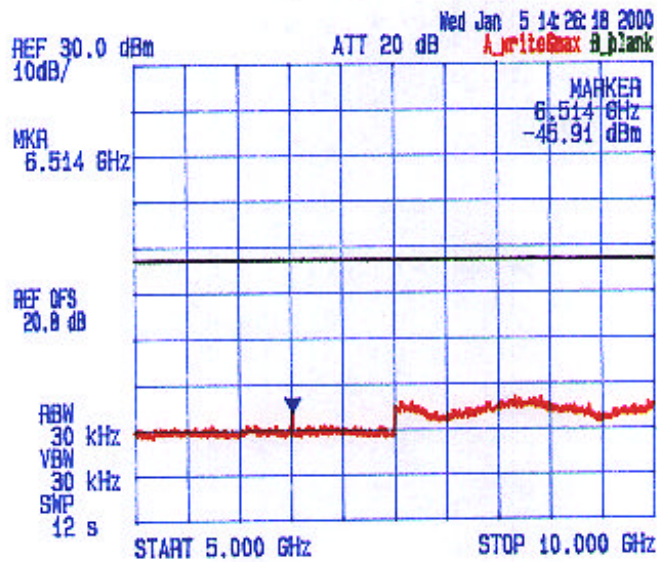


PLOT #42

Date: Jan. 5, 2000
Tested by: Hung Trinh


KAVAL TELECOM INC.

BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T- 808 - 824 MHz
Tx Freq.: 815 MHz, RF Output at antenna: 0.43 Watts
Modulation: RF In at level of -34 dBm @ 815 MHz, FM Modulated with an
external 9600 b/s random data, Freq. Dev.: 4 kHz

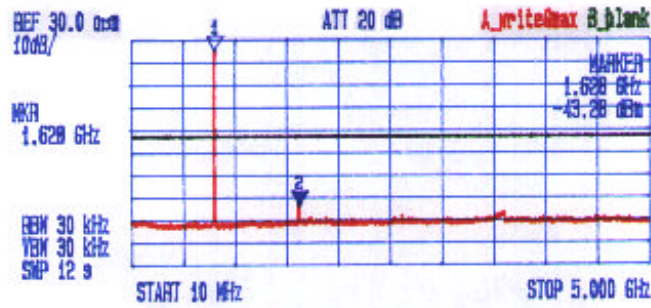

*** Multi Marker List ***



No. 1:	808 MHz	25.53 dBm	A
No. 2:	1.628 GHz	-43.28 dBm	A
No. 3:			
No. 4:			
No. 5:			
No. 6:			
No. 7:			
No. 8:			
A:			

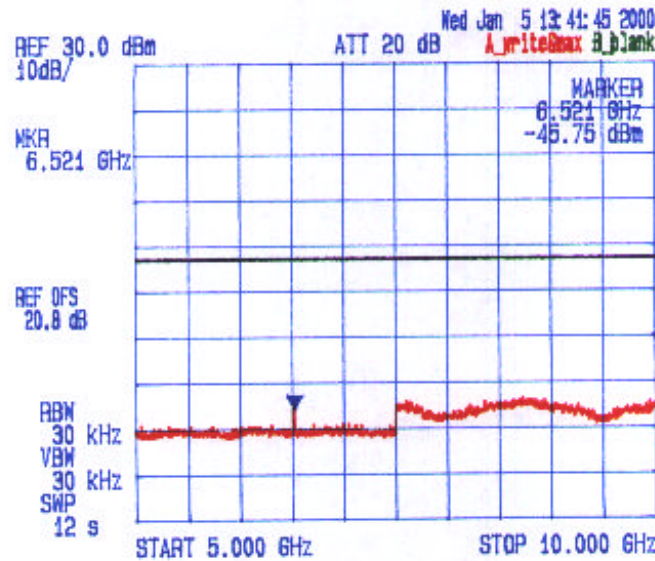

PLOT #43

Date: Jan. 5, 2000
 Tested by: Hung Trinh

KAVAL TELECOM INC.
BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T-
 Tx Freq: 824 MHz, RF Output at antenna: 0.24 Watts
 Modulation: RF In at level of -34 dBm @ 824 MHz, FM Modulated with 2.5 kHz
 Sine Wave signal, Freq. Dev.: 4 kHz

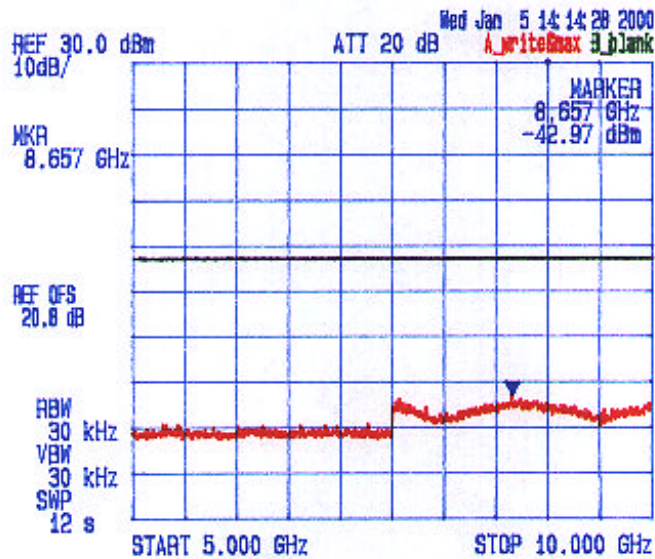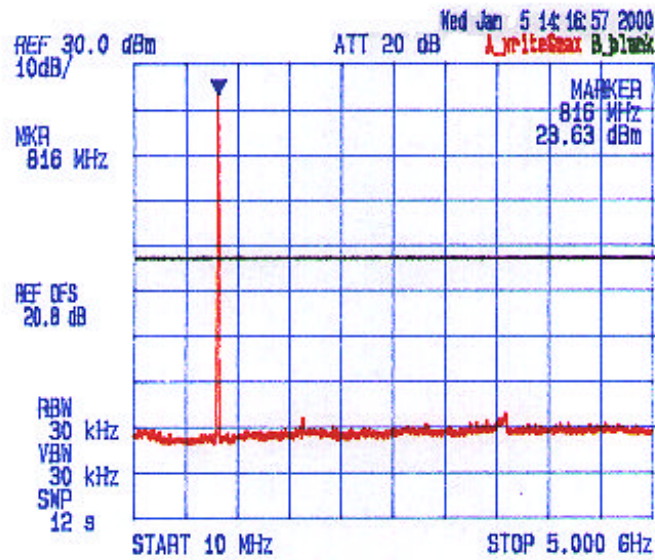

PLOT #44

Date: Jan. 05, 2000
Tested by: Hung Trinh

KAVAL TELECOM INC.
BI-DIRECTIONAL AMPLIFIERS, MODEL: BDA 1250-T-824 MHz
Tx Freq.: 824 MHz, RF Output at antenna 0.24 Watts
Modulation: RF In at level of -34 dBm @ 824 MHz, FM Modulated with an
external 9600 b/s random data, Freq. Dev.: 4 kHz

