



## EMISSION MASKS - FM Modulation with Voice Signal

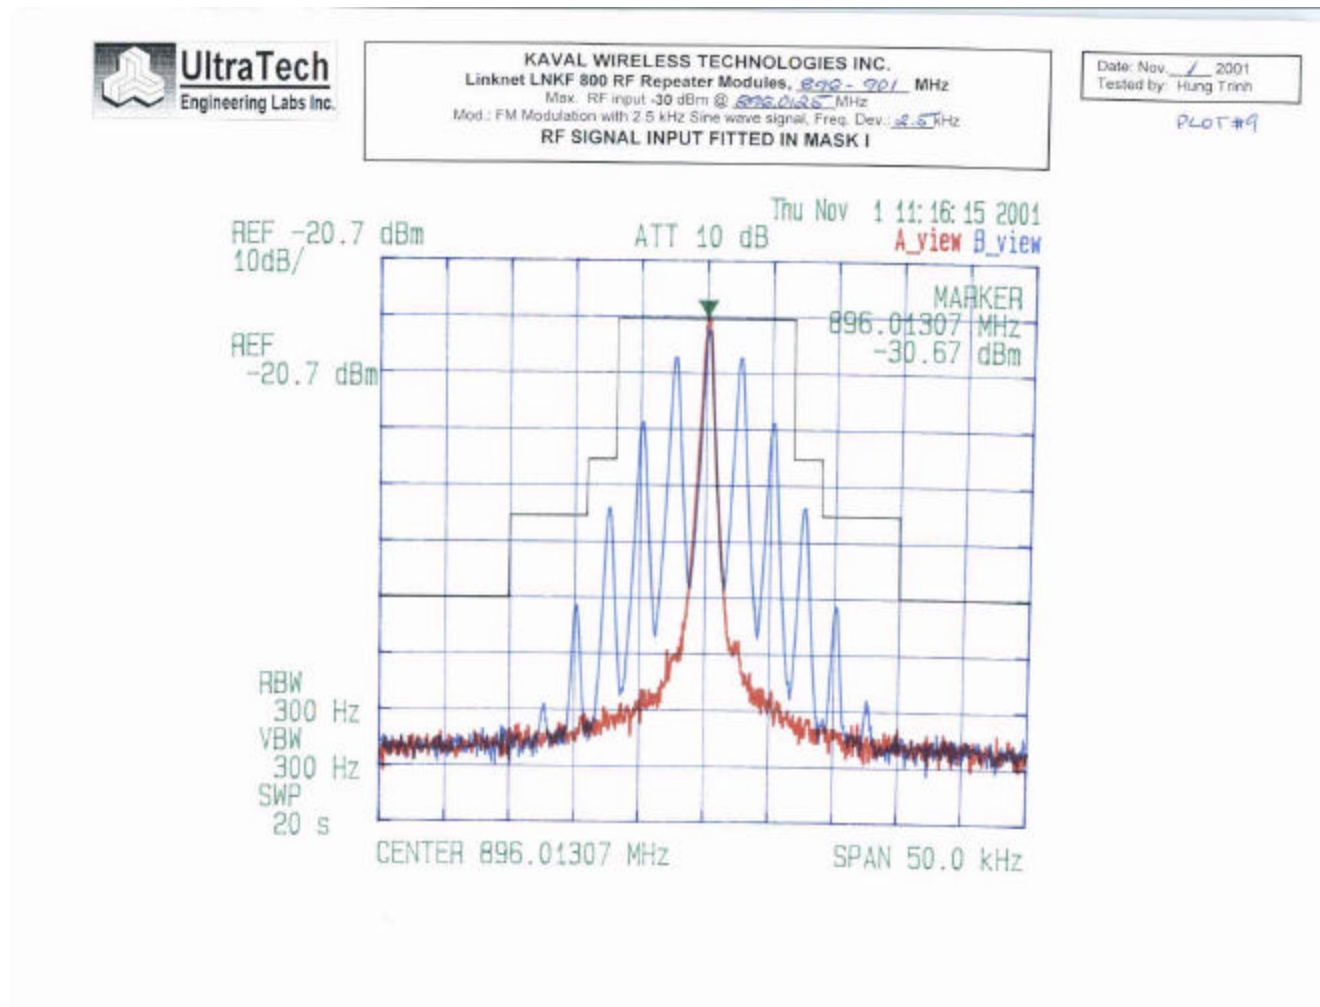

## EMISSION MASKS - FM Modulation with Voice Signal

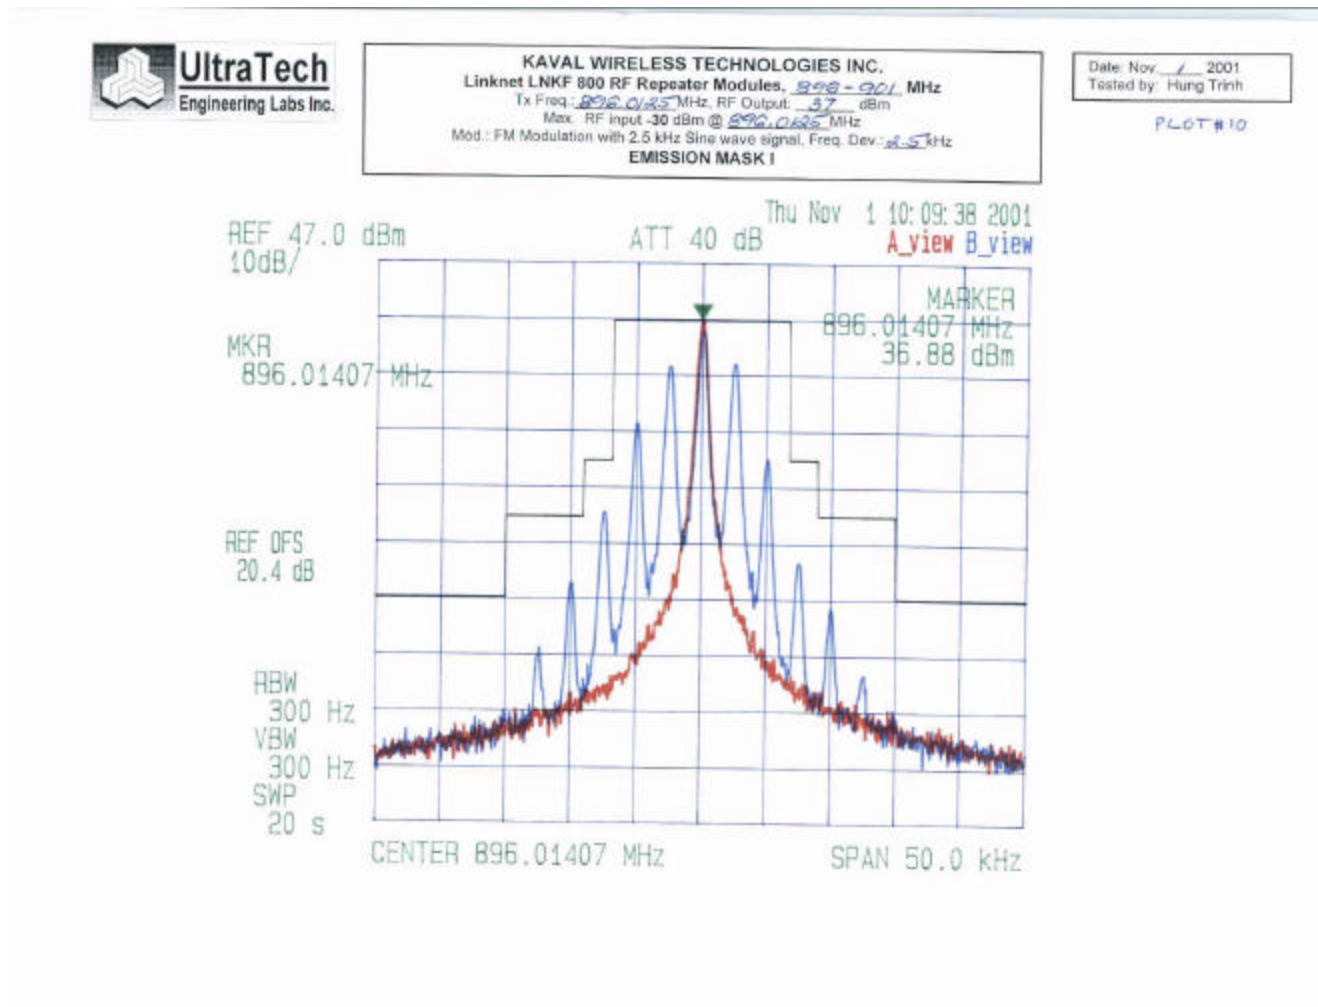


## EMISSION MASKS - FM Modulation with Voice Signal




KAVAL WIRELESS TECHNOLOGIES INC.  
Linknet LNK800 RF Repeater Modules, 896-901 MHz  
Max. RF Input -30 dBm @ 900.9875 MHz  
Mod.: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev.: 2.5 kHz  
RF SIGNAL INPUT FITTED IN MASK I

Date: Nov. 1 2001  
Tested by: Hung Trinh

PLOT # 11

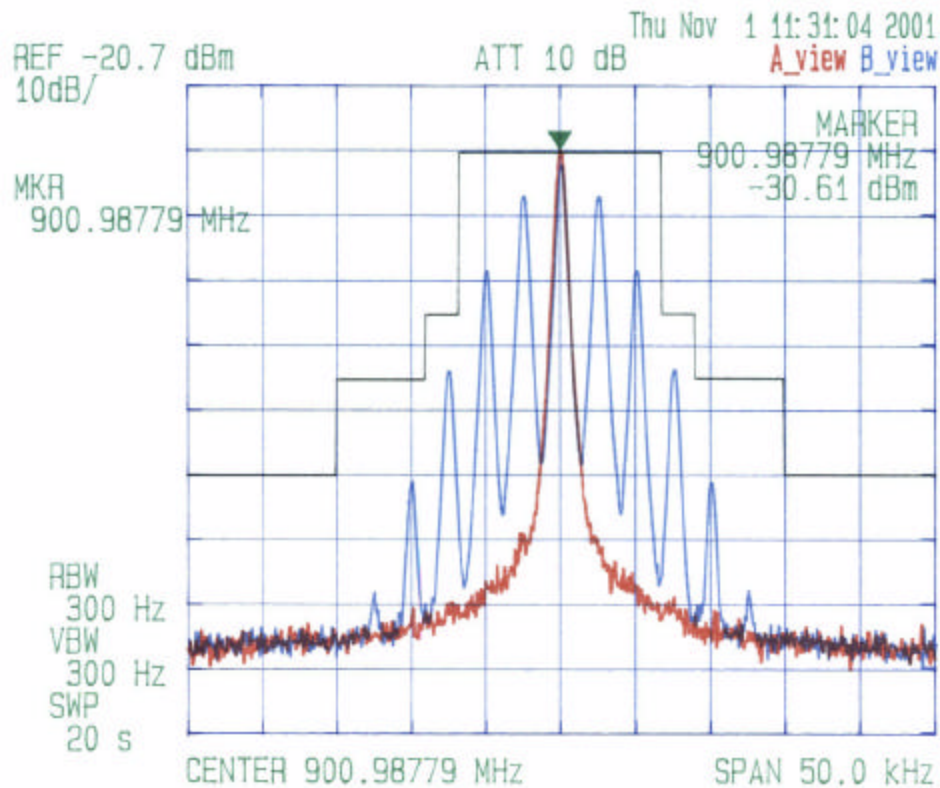

## EMISSION MASKS - FM Modulation with Voice Signal

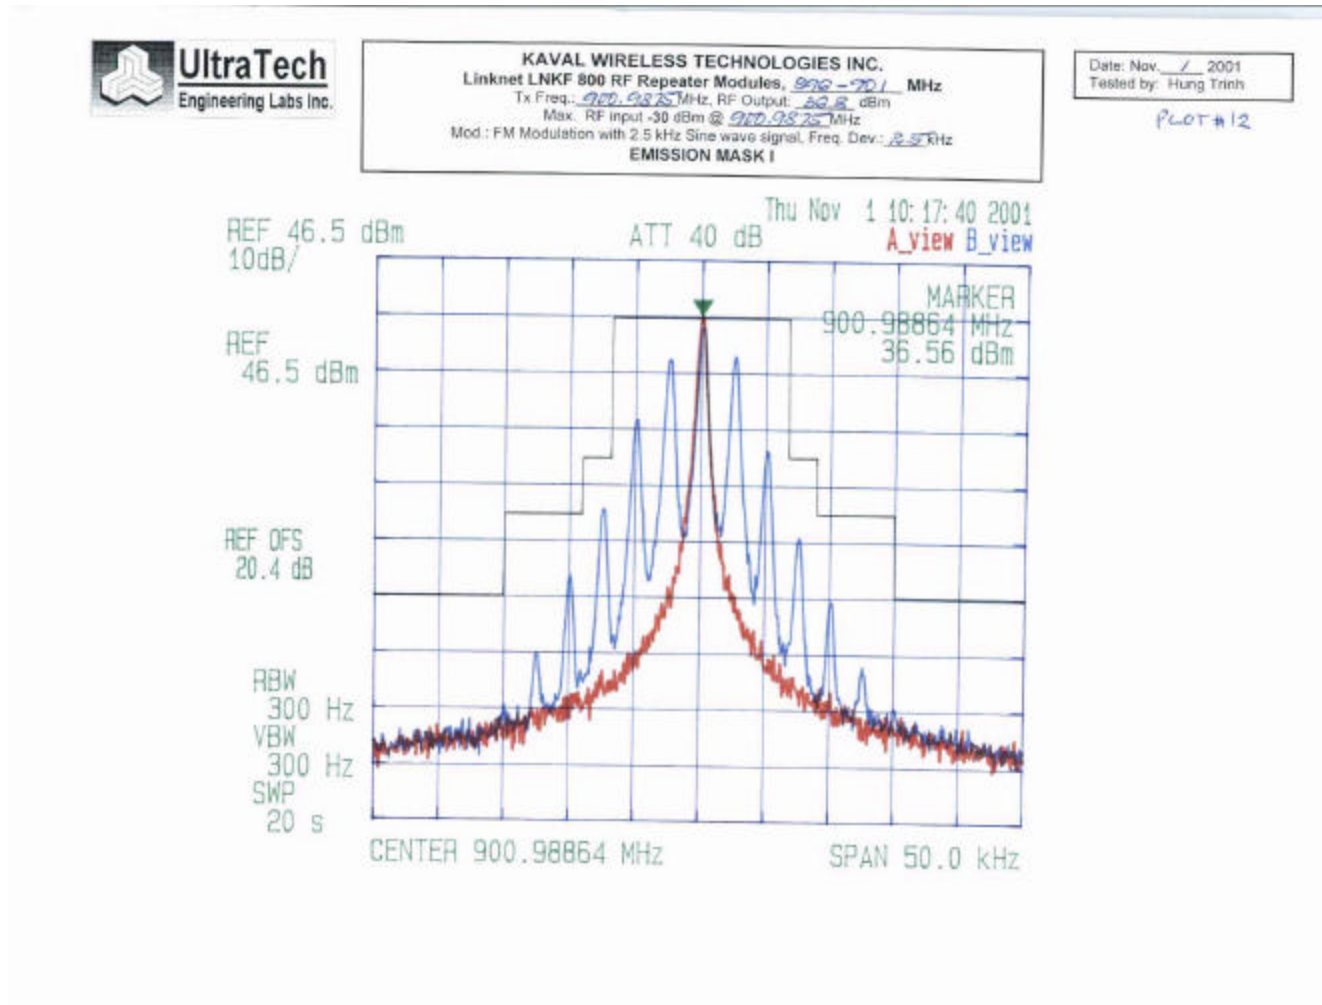


## EMISSION MASKS - FM Modulation with Voice Signal




KAVAL WIRELESS TECHNOLOGIES INC.  
Linknet LNKF 800 RF Repeater Modules, 935-940 MHz  
Max. RF input -30 dBm @ 935.0125 MHz  
Mod.: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev: 2.5 kHz  
RF SIGNAL INPUT FITTED IN MASK I

Date: Nov. 1 2001  
Tested by: Hung Trinh


PLOT # 13

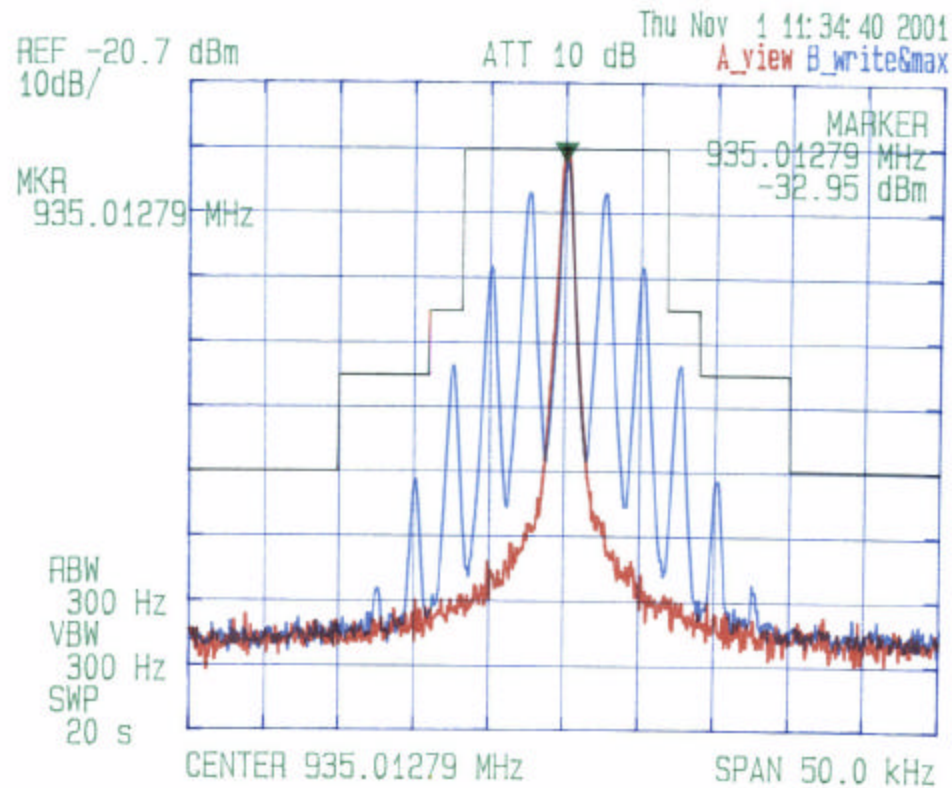

## EMISSION MASKS - FM Modulation with Voice Signal

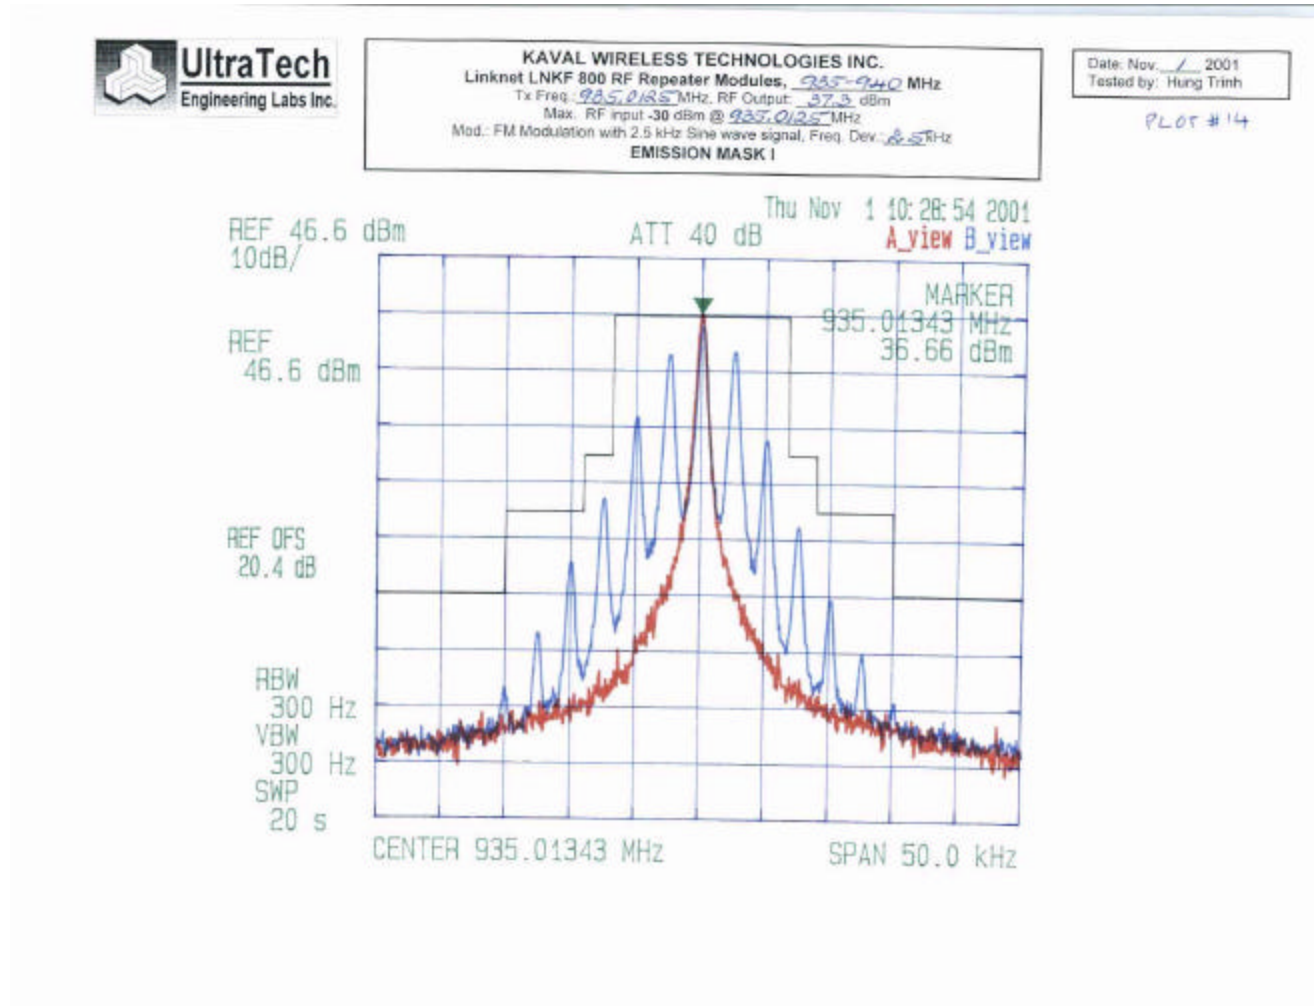

## EMISSION MASKS - FM Modulation with Voice Signal

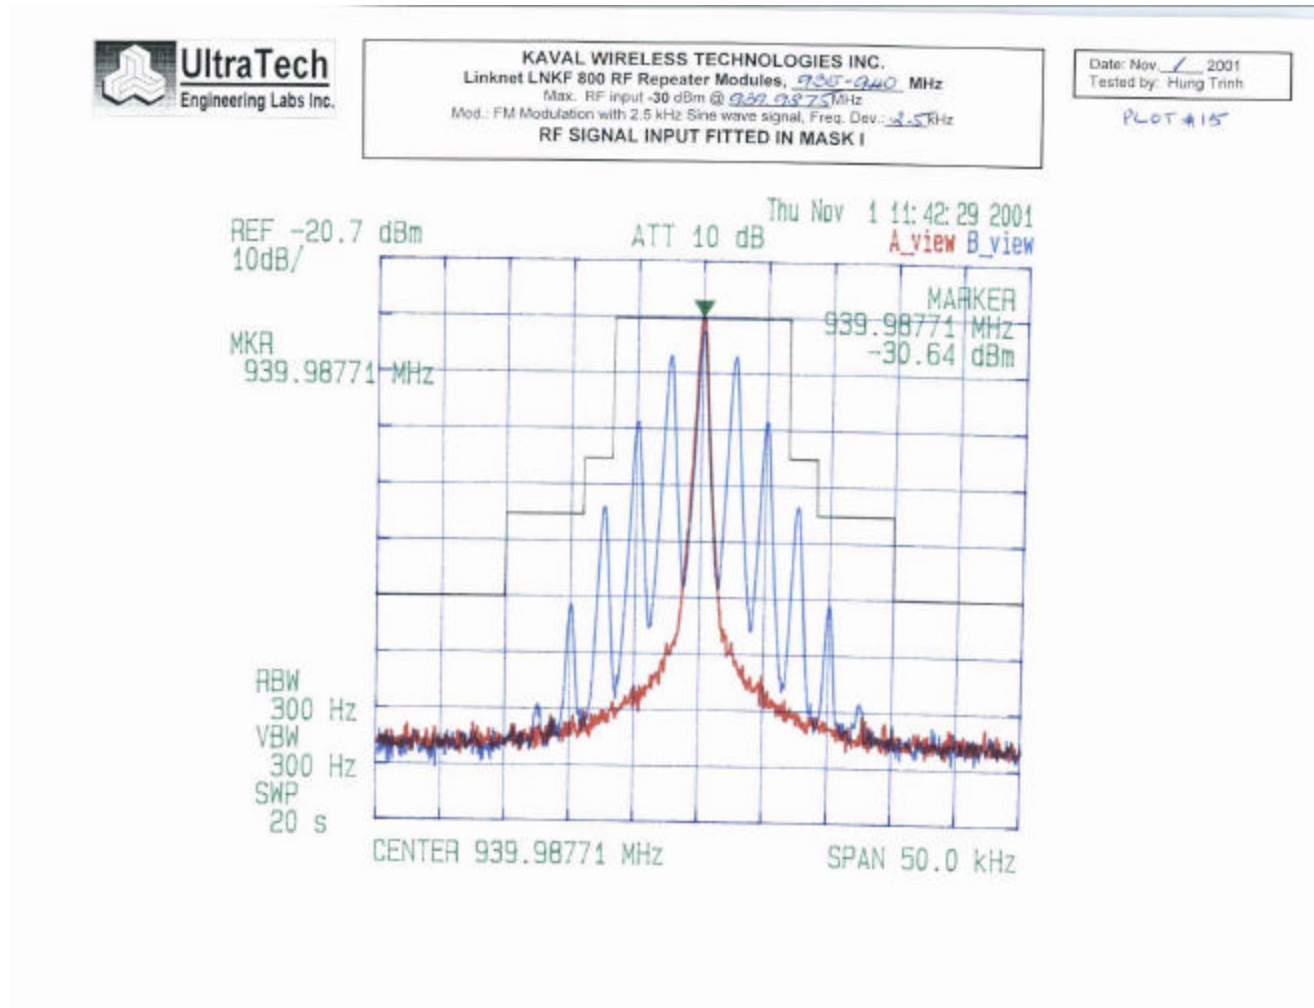

## EMISSION MASKS - FM Modulation with Voice Signal

