



Date: Oct 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.,
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01



Frequency: 852.0 MHz
 Modulation: F1M modulation with 2.5kHz Sine wave signal
 99 % OBW

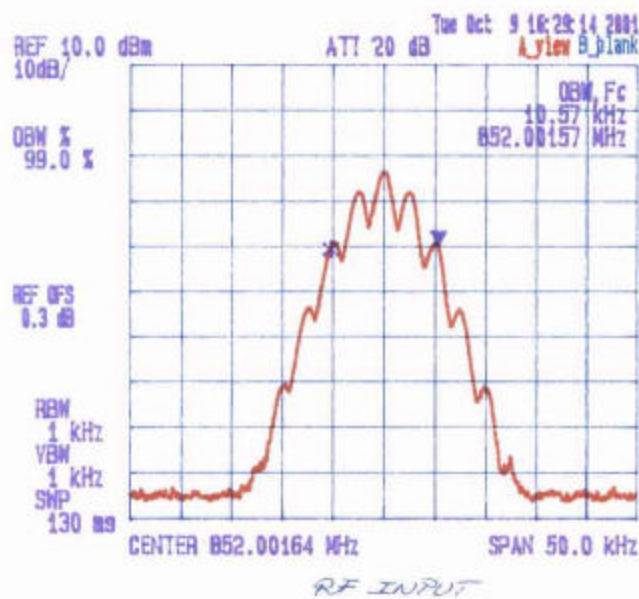

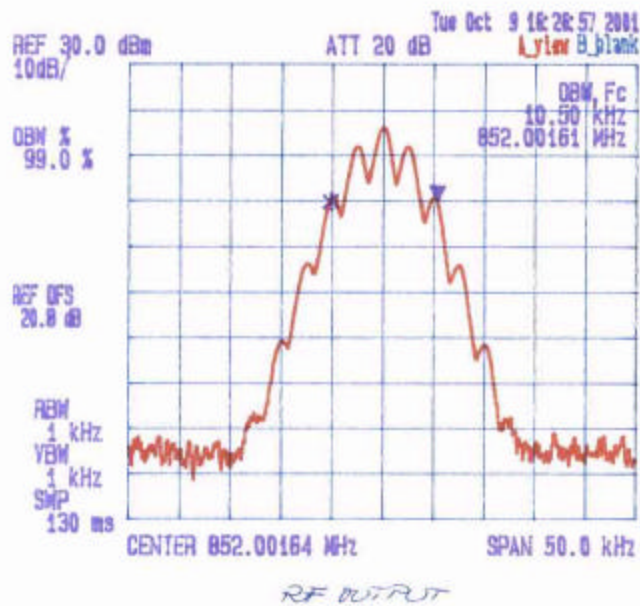

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency : 858.5 MHz
 Modulation: FM modulation with 2.5kHz Sine wave signal
 99 % OBW

Date: Oct 9 2001
 Tested by: Hung Trinh

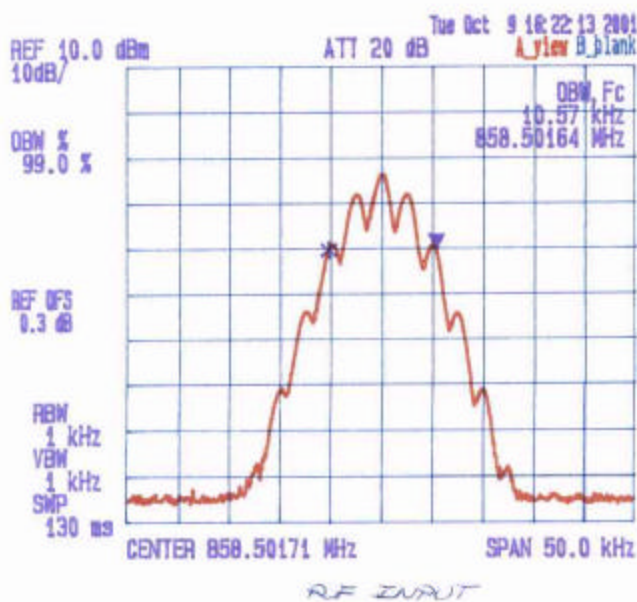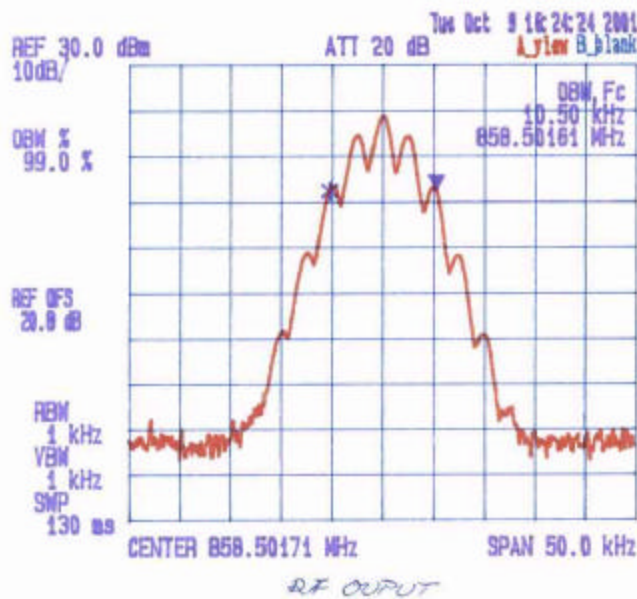



Date: Oct 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01

Frequency: 865 MHz

Modulation: FM modulation with 2.5kHz Sine wave signal



99 % OBW

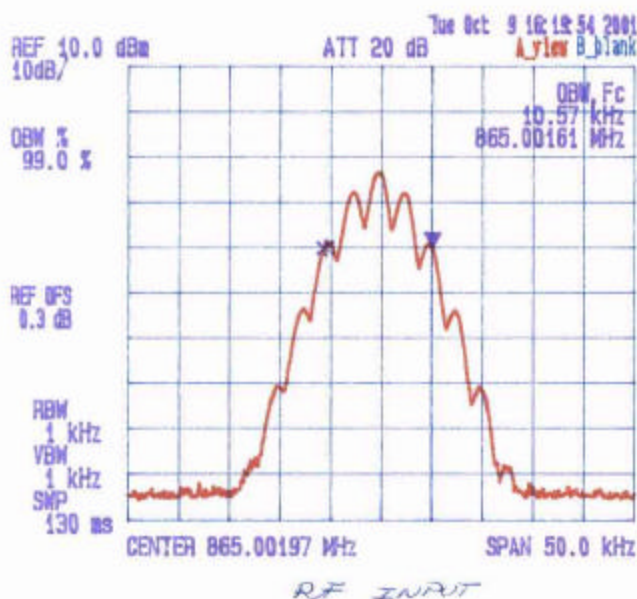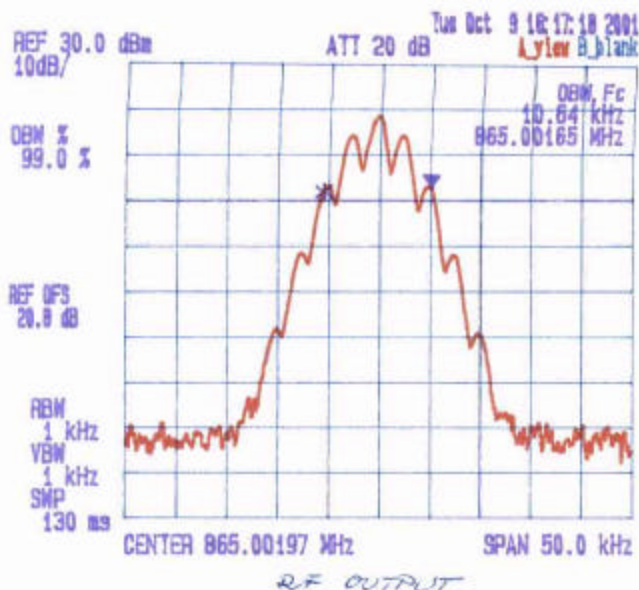



KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 852.0 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

Date Oct 9 2001
 Tested by: Hung Trinh

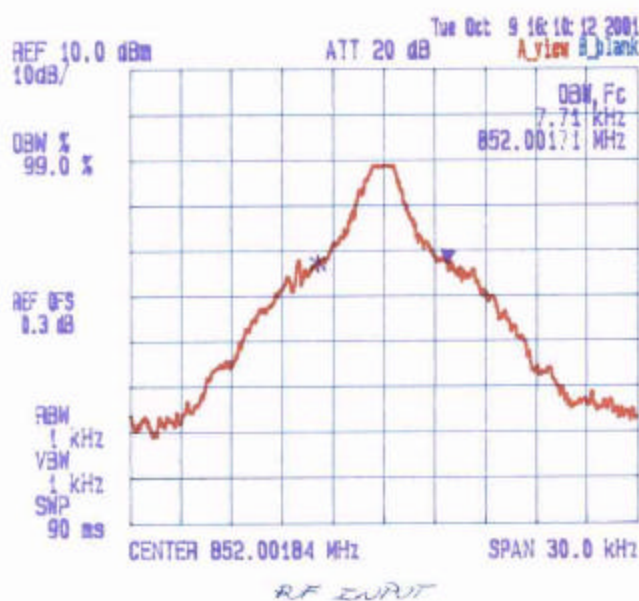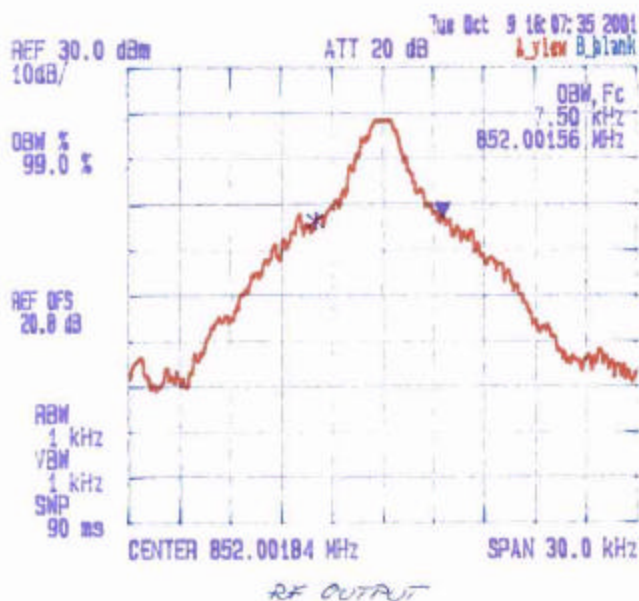



Date: Oct 9 2001
Tested by: Hung Trinh

KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01

Frequency: 858.5 MHz

Modulation: FM modulation with an external 9600 b/s random data source.

99 % OBW

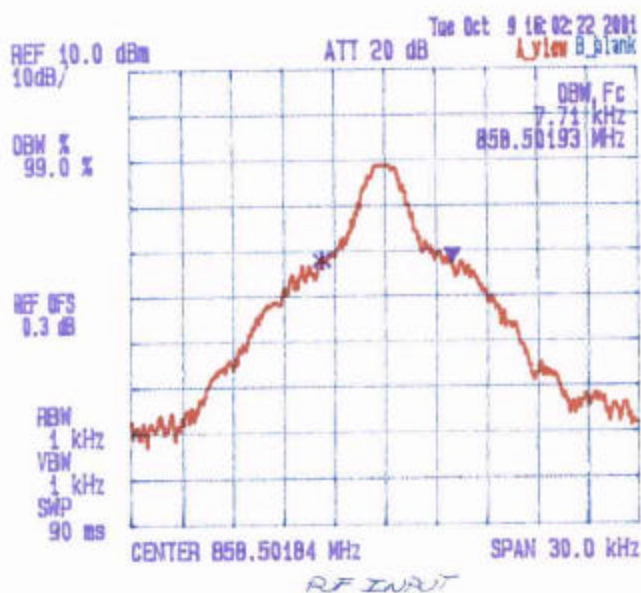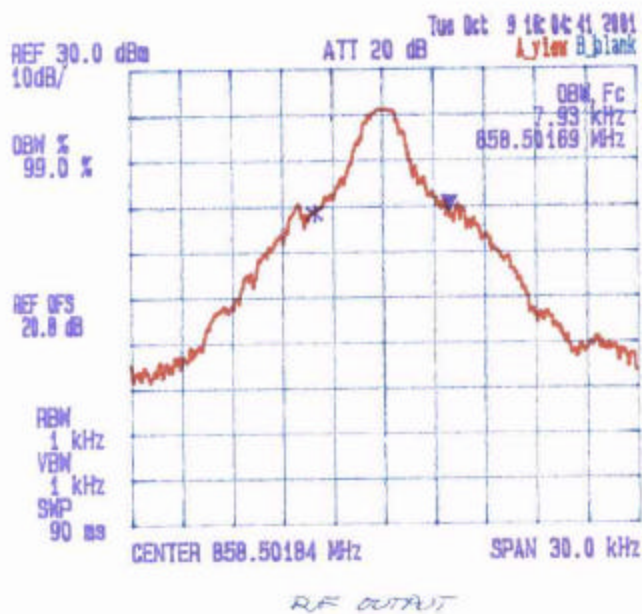

Date: Oct. 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 865.00154 MHz
 Modulation: FDM modulation with an external 9600 b/s random data source.
 99 % OBW

