



Date: Oct. 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 8.70 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

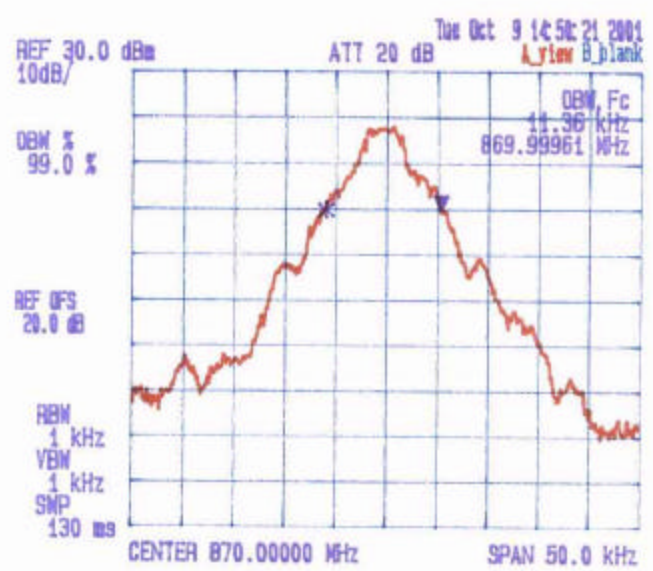


RF OUTPUT

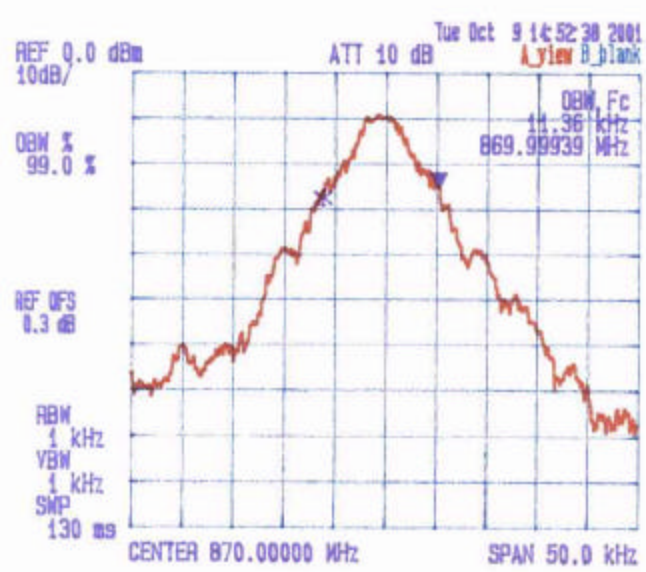


RF INPUT

Date: Oct 9 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFB-R01
 Frequency : 867.45 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

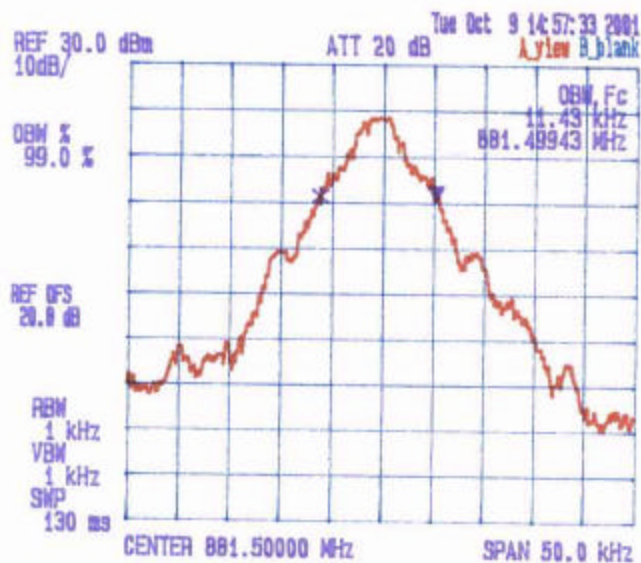



RF OUTPUT


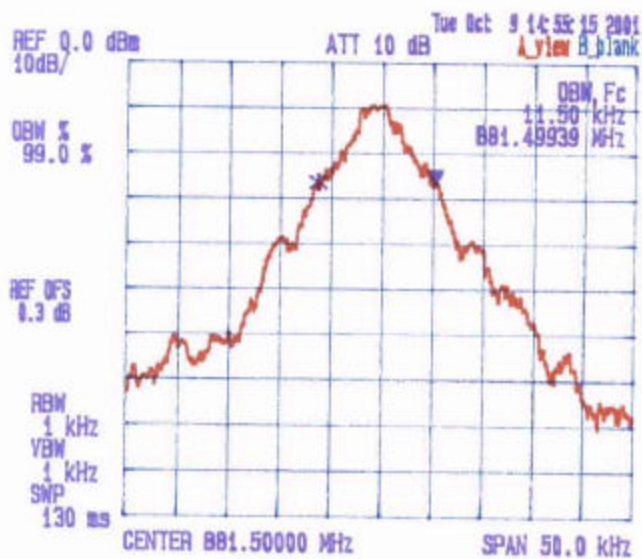


RF INPUT

Date: Oct 9 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 892.993 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

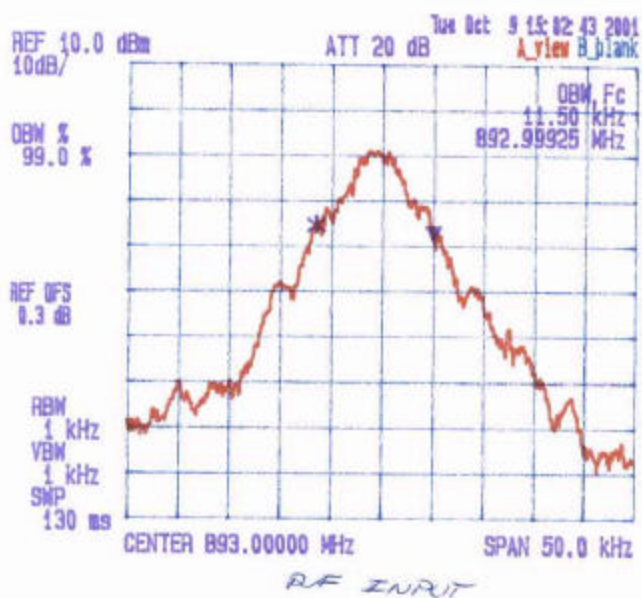
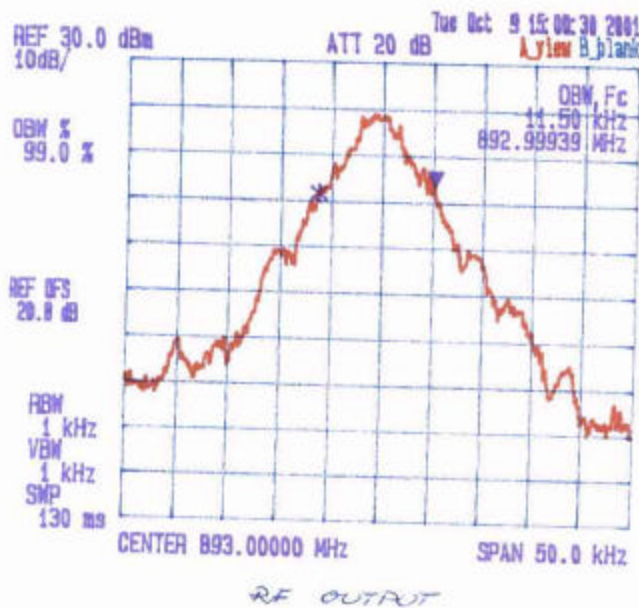


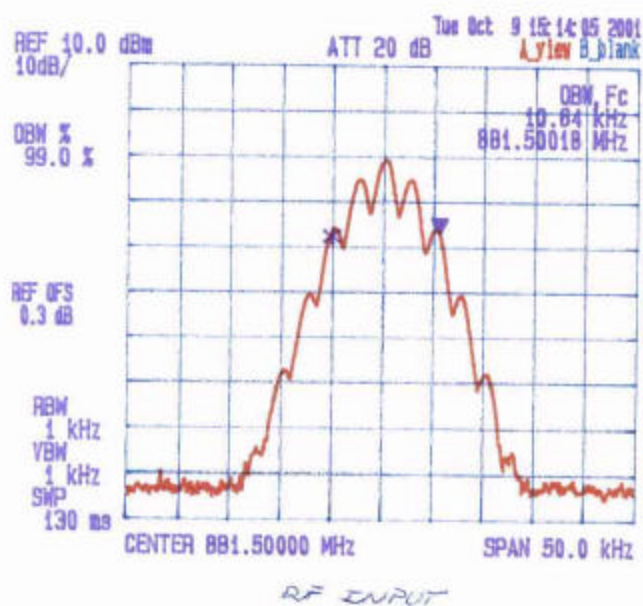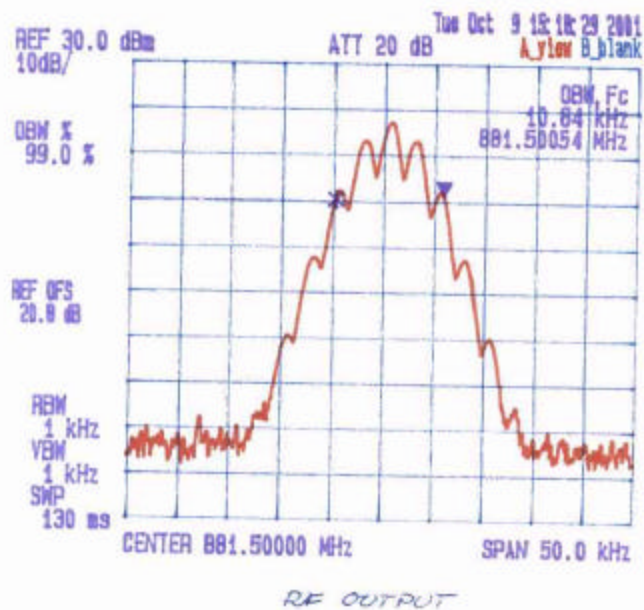

Date: Oct. 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01

Frequency: 87.3 MHz
 Modulation: FM modulation with 2.5kHz Sine wave signal
 99 % OBW

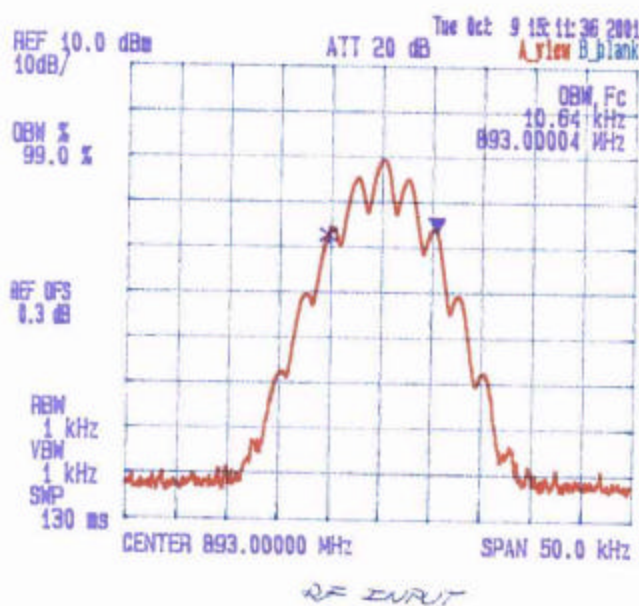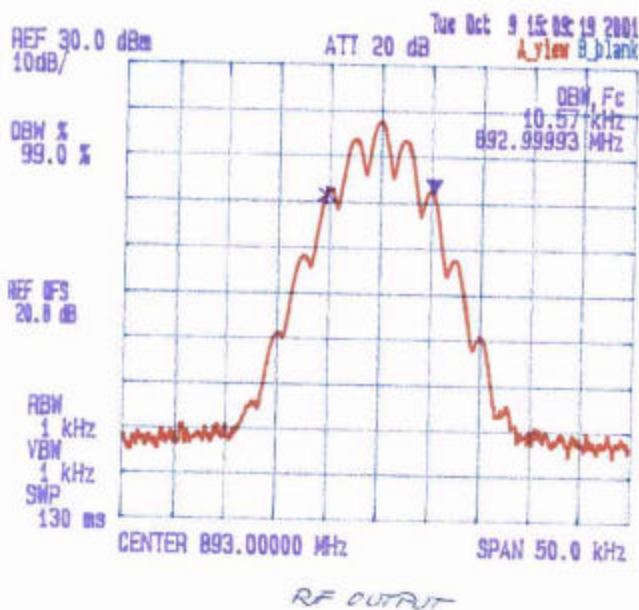

Date: Oct. 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency : 870 MHz
 Modulation: FM modulation with 2.5kHz Sine wave signal
 99 % OBW

