

Annex 1 - 20 dB Bandwidth of the Amplifier Bandpass
Kaval RF Fiber Interface Module, Model US800C

Photo # 10
FCC ID: H6M-US800C

20 dB BW of the 869 – 894 MHz band pass gain

RF Input: -11.64 dBm @ 881.5 MHz setting

Tracking from 831 – 931 MHz

(1) Low: 861 MHz, High: 902 MHz

MAX. GAIN: 27.67 DB

HP

MARKER
902.0 MHz
-5.65 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 902.0 MHz
-5.65 dBm

No user
Menu

REF OFFST 10.6 dB

LOG REF 25.0 dBm

10

dB/


ATN

30 dB

VA SB

SC FC

CORR

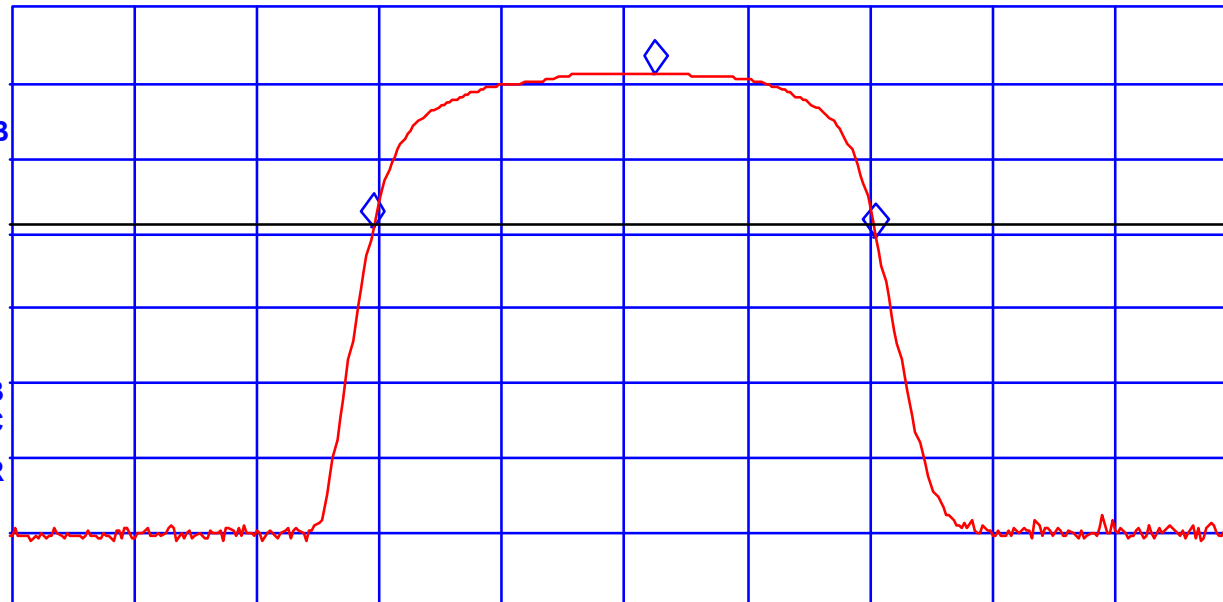

START 831.5 MHz

#IF BW 100 kHz

#AVG BW 300 kHz

STOP 931.5 MHz

SWP 30.0 msec