



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR
352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC

VHF MOBILE PART 90

TEST REPORT

APPLICANT	KP ELECTRONIC SYSTEMS LTD.
	P.O. BOX 42 TEFEN INDUSTRIAL PARK 24959 ISRAEL
FCC ID	H78KPRFM200
MODEL NUMBER	RFM200
PRODUCT DESCRIPTION	MOBILE TRANSCEIVER
STANDARD APPLIED	CFR 47 Part 90
DATE SAMPLE RECEIVED	8/3/2015
DATE TESTED	9/1/2015
TESTED BY	Tim Royer
APPROVED BY	Cory Leverett
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Version Number	Description	Issue Date
1250ZAUT15TestReport	Rev1	Initial Issue	9/16/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS.....	3
GENERAL INFORMATION	4
TEST REPORT SUMMARY	5
TEST PROCEDURE	6
RF POWER OUTPUT	7
OCCUPIED BANDWIDTH.....	8
Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -	9
Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -	10
Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -	11
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	12
FIELD STRENGTH OF SPURIOUS EMISSIONS	16
FREQUENCY STABILITY.....	18
TRANSIENT FREQUENCY BEHAVIOR.....	19
EQUIPMENT LIST	21

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report
☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:



Cory Leverett
Engineering Project Manager

Date: 9/16/2015

[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.
FCC ID: H78KPRFM200
Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

GENERAL INFORMATION

EUT Specification

EUT Description	MOBILE TRANSCEIVER
FCC ID	H78KPRFM200
Model Number	RFM200
Operating Frequency	150.8 - 174
Test Frequencies	151, 163, 173.3 MHz
Type of Emission	2K89F1D
Modulation	FM
EUT Power Source	☐ 110–120Vac/50– 60Hz
	☒ DC Power 12V
	☐ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☒ Fixed
	☐ Mobile
	☐ Portable
Test Conditions	The temperature was 26°C with a relative humidity of 50%.
Revision History to the EUT	None
Test Exercise	The EUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-D:2010, FCC CFR 47 Part 90
Test Facility	Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA.

[Table of Contents](#)

TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
Part 2.1033(c)(8) , Part 2.1046(a) , Part 90	RF Power Output	Pass
Part 2.1033(c) (4) Part 2.1047(a)(6)	Modulation Characteristics	NA
2.1049(c) , 90.210(b) , 90.210 (c) 90.210(d) , 90.210(e)	Emission Mask and Occupied Bandwidths	Pass
2.1051(a)	Antenna Conducted Emissions	Pass
2.1053 , Part 90	Field Strength Spurious Emissions	Pass
Part 2.1055 , Part 90.213	Frequency Stability	Pass
Part 90.214	Transient Frequency Behavior	Pass

[Table of Contents](#)

TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-D: 2010, using a 50uH LISN. Both lines were observed with the EUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-D: 2010, using a Rohde & Schwarz – EMI test receiver. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

[Table of Contents](#)

RF POWER OUTPUT


Rule Part No.: Part 2.1046(a), Part 90

Test Requirements: Manufacturer's Specification

Method of Measurement: RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

For the device with a fixed or integral antenna, the RF power is measured as ERP. The substitution method was used. The RF output measures:

Test Setup Diagram:

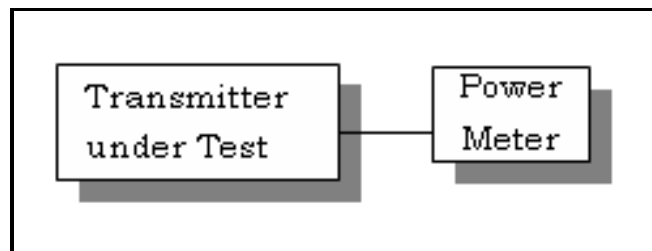

Test Data: RF power of the EUT can be set at 5W to 25W.

OUTPUT POWER:

Tuned Frequency (MHz)	RF POWER (W)	
	dBm	Watts
151	32.99	1.99
163	32.45	1.75
173.3	31.1	1.28

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR HIGH POWER SETTING INPUT POWER: $(12.5V) (.45A) = 5.625\text{Watts}$

[Table of Contents](#)

OCCUPIED BANDWIDTH

Part 2.1049(c) EMISSION BANDWIDTH:


Part 90.210(e) **Emission Mask E – 6.25 kHz channel BW equipment.**

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log(P)$ dB or 65 dB, whichever is the lesser attenuation.

Method of Measurement: ANSI/TIA 603-D: 2010

Test Setup Diagram:

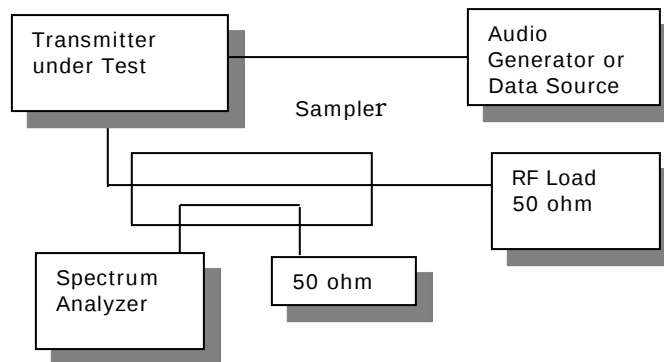


Test Data: See the plots below

OCCUPIED BANDWIDTH PLOTS: DIGIAL

Low End Band

Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -

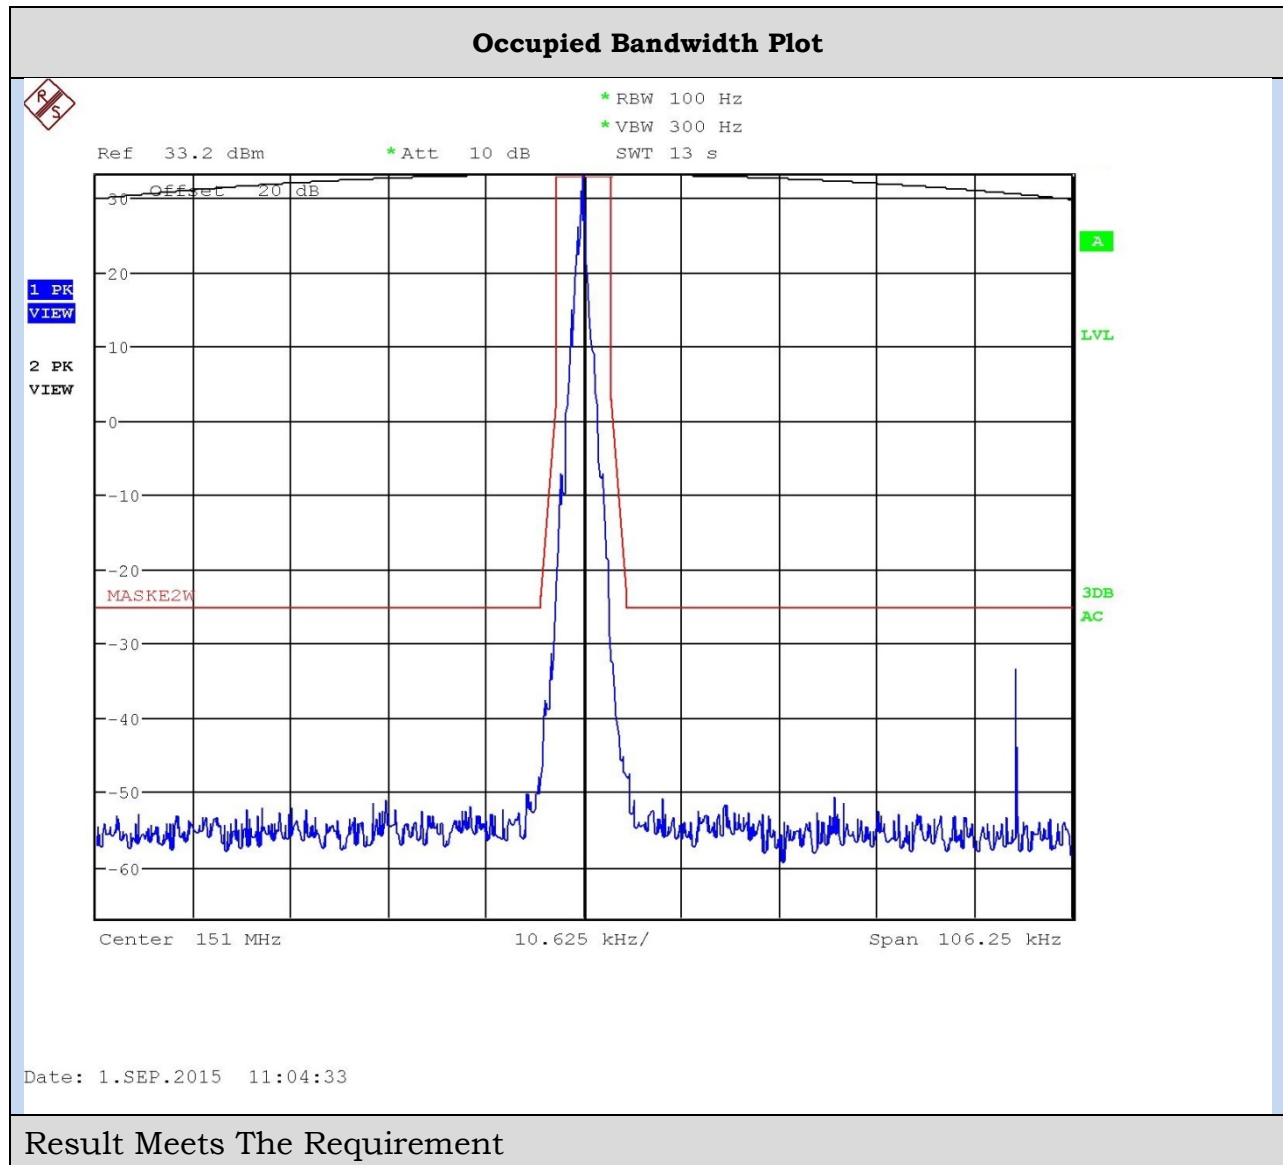


[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.
FCC ID: H78KPRFM200
Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

OCCUPIED BANDWIDTH PLOTS: DIGIAL

Middle of Band

Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -

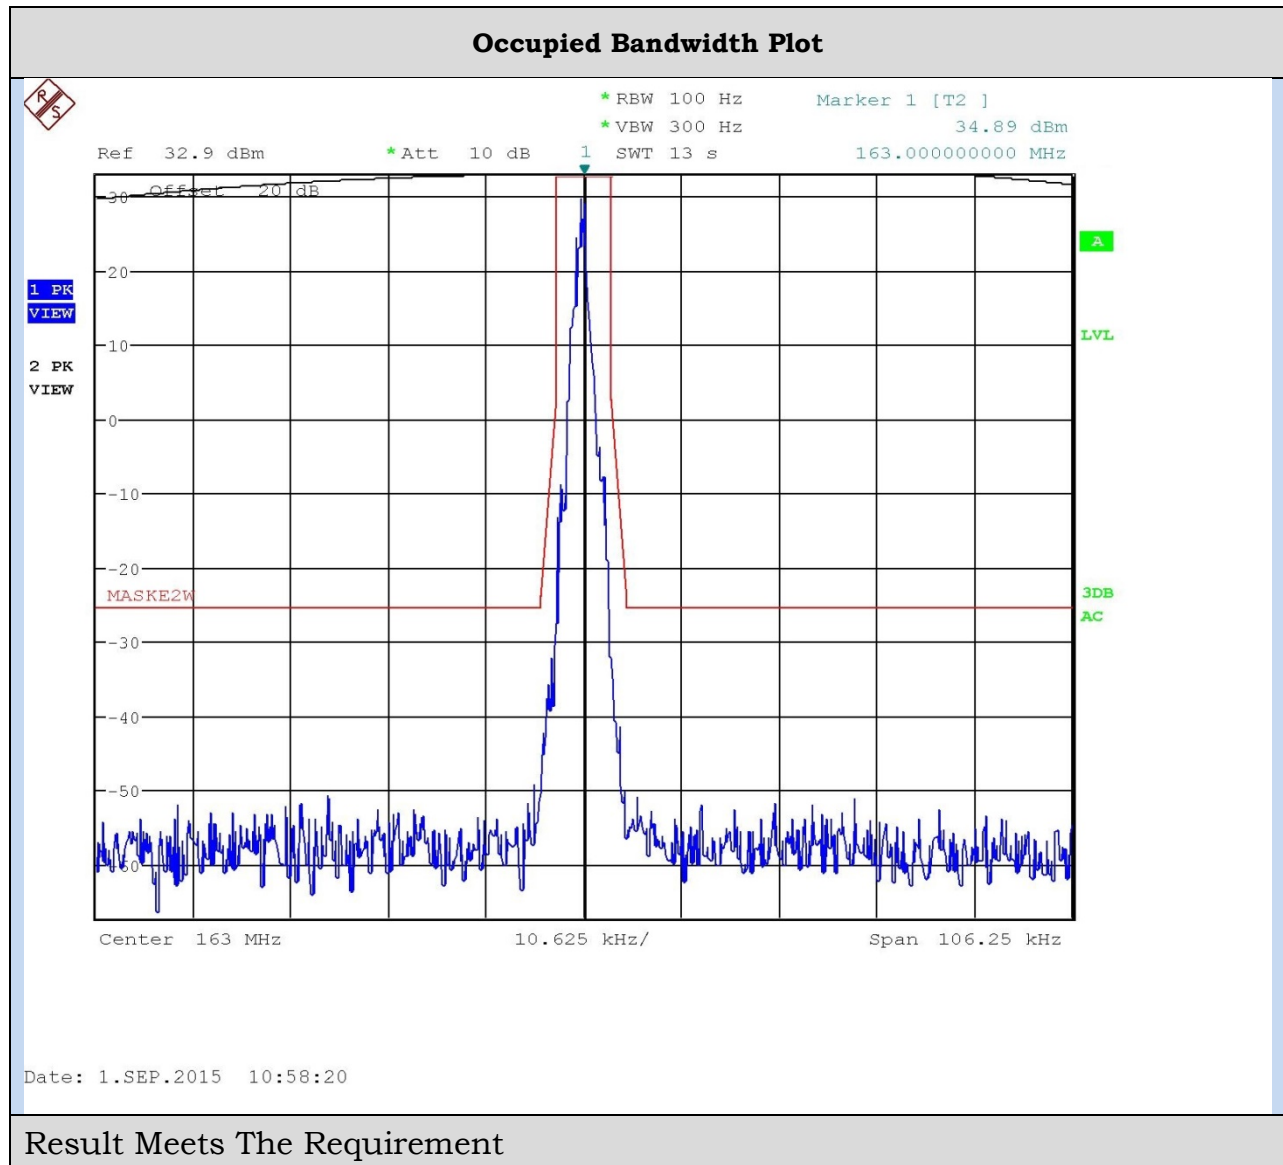


[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.
FCC ID: H78KPRFM200
Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

OCCUPIED BANDWIDTH PLOTS: DIGIAL

High End Band

Part 90.210(e) Emission Mask E – 6.25 KHz Channel Bandwidth -

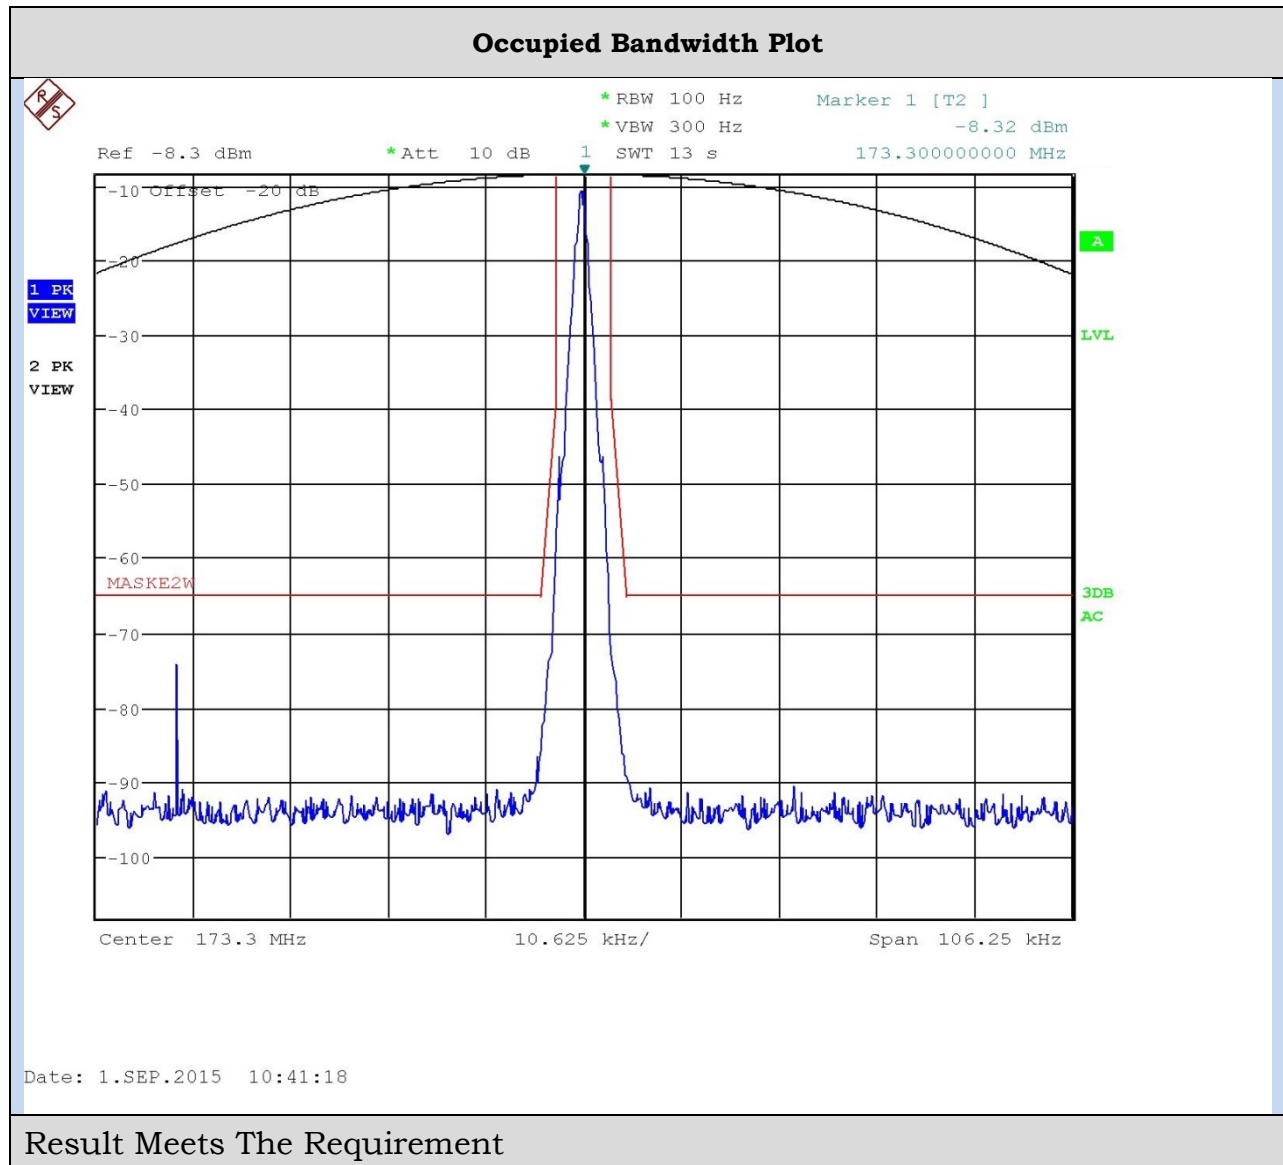

[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.
FCC ID: H78KPRFM200
Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)


Rule Part No.: Part 2.1051(a)

Requirements:

6.25 kHz Channel Spacing = $55 + 10 \log (P)$

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from the lowest frequency generated to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-D: 2010.

Method of Measuring Conducted Spurious Emissions

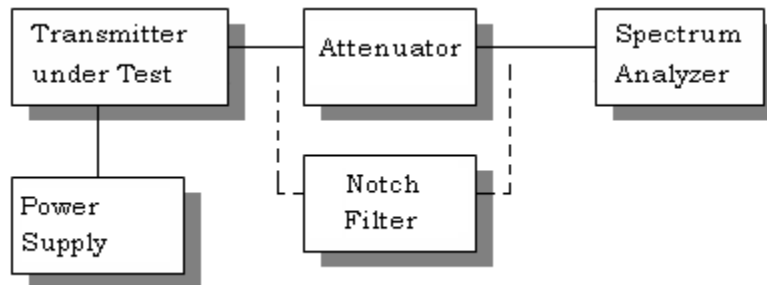

[Table of Contents](#)

Test Data: High Power Low end of Band 151 MHz

	dBm	Watts	Limit
Power Output	32.99	1.99	57.99
	Frequency	dBc	Margin
	42.79	71	13.01
	53.85	71.9	13.91
	78.28	76.7	18.71
	120.5	77.7	19.71
	302.00	67.0	9.01
	453.00	87.6	29.61
	604.00	92.1	34.11
	755.00	104.6	46.61
	906.00	103.6	45.61
	1057.00	103.5	45.51
	1208.00	102.9	44.9
	1359.00	103.7	45.71
	1510.00	104.1	46.11

[Table of Contents](#)

Test Data: High Power Middle of Band 163 MHz

	dBm	Watts	Limit
Power Output	32.45	1.76	52.45
	Frequency	dBc	Margin
	42.57	65.2	12.75
	121.22	72.1	19.65
	489.00	97.4	44.9
	652.00	93.9	41.45
	815.00	101.9	49.49
	978.00	101.9	49.49
	1141.00	102.0	49.5
	1304.00	102.0	49.5
	1467.00	70.8	18.35
	1630.00	100.2	47.75

Test Data: High Power High End of Band 173.3 MHz

	dBm	Watts	Limit
Power Output	31.1	1.29	56.1
	Frequency	dBc	Margin
	43.97	92.9	36.8
	87.29	83.6	83.6
	123.73	78.4	22.3
	154.66	83.8	27.7
	165.89	86.6	30.5
	346.60	70.0	13.9
	519.90	70.0	13.9
	693.20	71.3	15.2
	866.50	34.7	-21.4
	1039.80	96.5	40.4
	1213.10	34.7	-21.4
	1386.40	34.7	-21.4
	1559.70	97.4	41.3

[Table of Contents](#)

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Parts. No.: Part 2.1053

Requirements:

$$12.5 \text{ kHz Channel Spacing} = 50 + 10\log(\text{OP}) = \text{dBc}$$

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-D: 2010 using the substitution method. Measurements were made at the test site of **TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.**

Test Setup Diagram:

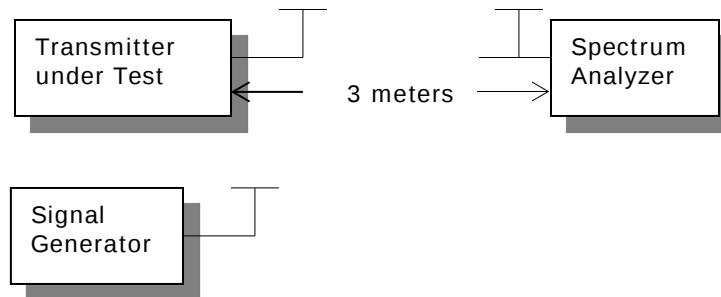

Test Data:

HIGH POWER: Low End of the Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
151.00	Hi	33.75	2.37	58.75	6.25
Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)		Margin	
302.00	H	97.83		39.08	
453.00	H	89.18		30.43	
604.00	H	90.84		32.09	
755.00	H	90.12		31.37	
906.00	H	82.82		24.07	
1,057.00	H	76.83		18.08	
1,208.00	V	80.74		21.99	
1,359.00	V	81.29		22.54	
1,510.00	H	80.32		21.57	

[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPRFM200

Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data:

HIGH POWER: Middle of the Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
163.00	Hi	33.84	2.42	58.84	6.25
Emission Frequency (MHz)	Ant. Polarity		Below Carrier (dBc)	Margin	
326.00	V		87.48	40.64	
489.00	V		80.72	33.88	
652.00	V		83.66	36.82	
815.00	H		88.16	41.32	
978.00	H		83.73	36.89	
1,141.00	V		81.90	23.06	
1,304.00	V		80.69	21.85	
1,467.00	H		81.44	22.60	
1,630.00	V		76.32	17.48	

HIGH POWER: High end of the Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
173.30	Hi	33.75	2.37	58.75	6.25
Emission Frequency (MHz)	Ant. Polarity		Below Carrier (dBc)	Margin	
346.60	V		94.75	36.00	
519.90	V		85.26	26.51	
693.20	V		88.96	30.21	
866.50	H		86.56	27.81	
1,039.80	V		70.82	12.07	
1,213.10	V		69.74	10.99	
1,386.40	V		69.54	10.79	
1,559.70	H		69.86	11.11	
1,733.00	V		65.69	6.94	

[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPRFM200

Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 90.213

Requirements: Temperature range requirements: -30 to +50° C.
Voltage Variation +, -15%
±2.5 PPM

Method of Measurements: ANSI/TIA 603-D: 2010.

Test Data:

Temperature	Frequency MHz	PPM
25°C (reference)	162.999799	
-30°C	162.999612	-1.147
-20°C	162.999684	-0.706
-10°C	162.999749	-0.307
0°C	162.999752	-0.288
10°C	162.999759	-0.245
20°C	162.999798	-0.006
30°C	162.999802	0.018
40°C	162.999819	0.123
50°C	162.999861	0.380
Battery Voltage	Frequency	PPM
-15%	162.999803	0.025
15%	162.999801	0.012

[Table of Contents](#)

TRANSIENT FREQUENCY BEHAVIOR

Part 90.214 Transient Frequency Behavior


REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz
t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms

TEST PROCEEDURE: ANSI/TIA 603-D: 2010, the levels were set as follows:

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, and then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

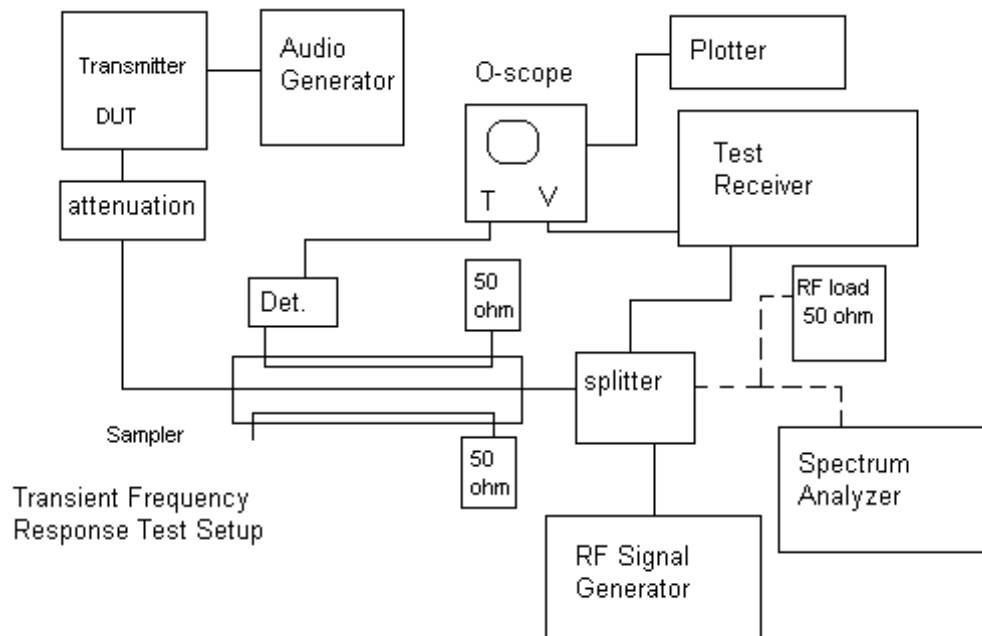


Applicant: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPRFM200

Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

TRANSIENT FREQUENCY BEHAVIOR

Test Data:

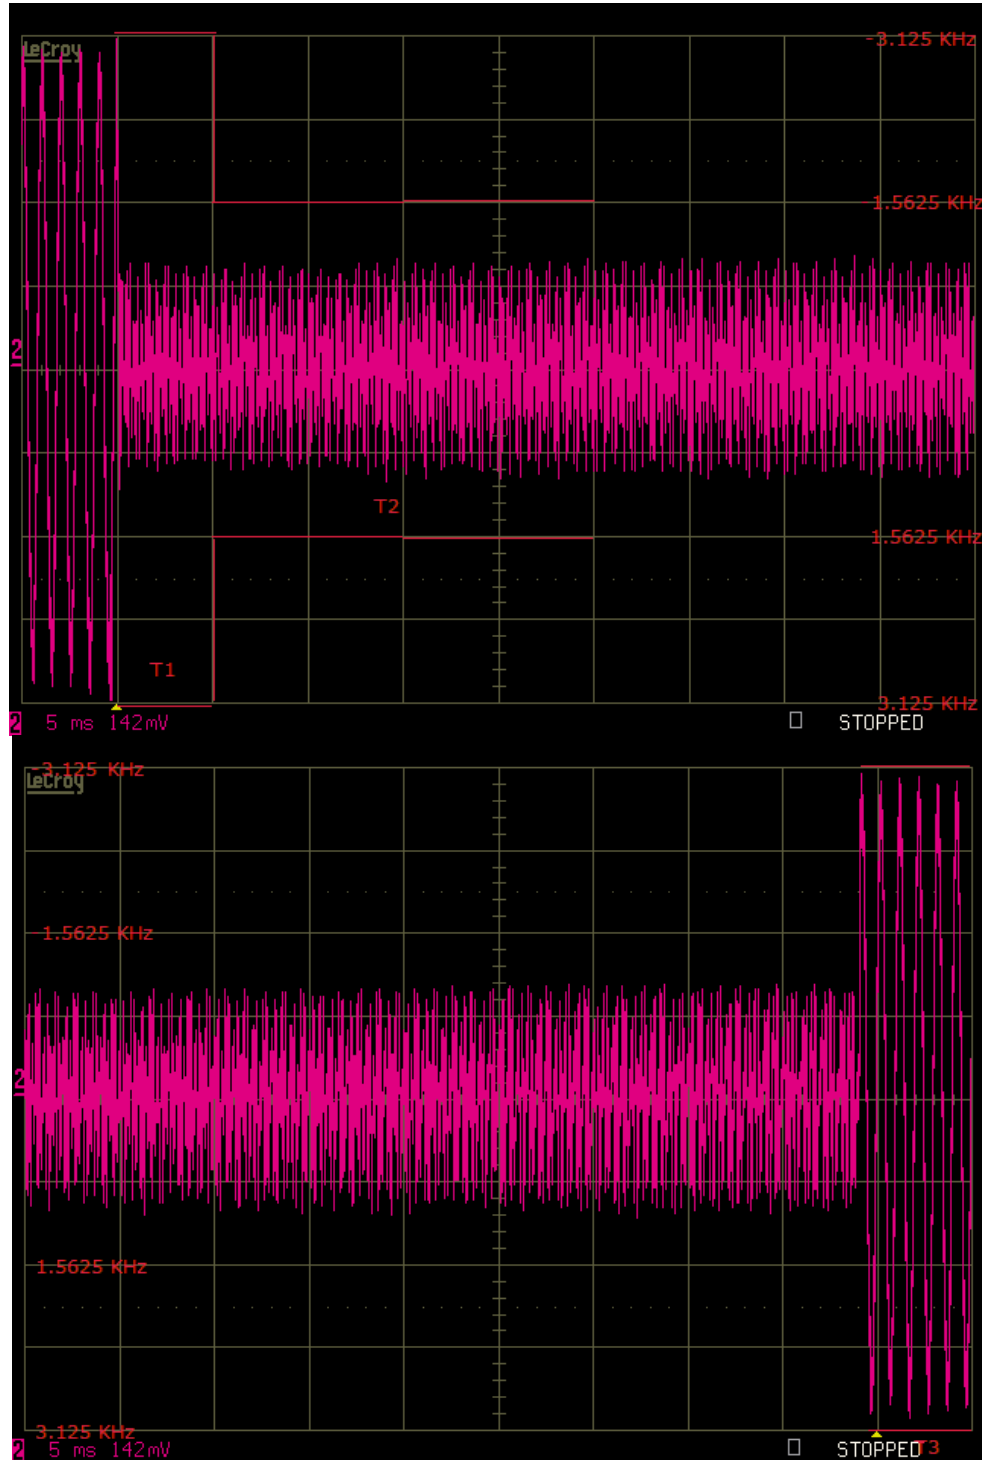

Applicant: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPRFM200

Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	12/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	11/30/15
DC Power Supply	HP	6264B	2032A04119	05/06/13	11/06/15
Digital Multimeter	Fluke	77	35053830	08/22/13	12/22/15
DC Power Supply	HP	6286A	2411A09414	NA	NA
Frequency Counter Small Chamber	HP	5385A	3242A07460	06/16/13	12/16/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
Temperature Chamber Small	Thermotron Corp.	S1.2 Mini Max	25-1420-09	08/20/14	08/20/16
EMI Test Receiver R & S ESIB 40	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	N/A	N/A
Hygro-Thermometer	Extech	445703	0602	06/20/13	12/20/15
Attenuator N 30dB 150W DC-6G	Narda	769-30	10267	6/29/15	6/29/17
EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16
Signal Generator HP 8648C	HP	8648C	3623A02898	08/29/13	12/29/15

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

Applicant: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPRFM200

Report: K\KP H78\1250ZAUT15\1250ZAUT15TestReport.docx