



Plots of EUT ceased transmission in the time domain

CBP

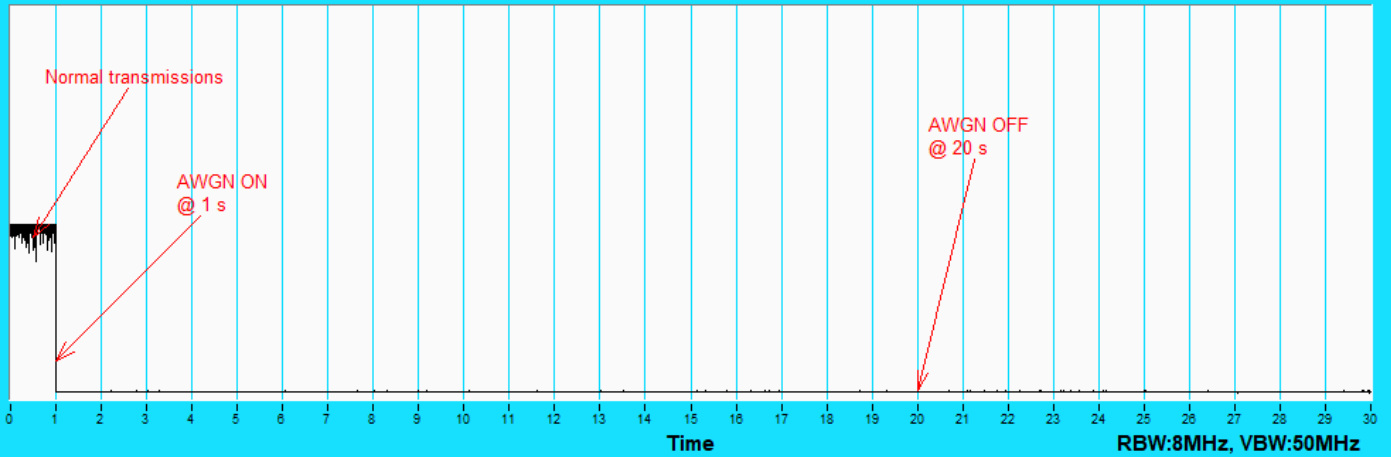


802.11be (EHT20) / CH161

CBP

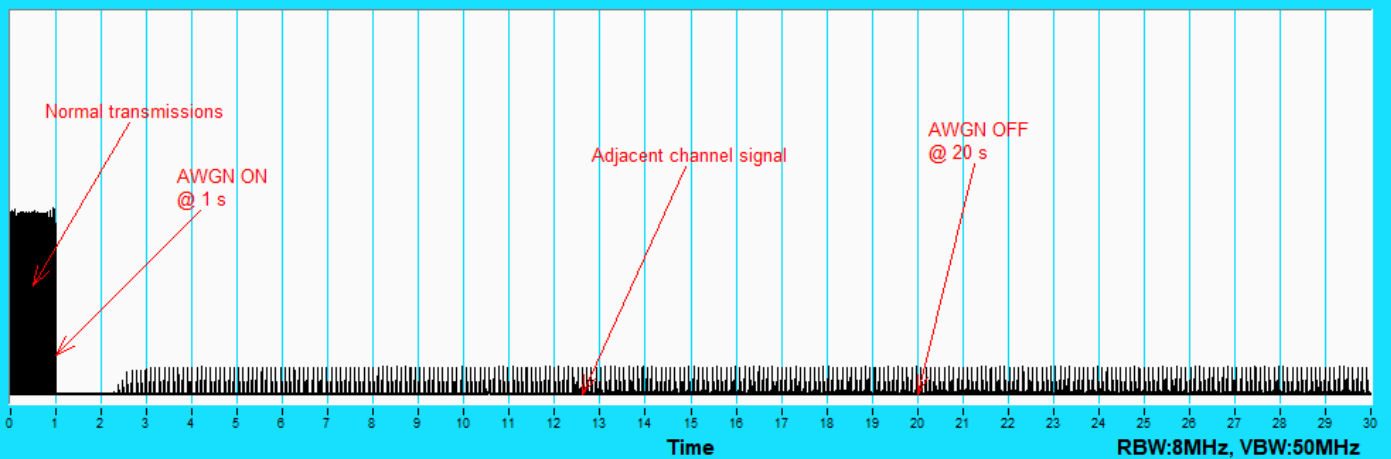

802.11be (EHT320) / CH159(Low Edge)


CBP

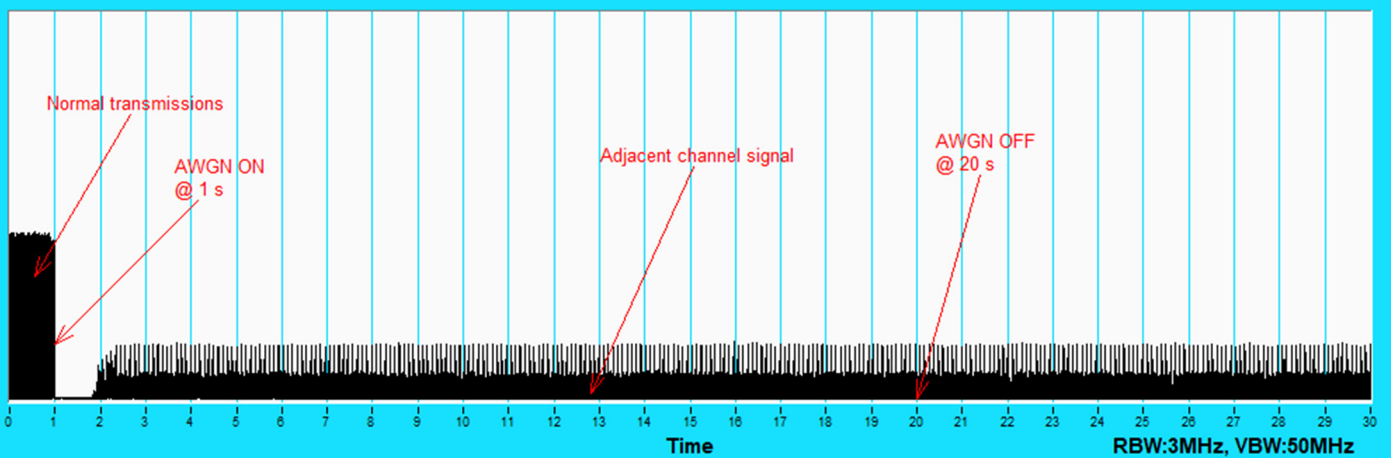

802.11be (EHT320) / CH159(Middle)

Plots of EUT ceased transmission in the time domain

CBP

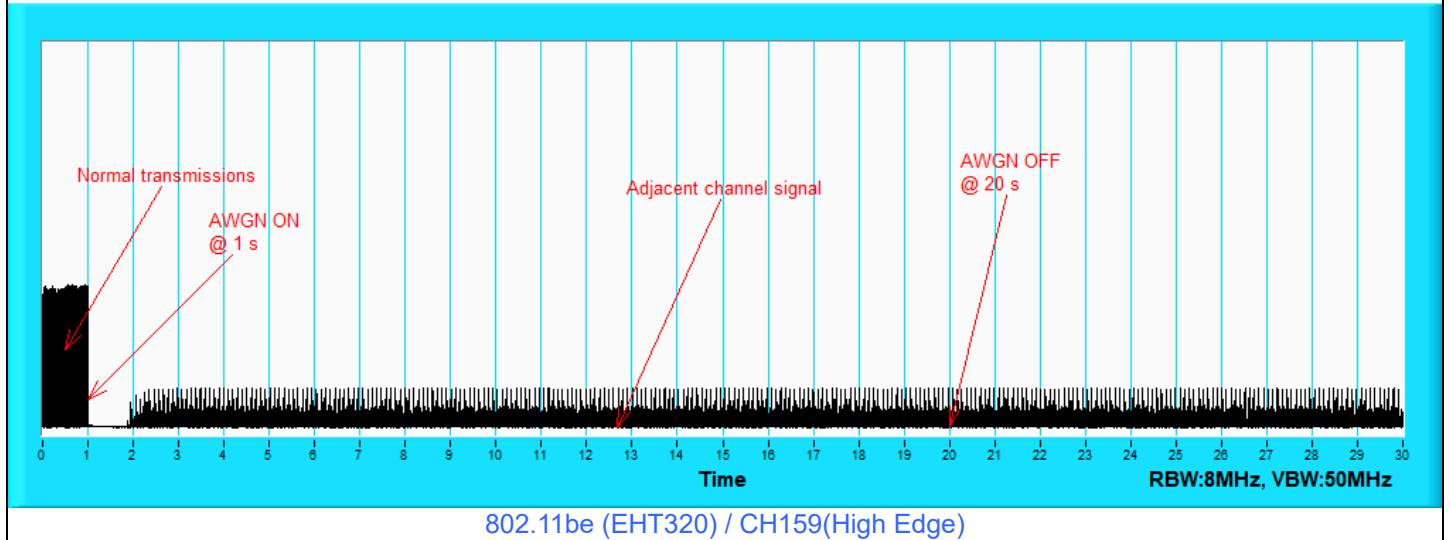

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-63	4.5	0	-67.5	-62	OFF
					-69	4.5	0	-73.5	-62	Minimal
					-77.5	4.5	0	-82	-62	ON
	320	191	6905	6750	-64	4.5	0	-68.5	-62	OFF
					-67	4.5	0	-71.5	-62	Minimal
					-77.5	4.5	0	-82	-62	ON
				6905	-58	4.5	0	-62.5	-62	OFF
					-64	4.5	0	-68.5	-62	Minimal
					-77.5	4.5	0	-82	-62	ON
				7060	-63	4.5	0	-67.5	-62	OFF
					-67	4.5	0	-71.5	-62	Minimal
					-77.5	4.5	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	x	90%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass
		6905	v	v	v	v	v	v	x	v	v	v	90%	90%	Pass
		7060	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass

Plots of EUT Tx waveform

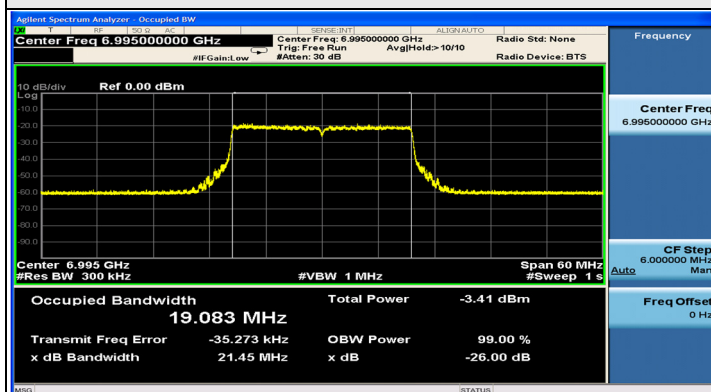


802.11be (EHT20) / CH209

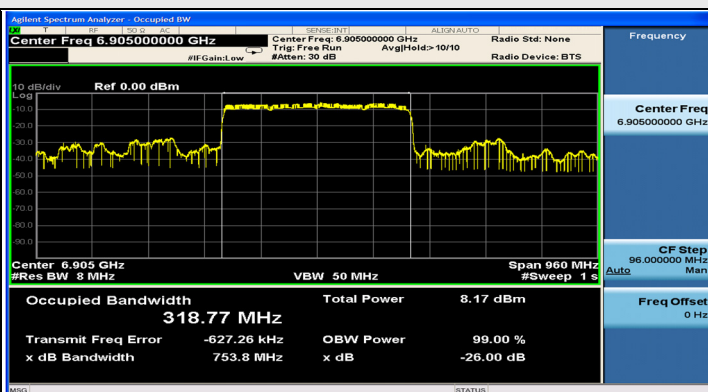


802.11be (EHT320) / CH191


Plots of Injected signal (AWGN) level

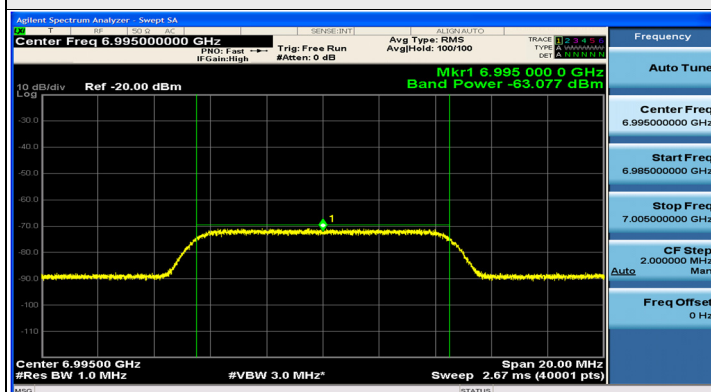


802.11be (EHT20) / CH209

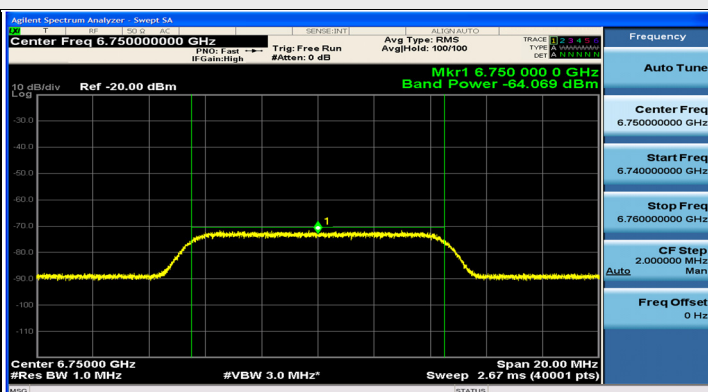

802.11be (EHT320) / CH191(Low Edge)

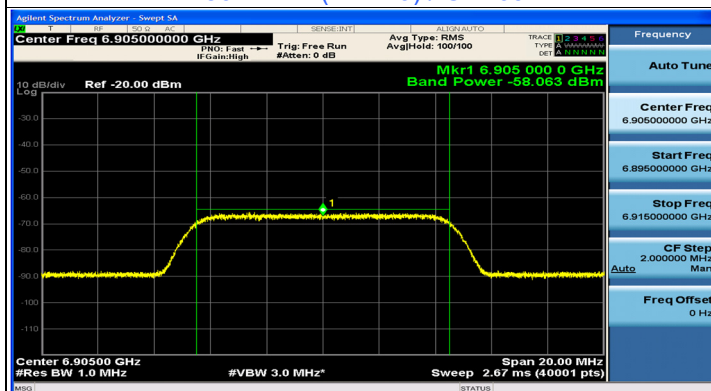


802.11be (EHT320) / CH191(Middle)

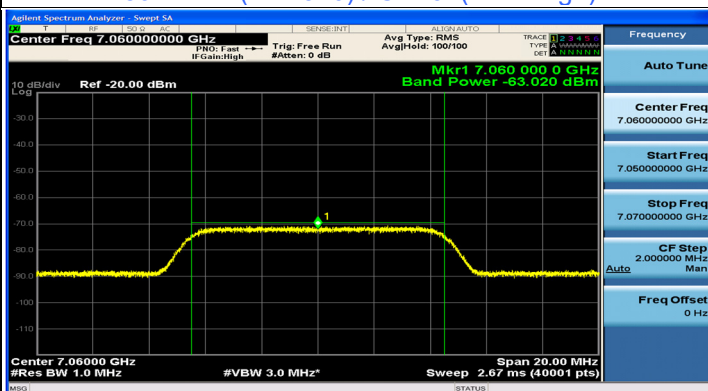

802.11be (EHT320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

CBP

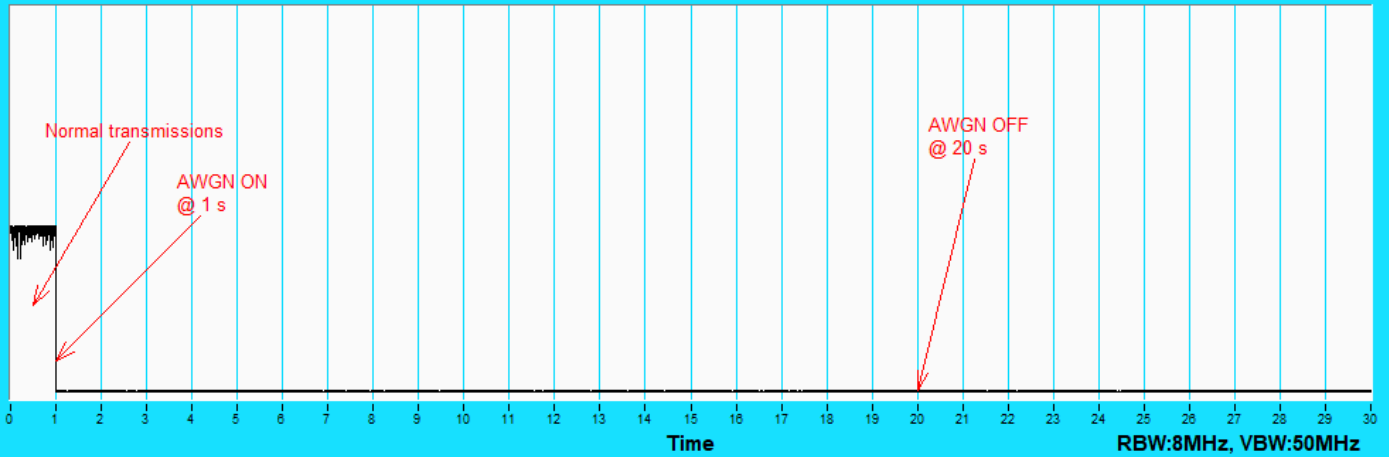


802.11be (EHT20) / CH209

CBP

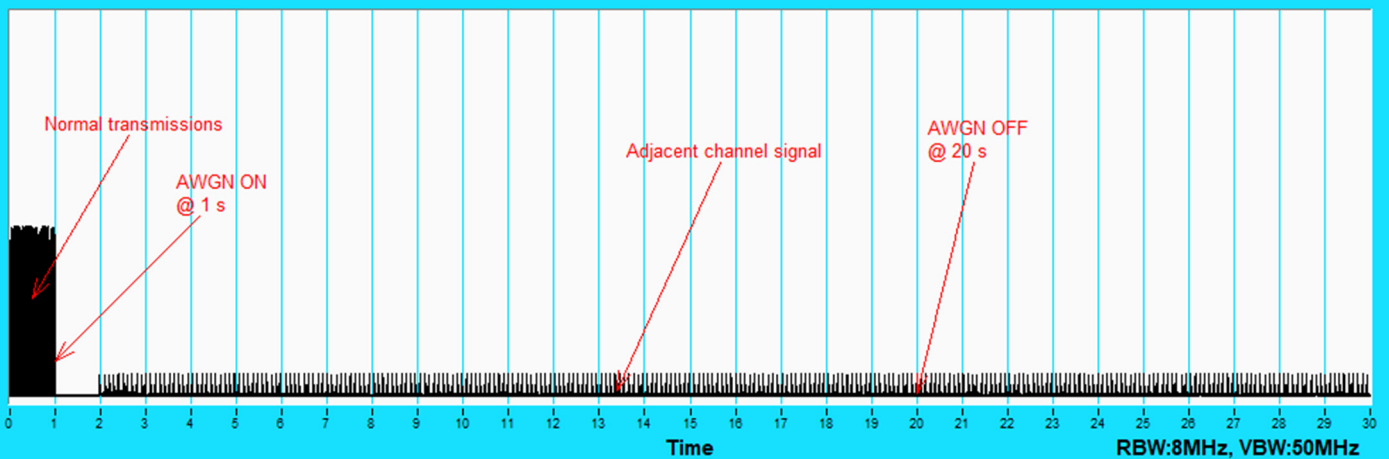

802.11be (EHT320) / CH191(Low Edge)


CBP

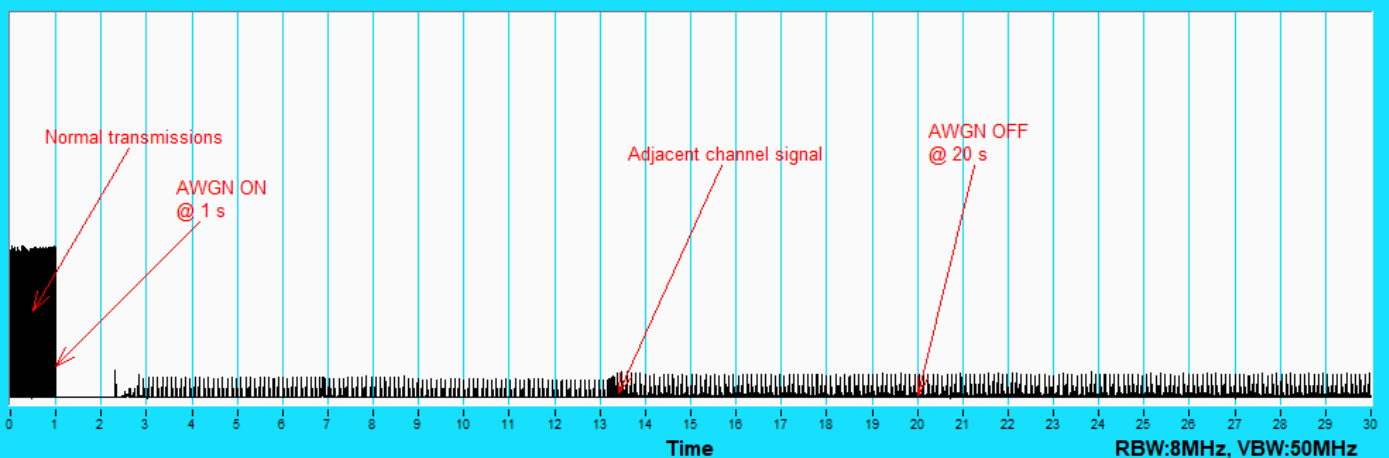

802.11be (EHT320) / CH191(Middle)

Plots of EUT ceased transmission in the time domain

CBP

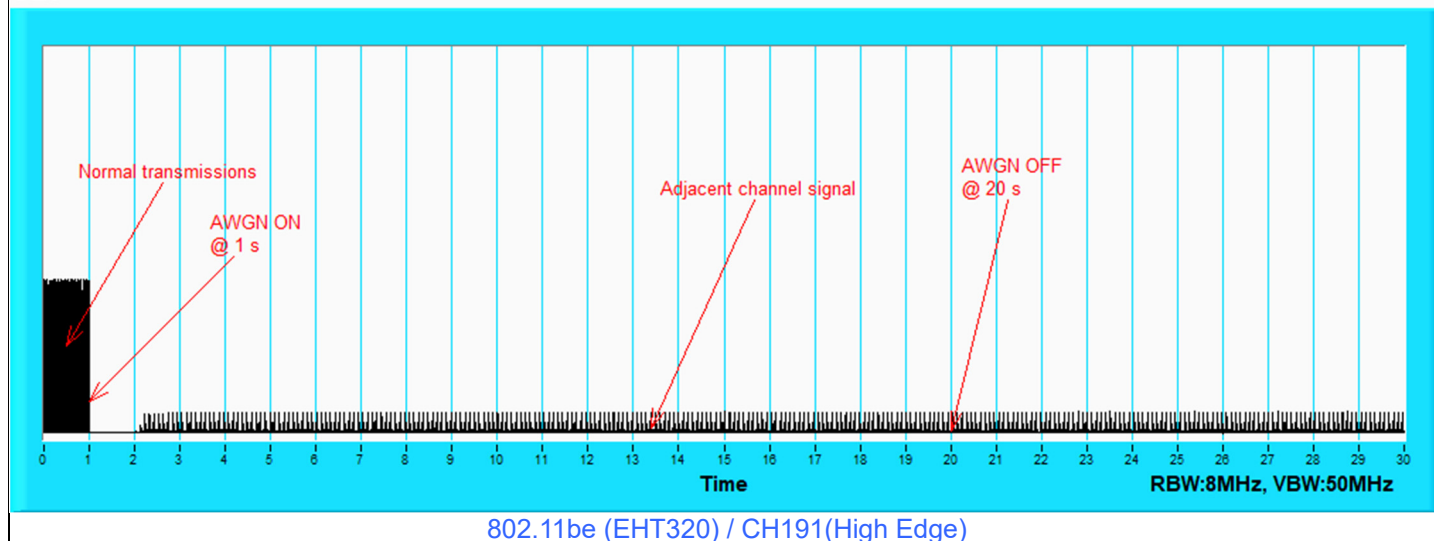


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Greg Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.75	28.13	17.48	37.88	27.23	66.00	56.00	-28.12	-28.77
2	0.17400	9.77	32.07	19.34	41.84	29.11	64.77	54.77	-22.93	-25.66
3	0.19800	9.79	24.70	12.08	34.49	21.87	63.69	53.69	-29.20	-31.82
4	0.21800	9.80	22.22	11.49	32.02	21.29	62.89	52.89	-30.87	-31.60
5	10.41000	10.42	19.68	12.54	30.10	22.96	60.00	50.00	-29.90	-27.04
6	15.39000	10.50	15.06	8.14	25.56	18.64	60.00	50.00	-34.44	-31.36

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

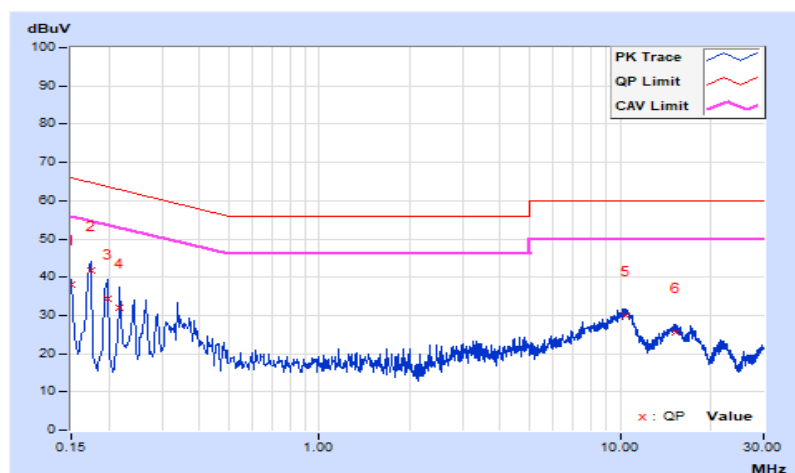


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Greg Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.71	30.36	16.75	40.07	26.46	66.00	56.00	-25.93	-29.54
2	0.17247	9.71	31.79	17.75	41.50	27.46	64.84	54.84	-23.34	-27.38
3	0.21800	9.74	23.27	8.63	33.01	18.37	62.89	52.89	-29.88	-34.52
4	0.26600	9.78	24.80	9.67	34.58	19.45	61.24	51.24	-26.66	-31.79
5	0.36200	9.87	21.19	11.99	31.06	21.86	58.68	48.68	-27.62	-26.82
6	10.86200	10.48	17.48	10.57	27.96	21.05	60.00	50.00	-32.04	-28.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

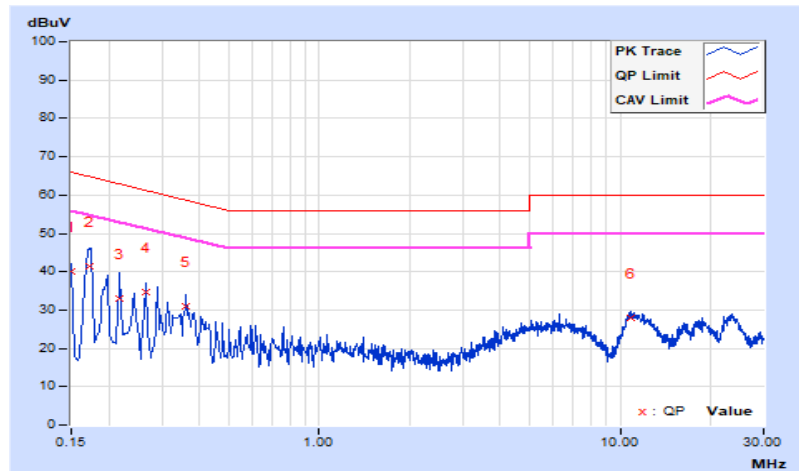


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	23.9 QP	40.0	-16.1	1.00 H	25	36.9	-13.0
2	195.87	26.7 QP	43.5	-16.8	1.25 H	261	42.9	-16.2
3	263.77	25.8 QP	46.0	-20.2	1.50 H	102	39.3	-13.5
4	447.10	26.2 QP	46.0	-19.8	1.25 H	78	34.5	-8.3
5	801.15	33.8 QP	46.0	-12.2	1.00 H	240	36.0	-2.2
6	945.68	32.0 QP	46.0	-14.0	1.50 H	16	32.0	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

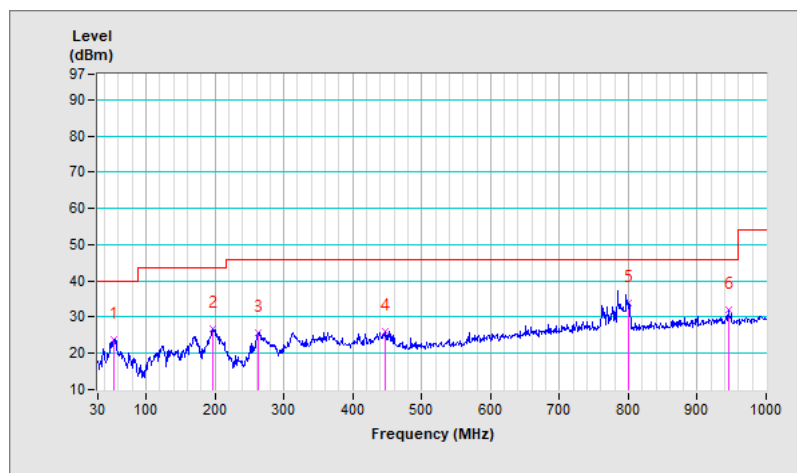


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	34.3 QP	40.0	-5.7	1.25 V	226	47.8	-13.5
2	48.43	33.0 QP	40.0	-7.0	1.25 V	324	45.9	-12.9
3	73.65	29.0 QP	40.0	-11.0	1.00 V	143	45.3	-16.3
4	132.82	31.2 QP	43.5	-12.3	1.50 V	16	45.0	-13.8
5	802.12	34.8 QP	46.0	-11.2	1.00 V	151	37.0	-2.2
6	944.71	32.9 QP	46.0	-13.1	1.50 V	200	32.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

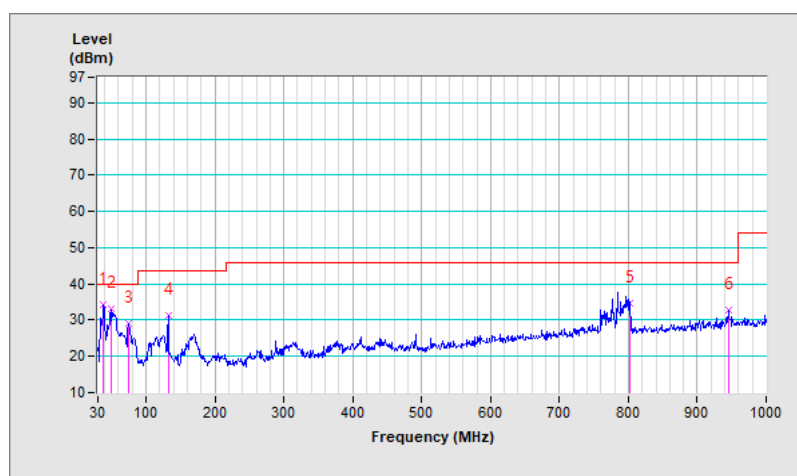

7.9 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.0 PK	88.2	-31.2	2.77 H	166	51.1	5.9
2	#5925.00	43.3 AV	68.2	-24.9	2.77 H	166	37.4	5.9
3	*5955.00	102.0 PK			2.77 H	166	58.6	43.4
4	*5955.00	92.3 AV			2.77 H	166	48.9	43.4
5	11910.00	58.8 PK	74.0	-15.2	1.57 H	58	47.4	11.4
6	11910.00	45.2 AV	54.0	-8.8	1.57 H	58	33.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	2.28 V	138	50.0	5.9
2	#5925.00	43.4 AV	68.2	-24.8	2.28 V	138	37.5	5.9
3	*5955.00	111.0 PK			2.28 V	138	67.6	43.4
4	*5955.00	101.1 AV			2.28 V	138	57.7	43.4
5	11910.00	58.9 PK	74.0	-15.1	2.68 V	165	47.5	11.4
6	11910.00	46.8 AV	54.0	-7.2	2.68 V	165	35.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	103.8 PK			2.77 H	40	59.3	44.5
2	*6175.00	94.9 AV			2.77 H	40	50.4	44.5
3	12350.00	58.5 PK	74.0	-15.5	1.57 H	58	47.3	11.2
4	12350.00	45.0 AV	54.0	-9.0	1.57 H	58	33.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.0 PK			2.27 V	79	67.5	44.5
2	*6175.00	102.8 AV			2.27 V	79	58.3	44.5
3	12350.00	58.7 PK	74.0	-15.3	1.79 V	167	47.5	11.2
4	12350.00	48.2 AV	54.0	-5.8	1.79 V	167	37.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.9 PK			2.76 H	177	58.0	45.9
2	*6415.00	94.8 AV			2.76 H	177	48.9	45.9
3	#12830.00	58.4 PK	88.2	-29.8	1.59 H	55	47.1	11.3
4	#12830.00	44.4 AV	68.2	-23.8	1.59 H	55	33.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.7 PK			2.27 V	83	66.8	45.9
2	*6415.00	102.6 AV			2.27 V	83	56.7	45.9
3	#12830.00	59.5 PK	88.2	-28.7	1.79 V	168	48.2	11.3
4	#12830.00	46.7 AV	68.2	-21.5	1.79 V	168	35.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.3 PK			2.77 H	173	58.4	45.9
2	*6435.00	94.5 AV			2.77 H	173	48.6	45.9
3	#12870.00	58.6 PK	88.2	-29.6	1.54 H	55	47.2	11.4
4	#12870.00	45.0 AV	68.2	-23.2	1.54 H	55	33.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.4 PK			2.25 V	112	66.5	45.9
2	*6435.00	102.3 AV			2.25 V	112	56.4	45.9
3	#12870.00	59.5 PK	88.2	-28.7	1.79 V	170	48.1	11.4
4	#12870.00	47.1 AV	68.2	-21.1	1.79 V	170	35.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.4 PK			2.79 H	265	58.2	46.2
2	*6475.00	95.1 AV			2.79 H	265	48.9	46.2
3	#12950.00	58.2 PK	88.2	-30.0	1.55 H	53	47.0	11.2
4	#12950.00	44.8 AV	68.2	-23.4	1.79 H	165	33.6	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.4 PK			2.27 V	112	66.2	46.2
2	*6475.00	102.4 AV			2.27 V	112	56.2	46.2
3	#12950.00	58.4 PK	88.2	-29.8	1.79 V	165	47.2	11.2
4	#12950.00	45.8 AV	68.2	-22.4	1.79 V	165	34.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.3 PK			2.79 H	258	58.9	46.4
2	*6515.00	95.4 AV			2.79 H	258	49.0	46.4
3	#13030.00	58.1 PK	88.2	-30.1	1.54 H	53	46.9	11.2
4	#13030.00	44.4 AV	68.2	-23.8	1.54 H	53	33.2	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.5 PK			2.31 V	101	66.1	46.4
2	*6515.00	102.8 AV			2.31 V	101	56.4	46.4
3	#13030.00	58.5 PK	88.2	-29.7	1.76 V	158	47.3	11.2
4	#13030.00	46.4 AV	68.2	-21.8	1.76 V	158	35.2	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.0 PK			2.47 H	170	58.6	46.4
2	*6535.00	95.2 AV			2.47 H	170	48.8	46.4
3	#13070.00	58.5 PK	88.2	-29.7	1.50 H	55	47.0	11.5
4	#13070.00	45.0 AV	68.2	-23.2	1.50 H	55	33.5	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.5 PK			3.09 V	97	66.1	46.4
2	*6535.00	103.1 AV			3.09 V	97	56.7	46.4
3	#13070.00	57.7 PK	88.2	-30.5	1.70 V	150	46.2	11.5
4	#13070.00	46.0 AV	68.2	-22.2	1.70 V	150	34.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.2 PK			2.45 H	176	58.6	46.6
2	*6695.00	95.5 AV			2.45 H	176	48.9	46.6
3	13390.00	58.5 PK	74.0	-15.5	1.56 H	65	47.3	11.2
4	13390.00	45.0 AV	54.0	-9.0	1.56 H	65	33.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.5 PK			3.03 V	87	66.9	46.6
2	*6695.00	103.9 AV			3.03 V	87	57.3	46.6
3	13390.00	60.3 PK	74.0	-13.7	1.79 V	157	49.1	11.2
4	13390.00	48.7 AV	54.0	-5.3	1.79 V	157	37.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.1 PK			2.45 H	116	58.0	47.1
2	*6855.00	95.6 AV			2.45 H	116	48.5	47.1
3	#13710.00	58.2 PK	88.2	-30.0	1.57 H	50	47.2	11.0
4	#13710.00	44.8 AV	68.2	-23.4	1.57 H	50	33.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.0 PK			2.28 V	90	65.9	47.1
2	*6855.00	103.6 AV			2.28 V	90	56.5	47.1
3	#13710.00	59.0 PK	88.2	-29.2	1.79 V	140	48.0	11.0
4	#13710.00	48.3 AV	68.2	-19.9	1.79 V	140	37.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.7 PK			2.89 H	190	57.6	47.1
2	*6875.00	94.9 AV			2.89 H	190	47.8	47.1
3	#13750.00	58.0 PK	88.2	-30.2	1.57 H	33	46.9	11.1
4	#13750.00	44.2 AV	68.2	-24.0	1.57 H	33	33.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	112.7 PK			2.30 V	92	65.6	47.1
2	*6875.00	103.3 AV			2.30 V	92	56.2	47.1
3	#13750.00	59.2 PK	88.2	-29.0	1.79 V	169	48.1	11.1
4	#13750.00	46.9 AV	68.2	-21.3	1.79 V	169	35.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.8 PK			3.03 H	258	58.7	47.1
2	*6995.00	95.4 AV			3.03 H	258	48.3	47.1
3	#13990.00	59.2 PK	88.2	-29.0	1.54 H	38	47.2	12.0
4	#13990.00	45.4 AV	68.2	-22.8	1.54 H	38	33.4	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.7 PK			2.36 V	36	65.6	47.1
2	*6995.00	102.8 AV			2.36 V	36	55.7	47.1
3	#13990.00	61.4 PK	88.2	-26.8	1.97 V	154	49.4	12.0
4	#13990.00	49.2 AV	68.2	-19.0	1.97 V	154	37.2	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.8 PK			2.34 H	186	54.2	47.6
2	*7115.00	92.8 AV			2.34 H	186	45.2	47.6
3	#7125.00	80.3 PK	88.2	-7.9	2.34 H	186	70.6	9.7
4	#7125.00	54.8 AV	68.2	-13.4	2.34 H	186	45.1	9.7
5	#14230.00	59.2 PK	88.2	-29.0	1.58 H	66	47.7	11.5
6	#14230.00	45.0 AV	68.2	-23.2	1.58 H	66	33.5	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.8 PK			2.64 V	177	60.2	47.6
2	*7115.00	99.6 AV			2.64 V	177	52.0	47.6
3	#7125.00	84.2 PK	88.2	-4.0	2.64 V	177	74.5	9.7
4	#7125.00	65.5 AV	68.2	-2.7	2.64 V	177	55.8	9.7
5	#14230.00	60.2 PK	88.2	-28.0	1.79 V	159	48.7	11.5
6	#14230.00	48.0 AV	68.2	-20.2	1.79 V	159	36.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.4 PK	88.2	-31.8	3.16 H	184	50.5	5.9
2	#5925.00	43.7 AV	68.2	-24.5	3.16 H	184	37.8	5.9
3	*5955.00	101.9 PK			3.16 H	184	58.5	43.4
4	*5955.00	89.4 AV			3.16 H	184	46.0	43.4
5	11910.00	56.7 PK	74.0	-17.3	1.50 H	85	45.3	11.4
6	11910.00	44.9 AV	54.0	-9.1	1.50 H	85	33.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.8 PK	88.2	-30.4	2.71 V	102	51.9	5.9
2	#5925.00	45.3 AV	68.2	-22.9	2.71 V	102	39.4	5.9
3	*5955.00	109.4 PK			2.71 V	102	66.0	43.4
4	*5955.00	96.4 AV			2.71 V	102	53.0	43.4
5	11910.00	58.2 PK	74.0	-15.8	2.25 V	158	46.8	11.4
6	11910.00	46.0 AV	54.0	-8.0	2.25 V	158	34.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	103.0 PK			3.21 H	179	58.5	44.5
2	*6175.00	90.0 AV			3.21 H	179	45.5	44.5
3	12350.00	56.4 PK	74.0	-17.6	1.58 H	88	45.2	11.2
4	12350.00	45.0 AV	54.0	-9.0	1.58 H	88	33.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.2 PK			3.00 V	93	66.7	44.5
2	*6175.00	98.5 AV			3.00 V	93	54.0	44.5
3	12350.00	57.8 PK	74.0	-16.2	2.25 V	158	46.6	11.2
4	12350.00	45.9 AV	54.0	-8.1	2.25 V	158	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.3 PK			3.10 H	181	57.4	45.9
2	*6415.00	91.2 AV			3.10 H	181	45.3	45.9
3	#12830.00	56.5 PK	88.2	-31.7	1.58 H	87	45.2	11.3
4	#12830.00	44.9 AV	68.2	-23.3	1.58 H	87	33.6	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.1 PK			3.19 V	91	61.2	45.9
2	*6415.00	98.8 AV			3.19 V	91	52.9	45.9
3	#12830.00	58.1 PK	88.2	-30.1	2.29 V	153	46.8	11.3
4	#12830.00	45.9 AV	68.2	-22.3	2.29 V	153	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.2 PK			2.79 H	173	59.3	45.9
2	*6435.00	91.9 AV			2.79 H	173	46.0	45.9
3	#12870.00	56.5 PK	88.2	-31.7	1.57 H	80	45.1	11.4
4	#12870.00	44.8 AV	68.2	-23.4	1.57 H	80	33.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.4 PK			3.22 V	91	65.5	45.9
2	*6435.00	99.3 AV			3.22 V	91	53.4	45.9
3	#12870.00	58.1 PK	88.2	-30.1	2.25 V	159	46.7	11.4
4	#12870.00	46.0 AV	68.2	-22.2	2.25 V	159	34.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.0 PK			2.86 H	171	57.8	46.2
2	*6475.00	92.4 AV			2.86 H	171	46.2	46.2
3	#12950.00	56.6 PK	88.2	-31.6	1.57 H	85	45.4	11.2
4	#12950.00	44.8 AV	68.2	-23.4	1.57 H	85	33.6	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.2 PK			3.14 V	90	66.0	46.2
2	*6475.00	99.4 AV			3.14 V	90	53.2	46.2
3	#12950.00	58.1 PK	88.2	-30.1	2.29 V	157	46.9	11.2
4	#12950.00	46.0 AV	68.2	-22.2	2.29 V	157	34.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.3 PK			2.71 H	172	58.9	46.4
2	*6515.00	92.4 AV			2.71 H	172	46.0	46.4
3	#13030.00	56.4 PK	88.2	-31.8	1.57 H	100	45.2	11.2
4	#13030.00	44.6 AV	68.2	-23.6	1.57 H	100	33.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.6 PK			3.08 V	89	66.2	46.4
2	*6515.00	99.4 AV			3.08 V	89	53.0	46.4
3	#13030.00	58.1 PK	88.2	-30.1	2.27 V	155	46.9	11.2
4	#13030.00	45.9 AV	68.2	-22.3	2.27 V	155	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.0 PK			2.66 H	170	58.6	46.4
2	*6535.00	92.3 AV			2.66 H	170	45.9	46.4
3	#13070.00	57.0 PK	88.2	-31.2	1.57 H	88	45.5	11.5
4	#13070.00	45.2 AV	68.2	-23.0	1.57 H	88	33.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.7 PK			3.00 V	95	64.3	46.4
2	*6535.00	98.9 AV			3.00 V	95	52.5	46.4
3	#13070.00	58.2 PK	88.2	-30.0	2.55 V	150	46.7	11.5
4	#13070.00	46.0 AV	68.2	-22.2	2.55 V	150	34.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.3 PK			2.43 H	180	57.7	46.6
2	*6695.00	91.9 AV			2.43 H	180	45.3	46.6
3	13390.00	56.4 PK	74.0	-17.6	1.57 H	88	45.2	11.2
4	13390.00	45.0 AV	54.0	-9.0	1.57 H	88	33.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.4 PK			3.26 V	88	65.8	46.6
2	*6695.00	99.0 AV			3.26 V	88	52.4	46.6
3	13390.00	58.0 PK	74.0	-16.0	2.27 V	150	46.8	11.2
4	13390.00	45.8 AV	54.0	-8.2	2.27 V	150	34.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.6 PK			2.45 H	177	57.5	47.1
2	*6855.00	92.2 AV			2.45 H	177	45.1	47.1
3	#13710.00	56.5 PK	88.2	-31.7	1.59 H	89	45.5	11.0
4	#13710.00	44.6 AV	68.2	-23.6	1.59 H	89	33.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.7 PK			2.94 V	95	66.6	47.1
2	*6855.00	99.1 AV			2.94 V	95	52.0	47.1
3	#13710.00	57.8 PK	88.2	-30.4	2.27 V	155	46.8	11.0
4	#13710.00	45.5 AV	68.2	-22.7	2.27 V	155	34.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.7 PK			2.31 H	176	57.6	47.1
2	*6875.00	91.6 AV			2.31 H	176	44.5	47.1
3	#13750.00	56.6 PK	88.2	-31.6	1.40 H	58	45.5	11.1
4	#13750.00	44.6 AV	68.2	-23.6	1.40 H	58	33.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.4 PK			2.92 V	90	66.3	47.1
2	*6875.00	99.5 AV			2.92 V	90	52.4	47.1
3	#13750.00	57.6 PK	88.2	-30.6	2.27 V	159	46.5	11.1
4	#13750.00	45.9 AV	68.2	-22.3	2.27 V	159	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.1 PK			2.21 H	173	57.0	47.1
2	*6995.00	90.9 AV			2.21 H	173	43.8	47.1
3	#13990.00	57.1 PK	88.2	-31.1	1.47 H	55	45.1	12.0
4	#13990.00	45.9 AV	68.2	-22.3	1.47 H	55	33.9	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.4 PK			3.14 V	86	64.3	47.1
2	*6995.00	98.9 AV			3.14 V	86	51.8	47.1
3	#13990.00	58.7 PK	88.2	-29.5	2.21 V	157	46.7	12.0
4	#13990.00	46.5 AV	68.2	-21.7	2.21 V	157	34.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.6 PK			2.72 H	299	48.0	47.6
2	*7115.00	83.3 AV			2.72 H	299	35.7	47.6
3	#7125.00	83.2 PK	88.2	-5.0	2.72 H	299	73.5	9.7
4	#7125.00	59.9 AV	68.2	-8.3	2.72 H	299	50.2	9.7
5	#14230.00	56.5 PK	88.2	-31.7	1.50 H	60	45.0	11.5
6	#14230.00	44.8 AV	68.2	-23.4	1.50 H	60	33.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.9 PK			2.52 V	102	55.3	47.6
2	*7115.00	90.7 AV			2.52 V	102	43.1	47.6
3	#7125.00	87.9 PK	88.2	-0.3	2.52 V	102	78.2	9.7
4	#7125.00	67.9 AV	68.2	-0.3	2.52 V	102	58.2	9.7
5	#14230.00	58.0 PK	88.2	-30.2	2.25 V	162	46.5	11.5
6	#14230.00	45.8 AV	68.2	-22.4	2.25 V	162	34.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.2 PK	88.2	-34.0	2.67 H	289	48.3	5.9
2	#5925.00	42.8 AV	68.2	-25.4	2.67 H	289	36.9	5.9
3	*5965.00	104.7 PK			2.67 H	289	61.3	43.4
4	*5965.00	91.9 AV			2.67 H	289	48.5	43.4
5	11930.00	58.0 PK	74.0	-16.0	1.55 H	73	46.5	11.5
6	11930.00	46.2 AV	54.0	-7.8	1.55 H	73	34.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.4 PK	88.2	-23.8	2.61 V	169	58.5	5.9
2	#5925.00	52.8 AV	68.2	-15.4	2.61 V	169	46.9	5.9
3	*5965.00	111.7 PK			2.61 V	169	68.3	43.4
4	*5965.00	99.7 AV			2.61 V	169	56.3	43.4
5	11930.00	58.7 PK	74.0	-15.3	1.86 V	167	47.2	11.5
6	11930.00	47.0 AV	54.0	-7.0	1.86 V	167	35.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	106.4 PK			2.68 H	177	62.0	44.4
2	*6165.00	93.7 AV			2.68 H	177	49.3	44.4
3	12330.00	57.7 PK	74.0	-16.3	1.78 H	65	46.5	11.2
4	12330.00	46.2 AV	54.0	-7.8	1.78 H	65	35.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	114.7 PK			3.01 V	96	70.3	44.4
2	*6165.00	102.0 AV			3.01 V	96	57.6	44.4
3	12330.00	58.5 PK	74.0	-15.5	1.87 V	166	47.3	11.2
4	12330.00	46.9 AV	54.0	-7.1	1.87 V	166	35.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.6 PK			2.67 H	177	61.8	45.8
2	*6405.00	95.2 AV			2.67 H	177	49.4	45.8
3	#12810.00	58.2 PK	88.2	-30.0	1.77 H	69	46.9	11.3
4	#12810.00	45.7 AV	68.2	-22.5	1.77 H	69	34.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.0 PK			3.10 V	91	70.2	45.8
2	*6405.00	102.8 AV			3.10 V	91	57.0	45.8
3	#12810.00	58.9 PK	88.2	-29.3	1.88 V	156	47.6	11.3
4	#12810.00	46.7 AV	68.2	-21.5	1.88 V	156	35.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.0 PK			2.54 H	175	63.0	46.0
2	*6445.00	95.5 AV			2.54 H	175	49.5	46.0
3	#12890.00	58.1 PK	88.2	-30.1	1.66 H	92	46.7	11.4
4	#12890.00	46.2 AV	68.2	-22.0	1.66 H	92	34.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	115.8 PK			3.02 V	91	69.8	46.0
2	*6445.00	103.1 AV			3.02 V	91	57.1	46.0
3	#12890.00	59.0 PK	88.2	-29.2	1.88 V	163	47.6	11.4
4	#12890.00	46.8 AV	68.2	-21.4	1.88 V	163	35.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.9 PK			2.67 H	174	61.6	46.3
2	*6485.00	95.9 AV			2.67 H	174	49.6	46.3
3	#12970.00	58.0 PK	88.2	-30.2	1.68 H	91	46.9	11.1
4	#12970.00	45.9 AV	68.2	-22.3	1.68 H	91	34.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	115.5 PK			2.62 V	113	69.2	46.3
2	*6485.00	101.5 AV			2.62 V	113	55.2	46.3
3	#12970.00	58.7 PK	88.2	-29.5	1.88 V	159	47.6	11.1
4	#12970.00	46.8 AV	68.2	-21.4	1.88 V	159	35.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.2 PK			2.40 H	174	61.8	46.4
2	*6525.00	95.7 AV			2.40 H	174	49.3	46.4
3	#13050.00	57.7 PK	88.2	-30.5	1.66 H	68	46.4	11.3
4	#13050.00	45.5 AV	68.2	-22.7	1.66 H	68	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.8 PK			3.29 V	91	69.4	46.4
2	*6525.00	102.9 AV			3.29 V	91	56.5	46.4
3	#13050.00	58.4 PK	88.2	-29.8	1.88 V	154	47.1	11.3
4	#13050.00	46.7 AV	68.2	-21.5	1.88 V	154	35.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.6 PK			2.40 H	172	62.1	46.5
2	*6565.00	95.4 AV			2.40 H	172	48.9	46.5
3	#13130.00	57.4 PK	88.2	-30.8	1.55 H	90	45.9	11.5
4	#13130.00	46.3 AV	68.2	-21.9	1.55 H	90	34.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.2 PK			3.20 V	94	69.7	46.5
2	*6565.00	103.6 AV			3.20 V	94	57.1	46.5
3	#13130.00	59.0 PK	88.2	-29.2	1.84 V	162	47.5	11.5
4	#13130.00	47.1 AV	68.2	-21.1	1.84 V	162	35.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.8 PK			2.31 H	136	61.1	46.7
2	*6725.00	95.1 AV			2.31 H	136	48.4	46.7
3	#13450.00	56.9 PK	88.2	-31.3	1.66 H	72	45.8	11.1
4	#13450.00	45.4 AV	68.2	-22.8	1.66 H	72	34.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	116.8 PK			3.26 V	92	70.1	46.7
2	*6725.00	103.5 AV			3.26 V	92	56.8	46.7
3	#13450.00	58.4 PK	88.2	-29.8	1.83 V	162	47.3	11.1
4	#13450.00	46.5 AV	68.2	-21.7	1.83 V	162	35.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.9 PK			2.33 H	118	60.9	47.0
2	*6845.00	95.3 AV			2.33 H	118	48.3	47.0
3	#13690.00	56.5 PK	88.2	-31.7	1.66 H	82	45.5	11.0
4	#13690.00	45.3 AV	68.2	-22.9	1.66 H	82	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.0 PK			3.06 V	94	69.0	47.0
2	*6845.00	102.9 AV			3.06 V	94	55.9	47.0
3	#13690.00	58.3 PK	88.2	-29.9	1.88 V	167	47.3	11.0
4	#13690.00	46.0 AV	68.2	-22.2	1.88 V	167	35.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.7 PK			2.45 H	118	61.6	47.1
2	*6885.00	94.9 AV			2.45 H	118	47.8	47.1
3	#13770.00	56.9 PK	88.2	-31.3	1.57 H	82	45.8	11.1
4	#13770.00	45.4 AV	68.2	-22.8	1.57 H	82	34.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	116.5 PK			3.05 V	91	69.4	47.1
2	*6885.00	103.3 AV			3.05 V	91	56.2	47.1
3	#13770.00	58.6 PK	88.2	-29.6	1.88 V	36	47.5	11.1
4	#13770.00	46.1 AV	68.2	-22.1	1.88 V	36	35.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	106.7 PK			2.22 H	121	59.6	47.1
2	*7005.00	94.1 AV			2.22 H	121	47.0	47.1
3	#14010.00	57.6 PK	88.2	-30.6	1.58 H	77	45.6	12.0
4	#14010.00	46.2 AV	68.2	-22.0	1.58 H	77	34.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	115.6 PK			3.04 V	98	68.5	47.1
2	*7005.00	103.1 AV			3.04 V	98	56.0	47.1
3	#14010.00	59.2 PK	88.2	-29.0	1.88 V	166	47.2	12.0
4	#14010.00	47.7 AV	68.2	-20.5	1.88 V	166	35.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.3 PK			2.48 H	186	60.7	47.6
2	*7085.00	95.1 AV			2.48 H	186	47.5	47.6
3	#7125.00	59.8 PK	88.2	-28.4	2.48 H	186	50.1	9.7
4	#7125.00	47.8 AV	68.2	-20.4	2.48 H	186	38.1	9.7
5	#14170.00	57.4 PK	88.2	-30.8	1.58 H	70	45.8	11.6
6	#14170.00	45.9 AV	68.2	-22.3	1.58 H	70	34.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	115.3 PK			3.04 V	93	67.7	47.6
2	*7085.00	102.6 AV			3.04 V	93	55.0	47.6
3	#7125.00	66.5 PK	88.2	-21.7	3.04 V	93	56.8	9.7
4	#7125.00	52.6 AV	68.2	-15.6	3.04 V	93	42.9	9.7
5	#14170.00	58.9 PK	88.2	-29.3	1.87 V	168	47.3	11.6
6	#14170.00	46.9 AV	68.2	-21.3	1.87 V	168	35.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.6 PK	88.2	-32.6	2.38 H	175	49.7	5.9
2	#5925.00	43.1 AV	68.2	-25.1	2.38 H	175	37.2	5.9
3	*5985.00	104.3 PK			2.38 H	175	60.9	43.4
4	*5985.00	90.9 AV			2.38 H	175	47.5	43.4
5	11970.00	58.1 PK	74.0	-15.9	1.66 H	49	46.8	11.3
6	11970.00	46.0 AV	54.0	-8.0	1.66 H	49	34.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	3.01 V	97	62.1	5.9
2	#5925.00	55.7 AV	68.2	-12.5	3.01 V	97	49.8	5.9
3	*5985.00	114.0 PK			3.01 V	97	70.6	43.4
4	*5985.00	100.9 AV			3.01 V	97	57.5	43.4
5	11970.00	58.6 PK	74.0	-15.4	1.90 V	156	47.3	11.3
6	11970.00	46.7 AV	54.0	-7.3	1.90 V	156	35.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	106.7 PK			2.52 H	177	62.5	44.2
2	*6145.00	93.3 AV			2.52 H	177	49.1	44.2
3	12290.00	57.8 PK	74.0	-16.2	1.59 H	54	46.7	11.1
4	12290.00	45.9 AV	54.0	-8.1	1.59 H	54	34.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	116.1 PK			3.03 V	84	71.9	44.2
2	*6145.00	101.9 AV			3.03 V	84	57.7	44.2
3	12290.00	58.7 PK	74.0	-15.3	1.93 V	155	47.6	11.1
4	12290.00	46.4 AV	54.0	-7.6	1.93 V	155	35.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.9 PK			2.32 H	176	61.2	45.7
2	*6385.00	94.4 AV			2.32 H	176	48.7	45.7
3	#12770.00	58.0 PK	88.2	-30.2	1.66 H	48	46.6	11.4
4	#12770.00	46.0 AV	68.2	-22.2	1.66 H	48	34.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	115.6 PK			3.07 V	87	69.9	45.7
2	*6385.00	102.8 AV			3.07 V	87	57.1	45.7
3	#12770.00	58.5 PK	88.2	-29.7	1.93 V	155	47.1	11.4
4	#12770.00	46.7 AV	68.2	-21.5	1.93 V	155	35.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.9 PK			2.31 H	173	62.7	46.2
2	*6465.00	95.7 AV			2.31 H	173	49.5	46.2
3	#12930.00	58.0 PK	88.2	-30.2	1.68 H	55	46.7	11.3
4	#12930.00	46.2 AV	68.2	-22.0	1.68 H	55	34.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	116.7 PK			3.10 V	86	70.5	46.2
2	*6465.00	103.2 AV			3.10 V	86	57.0	46.2
3	#12930.00	58.9 PK	88.2	-29.3	1.99 V	158	47.6	11.3
4	#12930.00	47.1 AV	68.2	-21.1	1.99 V	158	35.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.2 PK			2.21 H	174	62.8	46.4
2	*6545.00	95.2 AV			2.21 H	174	48.8	46.4
3	#13090.00	58.2 PK	88.2	-30.0	1.67 H	59	46.6	11.6
4	#13090.00	46.7 AV	68.2	-21.5	1.67 H	59	35.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	116.5 PK			3.06 V	88	70.1	46.4
2	*6545.00	103.5 AV			3.06 V	88	57.1	46.4
3	#13090.00	59.1 PK	88.2	-29.1	1.88 V	157	47.5	11.6
4	#13090.00	47.4 AV	68.2	-20.8	1.88 V	157	35.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.1 PK			2.37 H	179	63.4	46.7
2	*6705.00	95.5 AV			2.37 H	179	48.8	46.7
3	#13410.00	57.8 PK	88.2	-30.4	1.66 H	50	46.5	11.3
4	#13410.00	46.2 AV	68.2	-22.0	1.66 H	50	34.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	117.9 PK			3.08 V	91	71.2	46.7
2	*6705.00	103.9 AV			3.08 V	91	57.2	46.7
3	#13410.00	58.5 PK	88.2	-29.7	1.89 V	165	47.2	11.3
4	#13410.00	47.0 AV	68.2	-21.2	1.89 V	165	35.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.8 PK			2.29 H	178	60.7	47.1
2	*6865.00	94.7 AV			2.29 H	178	47.6	47.1
3	#13730.00	57.9 PK	88.2	-30.3	1.65 H	59	46.8	11.1
4	#13730.00	45.6 AV	68.2	-22.6	1.65 H	59	34.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	117.2 PK			3.10 V	90	70.1	47.1
2	*6865.00	103.2 AV			3.10 V	90	56.1	47.1
3	#13730.00	58.7 PK	88.2	-29.5	1.99 V	163	47.6	11.1
4	#13730.00	46.7 AV	68.2	-21.5	1.99 V	163	35.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.1 PK			2.29 H	174	60.9	47.2
2	*6945.00	94.5 AV			2.29 H	174	47.3	47.2
3	#13890.00	58.2 PK	88.2	-30.0	1.62 H	55	46.5	11.7
4	#13890.00	46.1 AV	68.2	-22.1	1.62 H	55	34.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	116.0 PK			3.10 V	88	68.8	47.2
2	*6945.00	103.5 AV			3.10 V	88	56.3	47.2
3	#13890.00	59.0 PK	88.2	-29.2	1.98 V	155	47.3	11.7
4	#13890.00	47.4 AV	68.2	-20.8	1.98 V	155	35.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.2 PK			2.22 H	175	60.9	47.3
2	*7025.00	94.4 AV			2.22 H	175	47.1	47.3
3	#7125.00	61.0 PK	88.2	-27.2	2.22 H	175	51.3	9.7
4	#7125.00	48.5 AV	68.2	-19.7	2.22 H	175	38.8	9.7
5	7250.00	61.5 PK	74.0	-12.5	2.22 H	175	51.7	9.8
6	7250.00	48.5 AV	54.0	-5.5	2.22 H	175	38.7	9.8
7	#14050.00	58.3 PK	88.2	-29.9	1.62 H	50	46.5	11.8
8	#14050.00	46.0 AV	68.2	-22.2	1.62 H	50	34.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	115.9 PK			2.93 V	93	68.6	47.3
2	*7025.00	102.8 AV			2.93 V	93	55.5	47.3
3	#7125.00	67.1 PK	88.2	-21.1	2.93 V	93	57.4	9.7
4	#7125.00	53.3 AV	68.2	-14.9	2.93 V	93	43.6	9.7
5	7250.00	65.1 PK	74.0	-8.9	2.93 V	93	55.3	9.8
6	7250.00	52.4 AV	54.0	-1.6	2.93 V	93	42.6	9.8
7	#14050.00	59.4 PK	88.2	-28.8	1.97 V	158	47.6	11.8
8	#14050.00	47.2 AV	68.2	-21.0	1.97 V	158	35.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.3 PK	88.2	-20.9	4.00 H	218	61.4	5.9
2	#5925.00	56.1 AV	68.2	-12.1	4.00 H	218	50.2	5.9
3	*6025.00	107.4 PK			4.00 H	218	63.8	43.6
4	*6025.00	94.9 AV			4.00 H	218	51.3	43.6
5	12050.00	58.2 PK	74.0	-15.8	1.86 H	99	46.8	11.4
6	12050.00	46.8 AV	54.0	-7.2	1.86 H	99	35.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.9 PK	88.2	-13.3	2.30 V	84	69.0	5.9
2	#5925.00	62.0 AV	68.2	-6.2	2.30 V	84	56.1	5.9
3	*6025.00	115.0 PK			2.30 V	84	71.4	43.6
4	*6025.00	102.1 AV			2.30 V	84	58.5	43.6
5	12050.00	59.4 PK	74.0	-14.6	2.22 V	160	48.0	11.4
6	12050.00	47.9 AV	54.0	-6.1	2.22 V	160	36.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.9 PK			4.00 H	114	62.4	44.5
2	*6185.00	92.8 AV			4.00 H	114	48.3	44.5
3	12370.00	57.5 PK	74.0	-16.5	1.87 H	69	46.4	11.1
4	12370.00	46.9 AV	54.0	-7.1	1.87 H	69	35.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	114.3 PK			2.33 V	84	69.8	44.5
2	*6185.00	101.7 AV			2.33 V	84	57.2	44.5
3	12370.00	58.9 PK	74.0	-15.1	2.28 V	167	47.8	11.1
4	12370.00	47.4 AV	54.0	-6.6	2.28 V	167	36.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.9 PK			4.00 H	87	61.4	45.5
2	*6345.00	93.5 AV			4.00 H	87	48.0	45.5
3	12690.00	58.0 PK	74.0	-16.0	1.79 H	83	46.6	11.4
4	12690.00	46.7 AV	54.0	-7.3	1.79 H	83	35.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	114.1 PK			3.04 V	89	68.6	45.5
2	*6345.00	101.0 AV			3.04 V	89	55.5	45.5
3	12690.00	58.9 PK	74.0	-15.1	2.28 V	165	47.5	11.4
4	12690.00	47.5 AV	54.0	-6.5	2.28 V	165	36.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.0 PK			4.00 H	119	61.6	46.4
2	*6505.00	94.4 AV			4.00 H	119	48.0	46.4
3	#13010.00	57.8 PK	88.2	-30.4	1.95 H	91	46.8	11.0
4	#13010.00	46.7 AV	68.2	-21.5	1.95 H	91	35.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	114.9 PK			3.04 V	90	68.5	46.4
2	*6505.00	102.7 AV			3.04 V	90	56.3	46.4
3	#13010.00	58.9 PK	88.2	-29.3	2.29 V	158	47.9	11.0
4	#13010.00	47.3 AV	68.2	-20.9	2.29 V	158	36.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.4 PK			4.00 H	106	61.8	46.6
2	*6665.00	95.3 AV			4.00 H	106	48.7	46.6
3	13330.00	58.2 PK	74.0	-15.8	1.93 H	96	46.8	11.4
4	13330.00	47.0 AV	54.0	-7.0	1.93 H	96	35.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	116.1 PK			3.16 V	90	69.5	46.6
2	*6665.00	103.2 AV			3.16 V	90	56.6	46.6
3	13330.00	59.2 PK	74.0	-14.8	2.35 V	167	47.8	11.4
4	13330.00	47.7 AV	54.0	-6.3	2.35 V	167	36.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.5 PK			4.00 H	126	59.6	46.9
2	*6825.00	93.6 AV			4.00 H	126	46.7	46.9
3	#13650.00	57.3 PK	88.2	-30.9	1.88 H	95	46.4	10.9
4	#13650.00	46.6 AV	68.2	-21.6	1.88 H	95	35.7	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	115.1 PK			3.05 V	93	68.2	46.9
2	*6825.00	102.2 AV			3.05 V	93	55.3	46.9
3	#13650.00	58.5 PK	88.2	-29.7	2.14 V	153	47.6	10.9
4	#13650.00	47.0 AV	68.2	-21.2	2.14 V	153	36.1	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.0 PK			4.00 H	129	58.8	47.2
2	*6985.00	92.9 AV			4.00 H	129	45.7	47.2
3	#7125.00	62.6 PK	88.2	-25.6	4.00 H	129	52.9	9.7
4	#7125.00	47.6 AV	68.2	-20.6	4.00 H	129	37.9	9.7
5	#13970.00	58.5 PK	88.2	-29.7	1.88 H	78	46.6	11.9
6	#13970.00	47.6 AV	68.2	-20.6	1.88 H	78	35.7	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	115.4 PK			3.24 V	91	68.2	47.2
2	*6985.00	102.1 AV			3.24 V	91	54.9	47.2
3	#7125.00	70.2 PK	88.2	-18.0	3.24 V	91	60.5	9.7
4	#7125.00	60.2 AV	68.2	-8.0	3.24 V	91	50.5	9.7
5	#13970.00	59.5 PK	88.2	-28.7	2.27 V	168	47.6	11.9
6	#13970.00	48.0 AV	68.2	-20.2	2.27 V	168	36.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.4 PK	88.2	-26.8	2.22 H	215	55.5	5.9
2	#5925.00	49.7 AV	68.2	-18.5	2.22 H	215	43.8	5.9
3	*6105.00	98.2 PK			2.22 H	215	54.2	44.0
4	*6105.00	86.2 AV			2.22 H	215	42.2	44.0
5	12210.00	56.0 PK	74.0	-18.0	1.45 H	56	45.0	11.0
6	12210.00	44.0 AV	54.0	-10.0	1.45 H	56	33.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	3.08 V	88	62.1	5.9
2	#5925.00	53.9 AV	68.2	-14.3	3.08 V	88	48.0	5.9
3	*6105.00	106.8 PK			3.08 V	88	62.8	44.0
4	*6105.00	94.5 AV			3.08 V	88	50.5	44.0
5	12210.00	57.5 PK	74.0	-16.5	2.22 V	156	46.5	11.0
6	12210.00	45.5 AV	54.0	-8.5	2.22 V	156	34.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	99.4 PK			2.23 H	192	54.4	45.0
2	*6265.00	86.5 AV			2.23 H	192	41.5	45.0
3	12530.00	56.8 PK	74.0	-17.2	1.43 H	60	45.2	11.6
4	12530.00	45.2 AV	54.0	-8.8	1.43 H	60	33.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	106.8 PK			3.10 V	86	61.8	45.0
2	*6265.00	94.3 AV			3.10 V	86	49.3	45.0
3	12530.00	58.1 PK	74.0	-15.9	2.30 V	151	46.5	11.6
4	12530.00	46.0 AV	54.0	-8.0	2.30 V	151	34.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	99.9 PK			2.18 H	203	54.0	45.9
2	*6425.00	87.0 AV			2.18 H	203	41.1	45.9
3	#12850.00	56.9 PK	88.2	-31.3	1.47 H	62	45.5	11.4
4	#12850.00	45.3 AV	68.2	-22.9	1.47 H	62	33.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.0 PK			3.06 V	91	61.1	45.9
2	*6425.00	94.1 AV			3.06 V	91	48.2	45.9
3	#12850.00	58.2 PK	88.2	-30.0	2.19 V	157	46.8	11.4
4	#12850.00	46.1 AV	68.2	-22.1	2.19 V	157	34.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	100.5 PK			2.04 H	179	54.0	46.5
2	*6585.00	87.4 AV			2.04 H	179	40.9	46.5
3	#13170.00	56.5 PK	88.2	-31.7	1.36 H	59	45.2	11.3
4	#13170.00	45.2 AV	68.2	-23.0	1.36 H	59	33.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.1 PK			3.11 V	74	60.6	46.5
2	*6585.00	94.3 AV			3.11 V	74	47.8	46.5
3	#13170.00	58.1 PK	88.2	-30.1	2.14 V	159	46.8	11.3
4	#13170.00	45.8 AV	68.2	-22.4	2.14 V	159	34.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	100.2 PK			2.12 H	184	53.5	46.7
2	*6745.00	87.4 AV			2.12 H	184	40.7	46.7
3	#13490.00	56.3 PK	88.2	-31.9	1.40 H	56	45.3	11.0
4	#13490.00	45.2 AV	68.2	-23.0	1.40 H	56	34.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.7 PK			3.14 V	86	61.0	46.7
2	*6745.00	95.0 AV			3.14 V	86	48.3	46.7
3	#13490.00	58.0 PK	88.2	-30.2	2.09 V	155	47.0	11.0
4	#13490.00	46.0 AV	68.2	-22.2	2.09 V	155	35.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	102.6 PK			2.30 H	181	55.5	47.1
2	*6905.00	89.9 AV			2.30 H	181	42.8	47.1
3	#7125.00	69.6 PK	88.2	-18.6	2.30 H	181	59.9	9.7
4	#7125.00	49.0 AV	68.2	-19.2	2.30 H	181	39.3	9.7
5	#13810.00	56.9 PK	88.2	-31.3	1.45 H	56	45.8	11.1
6	#13810.00	45.6 AV	68.2	-22.6	1.45 H	56	34.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.9 PK			3.08 V	81	62.8	47.1
2	*6905.00	97.1 AV			3.08 V	81	50.0	47.1
3	#7125.00	75.2 PK	88.2	-13.0	3.08 V	81	65.5	9.7
4	#7125.00	51.7 AV	68.2	-16.5	3.08 V	81	42.0	9.7
5	#13810.00	58.3 PK	88.2	-29.9	2.20 V	161	47.2	11.1
6	#13810.00	46.4 AV	68.2	-21.8	2.20 V	161	35.3	11.1


Remarks:





1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

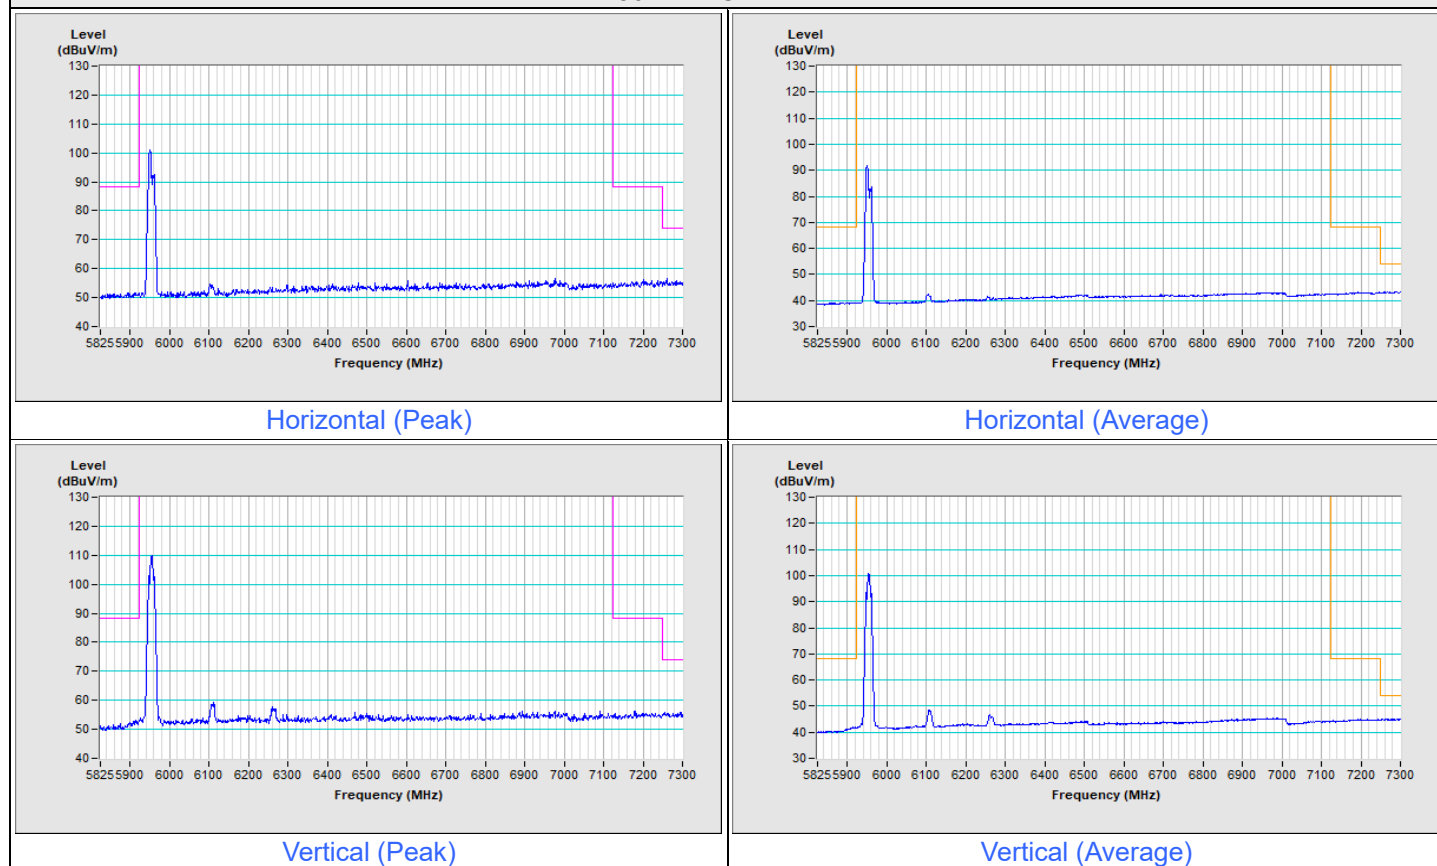

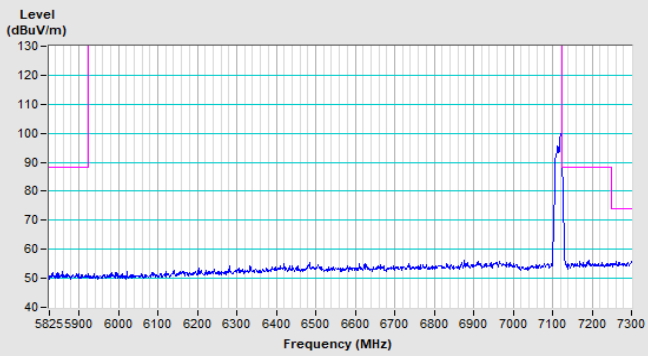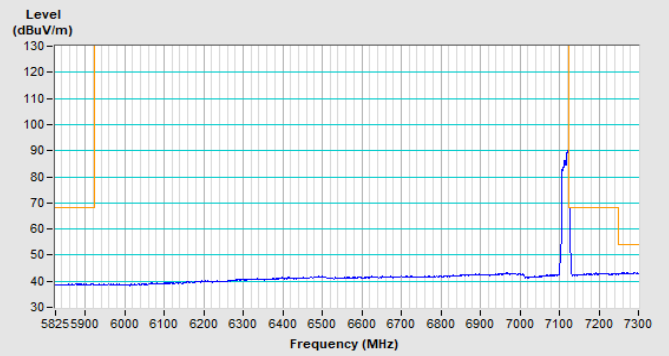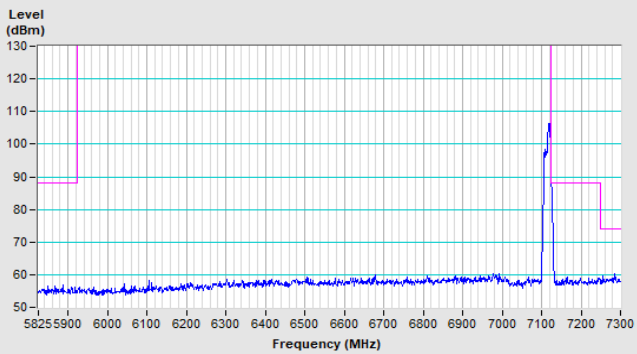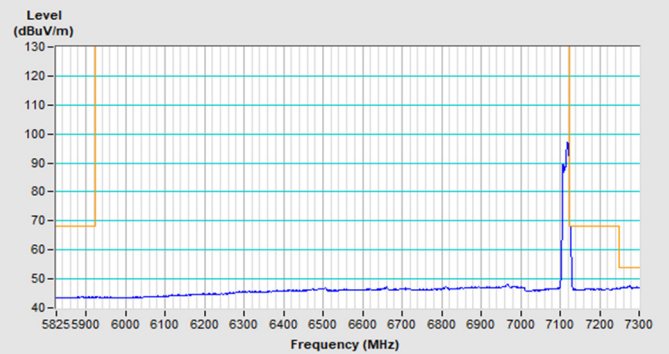
802.11a Channel 233**Horizontal (Peak)****Horizontal (Average)****Vertical (Peak)****Vertical (Average)**

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

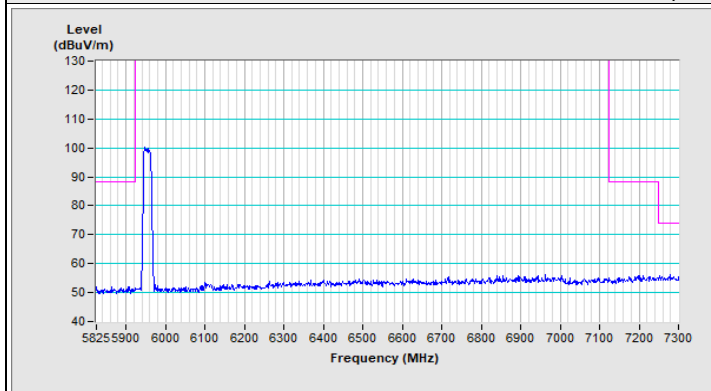


Horizontal (Peak)

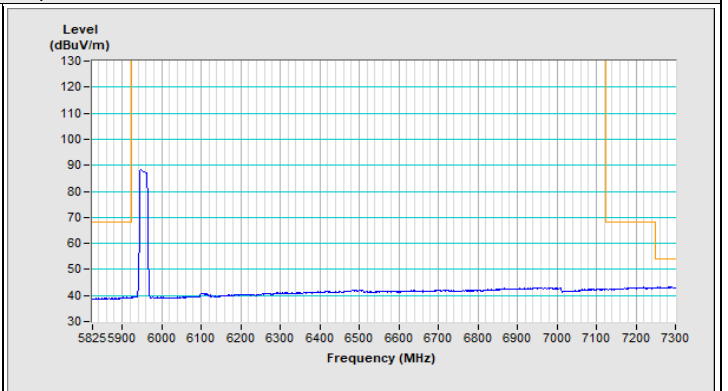

Horizontal (Average)

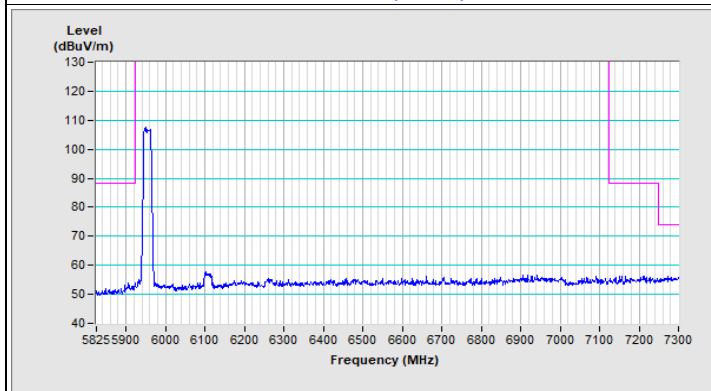


Vertical (Peak)

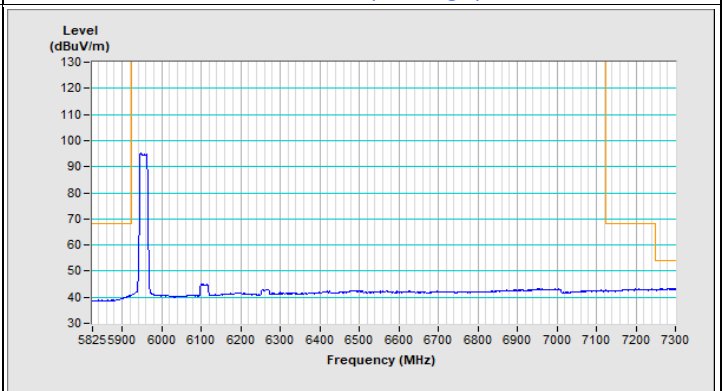


Vertical (Average)


802.11be (EHT20) Channel 233

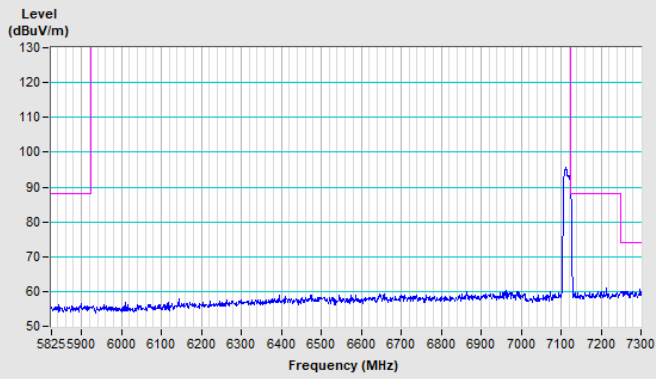


Horizontal (Peak)

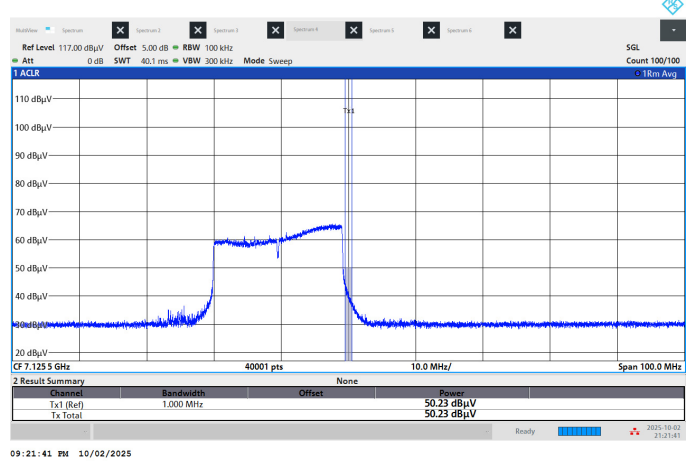

Horizontal (Average)

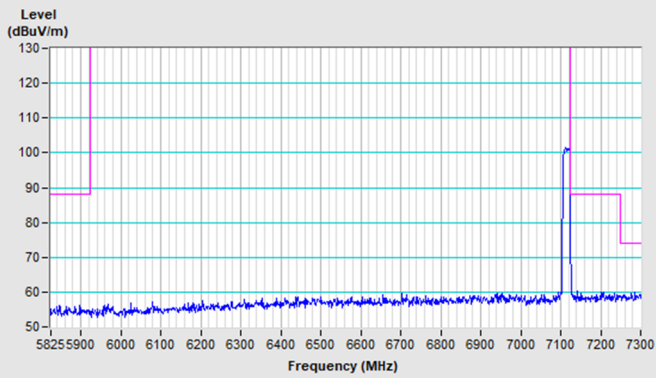


Vertical (Peak)

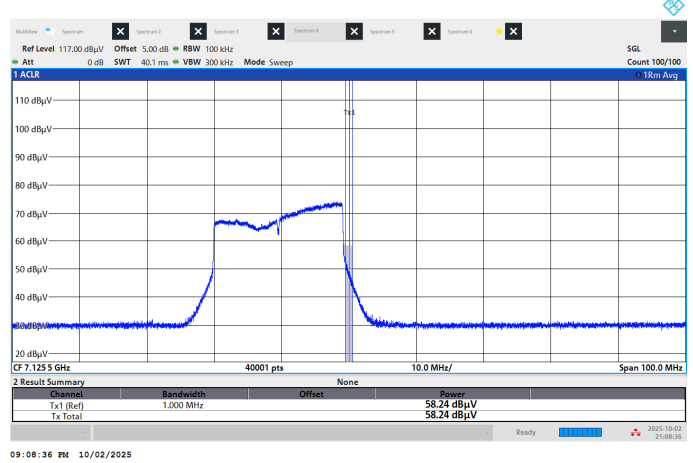


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

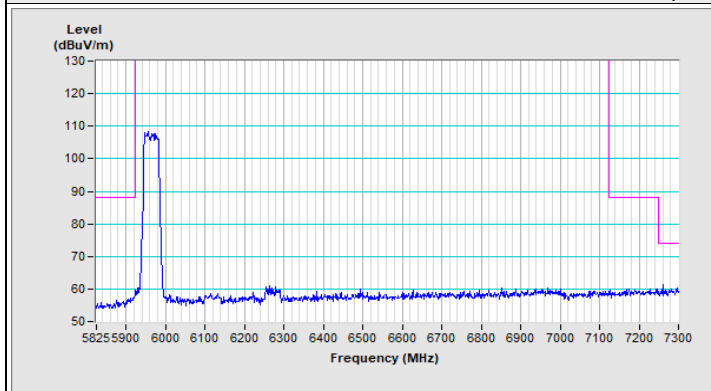


Horizontal (Peak)

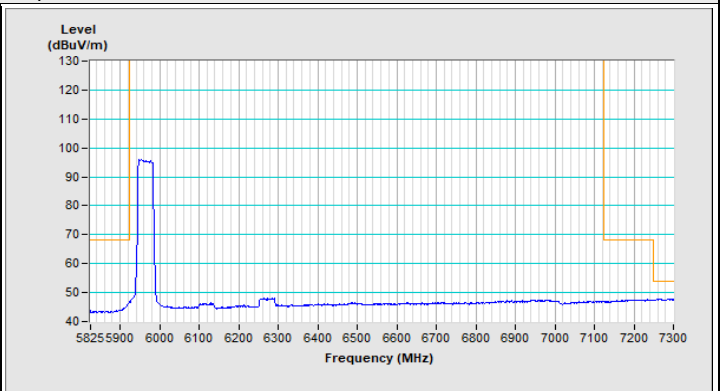





Horizontal (Average)

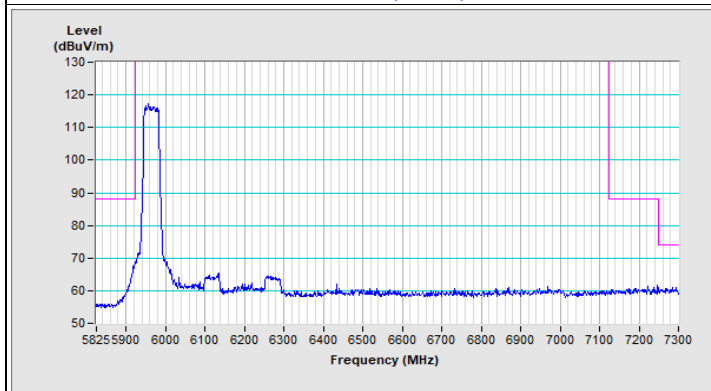

Vertical (Peak)

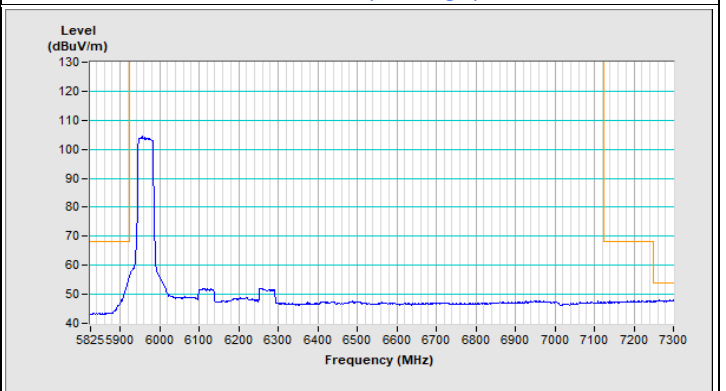


Vertical (Average)

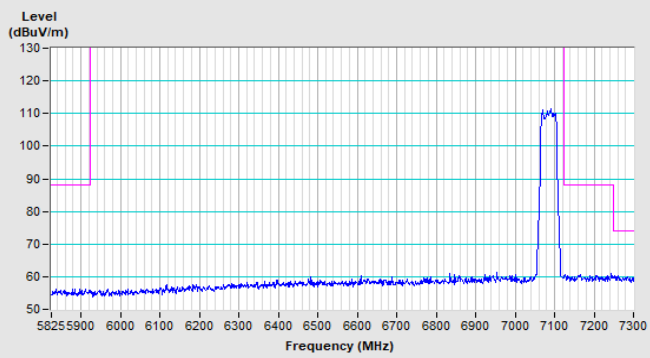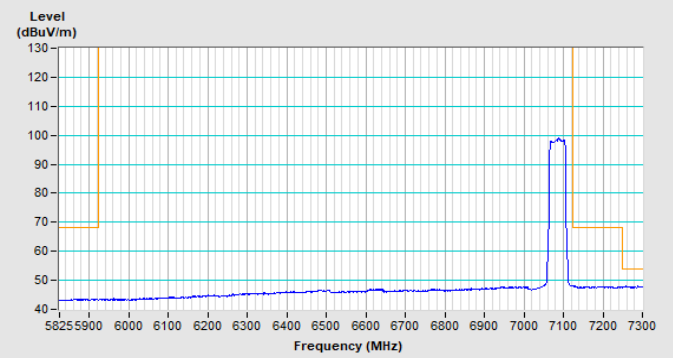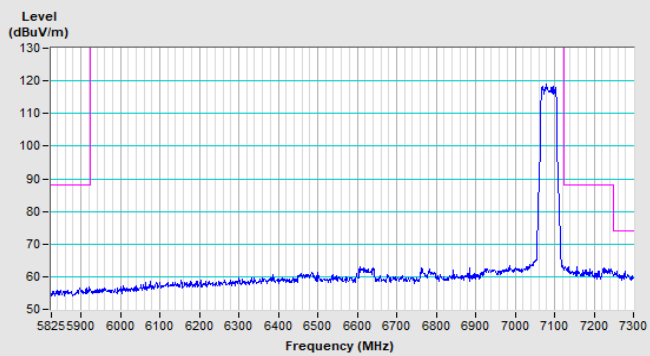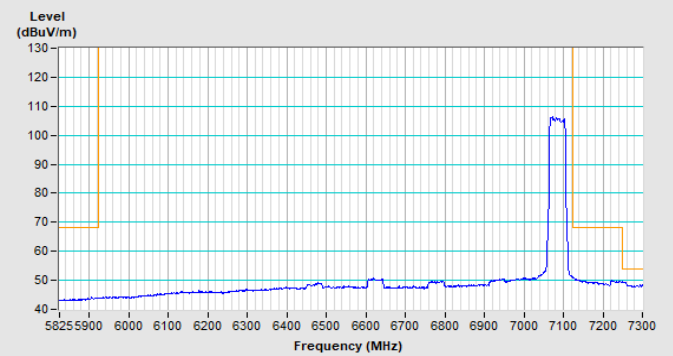
802.11be (EHT40) Channel 227**Horizontal (Peak)****Horizontal (Average)****Vertical (Peak)****Vertical (Average)**

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

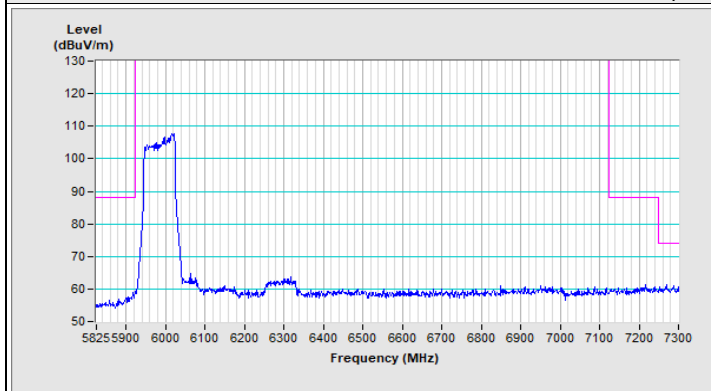


Horizontal (Peak)

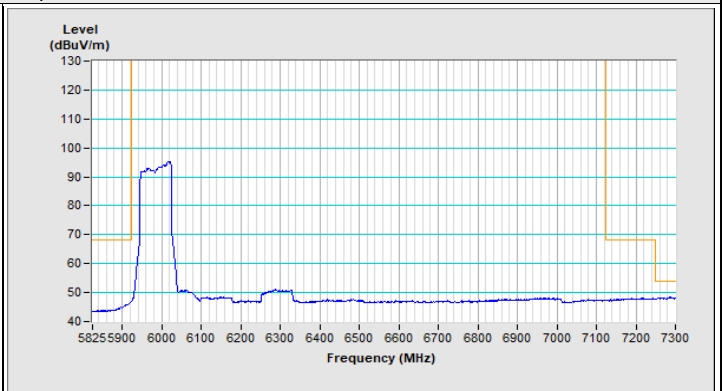

Horizontal (Average)

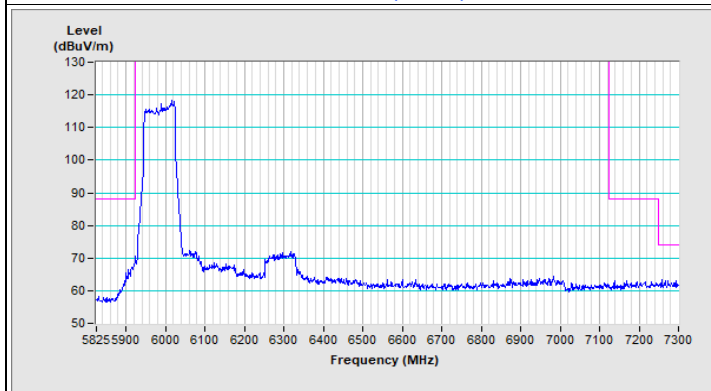


Vertical (Peak)

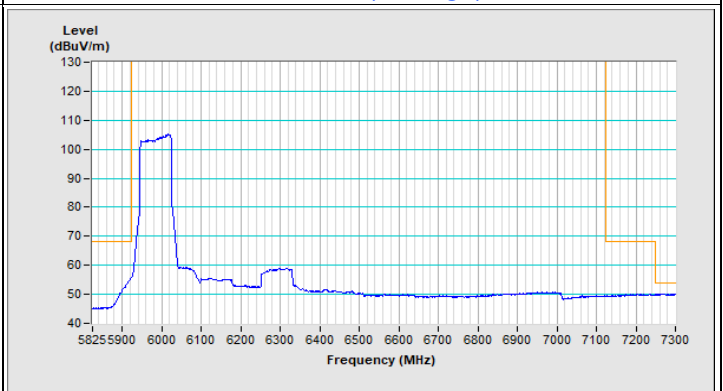


Vertical (Average)


802.11be (EHT80) Channel 215

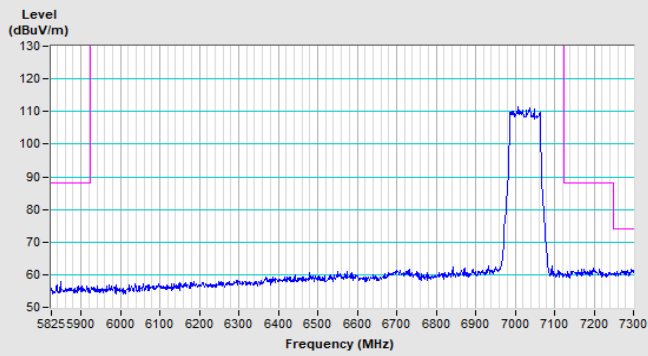


Horizontal (Peak)

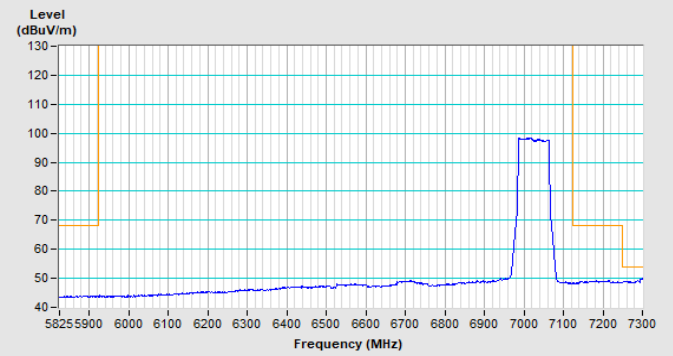

Horizontal (Average)

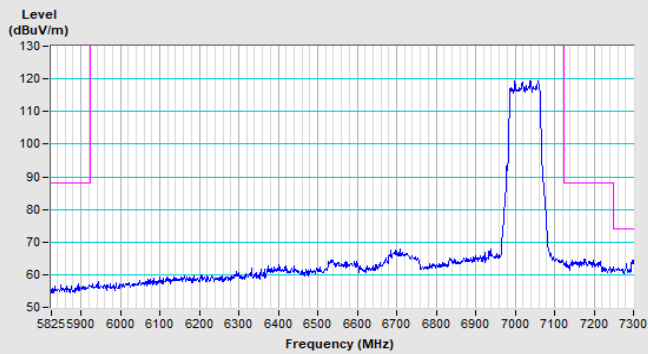


Vertical (Peak)

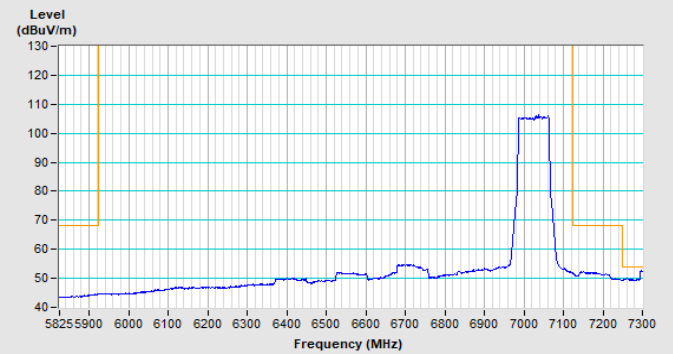


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

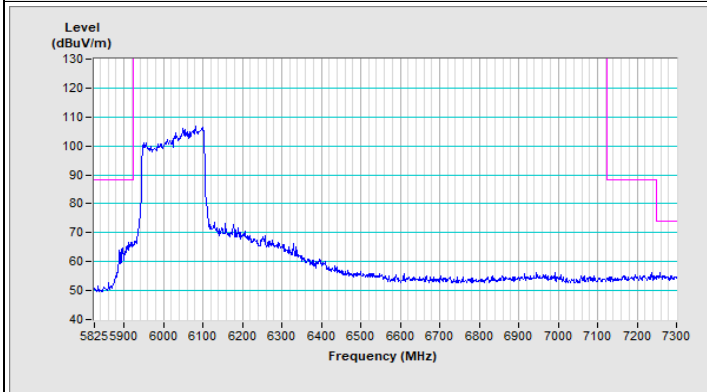


Horizontal (Peak)

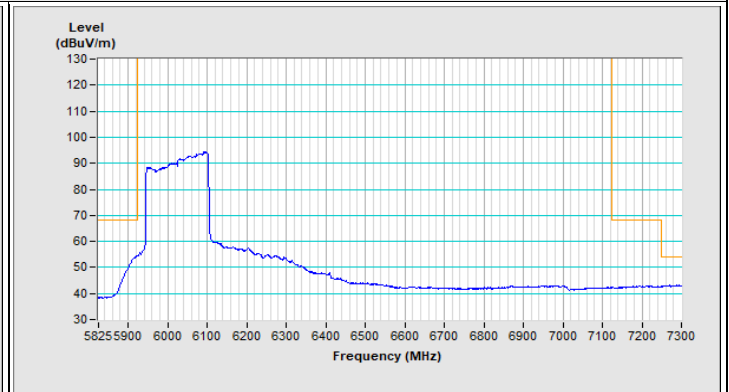

Horizontal (Average)

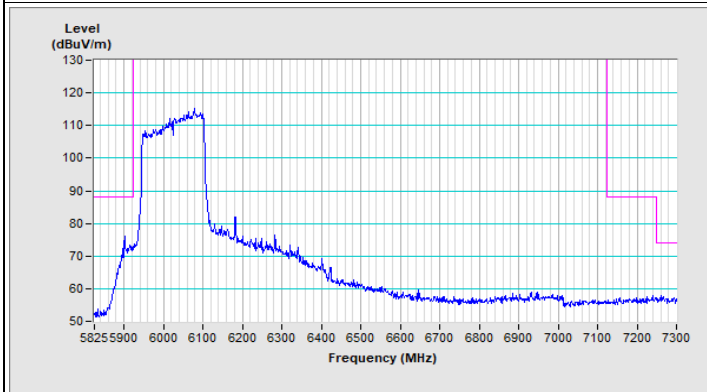


Vertical (Peak)

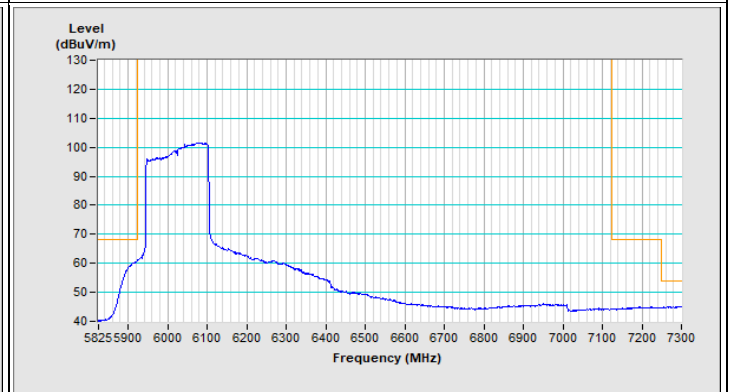


Vertical (Average)


802.11be (EHT160) Channel 207

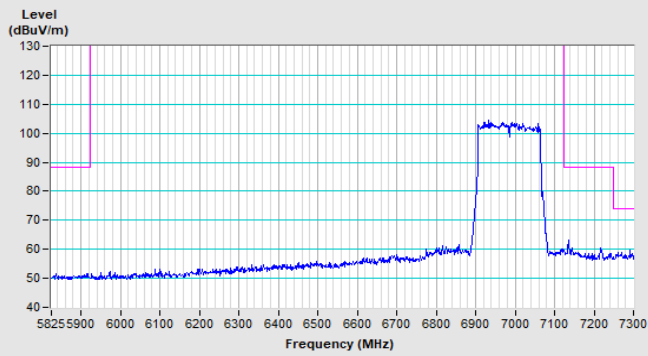


Horizontal (Peak)

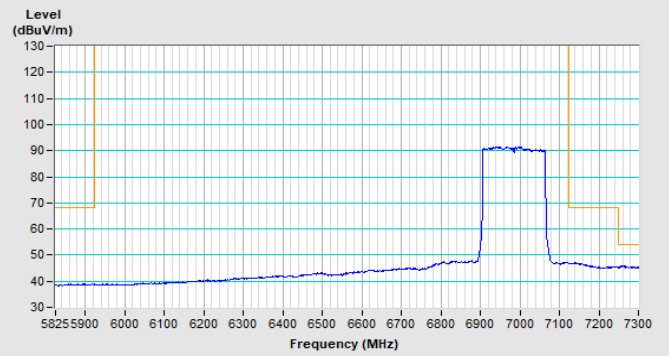

Horizontal (Average)

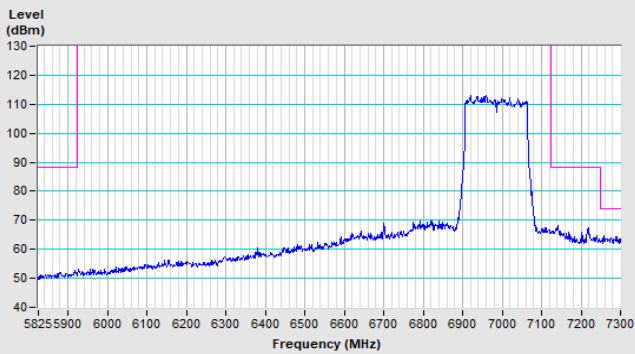


Vertical (Peak)

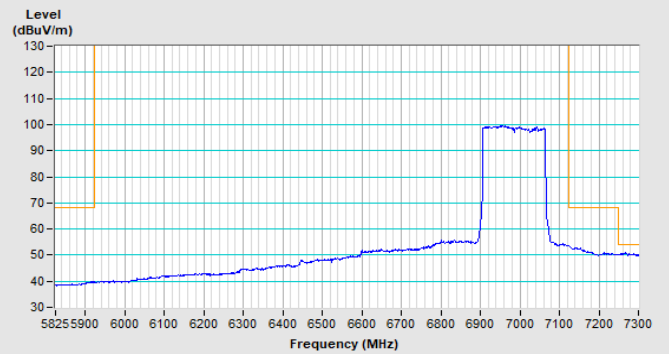


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

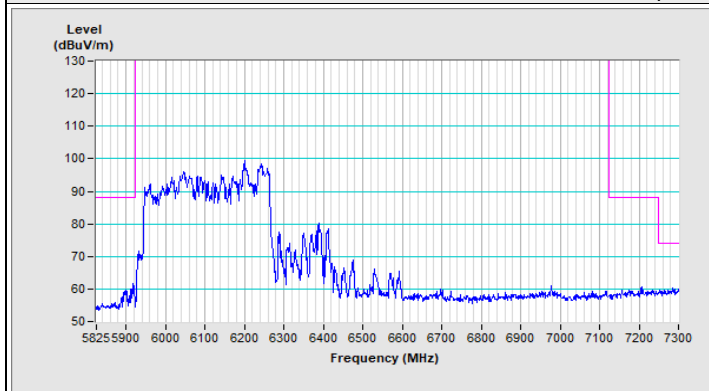


Horizontal (Peak)

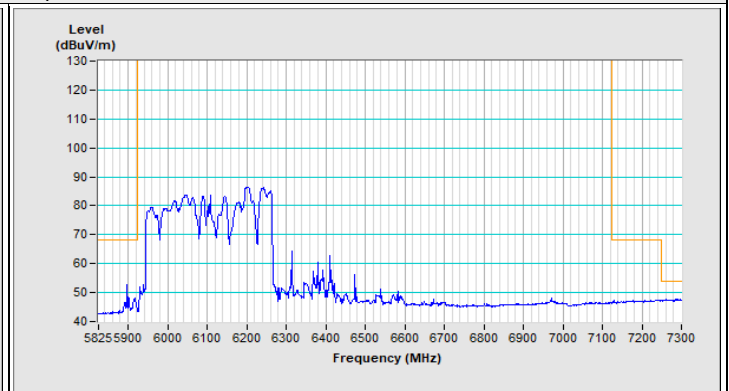

Horizontal (Average)

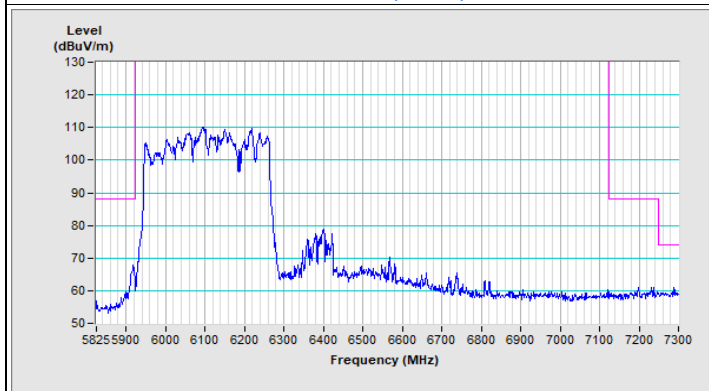


Vertical (Peak)

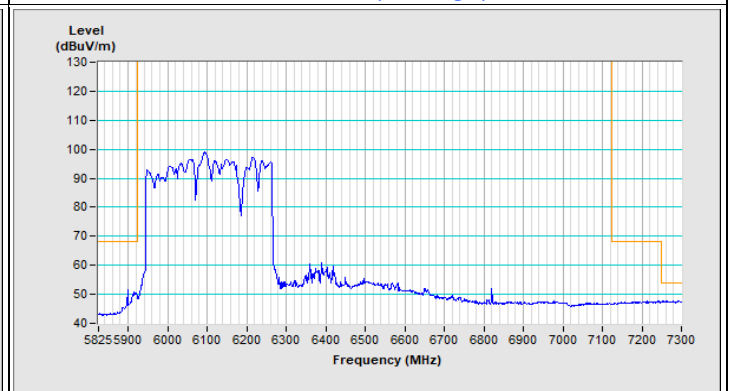


Vertical (Average)


802.11be (EHT320) Channel 191

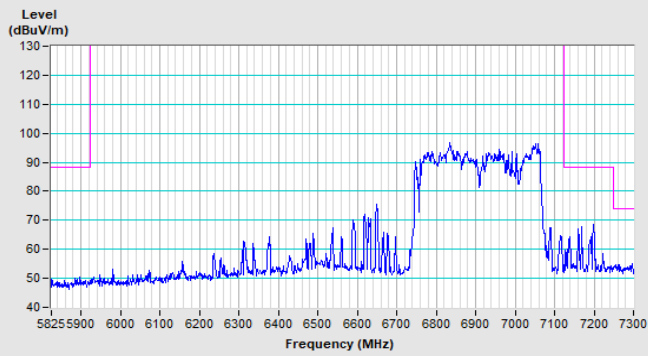


Horizontal (Peak)

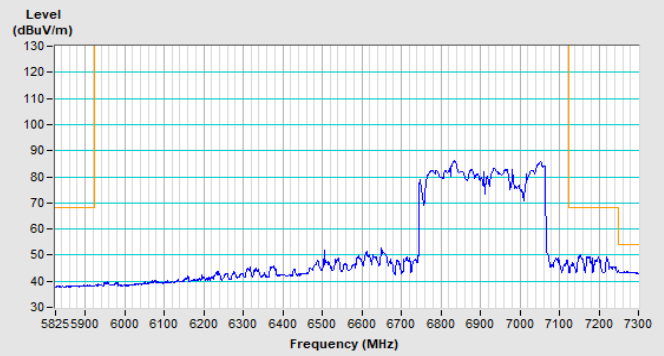

Horizontal (Average)

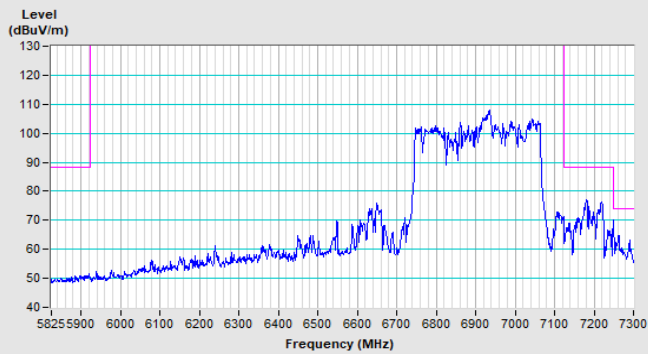

Vertical (Peak)

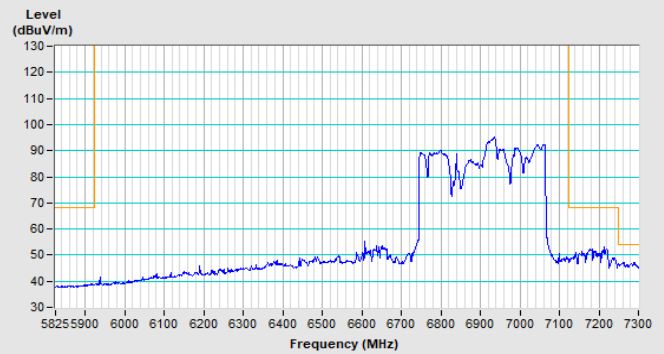


Vertical (Average)

Plot of other emissions

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11a Channel 209

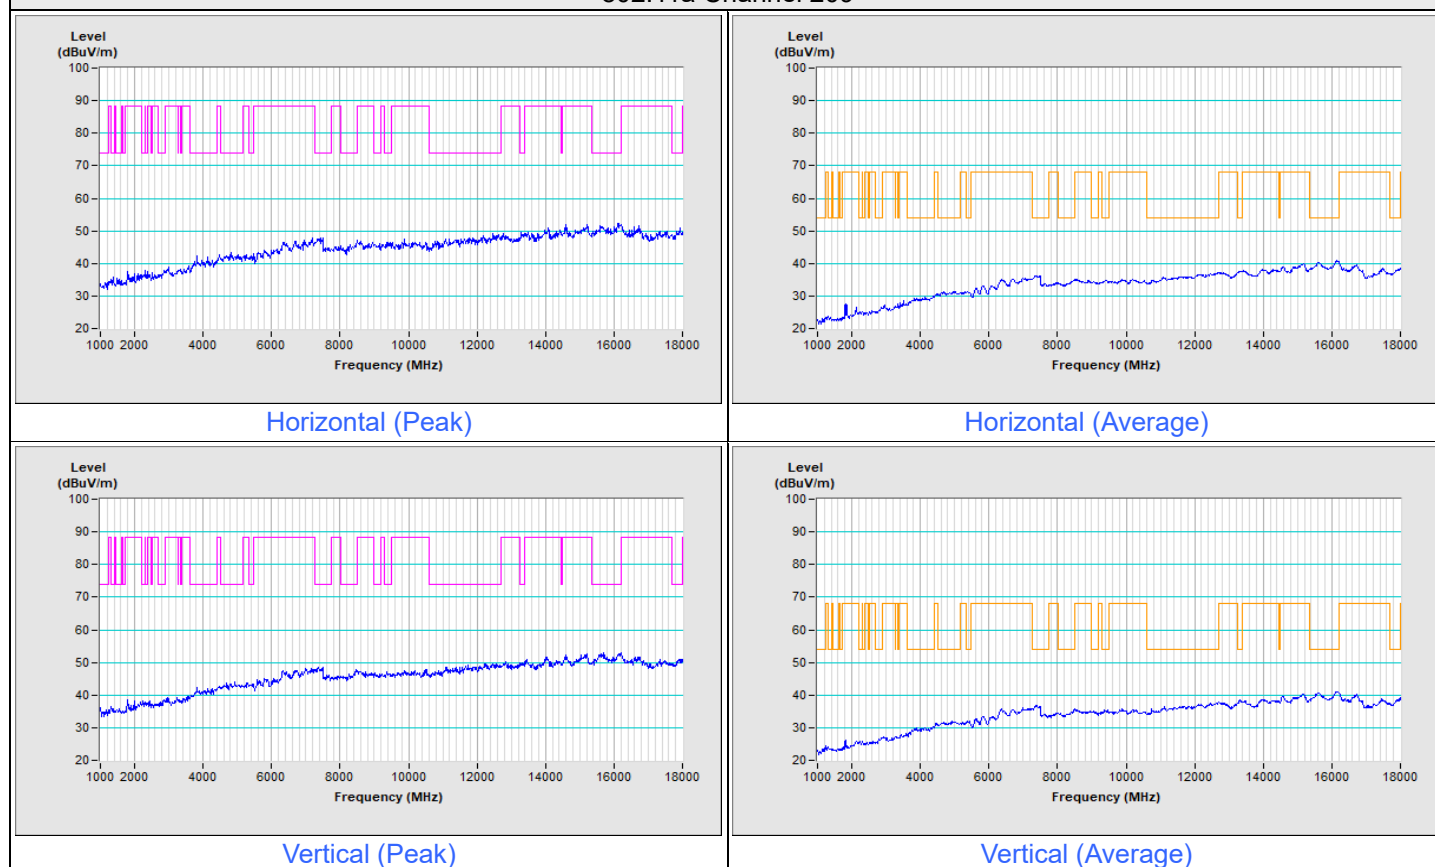


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT20) Channel 209

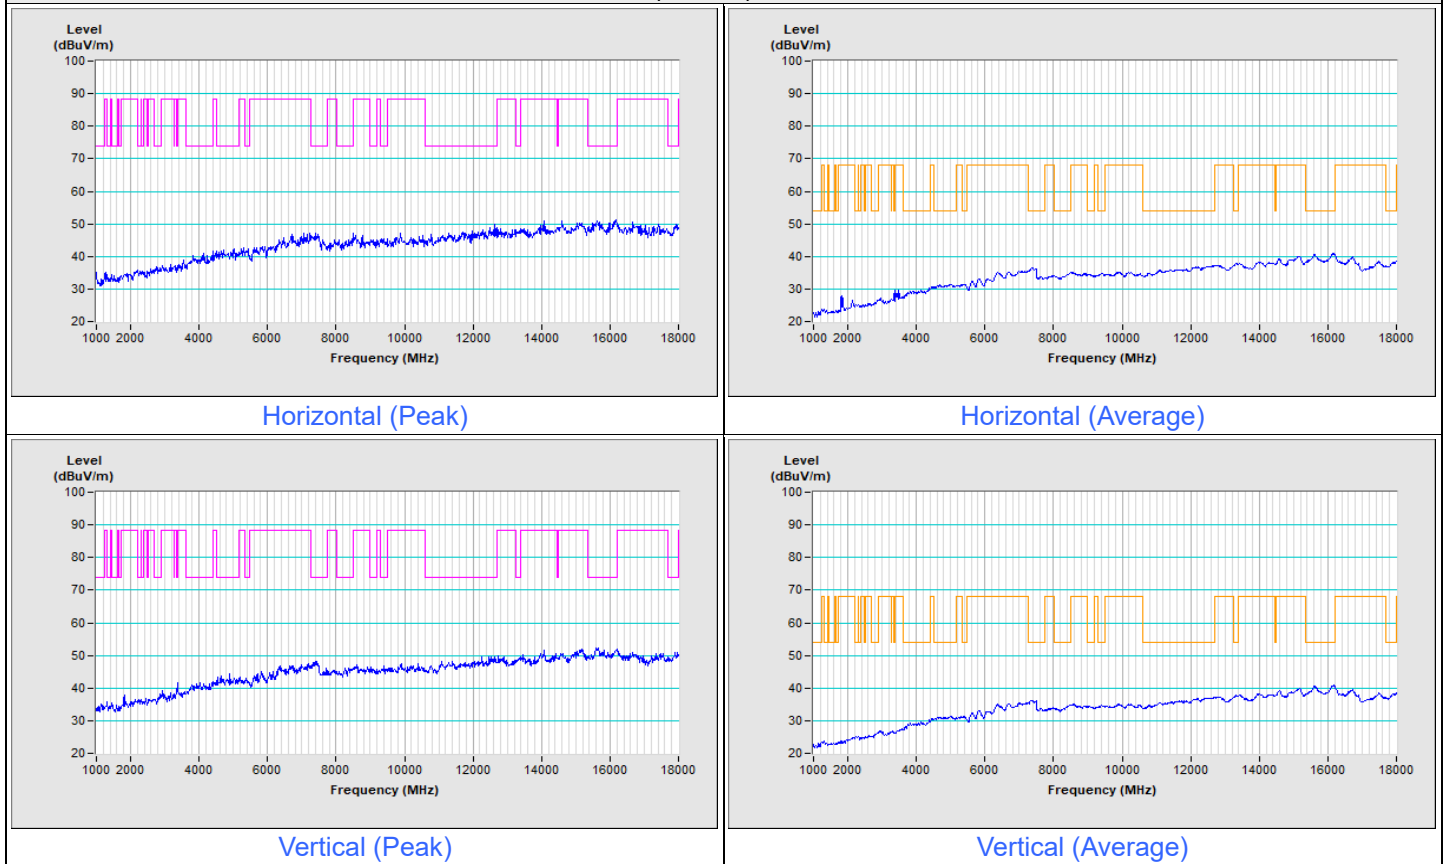


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT40) Channel 211

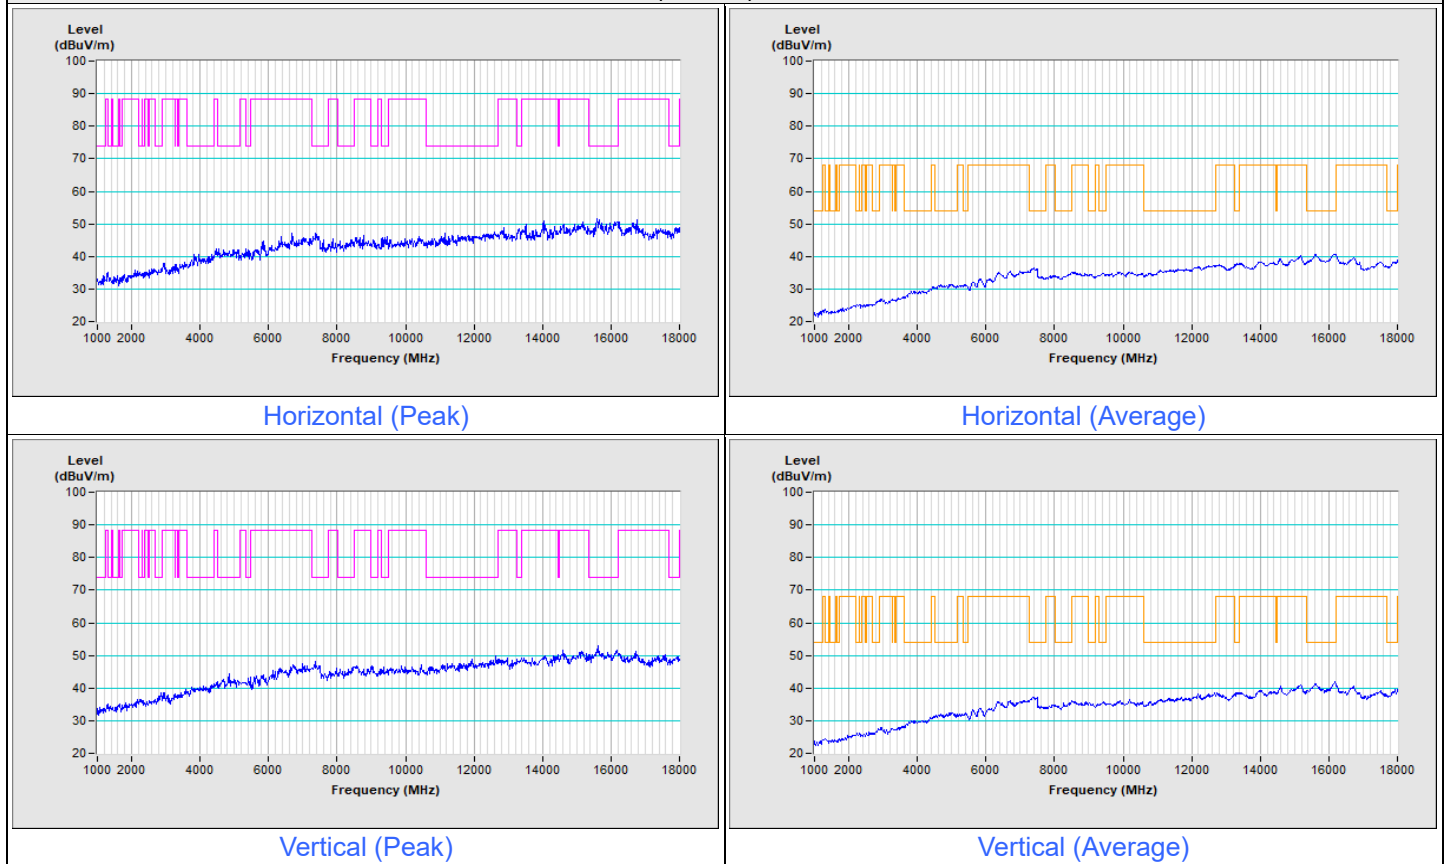


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT80) Channel 119

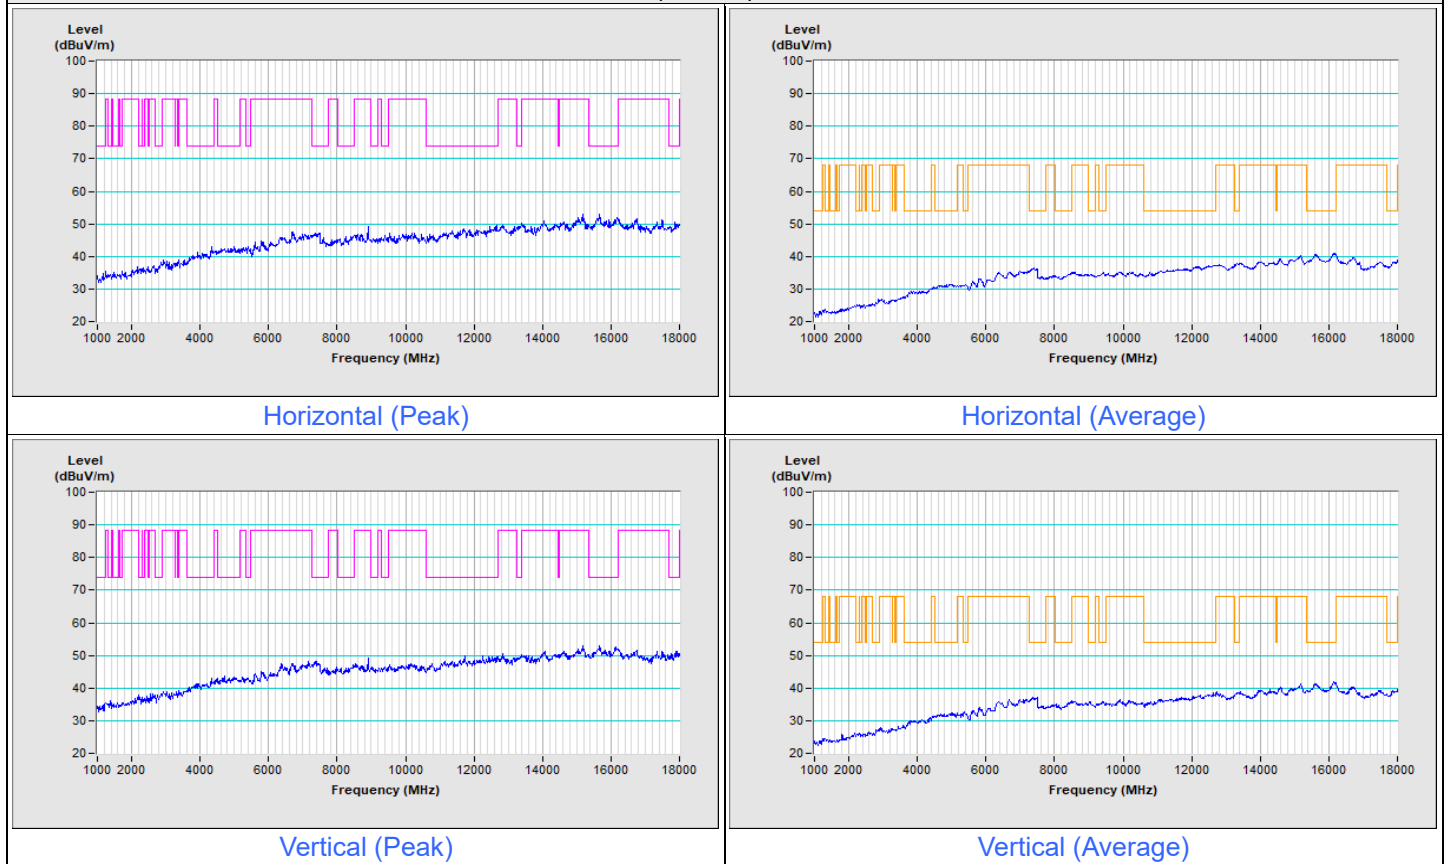


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Channel 207

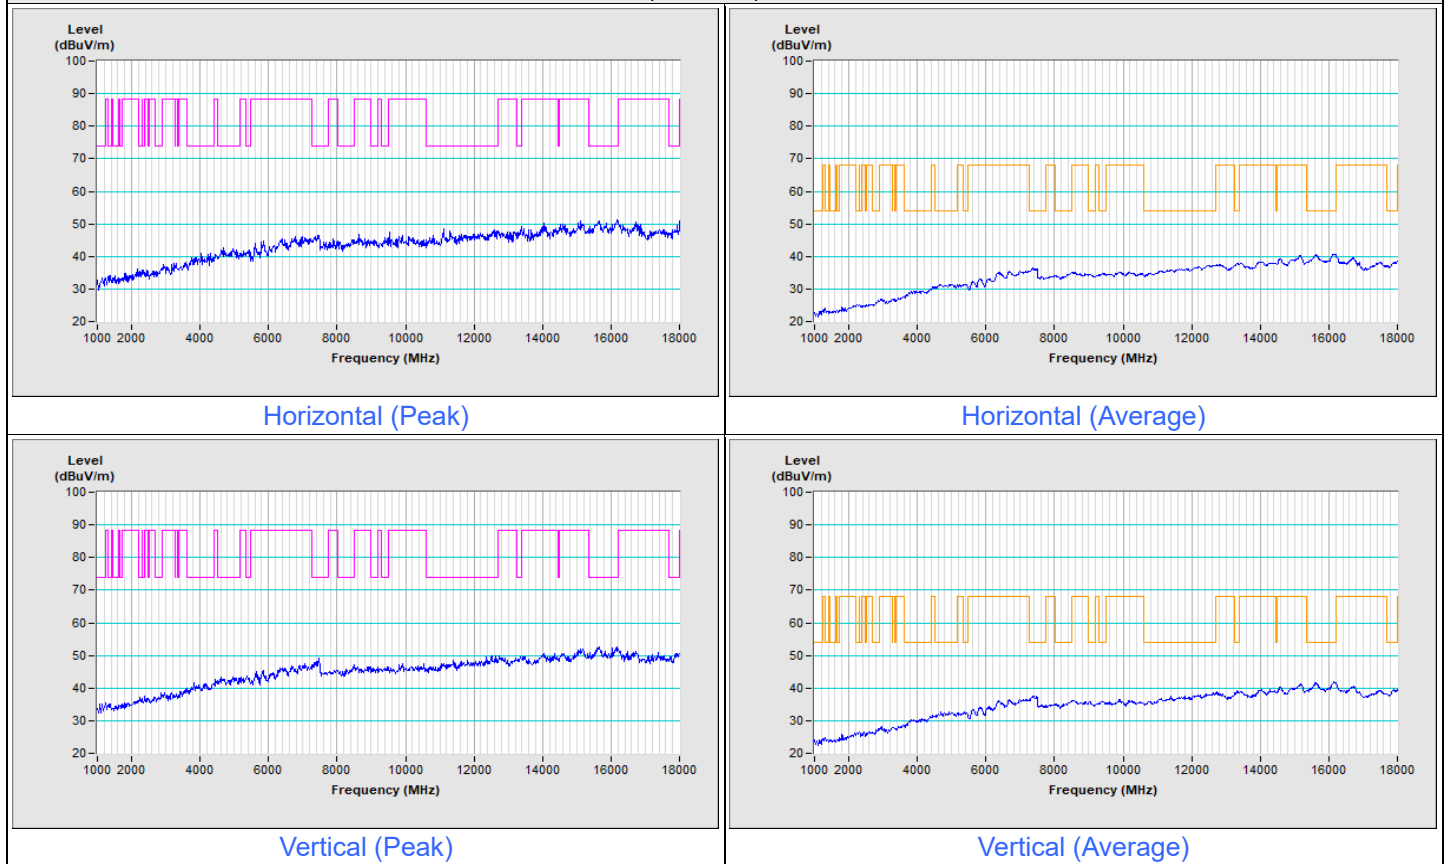


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT320) Channel 191

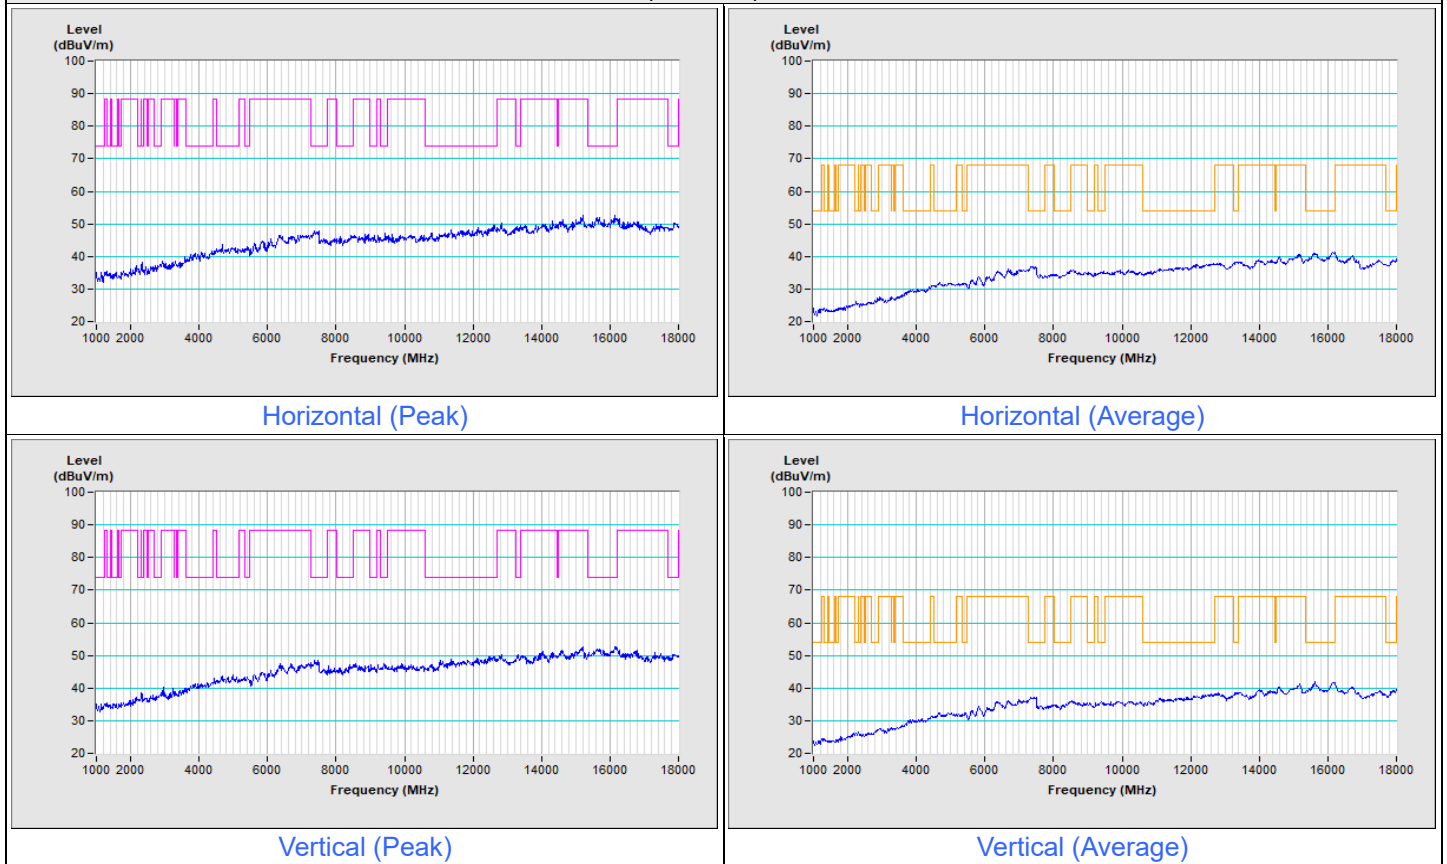

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---