


RADIO TEST REPORT

FCC ID : H8NTCG400
Equipment : Strand Mount Access Point
Brand Name : ASKEY
Model Name : TCG400-o
Applicant : Askey Computer Corp
10F, No. 119, JIANKANG RD., ZHONGHE DIST.,
NEW TAIPEI CITY 23585, Taiwan
Manufacturer : Askey Computer Corp
10F, No. 119, JIANKANG RD., ZHONGHE DIST.,
NEW TAIPEI CITY 23585, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on May 13, 2025, and testing was started from May 13, 2025 and completed on Aug. 25, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

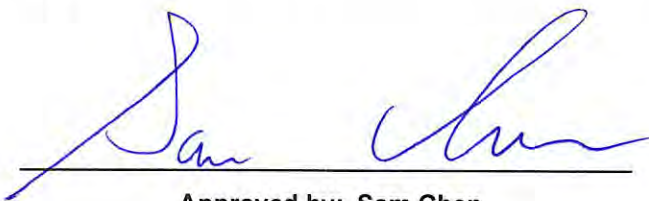

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration.....	16
2.3 EUT Operation during Test	16
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	19
3 Transmitter Test Result	21
3.1 Emission Bandwidth	21
3.2 Maximum Output Power	23
3.3 Power Spectral Density	26
3.4 Unwanted Emissions.....	29
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of Emission Bandwidth	
Appendix B. Test Results of Maximum Output Power	
Appendix C. Test Results of Power Spectral Density	
Appendix D. Test Results of Unwanted Emissions	
Appendix E. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 33
Issued Date : Sep. 16, 2025
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Output Power	PASS	-
3.3	15.407(a)	Power Spectral Density	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5250-5350	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5250-5350	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5250-5350	ac (VHT80), ax (HEW80), be (EHT80)	5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11a	20	4TX
5.25-5.35GHz	802.11n HT20	20	4TX
5.25-5.35GHz	802.11n HT20-BF	20	4TX
5.25-5.35GHz	802.11ac VHT20	20	4TX
5.25-5.35GHz	802.11ac VHT20-BF	20	4TX
5.25-5.35GHz	802.11ax HEW20	20	4TX
5.25-5.35GHz	802.11ax HEW20-BF	20	4TX
5.25-5.35GHz	802.11be EHT20	20	4TX
5.25-5.35GHz	802.11be EHT20-BF	20	4TX
5.25-5.35GHz	802.11n HT40	40	4TX
5.25-5.35GHz	802.11n HT40-BF	40	4TX
5.25-5.35GHz	802.11ac VHT40	40	4TX
5.25-5.35GHz	802.11ac VHT40-BF	40	4TX
5.25-5.35GHz	802.11ax HEW40	40	4TX
5.25-5.35GHz	802.11ax HEW40-BF	40	4TX
5.25-5.35GHz	802.11be EHT40	40	4TX
5.25-5.35GHz	802.11be EHT40-BF	40	4TX
5.25-5.35GHz	802.11ac VHT80	80	4TX
5.25-5.35GHz	802.11ac VHT80-BF	80	4TX
5.25-5.35GHz	802.11ax HEW80	80	4TX



Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11ax HEW80-BF	80	4TX
5.25-5.35GHz	802.11be EHT80	80	4TX
5.25-5.35GHz	802.11be EHT80-BF	80	4TX
5.15-5.35GHz	802.11ac VHT160	160	4TX
5.15-5.35GHz	802.11ac VHT160-BF	160	4TX
5.15-5.35GHz	802.11ax HEW160	160	4TX
5.15-5.35GHz	802.11ax HEW160-BF	160	4TX
5.15-5.35GHz	802.11be EHT160	160	4TX
5.15-5.35GHz	802.11be EHT160-BF	160	4TX
5.47-5.725GHz	802.11a	20	4TX
5.47-5.725GHz	802.11n HT20	20	4TX
5.47-5.725GHz	802.11n HT20-BF	20	4TX
5.47-5.725GHz	802.11ac VHT20	20	4TX
5.47-5.725GHz	802.11ac VHT20-BF	20	4TX
5.47-5.725GHz	802.11ax HEW20	20	4TX
5.47-5.725GHz	802.11ax HEW20-BF	20	4TX
5.47-5.725GHz	802.11be EHT20	20	4TX
5.47-5.725GHz	802.11be EHT20-BF	20	4TX
5.47-5.725GHz	802.11n HT40	40	4TX
5.47-5.725GHz	802.11n HT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT40	40	4TX
5.47-5.725GHz	802.11ac VHT40-BF	40	4TX
5.47-5.725GHz	802.11ax HEW40	40	4TX
5.47-5.725GHz	802.11ax HEW40-BF	40	4TX
5.47-5.725GHz	802.11be EHT40	40	4TX
5.47-5.725GHz	802.11be EHT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT80	80	4TX
5.47-5.725GHz	802.11ac VHT80-BF	80	4TX
5.47-5.725GHz	802.11ax HEW80	80	4TX
5.47-5.725GHz	802.11ax HEW80-BF	80	4TX
5.47-5.725GHz	802.11be EHT80	80	4TX
5.47-5.725GHz	802.11be EHT80-BF	80	4TX
5.47-5.725GHz	802.11ac VHT160	160	4TX
5.47-5.725GHz	802.11ac VHT160-BF	160	4TX
5.47-5.725GHz	802.11ax HEW160	160	4TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11ax HEW160-BF	160	4TX
5.47-5.725GHz	802.11be EHT160	160	4TX
5.47-5.725GHz	802.11be EHT160-BF	160	4TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port					Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	DFS	GPS					
1	1	4	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	Note1
2	3	2	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
3	4	1	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
4	2	3	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
5	-	-	4	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
6	-	-	2	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
7	-	-	1	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
8	-	-	3	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
9	-	-	-	1	-	AWAN	CHS3320N-D388	PIFA	I-Pex	4.57
10	-	-	-	-	1	AWAN	CHS3320N-D388	PIFA	I-Pex	4.33

Note 1:

Ant.	Gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
1	3.95	4.15	3.85	4.42	3.96	-	-
2	4.3	4.09	4.01	4.25	4.5	-	-
3	4.32	4.32	4.55	4.46	4.05	-	-
4	4.48	3.89	4.65	4.51	4.26	-	-
5	-	-	-	-	-	3.96	4.28
6	-	-	-	-	-	4.65	4.35
7	-	-	-	-	-	4.08	4.41
8	-	-	-	-	-	4.34	4.33



Ant.	Gain (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
1	-6.36	-10.16	-9.11	-10.23	-9.48	-	-
2	-6.43	-9.07	-10.09	-9.8	-10.18	-	-
3	-5.51	-9.52	-9.39	-11.15	-9.38	-	-
4	-3.55	-8	-7.24	-10.16	-10.54	-	-
5	-	-	-	-	-	-9.84	-9.85
6	-	-	-	-	-	-11.47	-11.66
7	-	-	-	-	-	-7.43	-9.67
8	-	-	-	-	-	-6.17	-7.94

Ant.	Uncorrelated (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	5.9949	4.904	4.8922	4.9339	5.7697	7.063	7.3218
Ant.	Uncorrelated (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	-3.9751	-7.4643	-8.2236	-8.6723	-8.0708	-7.483	-7.6229

Ant.	Correlated Gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	6.4216	5.2513	5.8649	5.9053	5.4561	7.5772	7.1478
Ant.	Correlated Gain (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	0.4203	-1.267	-1.5559	-2.1588	-1.2549	-1.3096	-1.4423



Note2: The above information was declared by manufacturer.

Note3: During operating in 5GHz, the antenna 9 which has the receiving function only is used for DFS.

For WLAN 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For WLAN 5GHz function:

For IEEE 802.11a/n/ac/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For additional DFS function (1RX):

Only Port 1(Ant. 9) can be used as a receiving antenna.

For WLAN 6GHz function:

For IEEE 802.11ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For GPS Function:

For GPS mode (1RX)

Only Port 1 can be use as receive antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11a	0.993	0.03	1.363m	10Hz (DC>=0.98)
802.11be EHT20	0.991	0.04	1m	10Hz (DC>=0.98)
802.11be EHT20-BF	0.951	0.22	5.34m	200
802.11be EHT40	0.983	0.07	535u	10Hz (DC>=0.98)
802.11be EHT40-BF	0.94	0.27	3.413m	300
802.11be EHT80	0.966	0.15	292.5u	10k
802.11be EHT80-BF	0.948	0.23	5.402m	200
802.11be EHT160	0.946	0.24	178.75u	10k
802.11be EHT160-BF	0.963	0.16	5.402m	200

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

EUT Power Type	From host system		
Beamforming Function	☒	With beamforming	☐ Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.		
Weather Band	☒	With 5600~5650MHz	☐ Without 5600~5650MHz
Function	☒	Outdoor P2M	☐ Indoor P2M
	☐	Fixed P2P	☐ Client
	☒	Point-to-multipoint	☐ Point-to-point
TPC Function	☒	With TPC	☐ Without TPC
Channel Puncturing Function	☐	Supported Static Puncturing	
	☐	Supported Dynamic Puncturing (Reduce BW)	
	☒	Unsupported	
Support RU	☒	Full RU	☐ Partial RU
Test Software Version	Non-beamforming: DUT GUI 2.20.1 Beamforming: DOS [ver 6.1.7601]		

Note: The above information was declared by manufacturer.

1.1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR550625AB

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding 6GHz (UNII 5, UNII 7) Standard Power Access Point function for the device.	It does not affect the test result of this test report.
2. Adding 5GHz (UNII 2A, UNII 2C) for the device.	1. Emission Bandwidth 2. Maximum Output Power 3. Power Spectral Density 4. Unwanted Emissions above 1GHz



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Stim Sung	21.7~22.3 / 58~64	Jun. 12, 2025~ Aug. 25, 2025
Radiated	03CH02-CB	Chris Li	21.5~23.3 / 58~61	May 13, 2025~ Jun. 26, 2025
				Jul. 02, 2025~ Jul. 05, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2025

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%

Test Date: After May 27, 2025

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_4TX
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
802.11be EHT20_Nss1,(MCS0)_4TX
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
802.11be EHT40_Nss1,(MCS0)_4TX
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0)_4TX
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
802.11be EHT160_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5270MHz
5310MHz



5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
Refer to Sporton Test Report No.: FA550625-01 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.1.7601].
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by WLAN module and transmit duty cycle no less than 98%.



2.4 Accessories

Accessories
Sealing collar 1*1
Sealing collar 2*1
Ground cable*1: Non-Shielded, 3m
Bracket*2
Grounding screw*1

2.5 Support Equipment

For Radiated (above 1GHz)/non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A

For Radiated (above 1GHz)/beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A
D	NB	DELL	E6230	N/A
E	WLAN module	Intel	BE200NGW	PD9BE200NG


For RF Conducted/non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A


**For RF Conducted/beamforming mode:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	WLAN module	Intel	BE200NGW	PD9BE200NG
D	NB	DELL	E4300	N/A
E	Fiber converter	CISCO	SFP-10G-SR	N/A

2.6 Test Setup Diagram

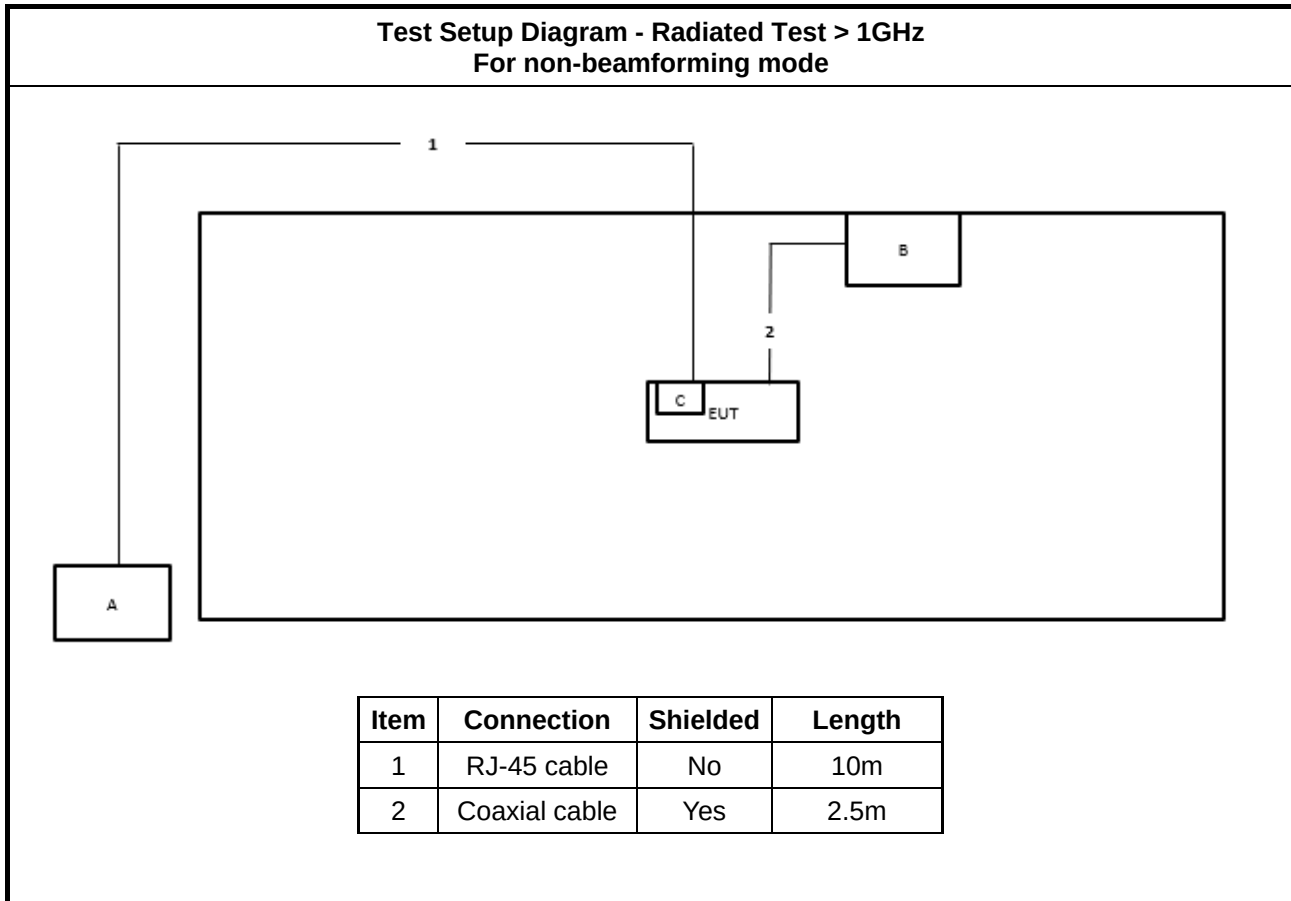

**Test Setup Diagram - Radiated Test > 1GHz
For beamforming mode**

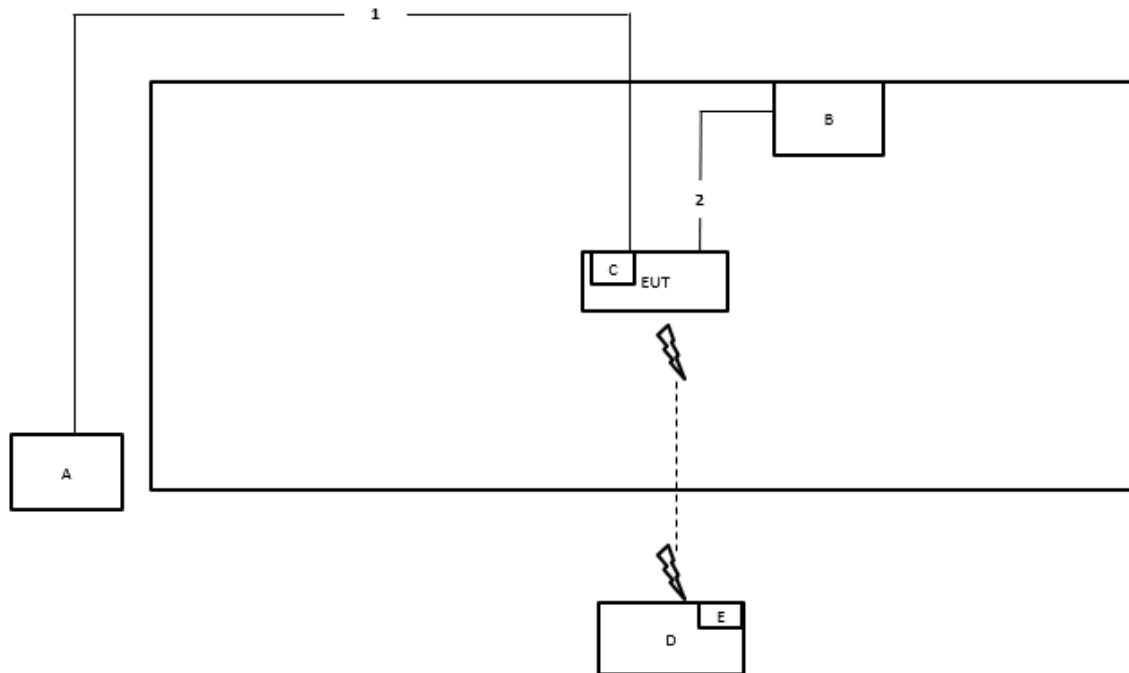

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Coaxial cable	Yes	2.5m

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth ≥ 500kHz.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

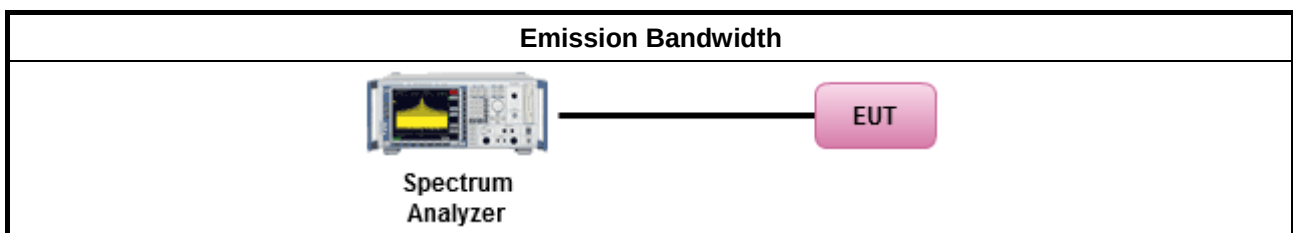



3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A



3.2 Maximum Output Power

3.2.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
	▪ For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
	▪ For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
☐ For the 5.725-5.85 GHz band:	

	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
	Average over on/off periods with duty factor
	☒ For Straddle channel Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
	☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
	☒ For Other channel Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
	☒ For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
	☐ For radiated measurement.
	Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.2.4 Test Setup

For Straddle channel

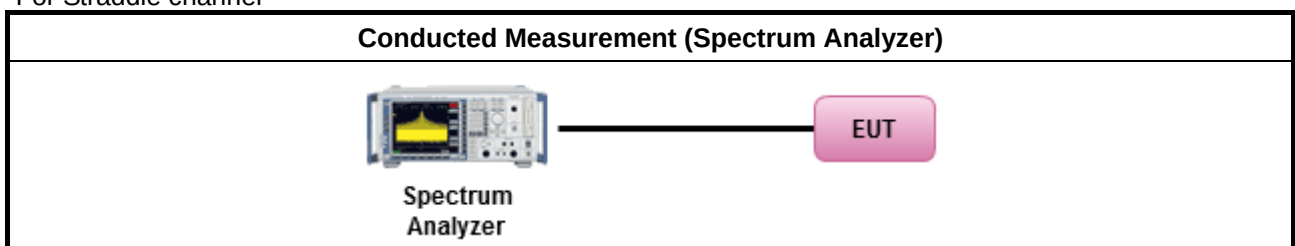

For Other channel

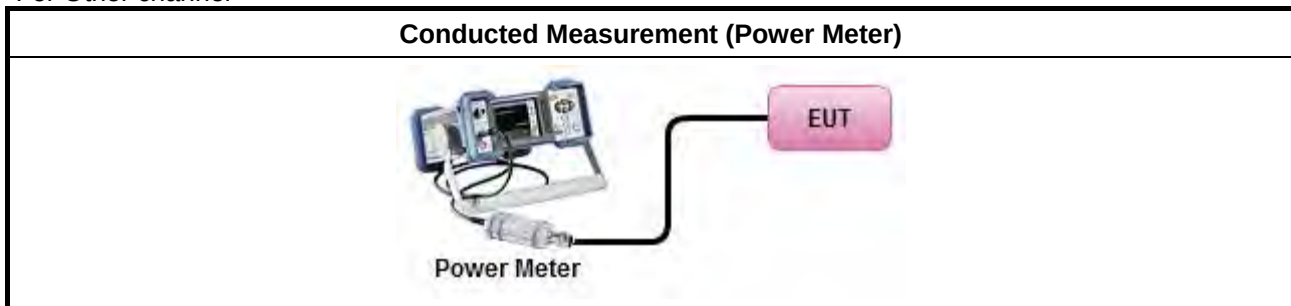

3.2.5 Test Result of Maximum Output Power

Refer as Appendix B



3.3 Power Spectral Density

3.3.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.3.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

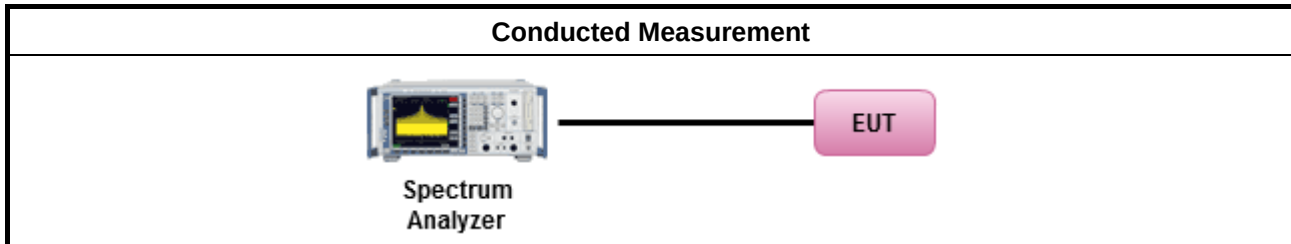

3.3.5 Test Result of Power Spectral Density

Refer as Appendix C



3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.4.4 Test Setup

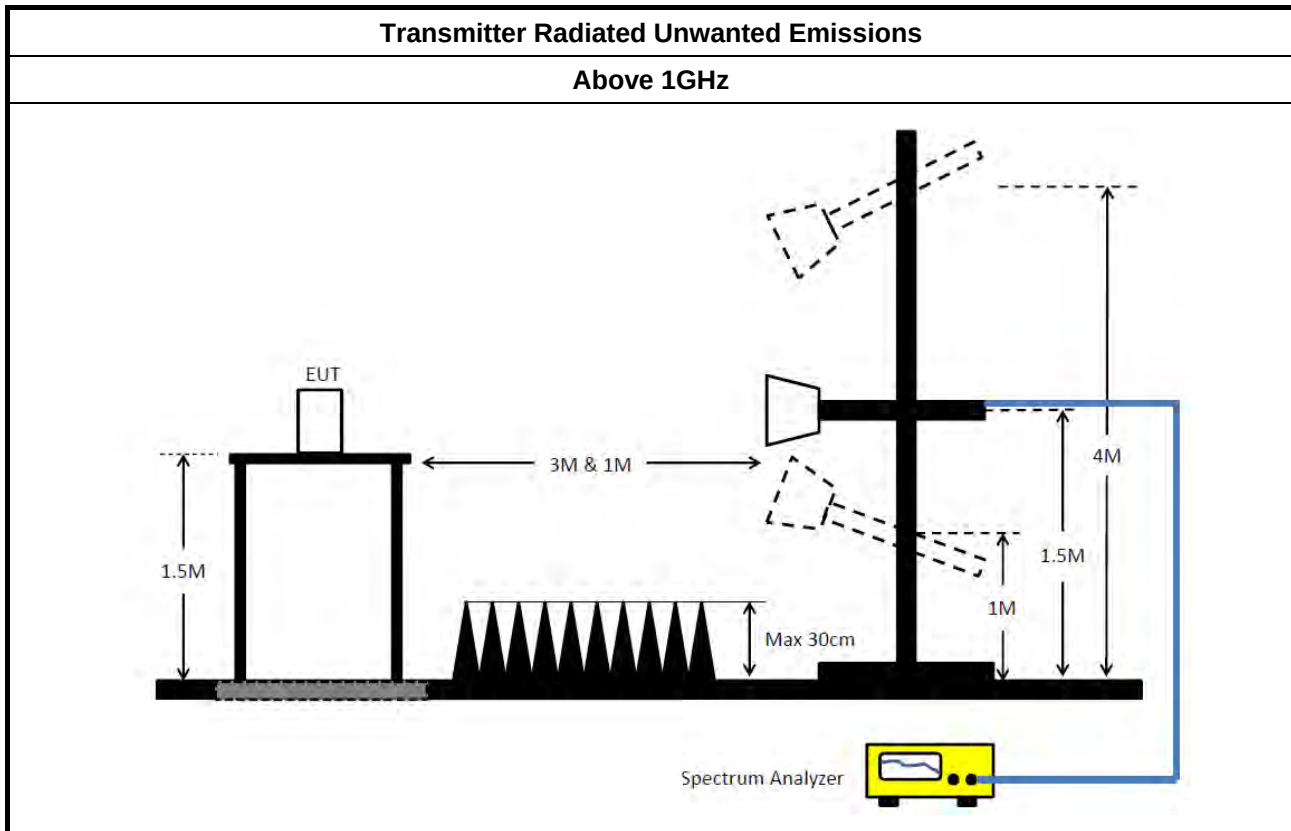

3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.4.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Aug. 27, 2024	Aug. 26, 2025	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)



RADIO TEST REPORT

Report No. : FR550625-01AA

Switch	SPTCB	SP-SWI	SWI-02	1–18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	84.4M	77.631M	77M6D1D	82.32M	77.383M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	82.64M	77.561M	77M6D1D	82.4M	77.561M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.595M	16.839M	16M8D1D	22.275M	16.693M
802.11be EHT20_Nss1,(MCS0)_4TX	23.155M	19.079M	19M1D1D	22.275M	19.011M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	24.035M	19.49M	19M5D1D	22.825M	19.365M
802.11be EHT40_Nss1,(MCS0)_4TX	43.78M	38.182M	38M2D1D	42.46M	37.977M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	42.9M	38.081M	38M1D1D	41.36M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	86.02M	77.704M	77M7D1D	85.58M	77.462M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	85.14M	77.661M	77M7D1D	84.48M	77.561M
802.11be EHT160_Nss1,(MCS0)_4TX	83.36M	77.858M	77M9D1D	82.64M	77.742M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	82.4M	77.721M	77M7D1D	82.08M	77.641M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	27.775M	16.907M	16M9D1D	16.17M	13.355M
802.11be EHT20_Nss1,(MCS0)_4TX	23.045M	19.107M	19M1D1D	16.47M	14.542M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.265M	19.365M	19M4D1D	16.38M	14.633M
802.11be EHT40_Nss1,(MCS0)_4TX	51.81M	38.168M	38M2D1D	35.595M	33.732M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	45.21M	38.181M	38M2D1D	35.21M	33.793M
802.11be EHT80_Nss1,(MCS0)_4TX	141.46M	77.921M	77M9D1D	77.325M	73.381M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	85.36M	78.061M	78M1D1D	78.225M	73.238M
802.11be EHT160_Nss1,(MCS0)_4TX	287.76M	157.574M	158MD1D	168.52M	156.848M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	165.88M	157.521M	158MD1D	164.56M	157.321M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	3.18M	4.67M	4M67D1D	3.16M	4.145M
802.11be EHT20_Nss1,(MCS0)_4TX	4.46M	4.597M	4M60D1D	4M	4.582M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.6M	5.857M	5M86D1D	4.6M	5.377M
802.11be EHT40_Nss1,(MCS0)_4TX	4.08M	4.693M	4M69D1D	3.84M	4.441M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.06M	11.294M	11M3D1D	4.06M	4.438M
802.11be EHT80_Nss1,(MCS0)_4TX	3.88M	4.496M	4M50D1D	3.84M	4.244M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.06M	21.629M	21M6D1D	4.06M	11.474M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	23.1M	16.811M	22.495M	16.703M	22.44M	16.716M	23.375M	16.816M
5300MHz	Pass	Inf	22.99M	16.813M	22.495M	16.699M	22.275M	16.7M	23.43M	16.824M
5320MHz	Pass	Inf	23.045M	16.797M	22.44M	16.693M	22.605M	16.699M	23.595M	16.839M
5500MHz	Pass	Inf	22.935M	16.803M	27.775M	16.831M	22.33M	16.701M	23.485M	16.817M
5580MHz	Pass	Inf	22.99M	16.773M	23.76M	16.75M	22.44M	16.695M	23.54M	16.842M
5700MHz	Pass	Inf	22.825M	16.764M	22.11M	16.676M	22.605M	16.712M	23.705M	16.907M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.725M	13.491M	17.055M	13.355M	16.17M	13.367M	16.725M	13.521M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.16M	4.187M	3.16M	4.307M	3.16M	4.145M	3.18M	4.67M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	23.1M	19.077M	22.605M	19.079M	22.495M	19.042M	22.385M	19.011M
5300MHz	Pass	Inf	23.155M	19.074M	22.66M	19.078M	22.33M	19.032M	22.33M	19.027M
5320MHz	Pass	Inf	23.1M	19.064M	22.605M	19.062M	22.275M	19.025M	22.385M	19.019M
5500MHz	Pass	Inf	22.99M	19.066M	22.715M	19.092M	22.385M	19.02M	22.275M	19.002M
5580MHz	Pass	Inf	22.55M	19.063M	22.605M	19.107M	22.44M	19.019M	22.55M	19.025M
5700MHz	Pass	Inf	23.045M	19.03M	22.55M	19.035M	22.55M	19.025M	22.935M	19.046M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.695M	14.549M	16.47M	14.551M	16.47M	14.552M	16.56M	14.542M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.28M	4.582M	4M	4.596M	4.26M	4.587M	4.46M	4.597M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	43.78M	38.012M	42.46M	37.977M	43.01M	38.088M	43.23M	38.143M
5310MHz	Pass	Inf	43.78M	38.027M	42.46M	37.998M	43.01M	38.133M	43.45M	38.182M
5510MHz	Pass	Inf	42.35M	37.992M	42.57M	38.01M	43.12M	38.122M	43.34M	38.168M
5550MHz	Pass	Inf	42.68M	38.017M	51.81M	38.125M	42.9M	38.148M	43.23M	38.158M
5670MHz	Pass	Inf	42.57M	37.991M	42.35M	37.959M	42.9M	38.088M	43.12M	38.053M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.875M	33.831M	35.595M	33.793M	36.19M	33.876M	35.98M	33.732M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	4.441M	4.02M	4.474M	4.08M	4.517M	3.84M	4.693M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	85.58M	77.645M	85.8M	77.704M	86.02M	77.605M	86.02M	77.462M
5530MHz	Pass	Inf	85.58M	77.656M	88M	77.769M	86.02M	77.643M	85.8M	77.475M
5610MHz	Pass	Inf	85.36M	77.674M	141.46M	77.921M	86.02M	77.649M	85.58M	77.408M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	77.625M	73.531M	77.325M	73.389M	78.45M	73.479M	78.225M	73.381M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.88M	4.415M	3.84M	4.377M	3.88M	4.496M	3.84M	4.244M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	82.32M	77.516M	83.2M	77.572M	82.4M	77.383M	84.4M	77.631M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	82.64M	77.858M	83.36M	77.857M	82.8M	77.742M	82.8M	77.761M
5570MHz	Pass	Inf	210.32M	156.98M	287.76M	157.574M	168.52M	156.856M	169.84M	156.848M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	23.705M	19.465M	23.65M	19.465M	24.035M	19.465M	23.87M	19.465M
5300MHz	Pass	Inf	23.705M	19.465M	23.98M	19.465M	23.76M	19.465M	23.98M	19.49M
5320MHz	Pass	Inf	22.99M	19.365M	23.1M	19.365M	22.825M	19.365M	23.21M	19.365M
5500MHz	Pass	Inf	22.935M	19.34M	23.045M	19.365M	22.935M	19.34M	22.99M	19.34M
5580MHz	Pass	Inf	22.88M	19.015M	22.935M	19.04M	23.265M	19.015M	22.88M	19.015M
5700MHz	Pass	Inf	23.155M	19.365M	22.88M	19.365M	22.99M	19.365M	23.1M	19.365M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.545M	14.648M	16.395M	14.633M	16.38M	14.648M	16.425M	14.663M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.6M	5.537M	4.6M	5.377M	4.6M	5.617M	4.6M	5.857M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	41.36M	37.931M	41.58M	37.981M	41.8M	37.881M	41.69M	37.931M
5310MHz	Pass	Inf	42.79M	38.081M	42.9M	38.081M	42.79M	38.081M	42.9M	38.031M
5510MHz	Pass	Inf	43.12M	38.031M	43.23M	38.081M	43.34M	38.081M	43.23M	38.081M
5550MHz	Pass	Inf	44.77M	38.181M	44.99M	38.131M	45.21M	38.131M	45.1M	38.181M
5670MHz	Pass	Inf	43.56M	38.031M	43.78M	38.081M	44M	38.031M	44.33M	38.031M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.315M	33.828M	35.21M	33.793M	35.455M	33.863M	35.42M	33.828M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	5.677M	4.06M	4.438M	4.06M	6.197M	4.06M	11.294M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	84.92M	77.661M	85.14M	77.561M	84.48M	77.561M	84.7M	77.561M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5530MHz	Pass	Inf	84.26M	77.861M	84.04M	77.761M	84.26M	77.961M	84.92M	77.961M
5610MHz	Pass	Inf	84.92M	77.961M	85.36M	77.961M	84.7M	77.961M	85.14M	78.061M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	78.525M	73.313M	78.225M	73.238M	78.75M	73.313M	78.825M	73.463M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	16.492M	4.06M	11.474M	4.06M	20.23M	4.06M	21.629M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	82.4M	77.561M	82.48M	77.561M	82.48M	77.561M	82.64M	77.561M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	82.24M	77.641M	82.16M	77.721M	82.4M	77.641M	82.08M	77.641M
5570MHz	Pass	Inf	164.56M	157.321M	165.88M	157.321M	165.44M	157.321M	165.44M	157.521M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5260MHz

12/06/2025

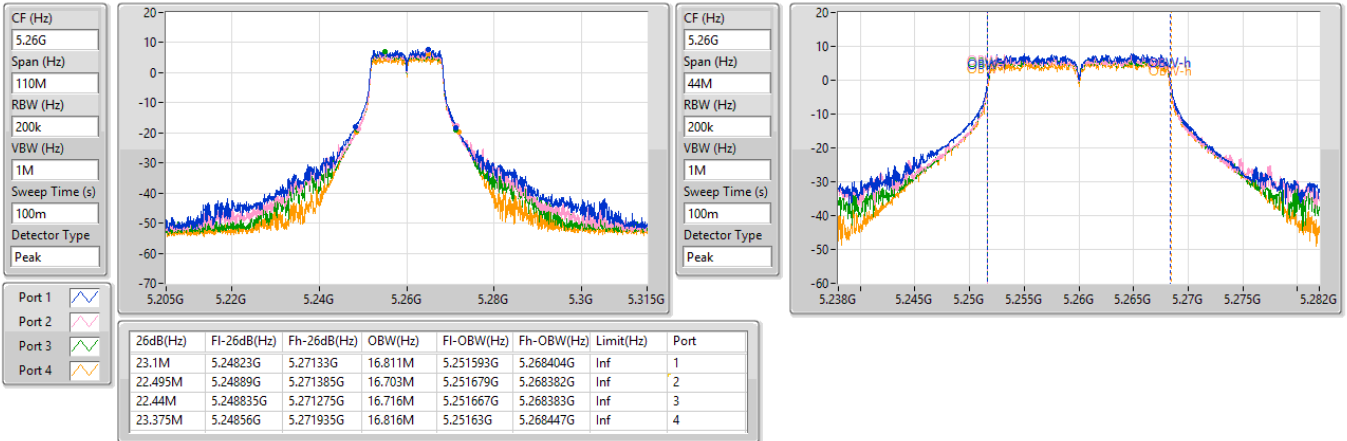


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5300MHz

12/06/2025

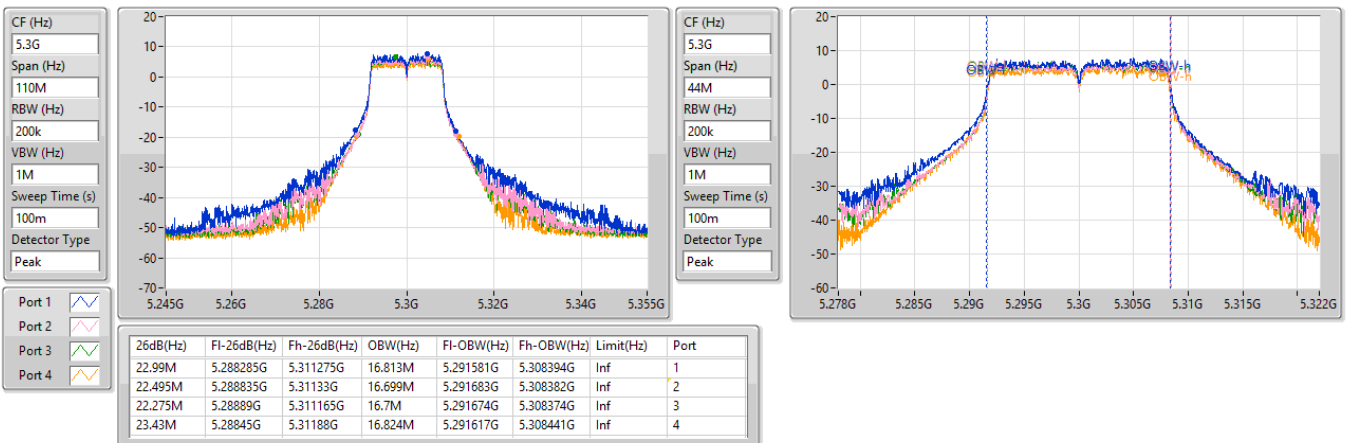


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5320MHz

12/06/2025

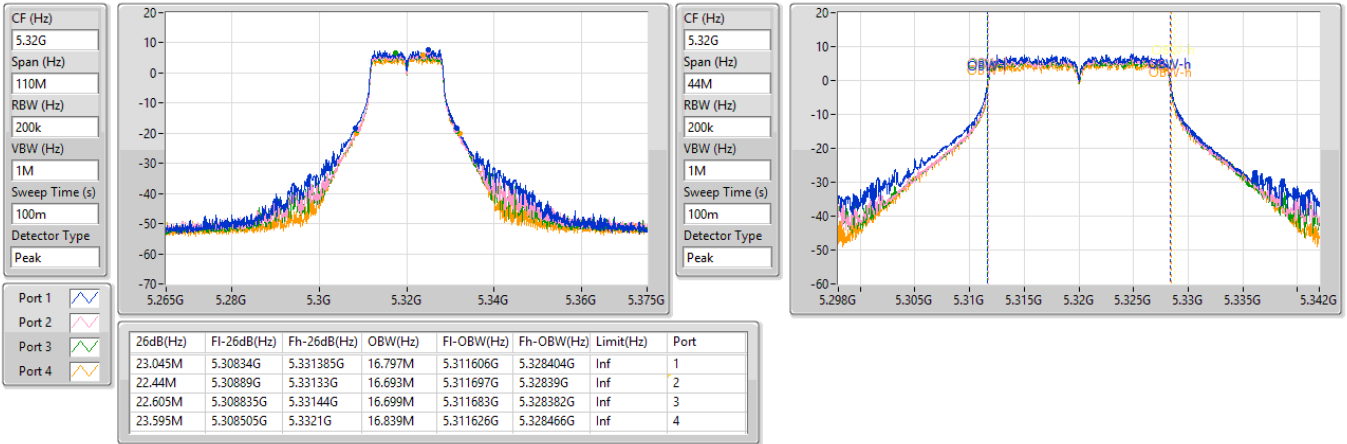


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5500MHz

12/06/2025

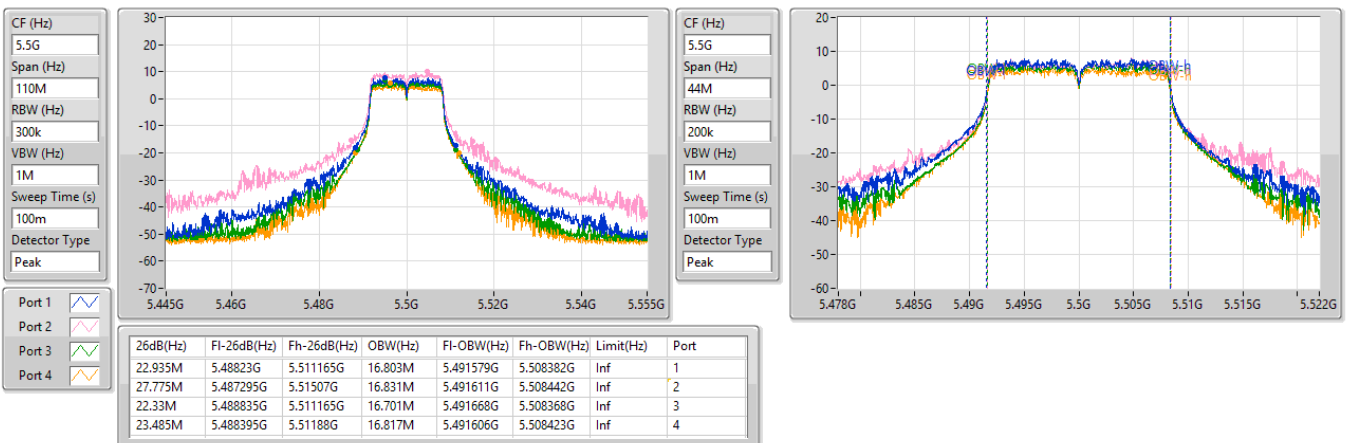


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5580MHz

12/06/2025

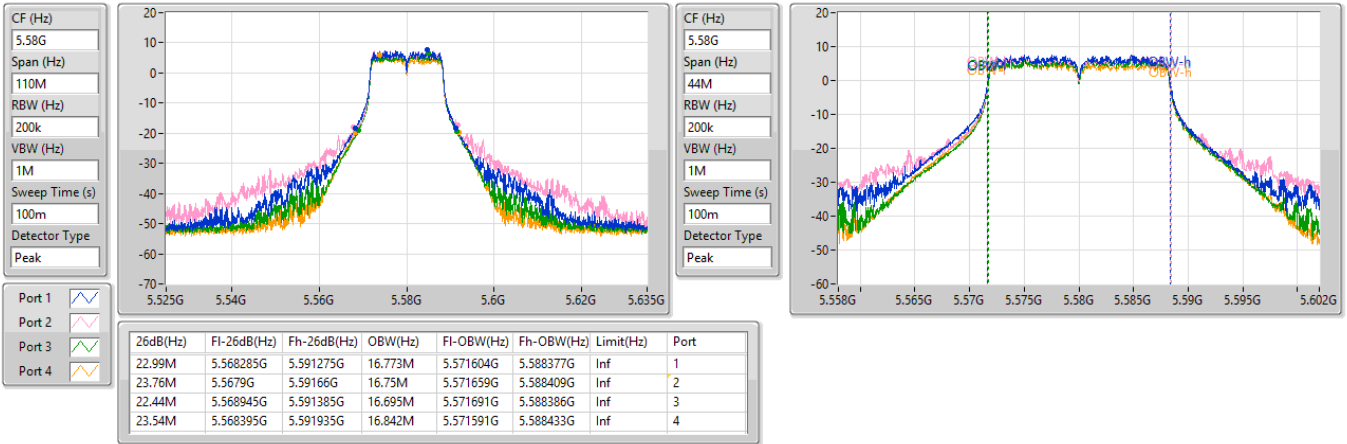


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5700MHz

12/06/2025

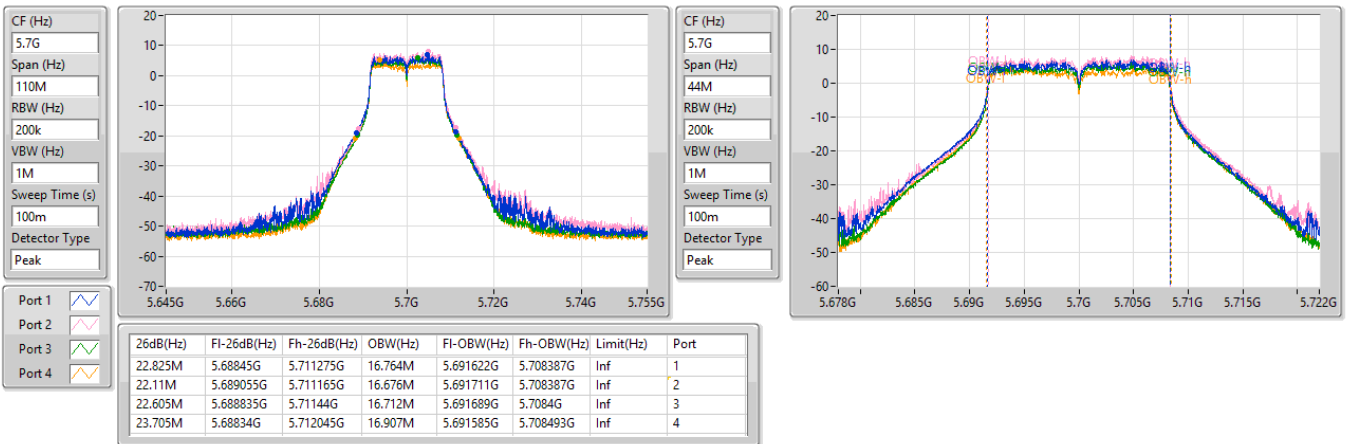


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

12/06/2025

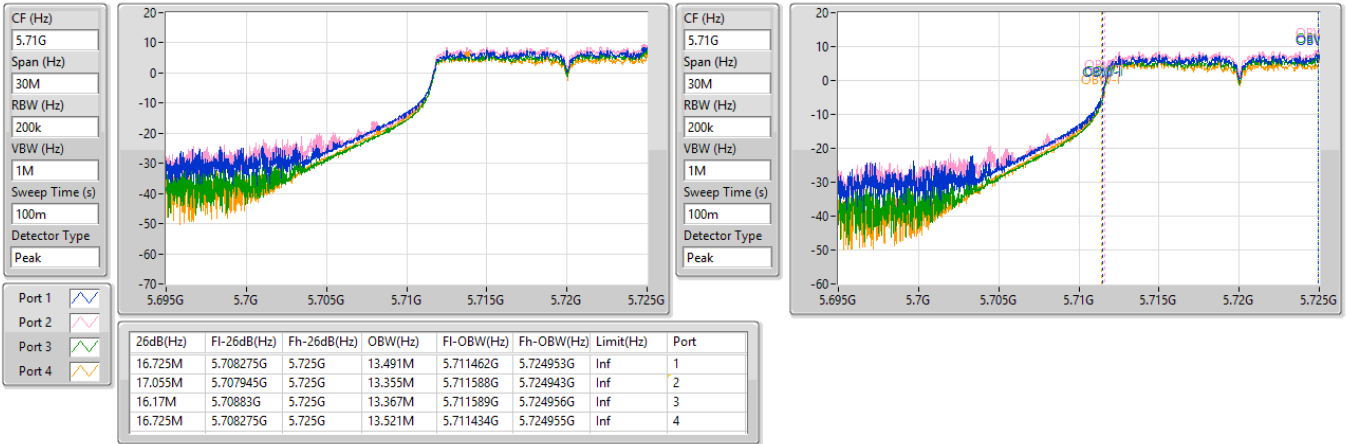


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5720MHz Straddle 5.725-5.85GHz

12/06/2025

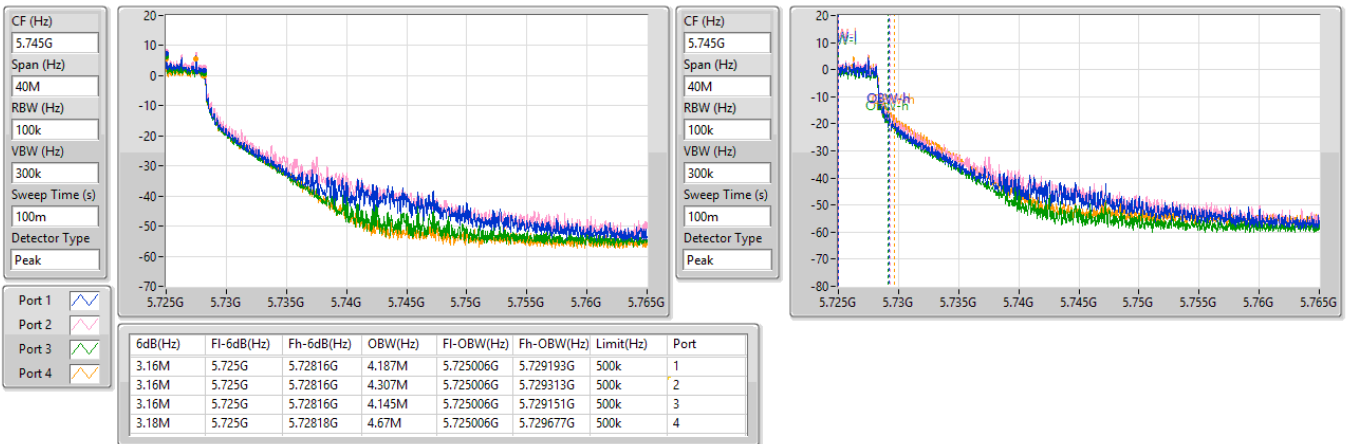


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

12/06/2025

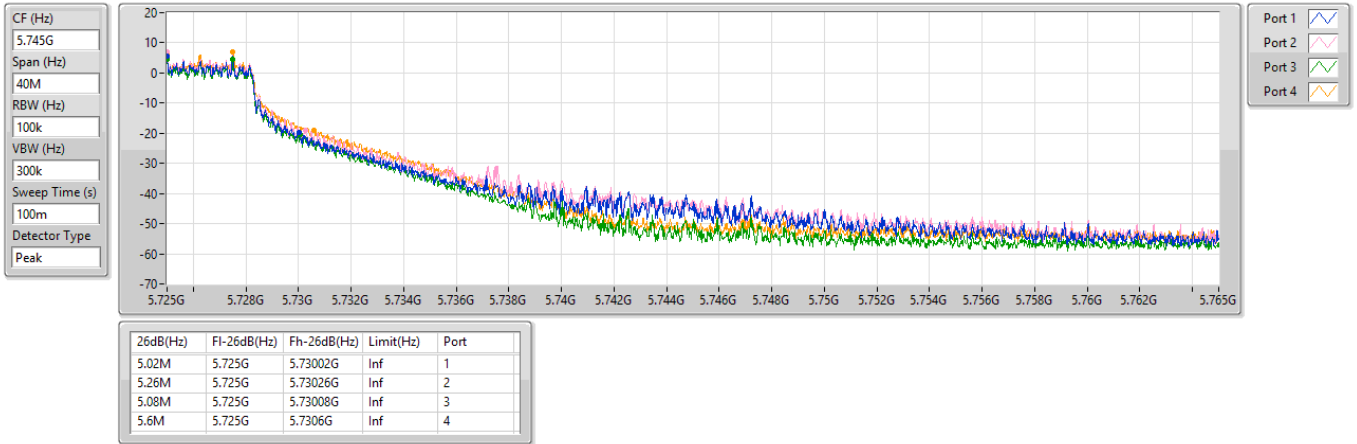
5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
5260MHz

12/06/2025

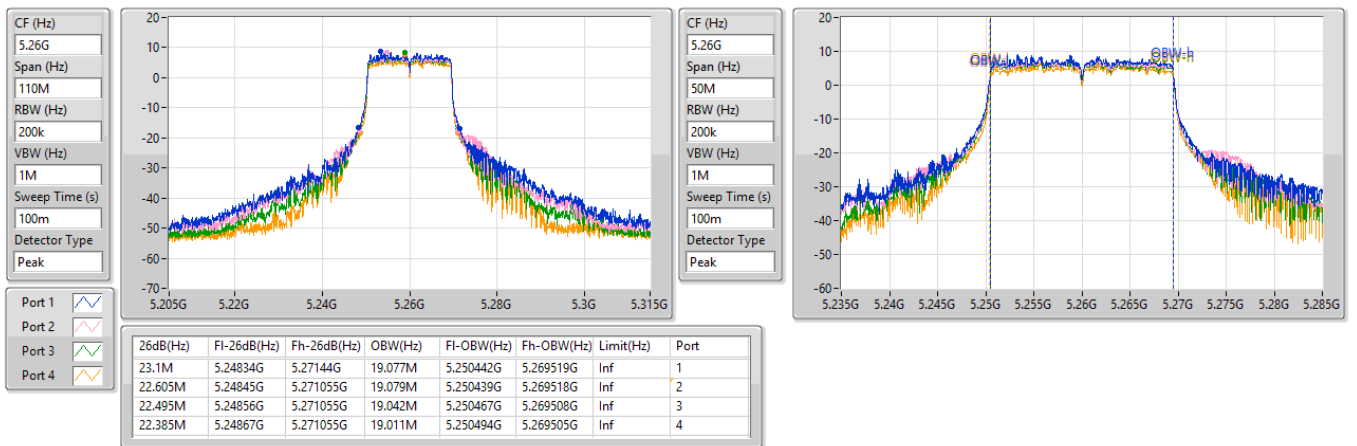


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5300MHz

12/06/2025

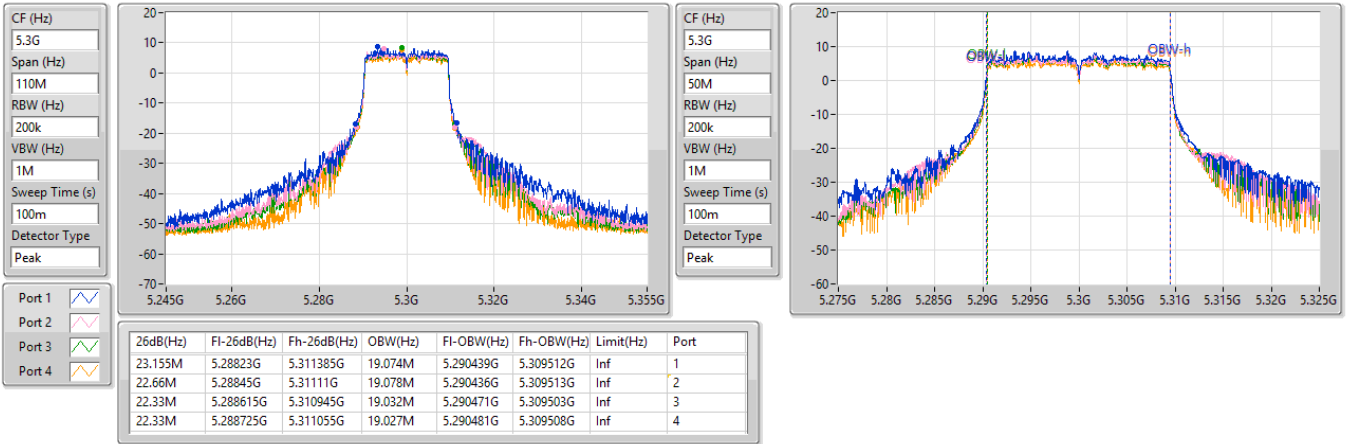


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5320MHz

12/06/2025


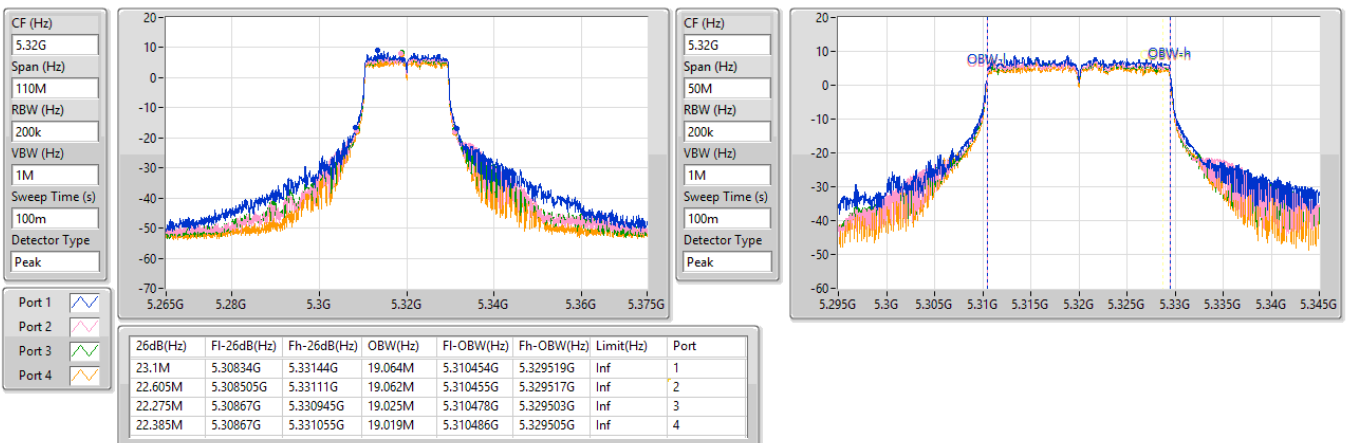


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5500MHz

12/06/2025

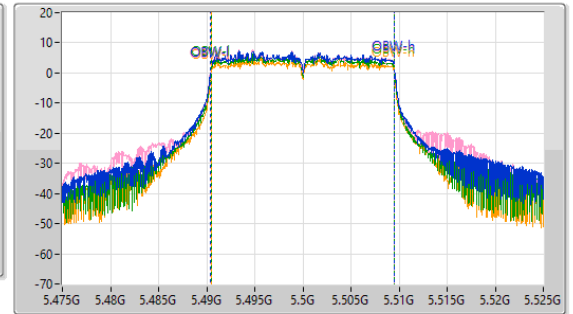
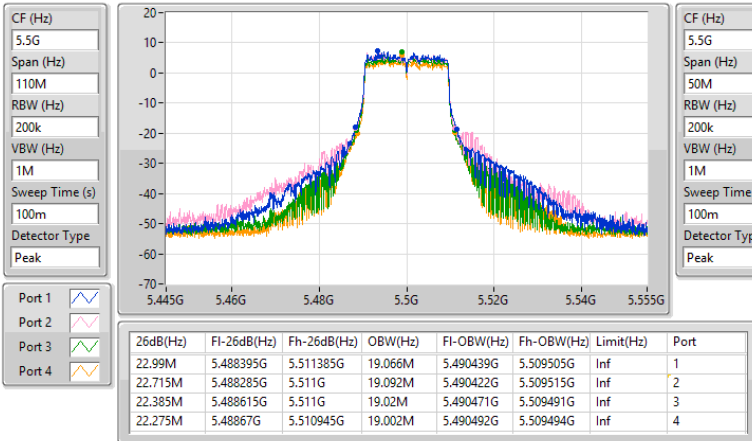


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5580MHz

12/06/2025

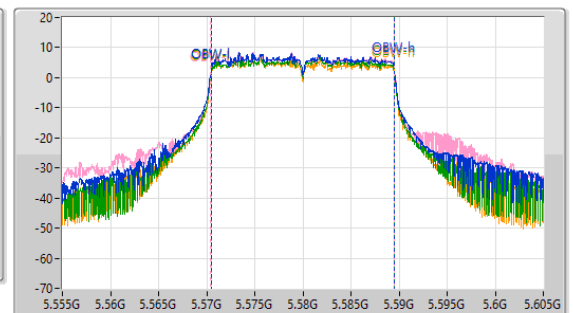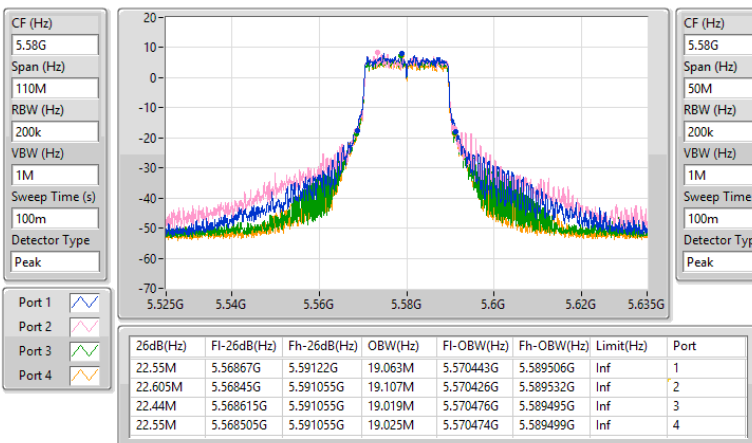


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5700MHz

12/06/2025

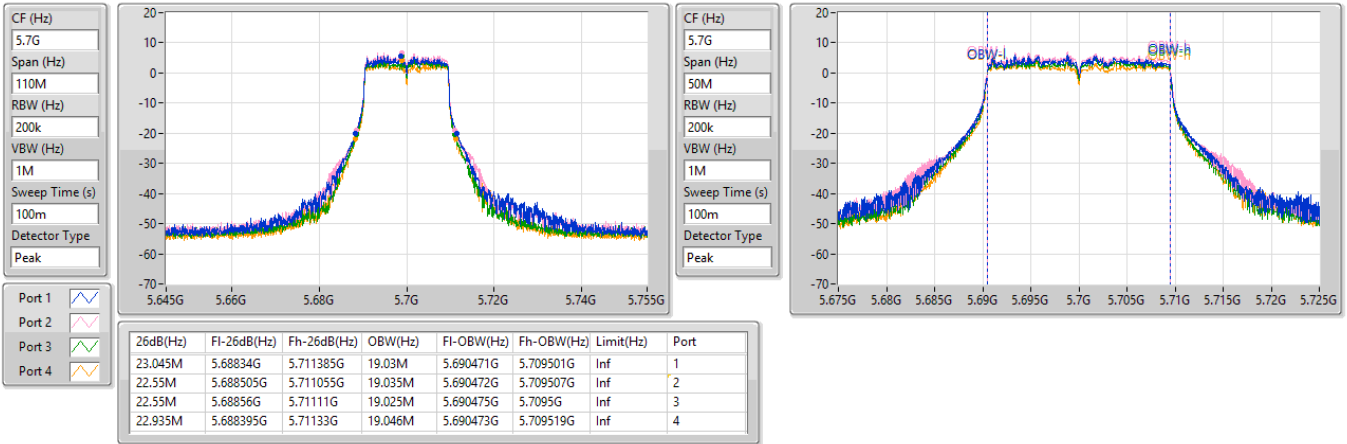


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

12/06/2025

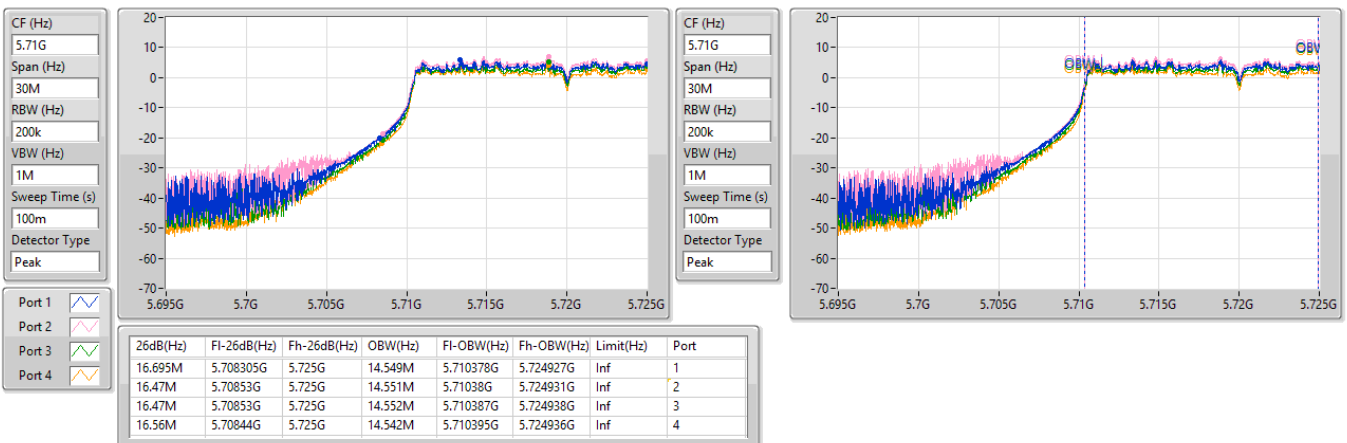


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

12/06/2025

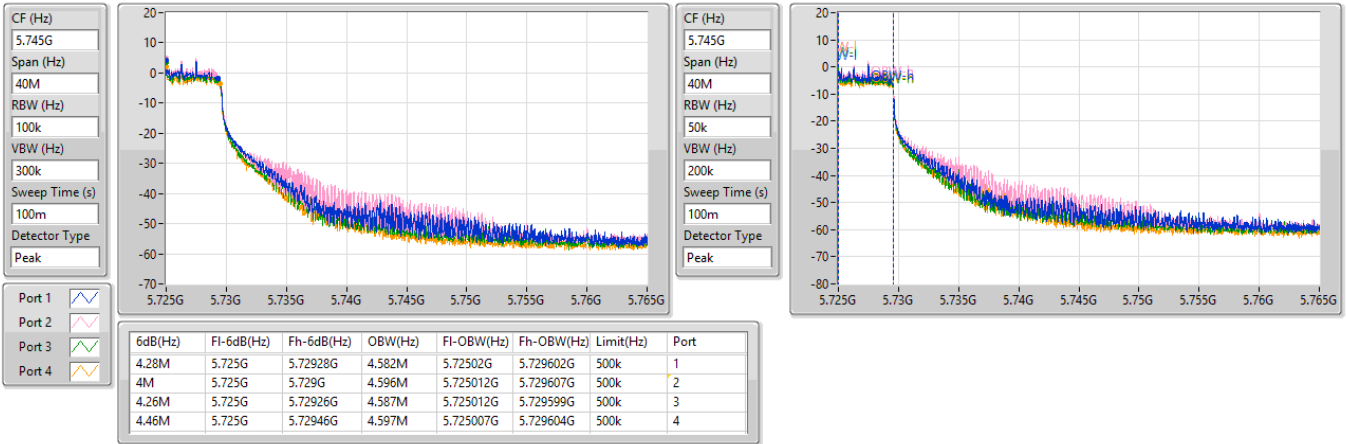


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

12/06/2025

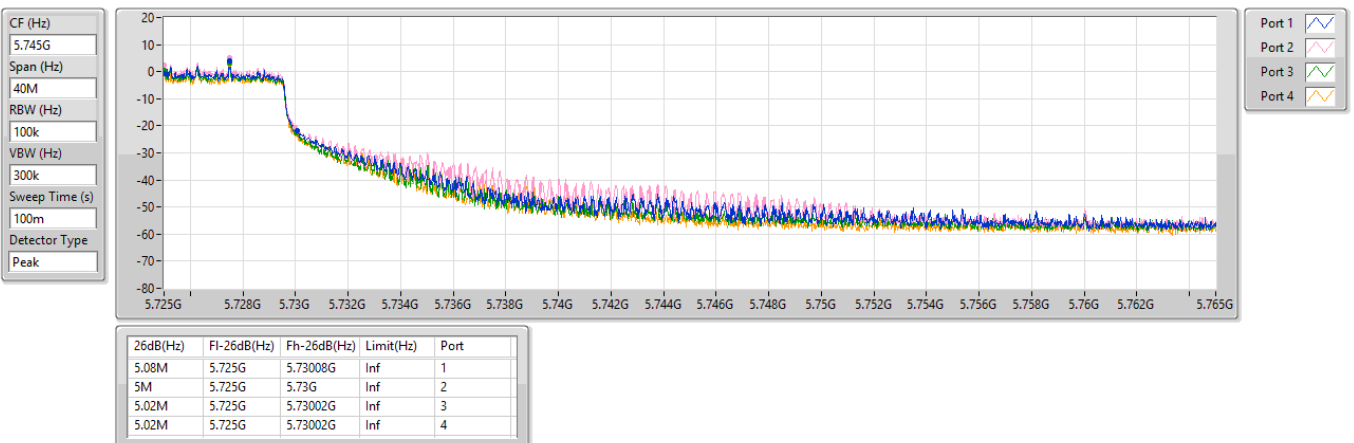


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5270MHz

12/06/2025

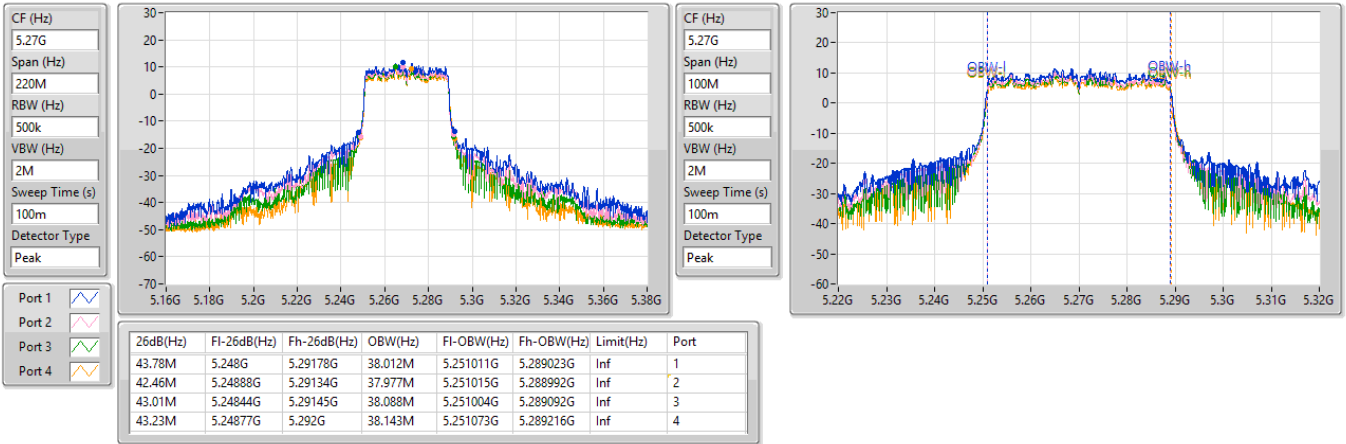


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5310MHz

12/06/2025

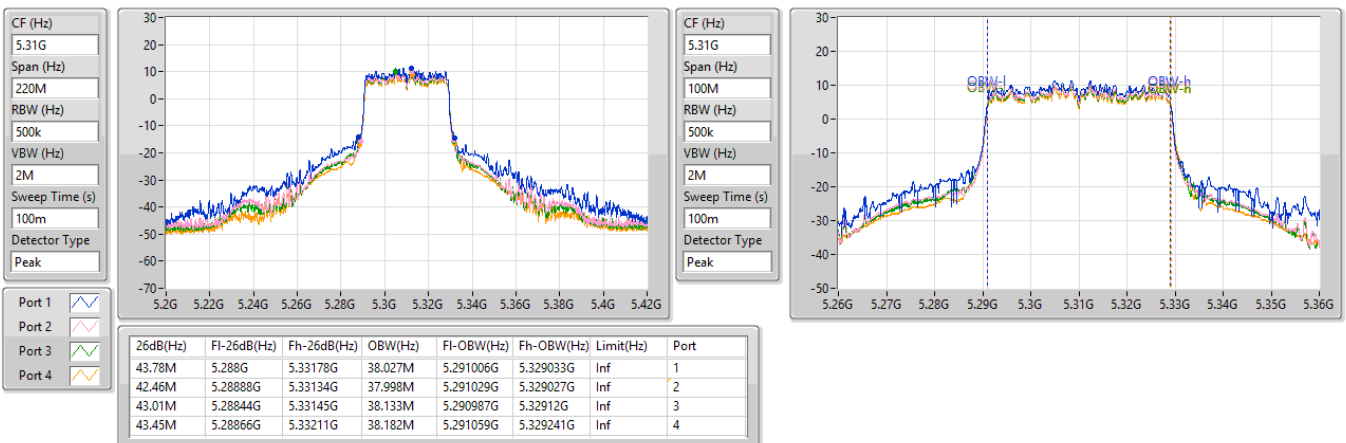


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5510MHz

12/06/2025

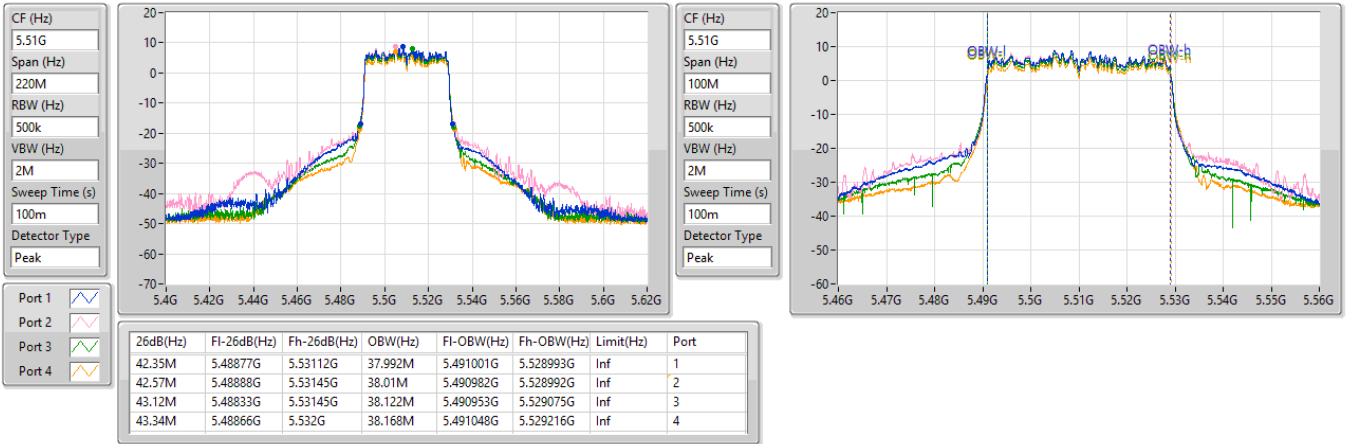


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5550MHz

12/06/2025


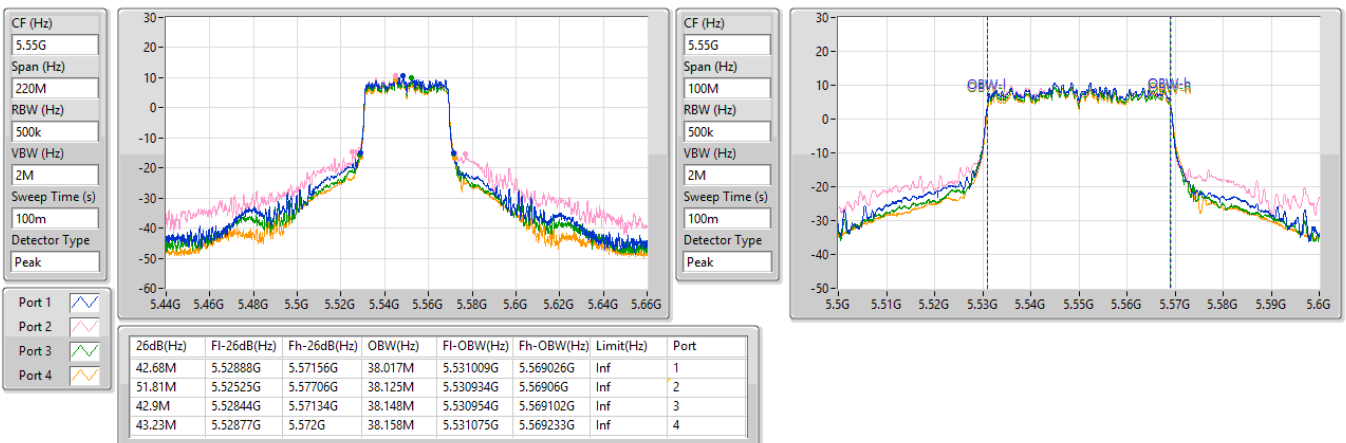


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5670MHz

12/06/2025

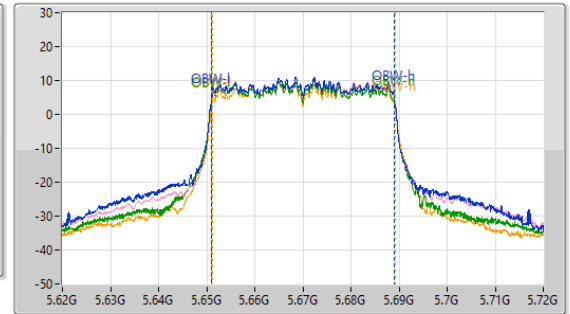
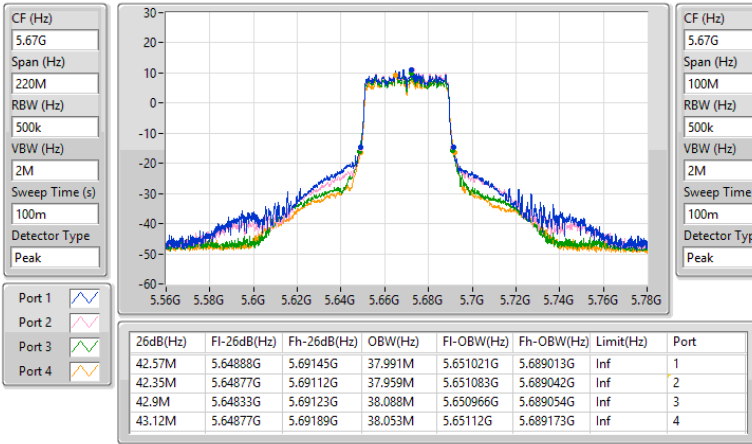


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

12/06/2025

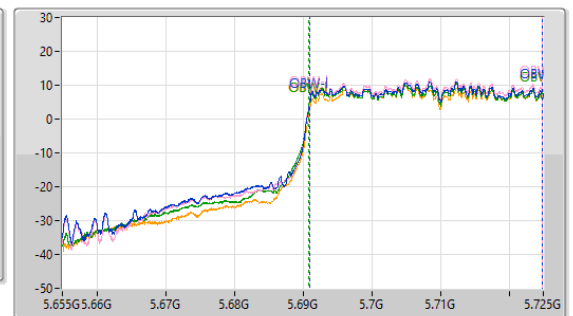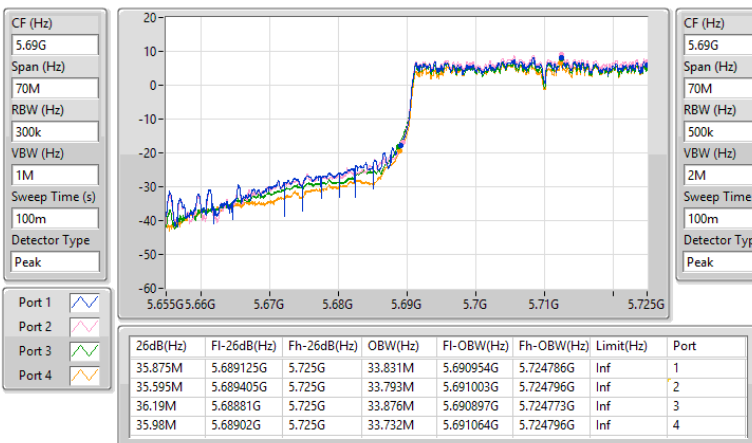


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

12/06/2025

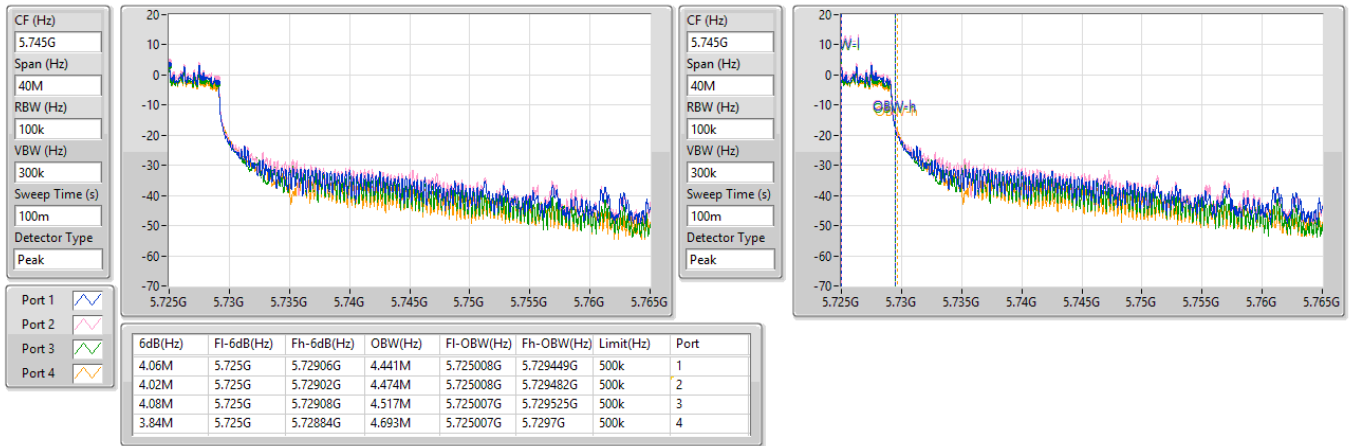


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

12/06/2025

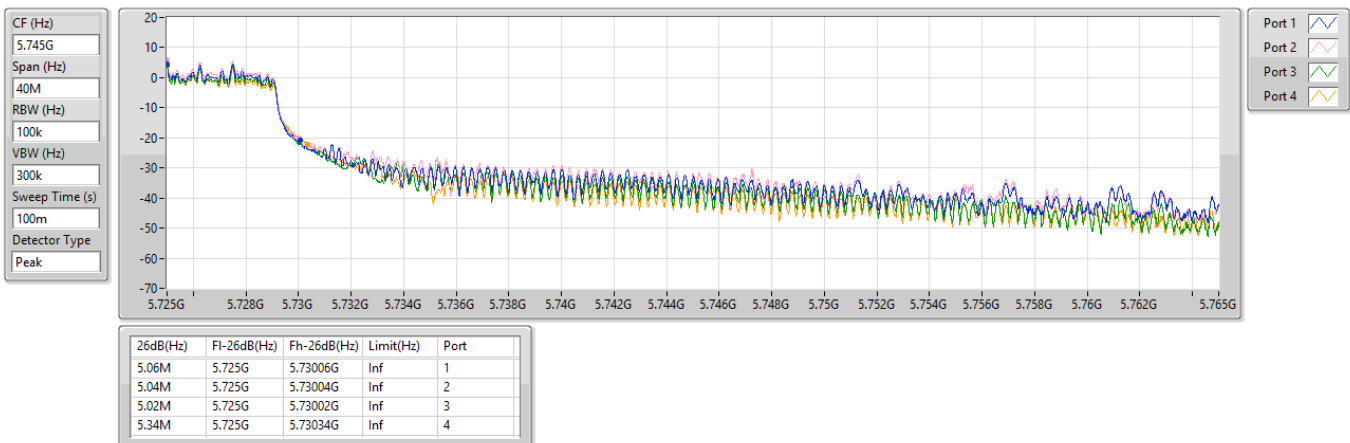


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5290MHz

12/06/2025

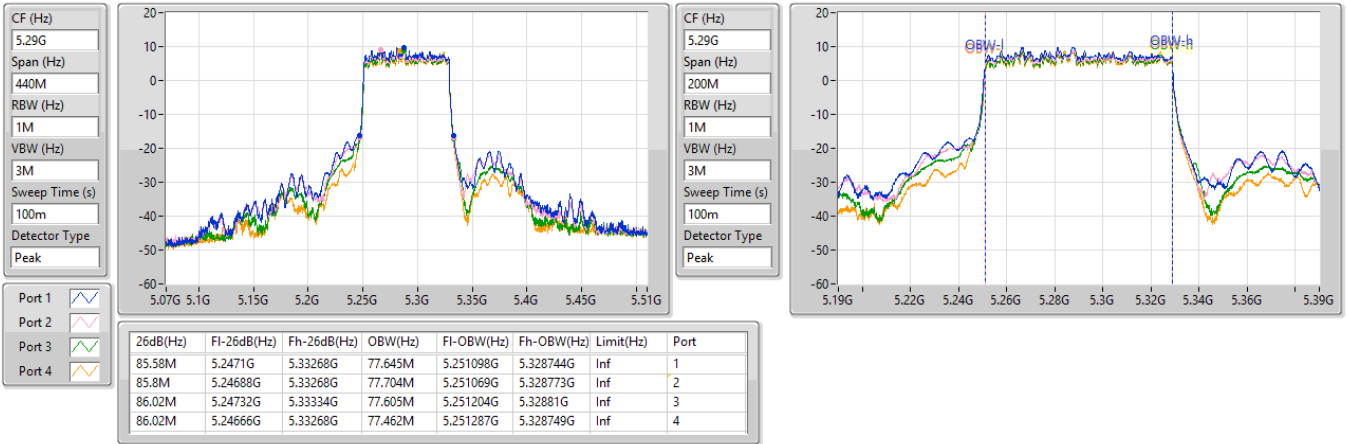


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5530MHz

12/06/2025

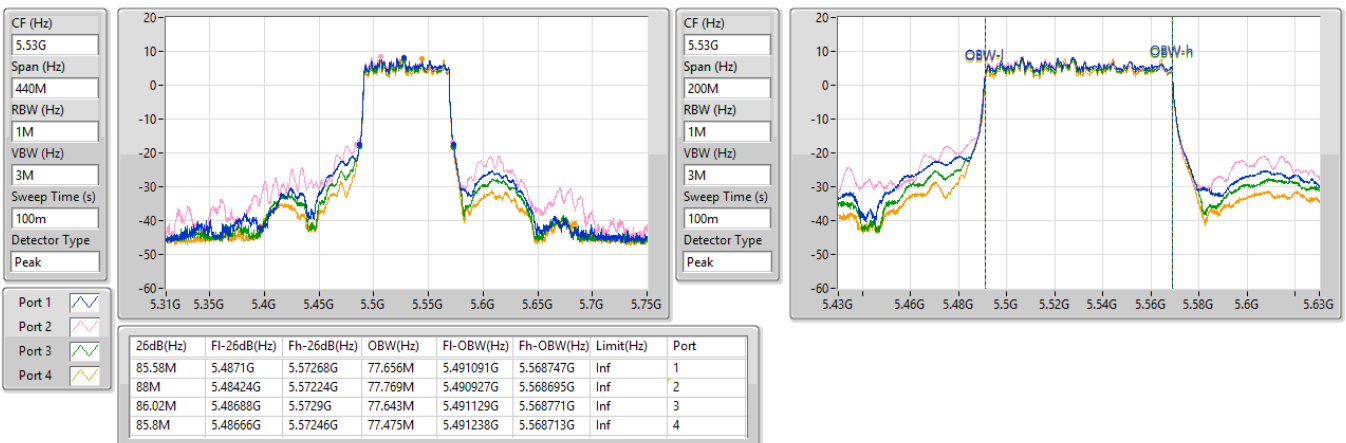


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5610MHz

12/06/2025

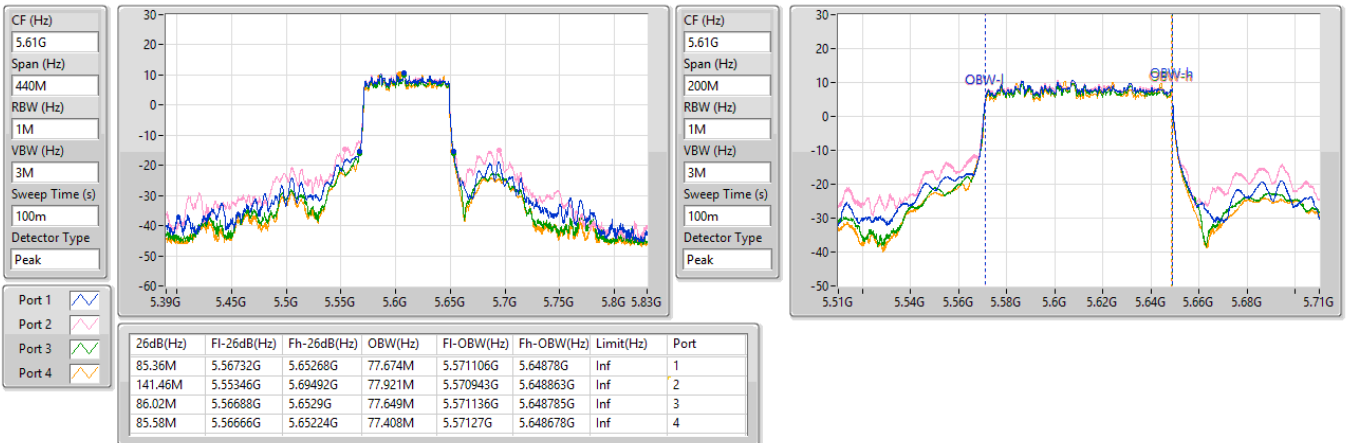


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

12/06/2025

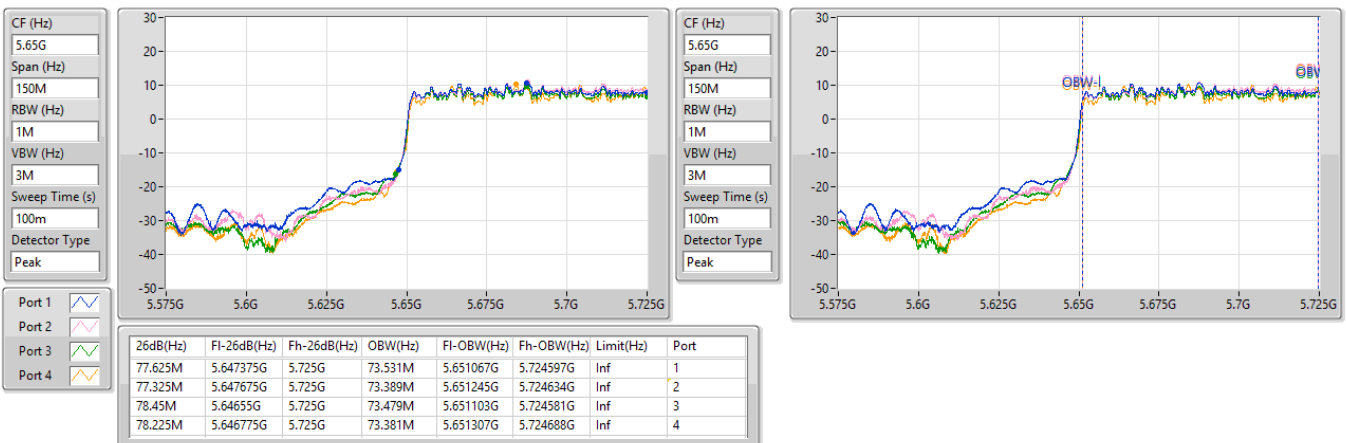


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

12/06/2025

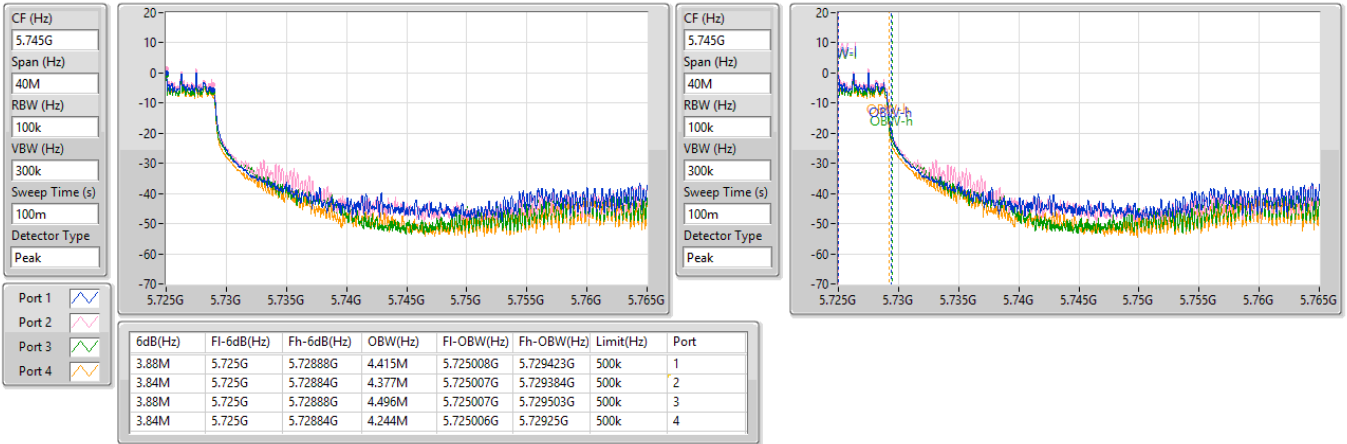


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

12/06/2025

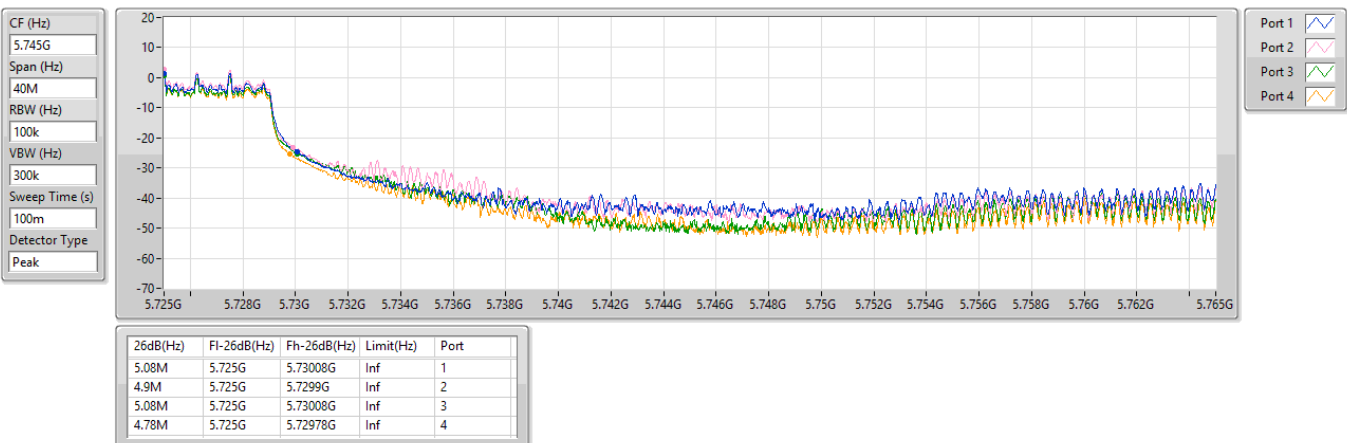


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

12/06/2025

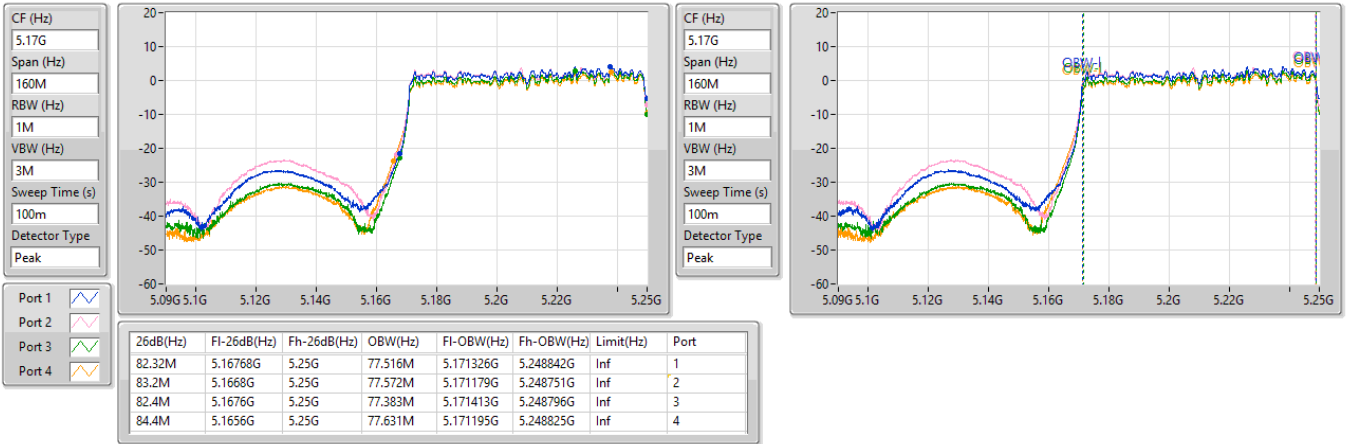


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

12/06/2025

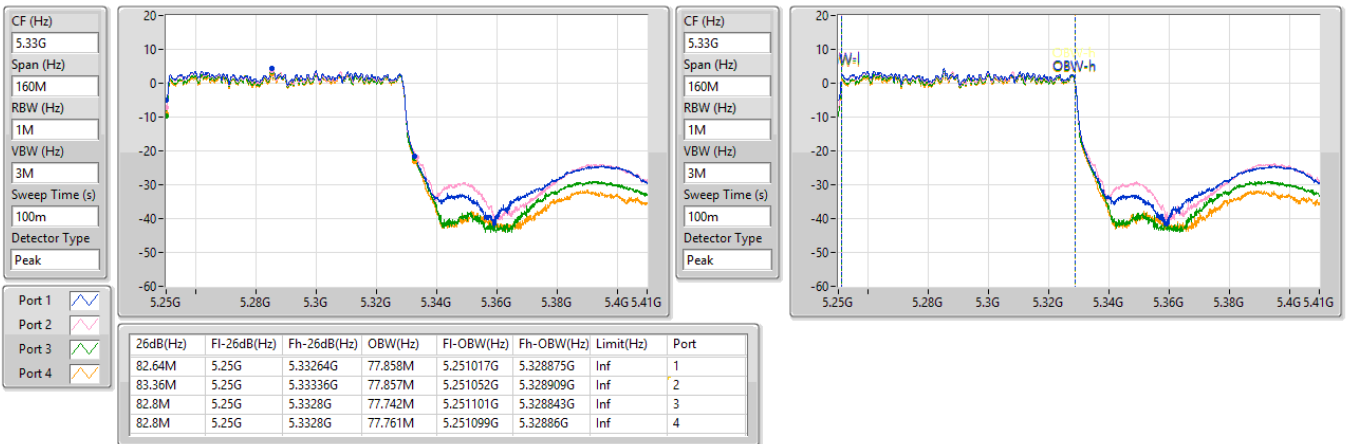


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5570MHz

12/06/2025

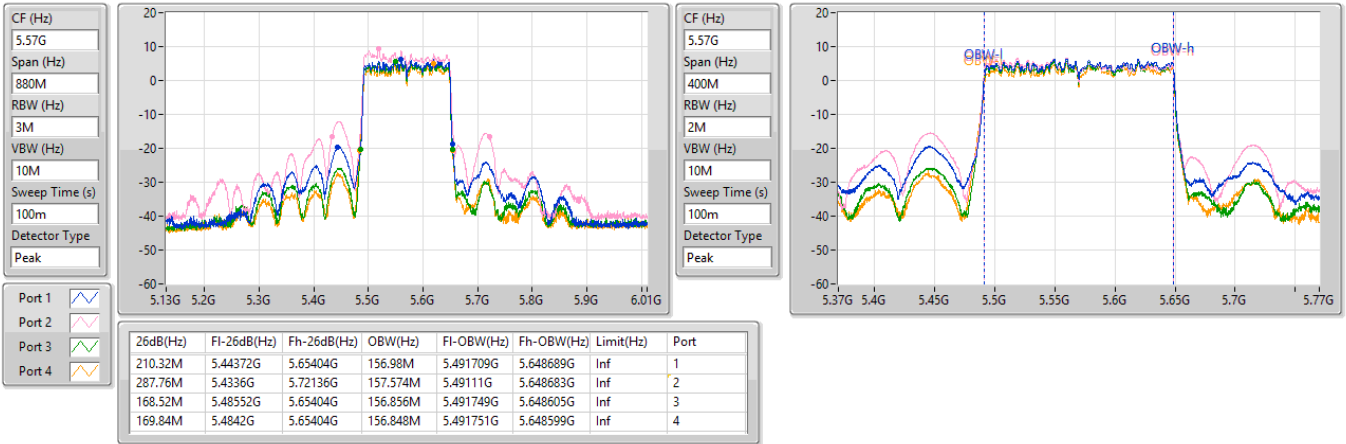


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5260MHz

09/07/2025

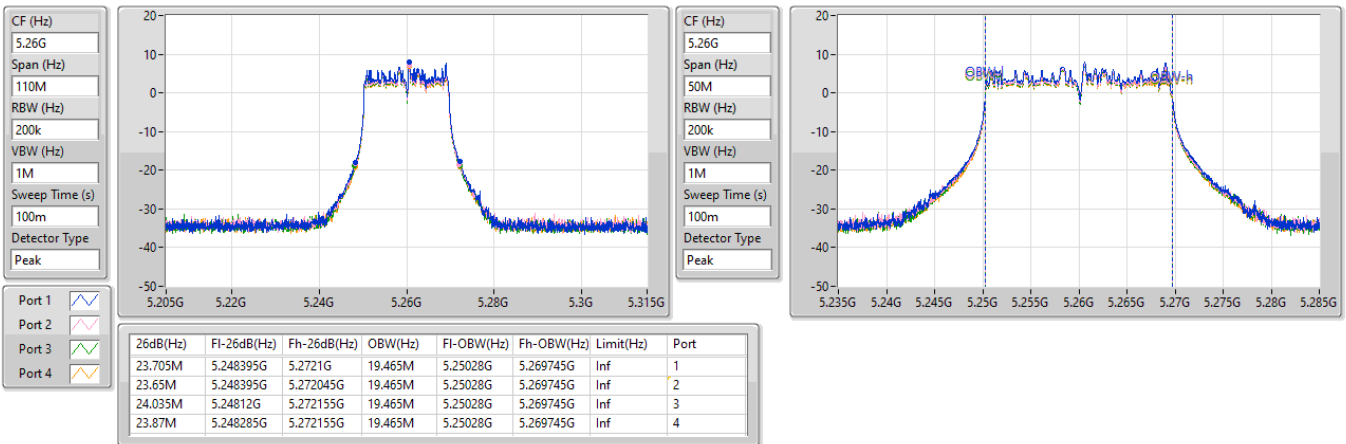


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5300MHz

09/07/2025

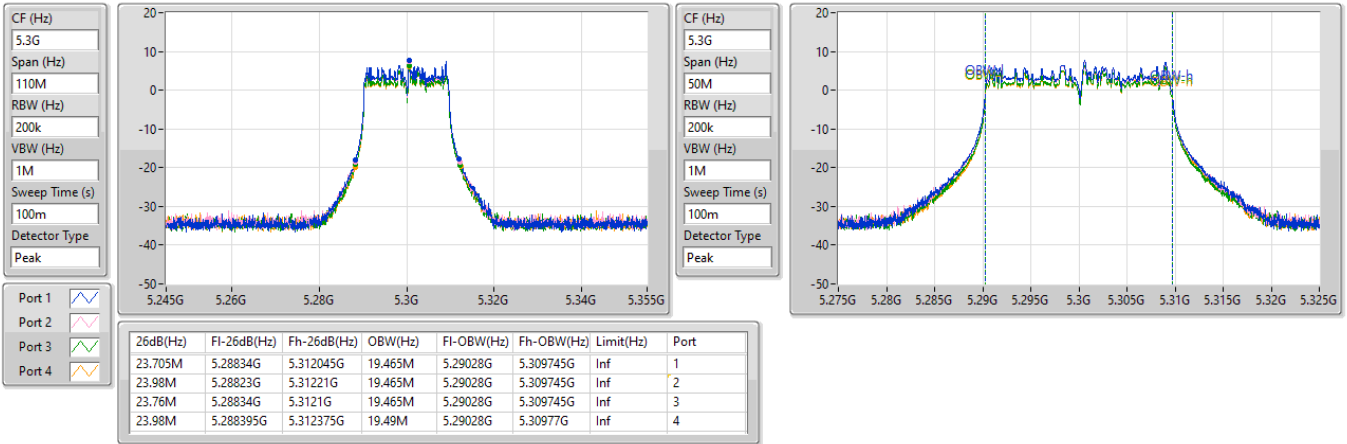


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5320MHz

09/07/2025

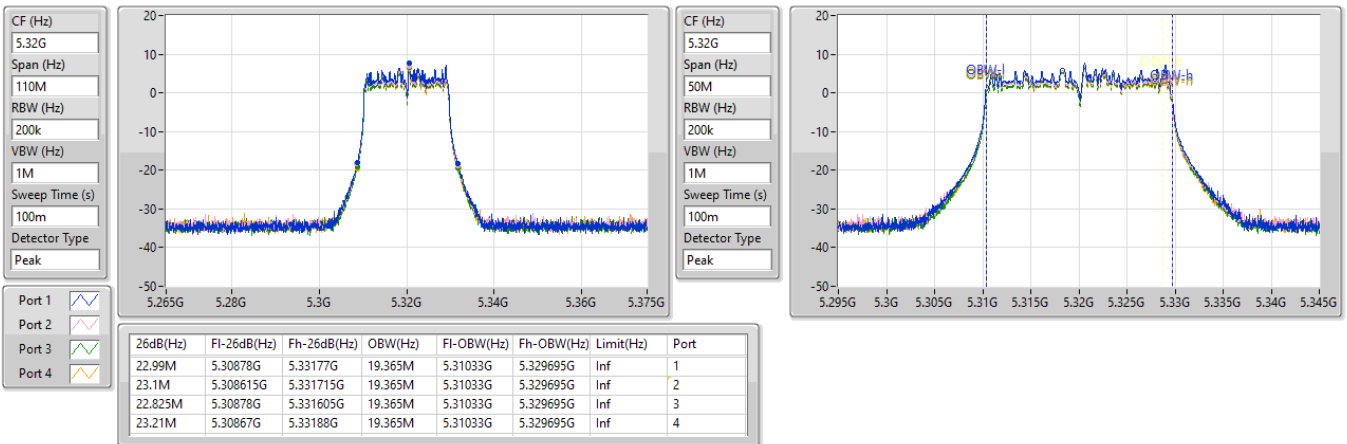


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5500MHz

09/07/2025

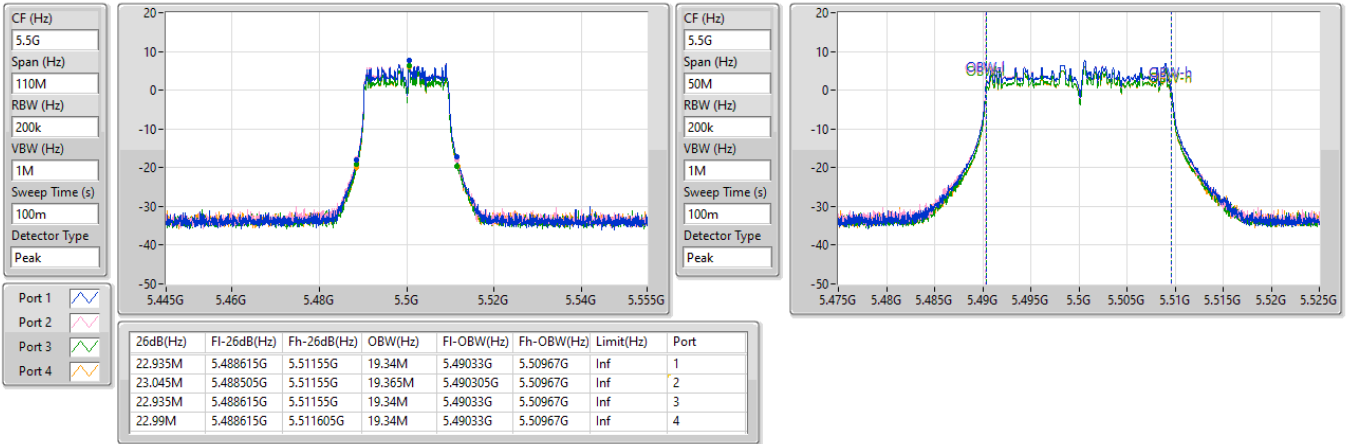


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5580MHz

09/07/2025

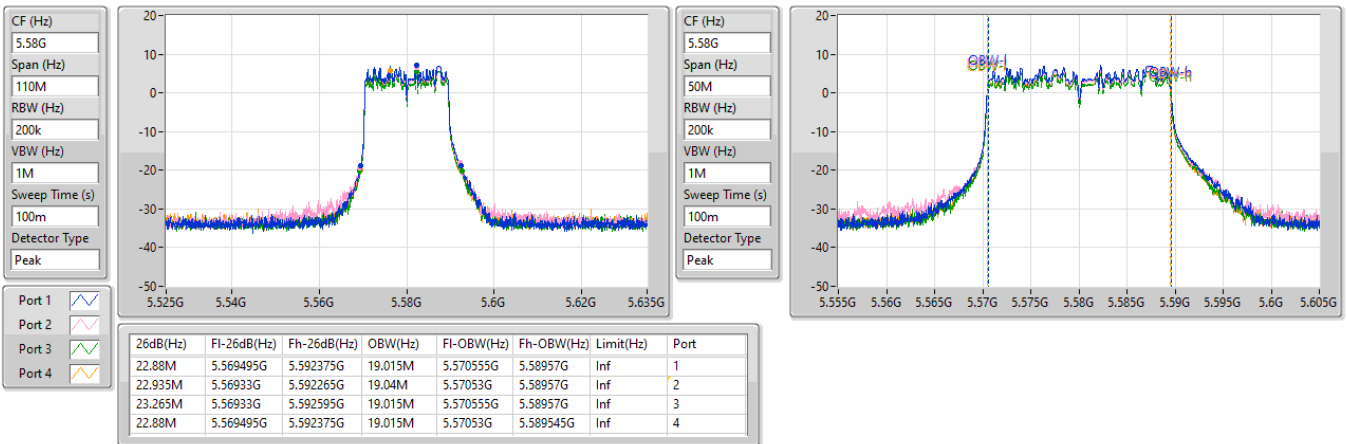


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5700MHz

09/07/2025

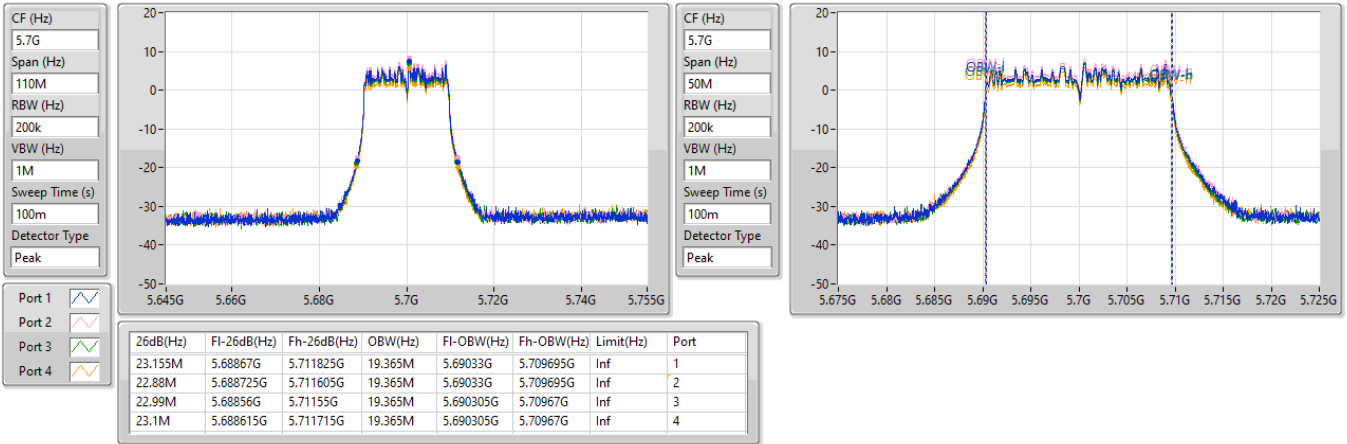


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW


5720MHz Straddle 5.47-5.725GHz

09/07/2025

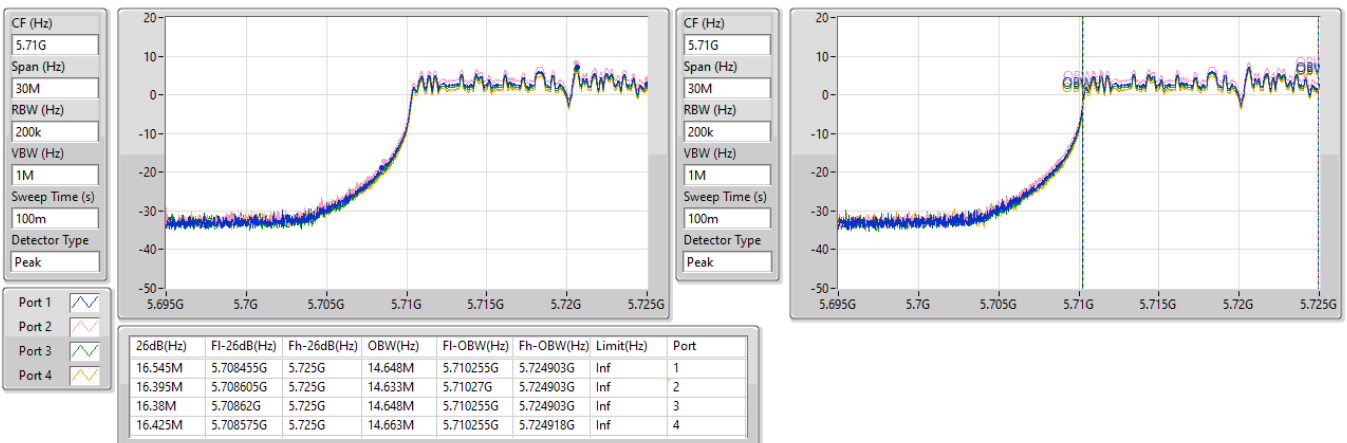


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

09/07/2025

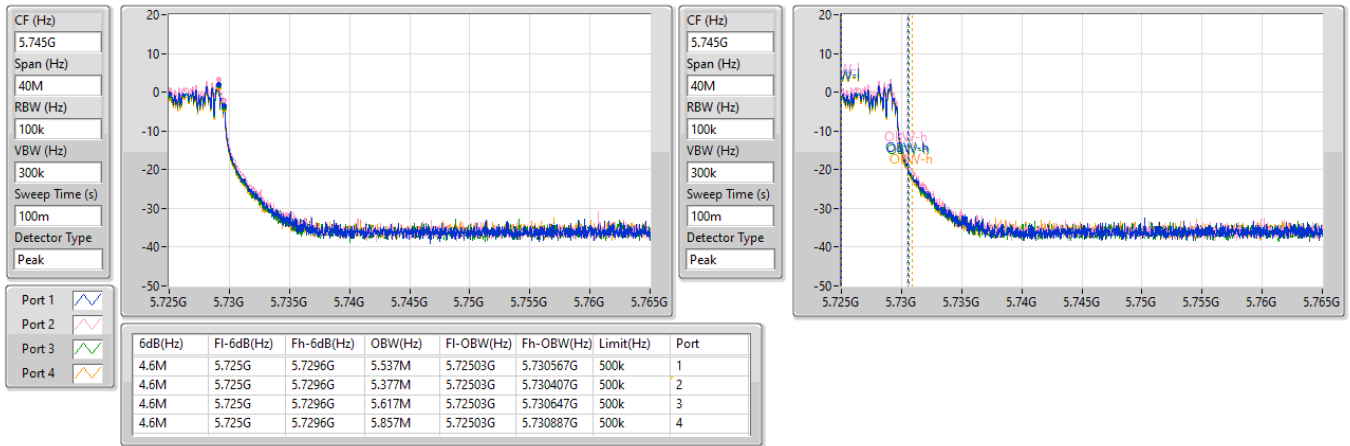
5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

09/07/2025


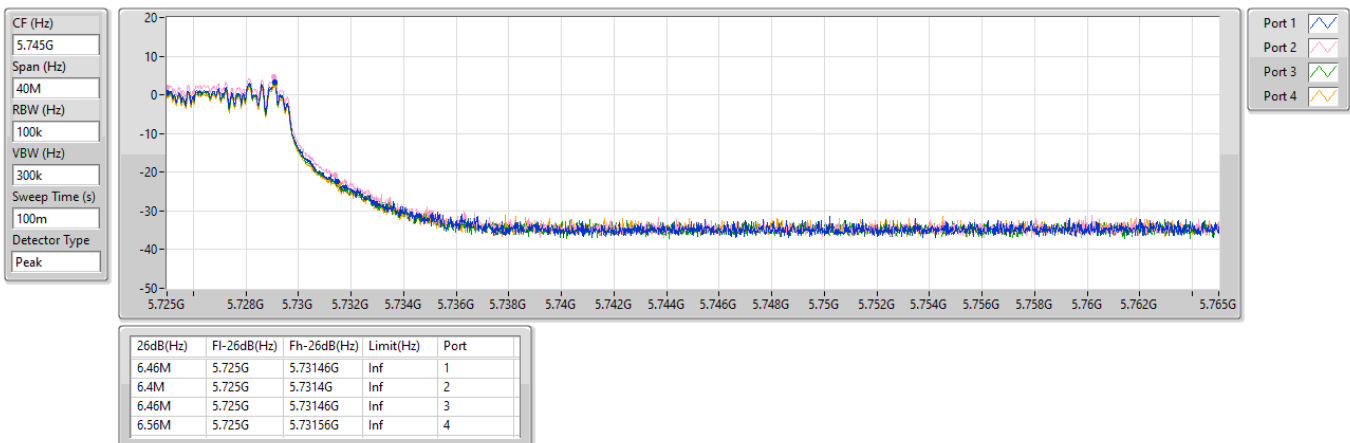


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5270MHz

09/07/2025

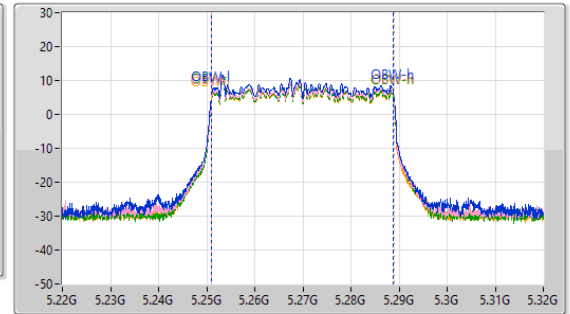
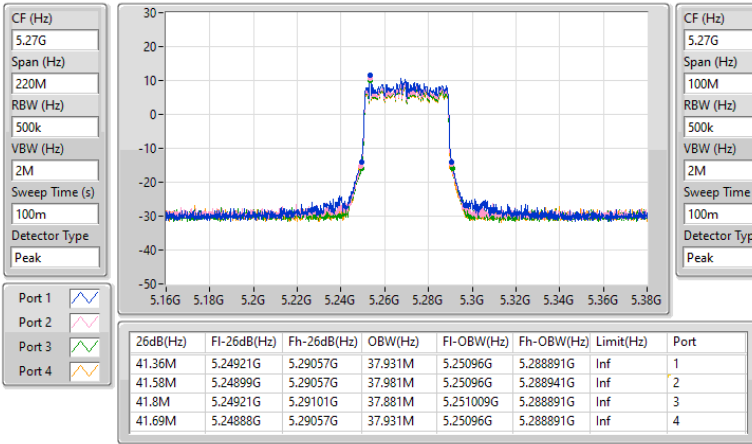


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5310MHz

09/07/2025

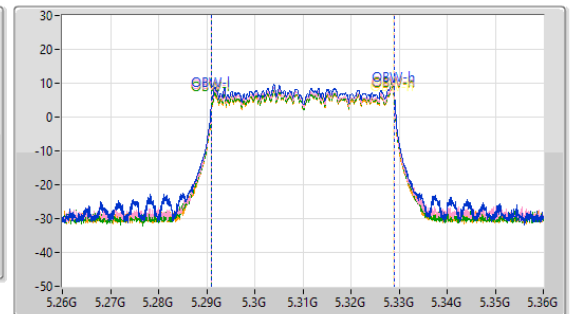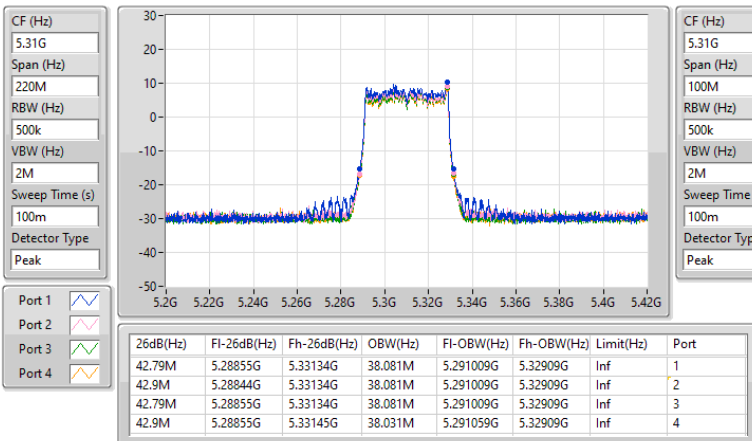


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5510MHz

09/07/2025

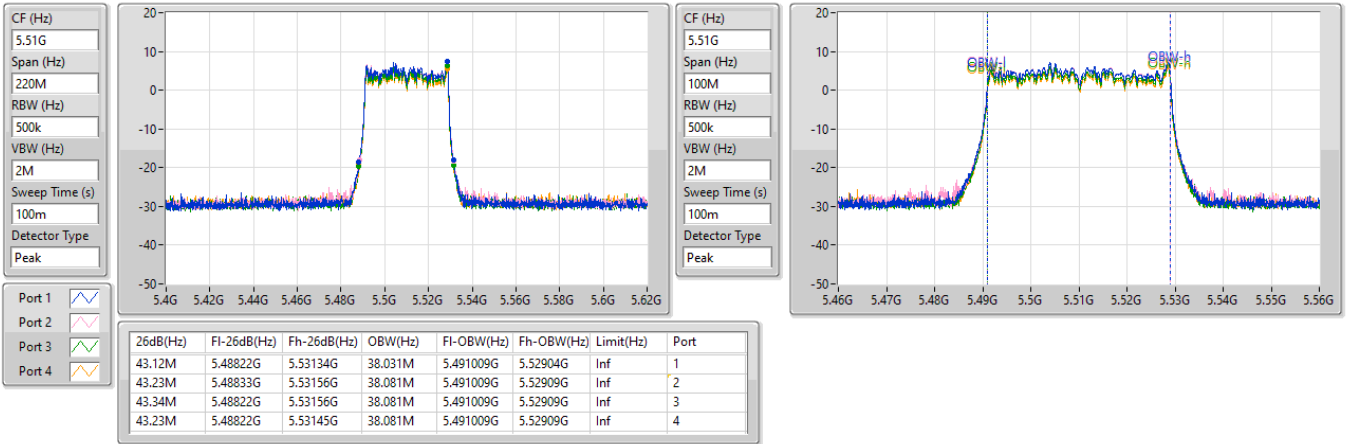


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5550MHz

09/07/2025


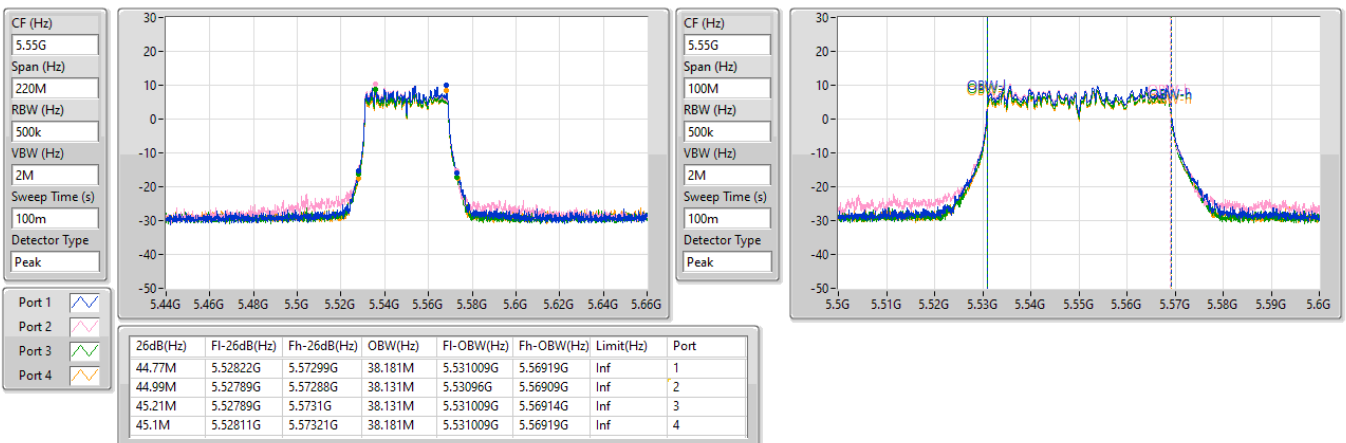


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5670MHz

09/07/2025

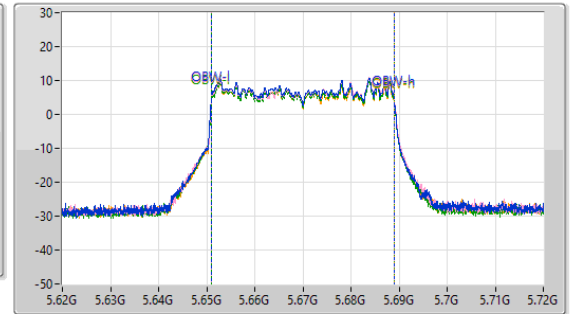
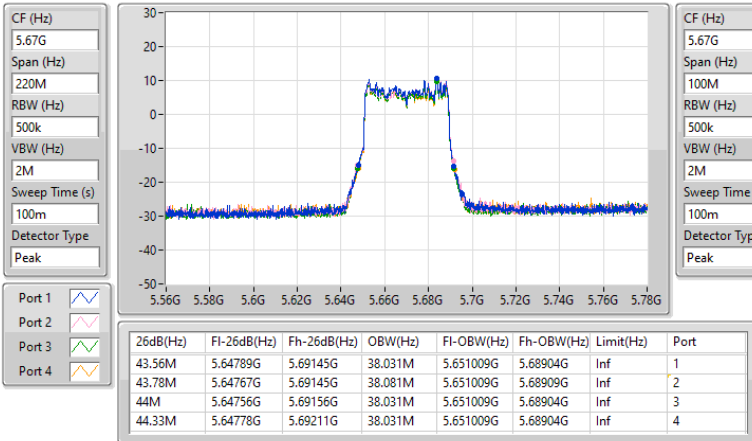


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

09/07/2025

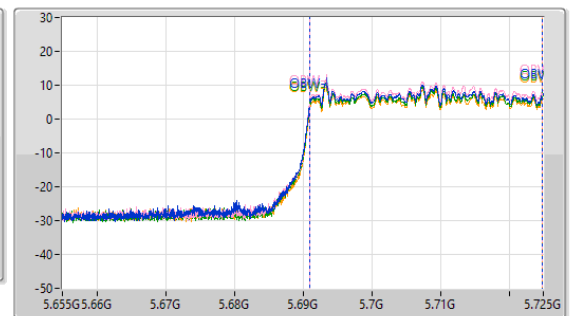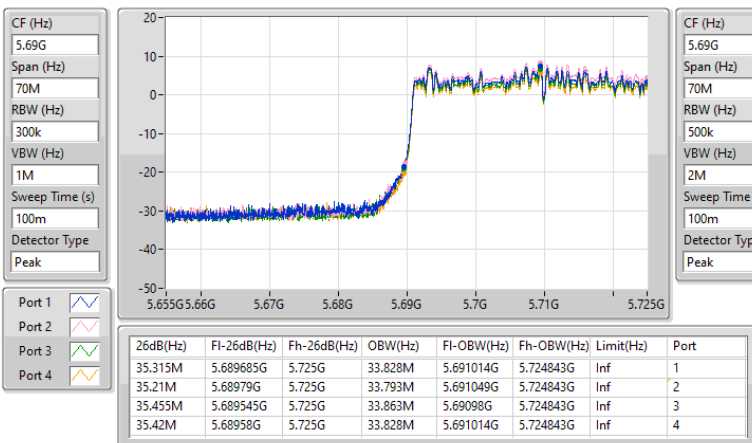


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

09/07/2025

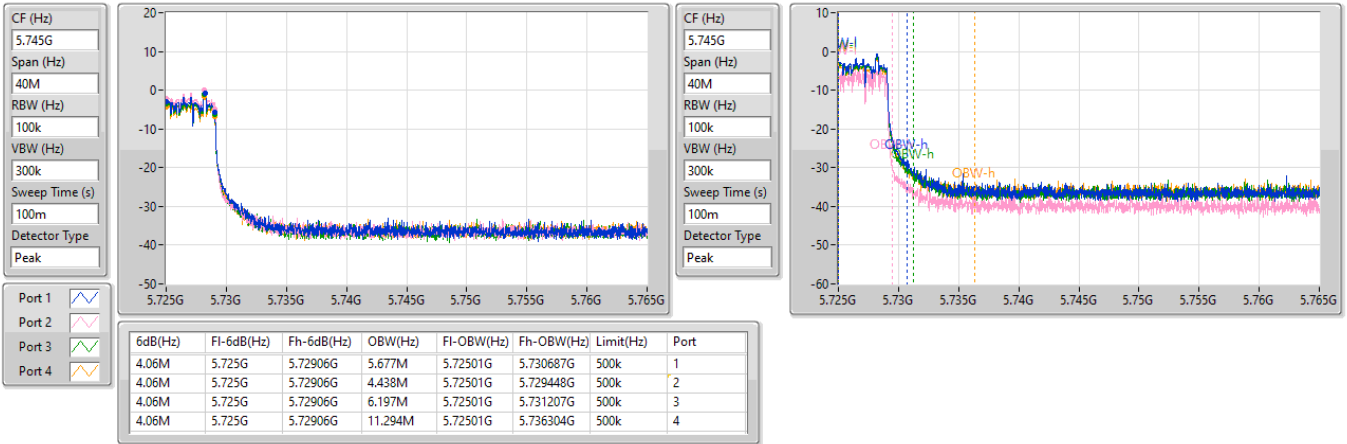


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

09/07/2025

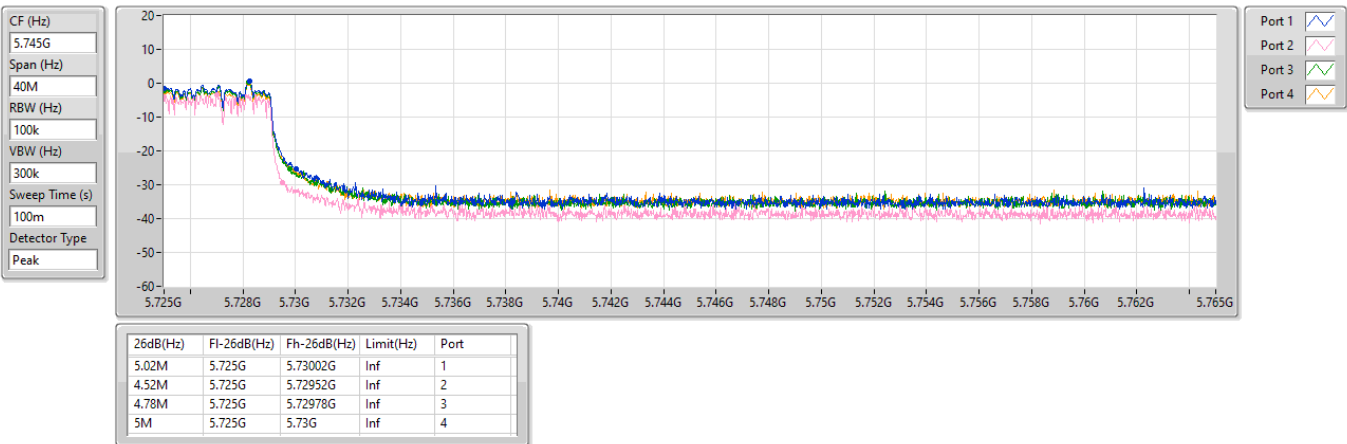


5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5290MHz

09/07/2025

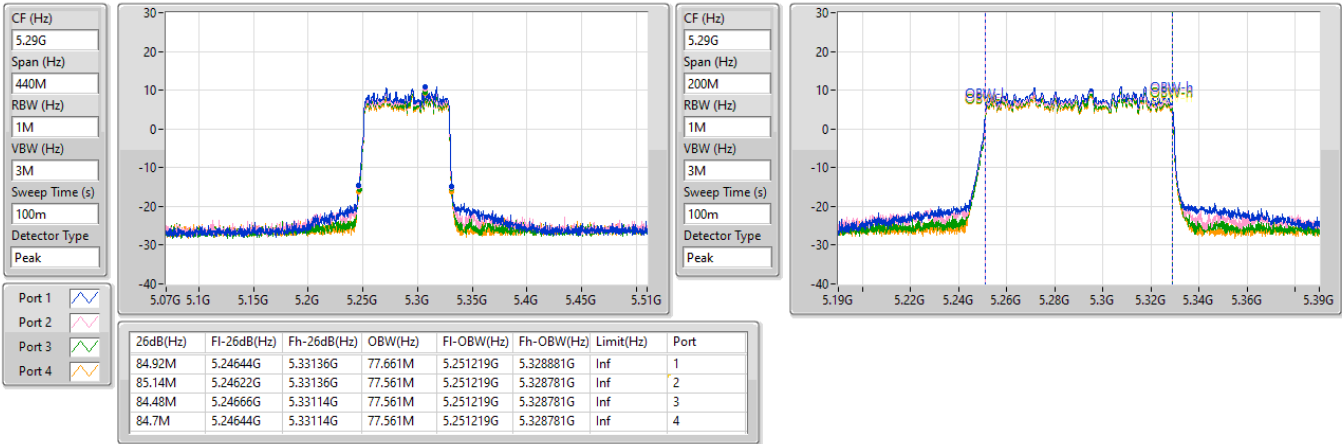


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5530MHz

10/07/2025


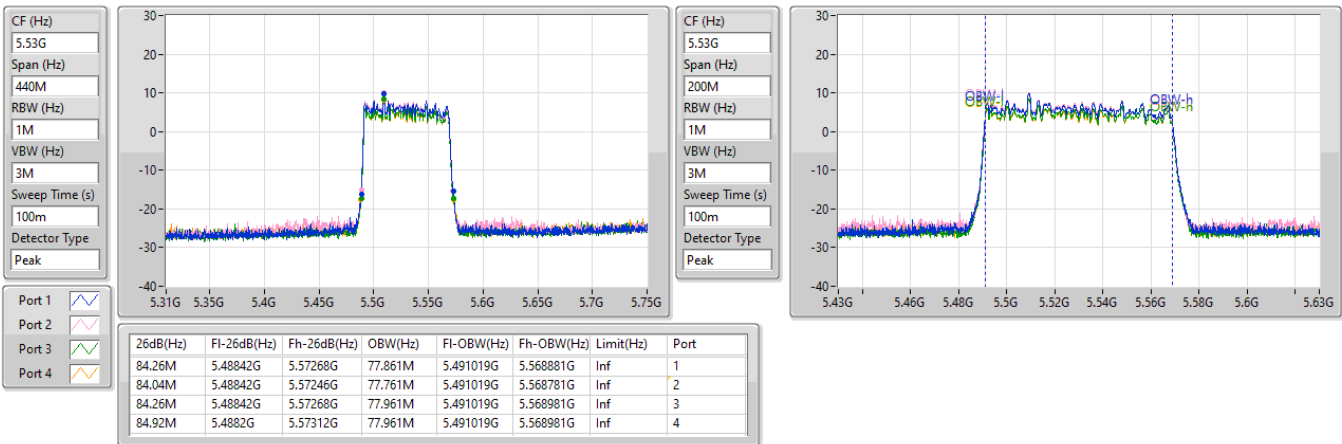


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5610MHz

10/07/2025

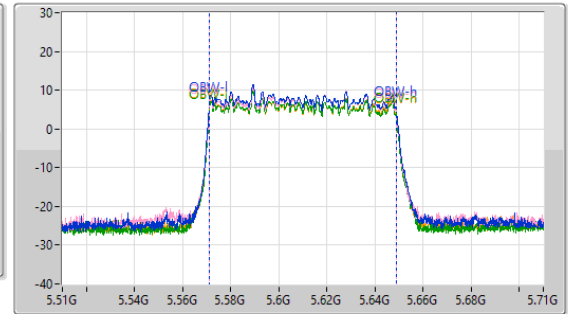
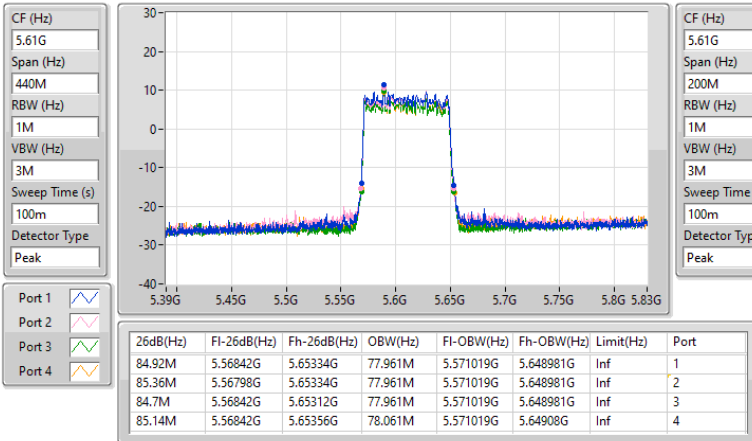


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

10/07/2025

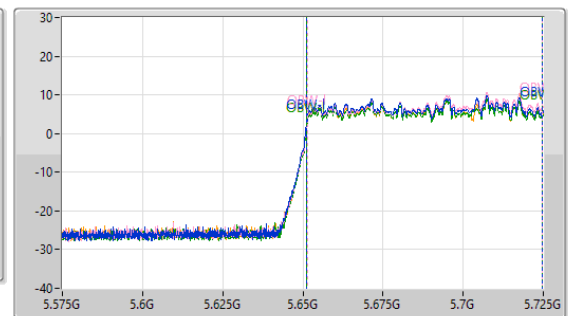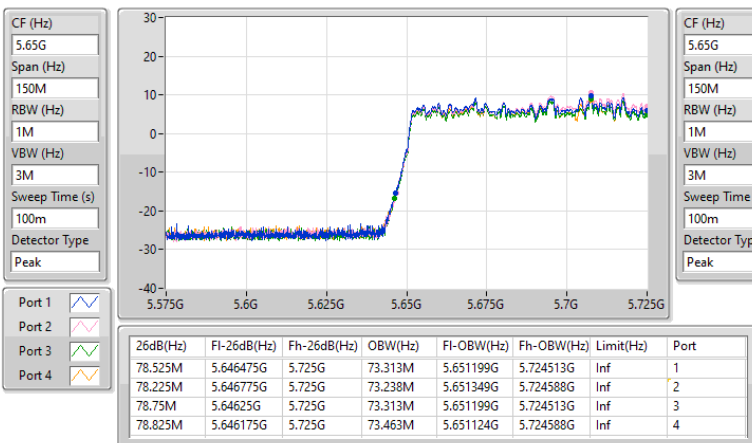


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

10/07/2025

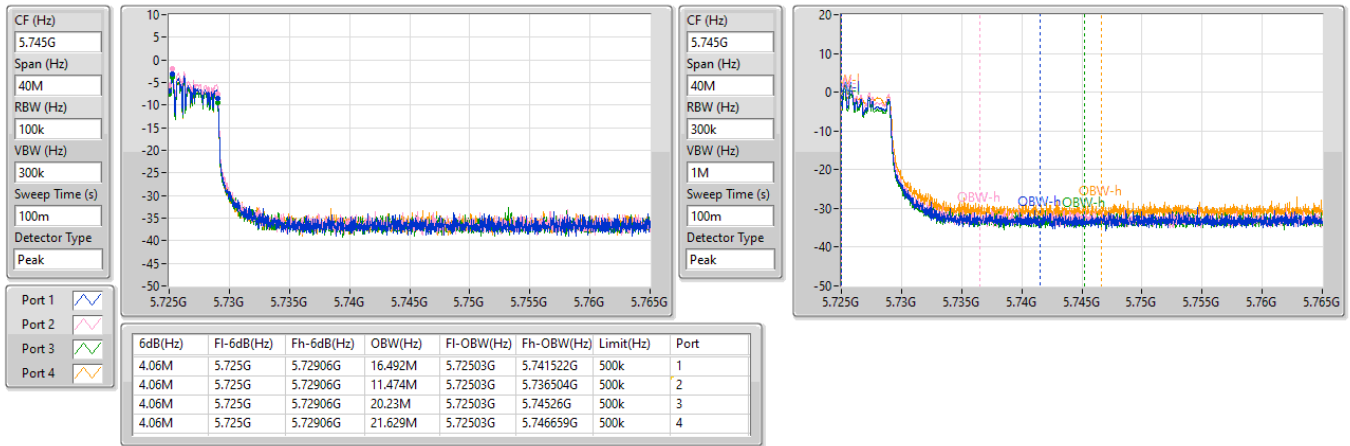


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

10/07/2025

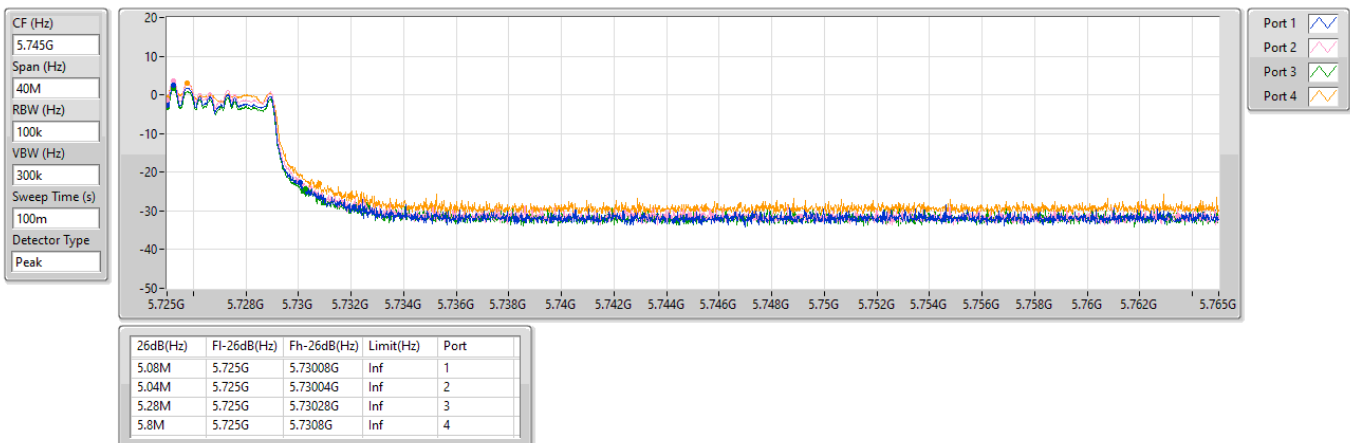


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

10/07/2025

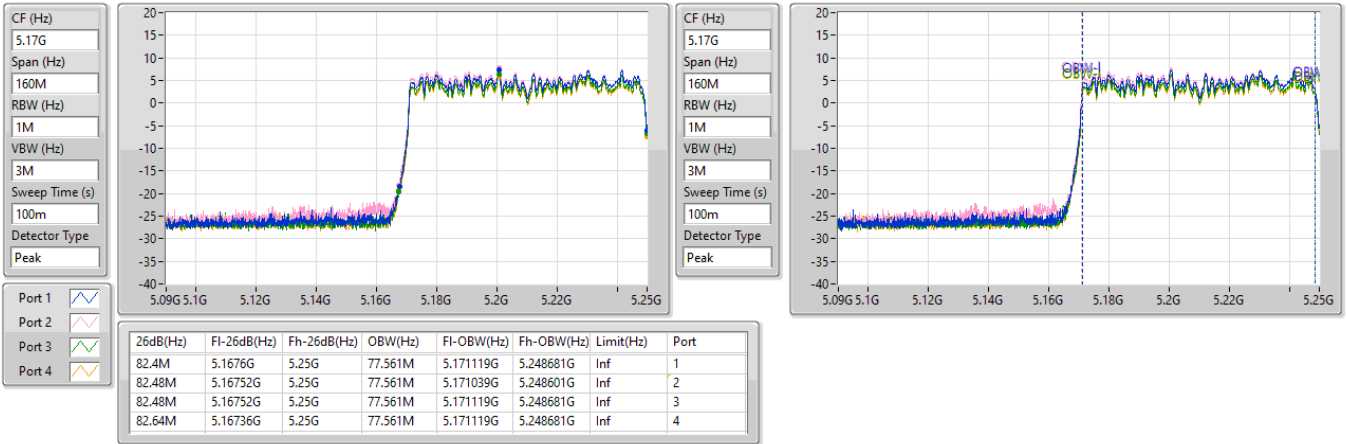


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

10/07/2025

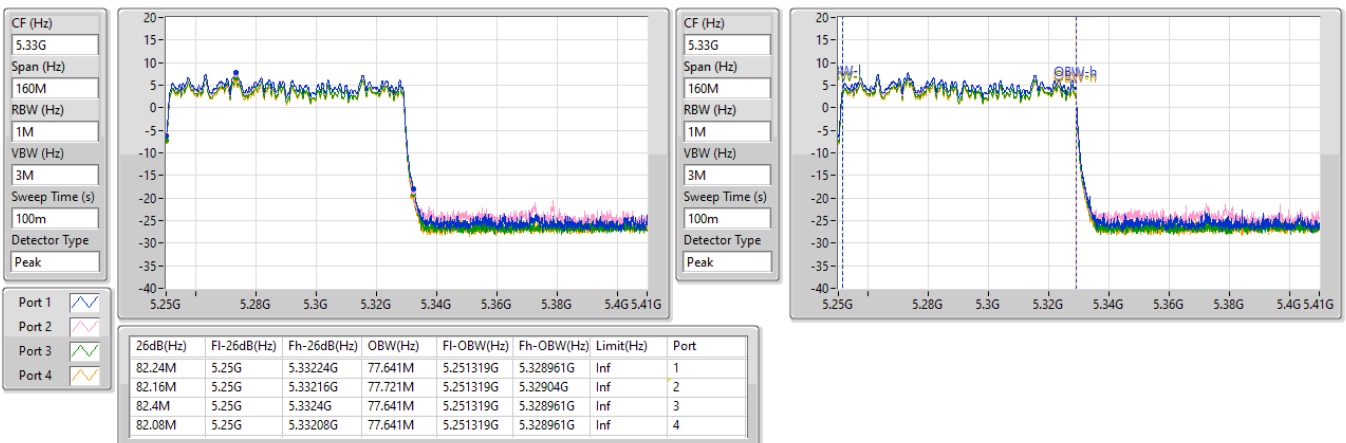


5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5570MHz

10/07/2025

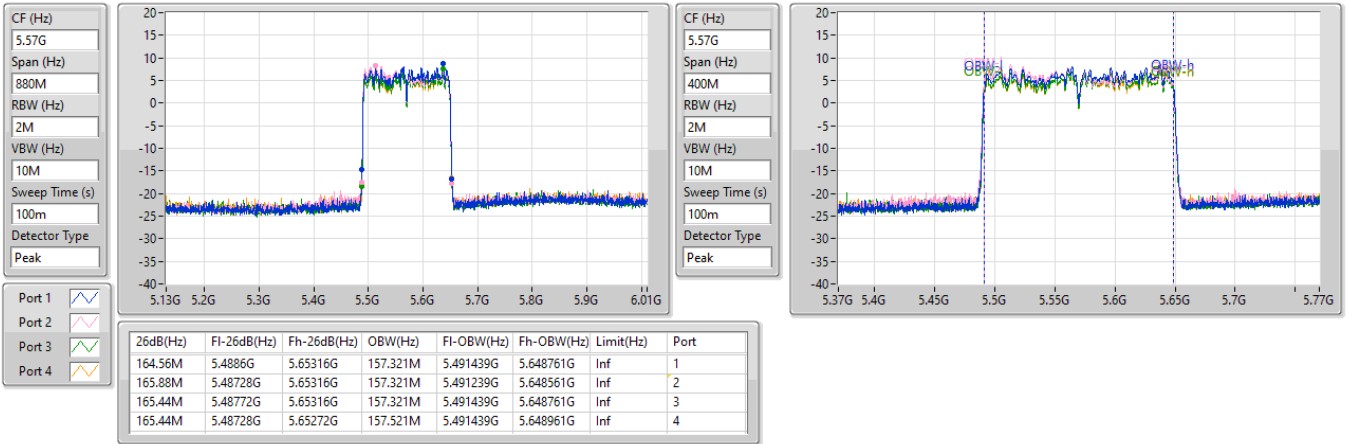

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	17.64	0.05808	10.18	0.010423
802.11be EHT160-BF_Nss1,(MCS0)_4TX	22.00	0.15849	20.73	0.118304
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.70	0.23442	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.86	0.24322	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.76	0.18880	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	23.87	0.24378	-	-
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.87	0.24378	-	-
802.11be EHT80_Nss1,(MCS0)_4TX	22.61	0.18239	-	-
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.96	0.24889	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	18.01	0.06324	-	-
802.11be EHT160-BF_Nss1,(MCS0)_4TX	22.22	0.16672	-	-
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.74	0.23659	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.53	0.22542	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.97	0.19815	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	23.69	0.23388	-	-
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.96	0.24889	-	-
802.11be EHT80_Nss1,(MCS0)_4TX	23.87	0.24378	-	-
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.84	0.24210	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	19.86	0.09683	-	-
802.11be EHT160-BF_Nss1,(MCS0)_4TX	21.79	0.15101	-	-
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	17.18	0.05224	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.04	0.03192	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	17.84	0.06081	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	14.10	0.02570	-	-
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.37	0.02735	-	-
802.11be EHT80_Nss1,(MCS0)_4TX	10.86	0.01219	-	-
802.11be EHT80-BF_Nss1,(MCS0)_4TX	11.24	0.01330	-	-

Result

Mode	Result	DG/ DG[Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°]Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	4.8922	18.43	17.81	17.68	16.62	23.70	23.98	-	Inf
5300MHz	Pass	4.8922	18.36	17.41	17.46	16.55	23.51	23.98	-	Inf
5320MHz	Pass	4.8922	18.21	17.62	17.34	16.62	23.51	23.98	-	Inf
5500MHz	Pass	4.9339	16.81	16.90	16.05	14.94	22.26	23.98	-	Inf
5580MHz	Pass	4.9339	18.33	18.22	17.40	16.75	23.74	23.98	-	Inf
5700MHz	Pass	4.9339	17.46	18.42	16.83	15.76	23.24	23.98	-	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	4.9339	17.37	18.31	16.40	15.57	23.05	23.09	-	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	5.7697	11.41	12.31	10.58	9.98	17.18	30.00	-	Inf
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	4.8922	18.25	17.65	17.35	16.48	23.50	23.98	-	Inf
5300MHz	Pass	4.8922	18.54	17.83	17.60	16.88	23.77	23.98	-	Inf
5320MHz	Pass	4.8922	18.68	17.87	17.71	16.90	23.86	23.98	-	Inf
5500MHz	Pass	4.9339	17.04	17.14	16.18	15.05	22.45	23.98	-	Inf
5580MHz	Pass	4.9339	18.05	18.20	17.07	16.50	23.53	23.98	-	Inf
5700MHz	Pass	4.9339	15.58	16.62	14.93	14.01	21.41	23.98	-	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	4.9339	14.31	15.36	13.41	12.50	20.05	23.17	-	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	5.7697	9.19	10.24	8.48	7.77	15.04	30.00	-	Inf
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	4.8922	18.97	17.79	17.58	16.78	23.87	23.98	-	Inf
5310MHz	Pass	4.8922	18.86	17.74	17.34	16.78	23.77	23.98	-	Inf
5510MHz	Pass	4.9339	16.12	16.33	15.49	14.40	21.67	23.98	-	Inf
5550MHz	Pass	4.9339	18.07	18.10	17.16	16.66	23.56	23.98	-	Inf
5670MHz	Pass	4.9339	17.97	18.51	17.23	16.76	23.69	23.98	-	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	4.9339	17.84	18.62	17.23	16.67	23.67	23.98	-	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	5.7697	8.32	9.29	7.46	6.85	14.10	30.00	-	Inf
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	4.8922	17.46	16.76	16.20	15.74	22.61	23.98	-	Inf
5530MHz	Pass	4.9339	15.84	16.11	15.16	14.50	21.47	23.98	-	Inf
5610MHz	Pass	4.9339	18.20	18.54	17.45	17.07	23.87	23.98	-	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	4.9339	18.02	18.27	17.21	16.66	23.61	23.98	-	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	5.7697	5.25	6.01	4.05	3.61	10.86	30.00	-	Inf
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.9040/-7.46	12.40	12.49	11.01	10.17	17.64	30.00	10.18	21.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.8922	12.59	12.27	11.68	11.31	18.01	23.98	-	Inf
5570MHz	Pass	4.9339	14.28	14.42	13.64	12.84	19.86	23.98	-	Inf
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	5.8649	17.35	16.71	16.51	16.32	22.76	23.98	-	Inf
5300MHz	Pass	5.8649	17.21	17.08	15.94	15.83	22.58	23.98	-	Inf
5320MHz	Pass	5.8649	17.17	16.55	16.05	15.87	22.46	23.98	-	Inf
5500MHz	Pass	5.9053	17.31	17.19	15.89	15.78	22.62	23.98	-	Inf
5580MHz	Pass	5.9053	17.63	17.26	16.28	16.34	22.94	23.98	-	Inf
5700MHz	Pass	5.9053	16.91	17.65	16.46	15.97	22.81	23.98	-	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	5.9053	16.96	18.19	16.47	15.83	22.97	23.14	-	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	5.4561	11.73	13.08	11.31	10.80	17.84	30.00	-	Inf
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	5.8649	18.76	17.86	17.37	17.25	23.87	23.98	-	Inf
5310MHz	Pass	5.8649	18.63	17.71	17.15	16.92	23.67	23.98	-	Inf
5510MHz	Pass	5.9053	16.02	16.17	15.05	14.76	21.56	23.98	-	Inf
5550MHz	Pass	5.9053	18.18	18.35	17.14	16.89	23.71	23.98	-	Inf
5670MHz	Pass	5.9053	18.32	18.41	17.55	17.38	23.96	23.98	-	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	5.9053	17.99	18.65	17.34	16.72	23.76	23.98	-	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	5.4561	8.50	9.43	7.92	7.26	14.37	30.00	-	Inf
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	5.8649	18.67	18.18	17.61	17.13	23.96	23.98	-	Inf

Mode	Result	DG/ DG[Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°]Limit (dBm)
5530MHz	Pass	5.9053	16.77	17.03	15.52	15.38	22.26	23.98	-	Inf
5610MHz	Pass	5.9053	18.39	18.16	16.79	16.83	23.63	23.98	-	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	5.9053	18.15	18.50	17.21	17.27	23.84	23.98	-	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	5.4561	5.24	6.39	4.48	4.48	11.24	30.00	-	Inf
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.2513/-1.27	16.39	16.84	15.43	15.02	22.00	30.00	20.73	21.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.8649	16.83	16.67	15.75	15.40	22.22	23.98	-	Inf
5570MHz	Pass	5.9053	16.29	16.34	15.23	15.06	21.79	23.98	-	Inf


DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

12/06/2025

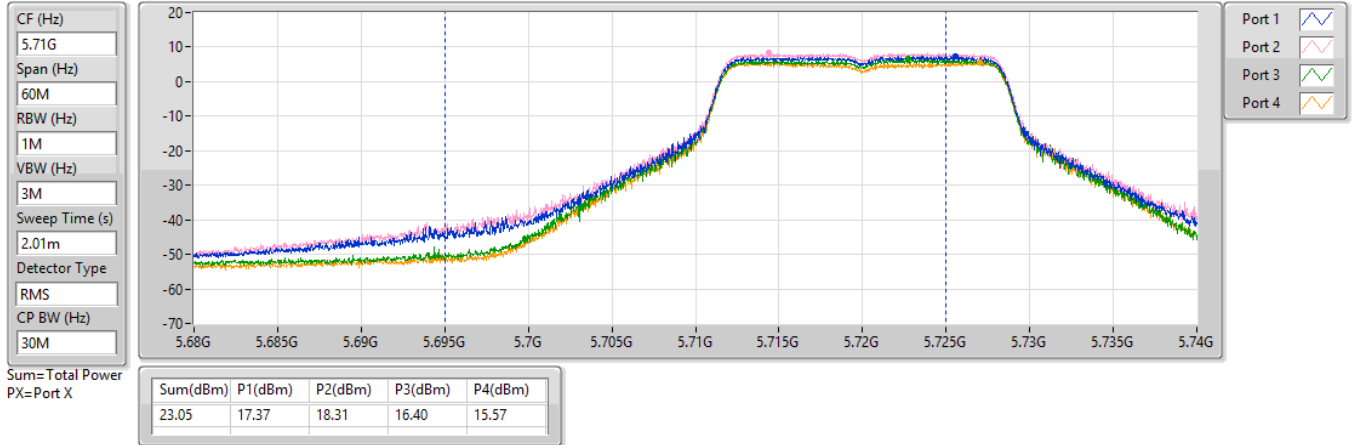


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

12/06/2025

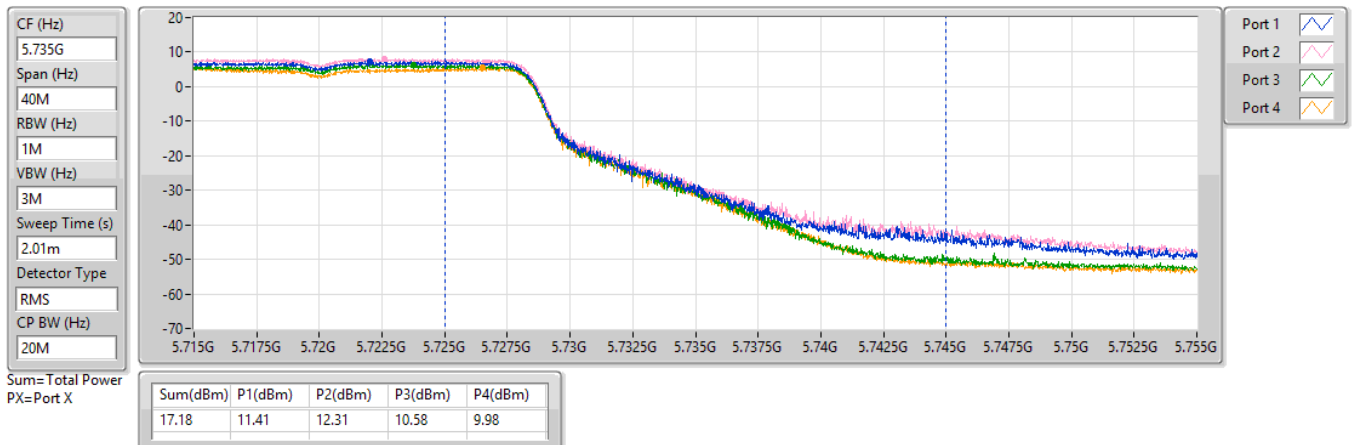


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

12/06/2025

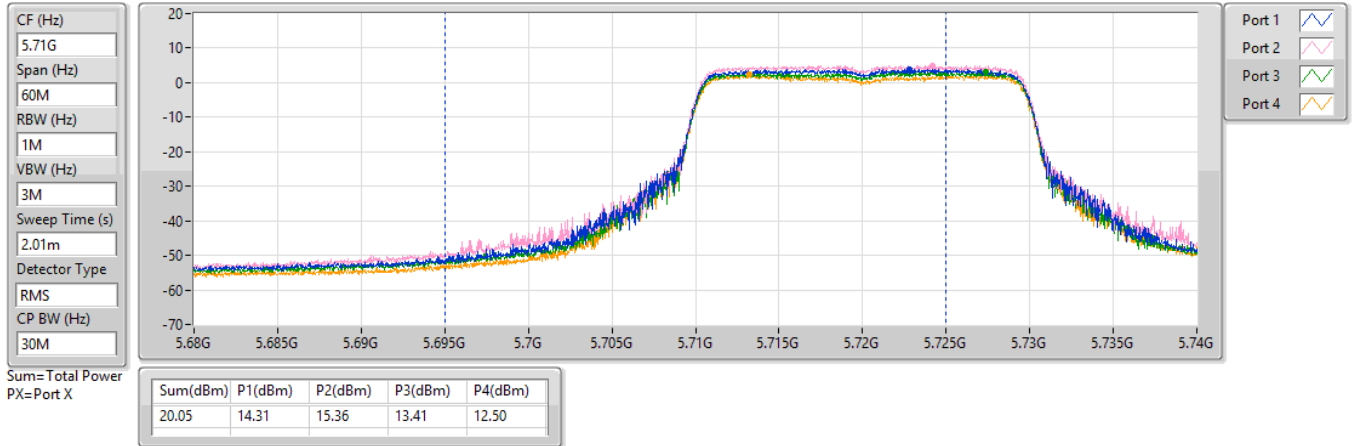


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

12/06/2025

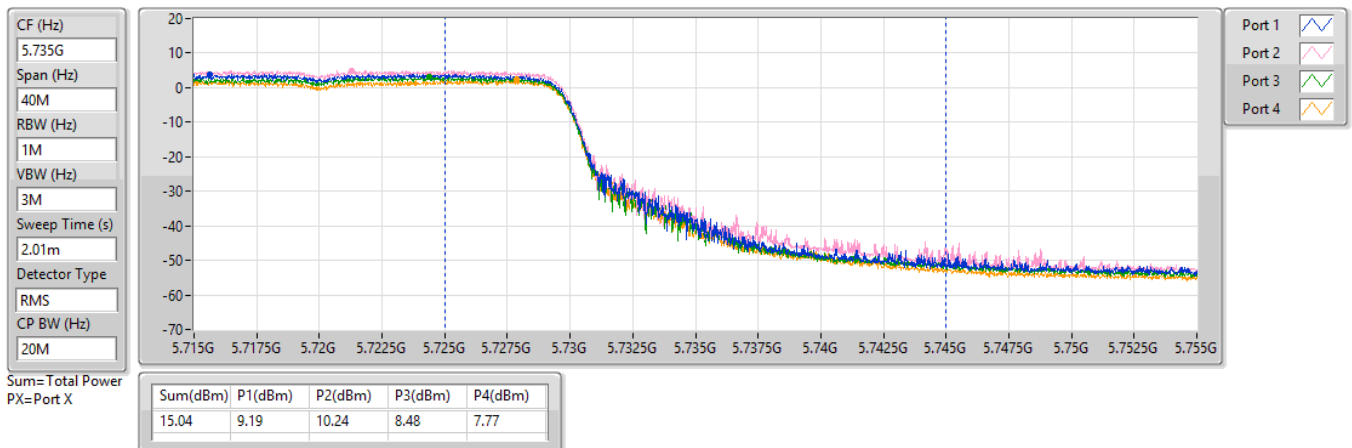


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

12/06/2025

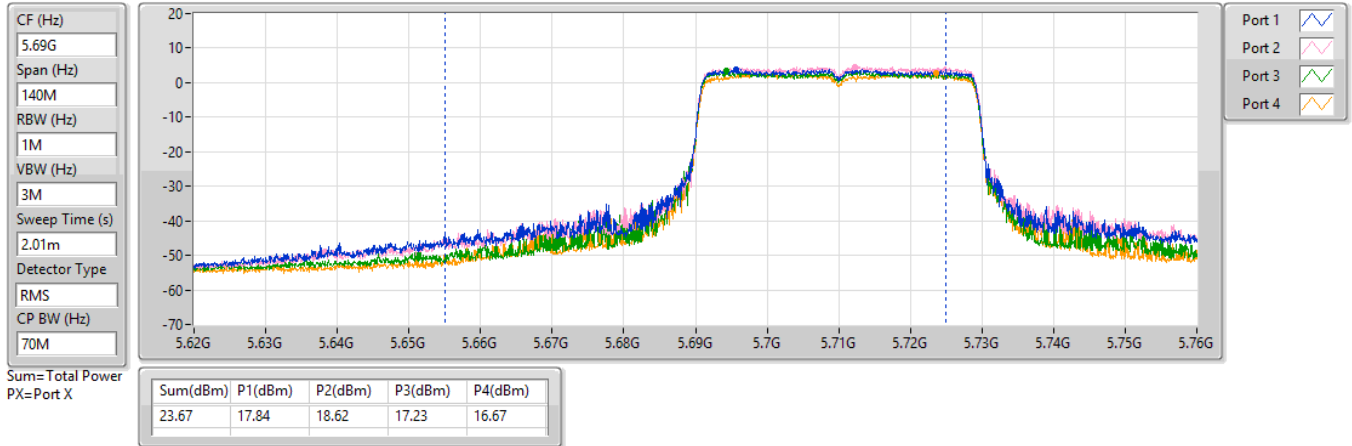


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

12/06/2025

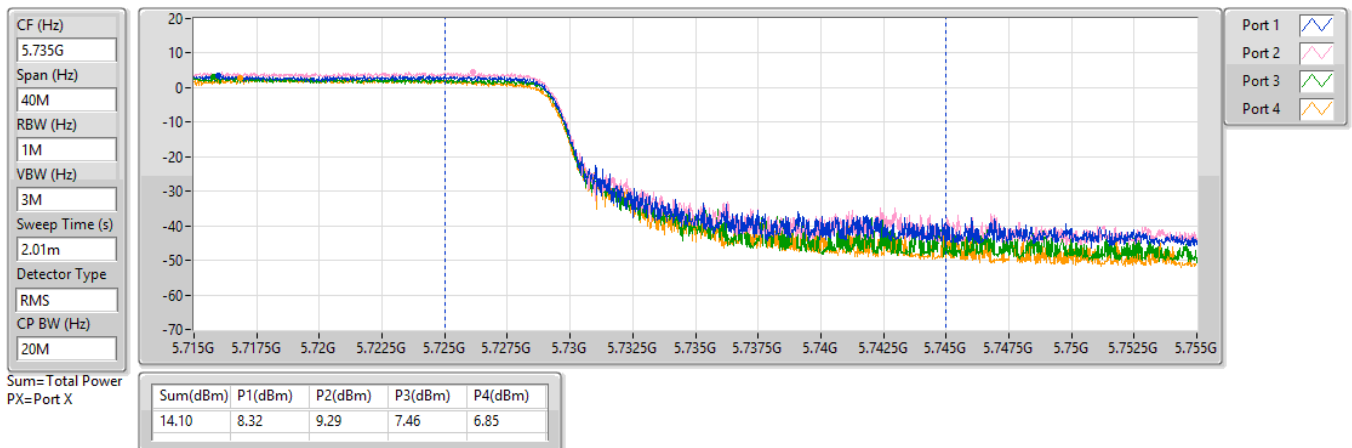


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

12/06/2025

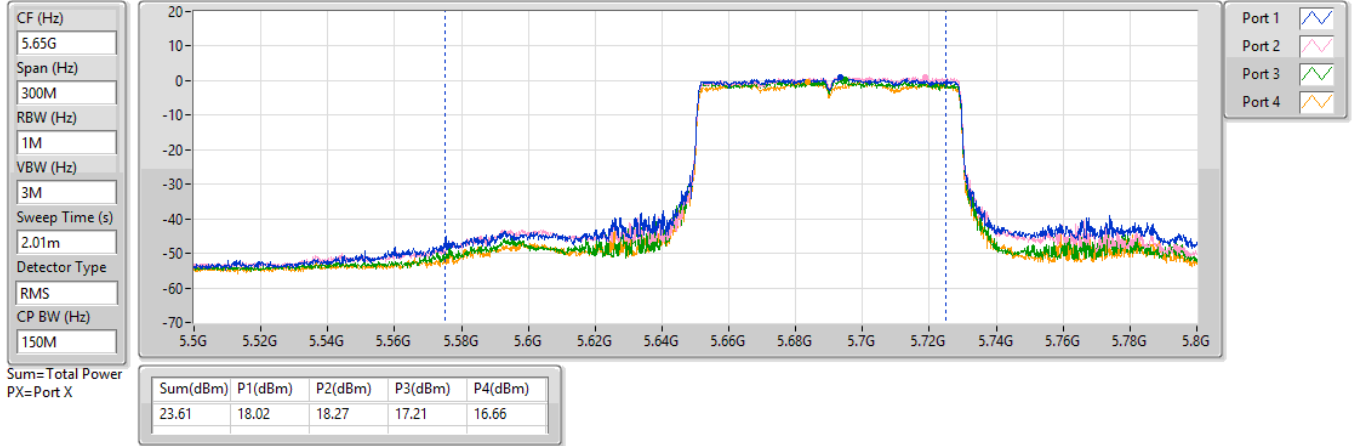


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

12/06/2025

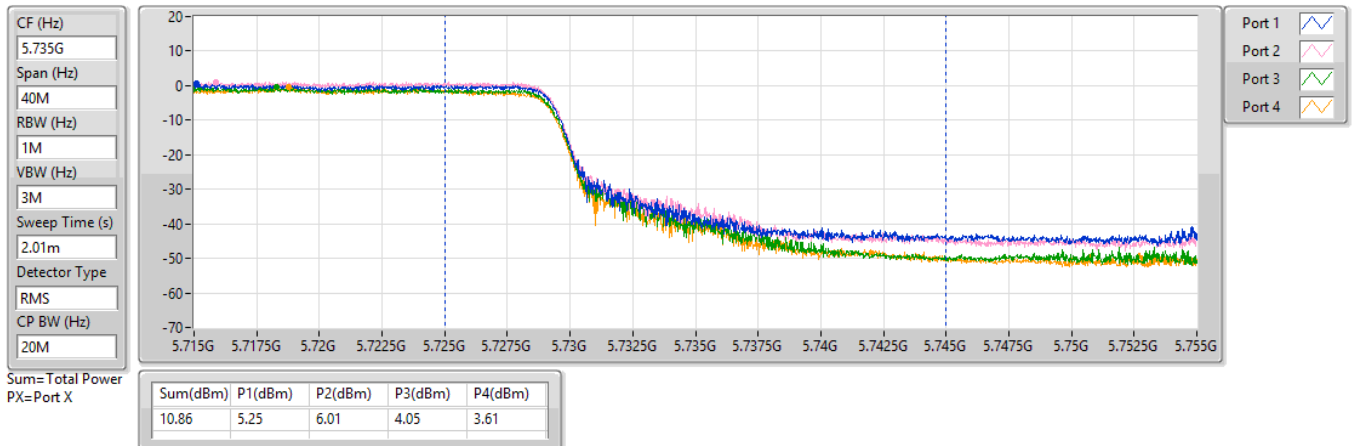


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

12/06/2025

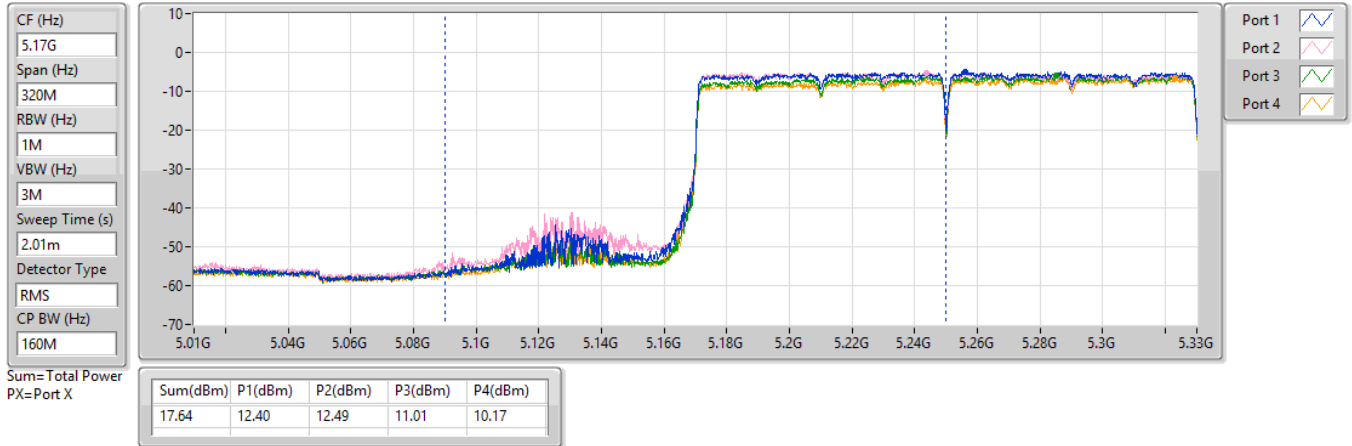


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

12/06/2025

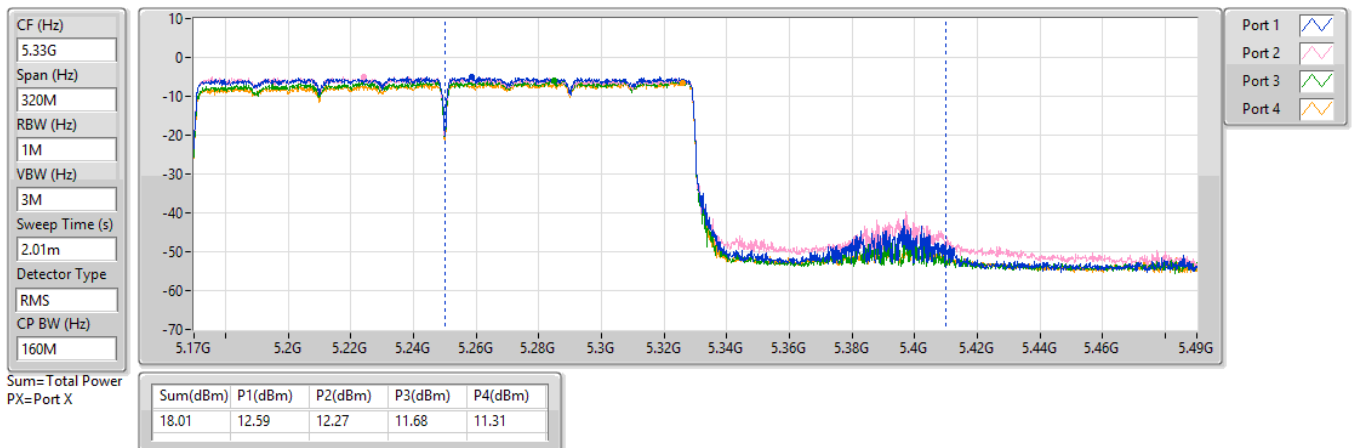


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

09/07/2025

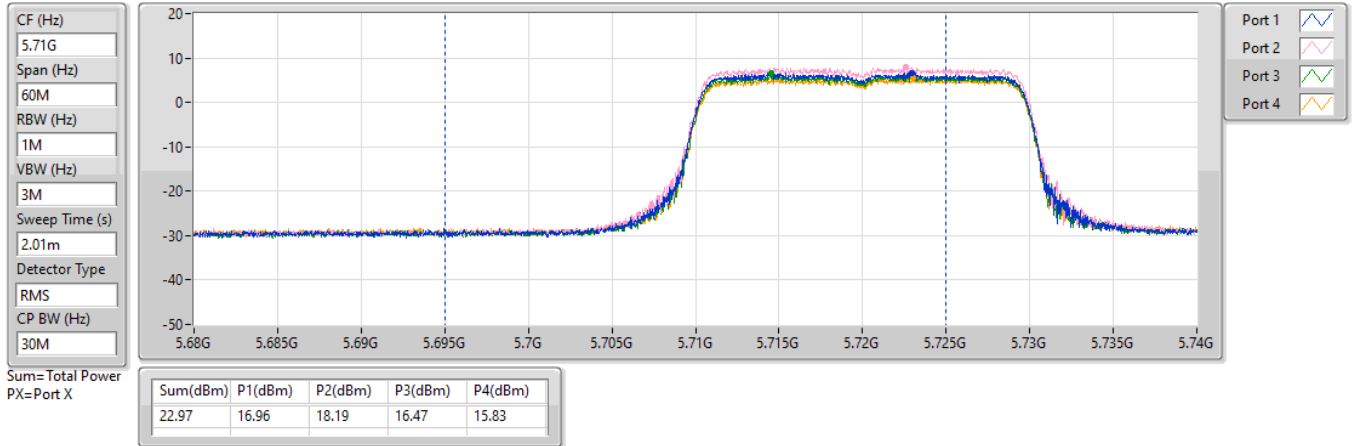


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

09/07/2025

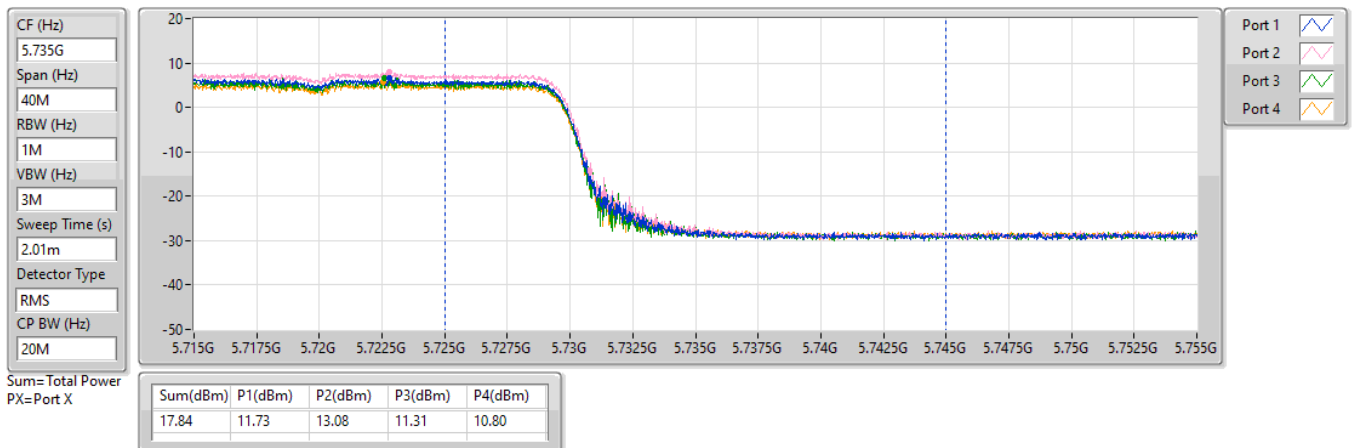


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

09/07/2025

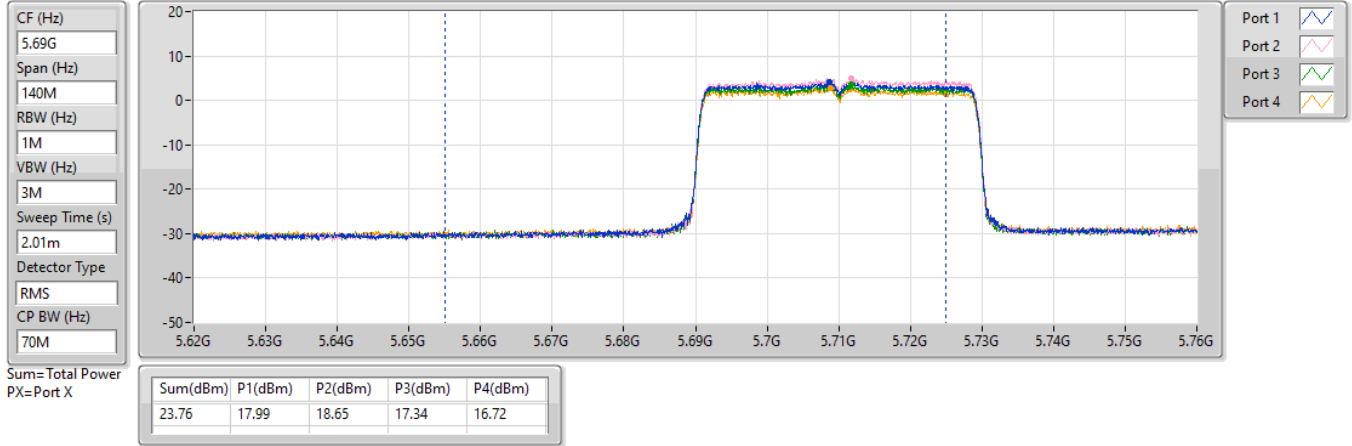


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

09/07/2025

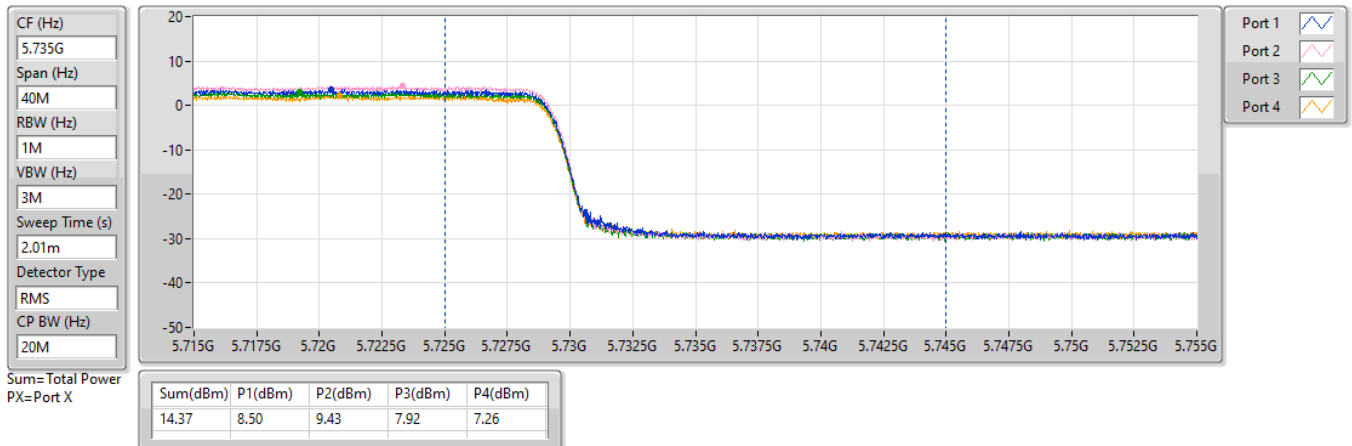


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

10/07/2025

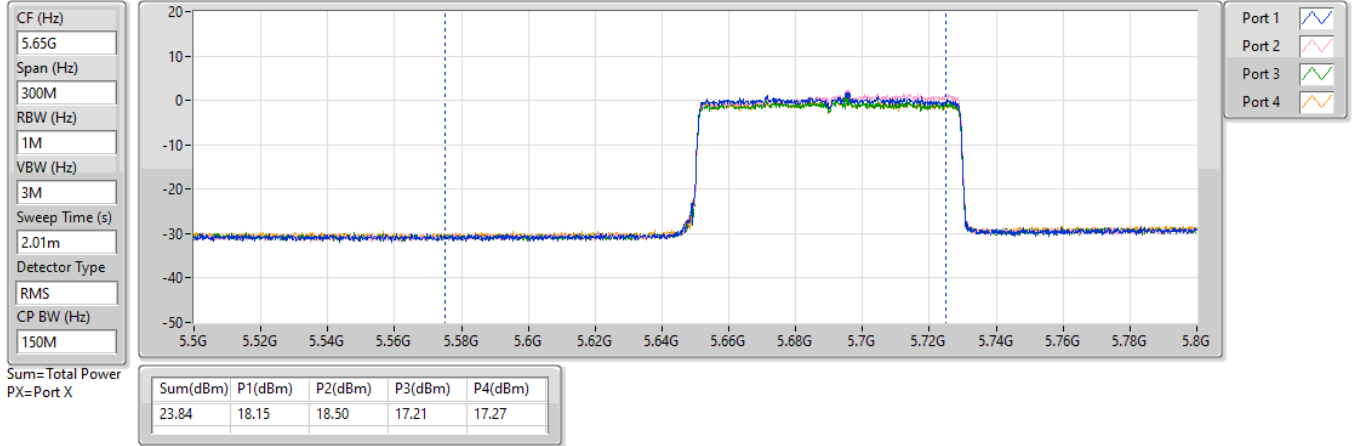


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

10/07/2025

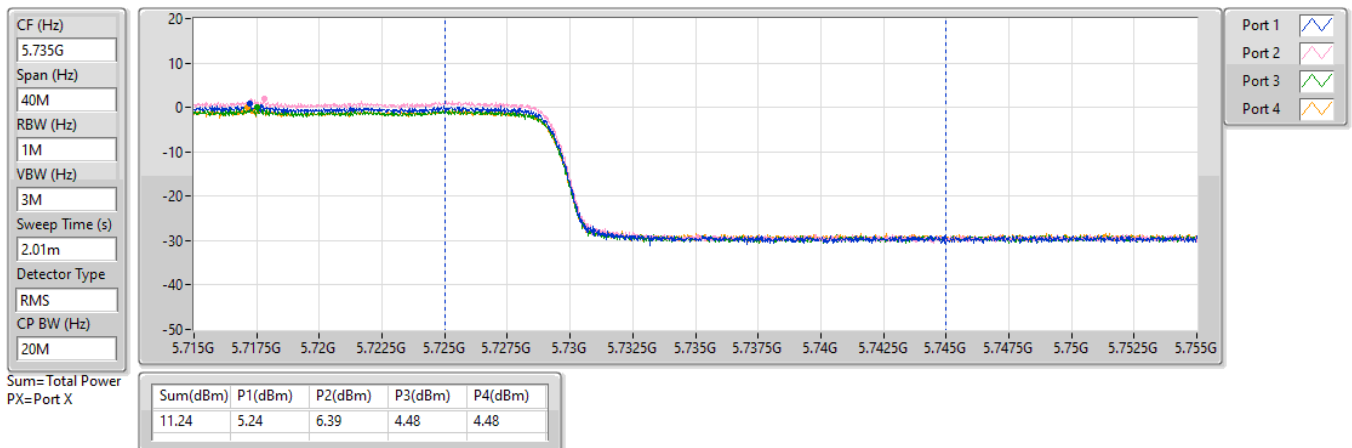


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

10/07/2025

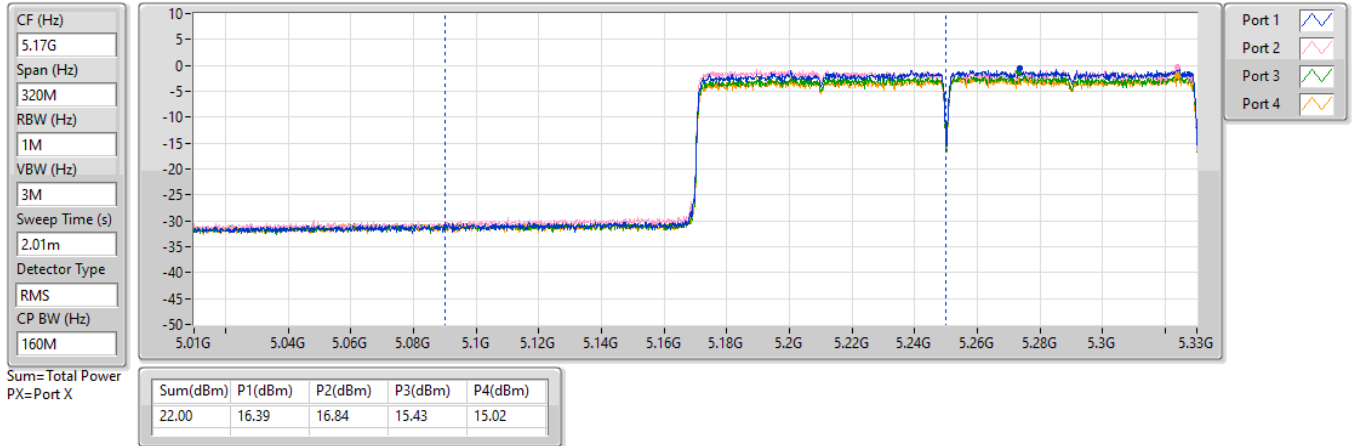


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

10/07/2025

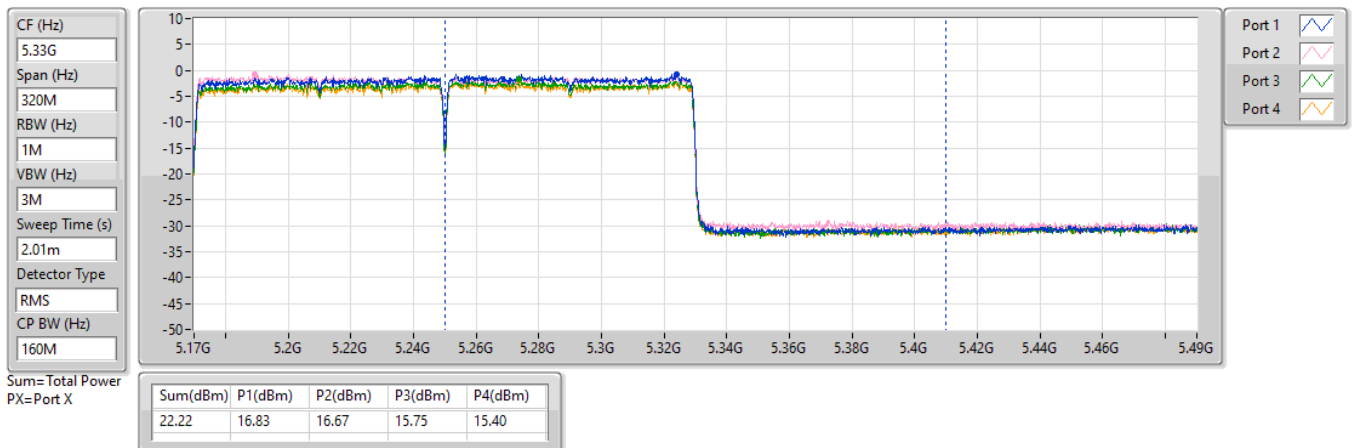

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0)_4TX	-1.58
802.11be EHT160-BF_Nss1,(MCS0)_4TX	2.65
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.39
802.11be EHT20_Nss1,(MCS0)_4TX	9.91
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.93
802.11be EHT40_Nss1,(MCS0)_4TX	7.22
802.11be EHT40-BF_Nss1,(MCS0)_4TX	8.66
802.11be EHT80_Nss1,(MCS0)_4TX	3.19
802.11be EHT80-BF_Nss1,(MCS0)_4TX	5.92
802.11be EHT160_Nss1,(MCS0)_4TX	-1.47
802.11be EHT160-BF_Nss1,(MCS0)_4TX	3.19
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.93
802.11be EHT20_Nss1,(MCS0)_4TX	9.69
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.95
802.11be EHT40_Nss1,(MCS0)_4TX	7.62
802.11be EHT40-BF_Nss1,(MCS0)_4TX	8.61
802.11be EHT80_Nss1,(MCS0)_4TX	4.41
802.11be EHT80-BF_Nss1,(MCS0)_4TX	5.04
802.11be EHT160_Nss1,(MCS0)_4TX	-2.46
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.47
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	9.37
802.11be EHT20_Nss1,(MCS0)_4TX	6.06
802.11be EHT20-BF_Nss1,(MCS0)_4TX	8.85
802.11be EHT40_Nss1,(MCS0)_4TX	5.79
802.11be EHT40-BF_Nss1,(MCS0)_4TX	5.81
802.11be EHT80_Nss1,(MCS0)_4TX	2.52
802.11be EHT80-BF_Nss1,(MCS0)_4TX	3.09

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	5.8649	5.15	4.55	4.51	3.56	10.39	11.00
5300MHz	Pass	5.8649	5.08	4.17	4.30	3.24	10.16	11.00
5320MHz	Pass	5.8649	4.94	4.38	4.30	3.33	10.17	11.00
5500MHz	Pass	5.9053	3.69	3.82	2.89	1.86	9.06	11.00
5580MHz	Pass	5.9053	4.92	4.97	4.16	3.75	10.38	11.00
5700MHz	Pass	5.9053	4.39	5.26	3.74	2.67	9.99	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.9053	5.37	6.19	4.48	3.70	10.93	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.4561	3.75	4.61	2.86	2.30	9.37	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	5.8649	4.36	3.80	3.56	2.71	9.60	11.00
5300MHz	Pass	5.8649	4.65	3.96	3.85	3.03	9.86	11.00
5320MHz	Pass	5.8649	4.78	4.01	3.99	3.16	9.91	11.00
5500MHz	Pass	5.9053	3.35	3.48	2.38	1.39	8.68	11.00
5580MHz	Pass	5.9053	4.24	4.44	3.24	2.97	9.69	11.00
5700MHz	Pass	5.9053	1.88	2.78	1.27	0.35	7.55	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.9053	1.91	2.81	1.08	0.29	7.53	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.4561	0.41	1.28	-0.46	-1.31	6.06	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5270MHz	Pass	5.8649	2.34	1.13	1.03	0.23	7.22	11.00
5310MHz	Pass	5.8649	2.20	1.11	0.82	0.28	7.05	11.00
5510MHz	Pass	5.9053	-0.55	-0.23	-1.01	-1.99	4.99	11.00
5550MHz	Pass	5.9053	1.42	1.56	0.83	0.33	6.92	11.00
5670MHz	Pass	5.9053	1.51	1.91	0.98	0.28	7.08	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.9053	1.88	2.62	1.43	0.76	7.62	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.4561	-0.13	0.95	-0.83	-1.16	5.79	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	5.8649	-2.02	-2.81	-3.01	-3.52	3.19	11.00
5530MHz	Pass	5.9053	-3.79	-3.24	-4.32	-4.76	1.91	11.00
5610MHz	Pass	5.9053	-1.19	-0.82	-1.94	-1.94	4.39	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.9053	-1.07	-0.79	-1.76	-2.19	4.41	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.4561	-3.17	-2.41	-4.39	-4.37	2.52	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.2513	-6.87	-6.95	-7.94	-8.89	-1.58	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.8649	-6.85	-6.99	-7.78	-7.99	-1.47	11.00
5570MHz	Pass	5.9053	-8.03	-7.05	-8.36	-9.28	-2.46	11.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	5.8649	5.55	4.85	4.71	4.46	10.93	11.00
5300MHz	Pass	5.8649	5.38	5.16	4.09	3.81	10.65	11.00
5320MHz	Pass	5.8649	5.45	4.76	4.24	4.01	10.65	11.00
5500MHz	Pass	5.9053	5.29	5.65	3.83	3.87	10.71	11.00
5580MHz	Pass	5.9053	5.58	5.22	4.11	4.35	10.85	11.00
5700MHz	Pass	5.9053	5.05	6.16	4.68	3.58	10.95	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.9053	4.87	6.04	4.36	3.74	10.81	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.4561	2.80	4.10	2.33	1.78	8.85	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5270MHz	Pass	5.8649	3.73	2.55	2.13	2.01	8.66	11.00
5310MHz	Pass	5.8649	3.49	2.61	1.90	1.75	8.50	11.00
5510MHz	Pass	5.9053	0.94	0.99	0.01	-0.67	6.38	11.00
5550MHz	Pass	5.9053	2.91	2.96	1.80	1.49	8.31	11.00
5670MHz	Pass	5.9053	3.03	3.32	2.39	2.09	8.61	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.9053	2.56	3.18	1.94	1.19	8.26	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.4561	-0.03	0.89	-0.58	-1.16	5.81	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	5.8649	0.96	0.02	-0.47	-0.97	5.92	11.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5530MHz	Pass	5.9053	-1.63	-1.26	-2.85	-3.20	3.86	11.00
5610MHz	Pass	5.9053	-0.01	-0.30	-1.62	-1.75	5.04	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.9053	-0.67	-0.15	-1.60	-1.53	4.87	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.4561	-2.90	-1.73	-3.67	-3.64	3.09	30.00
802.11be EHT160-BF_Nss1_(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.2513	-2.76	-2.45	-3.84	-4.20	2.65	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.8649	-2.13	-2.48	-3.23	-3.59	3.19	11.00
5570MHz	Pass	5.9053	-5.03	-4.29	-6.22	-6.27	0.47	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Inf = There's no restriction for the limit.


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5260MHz

12/06/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

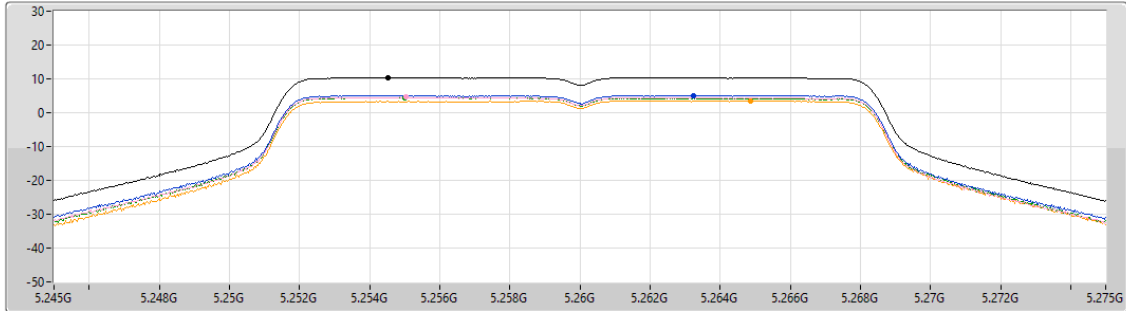

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.39	10.39	5.15	4.55	4.51	3.56

Sum
Port 1
Port 2
Port 3
Port 4


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5300MHz

12/06/2025

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

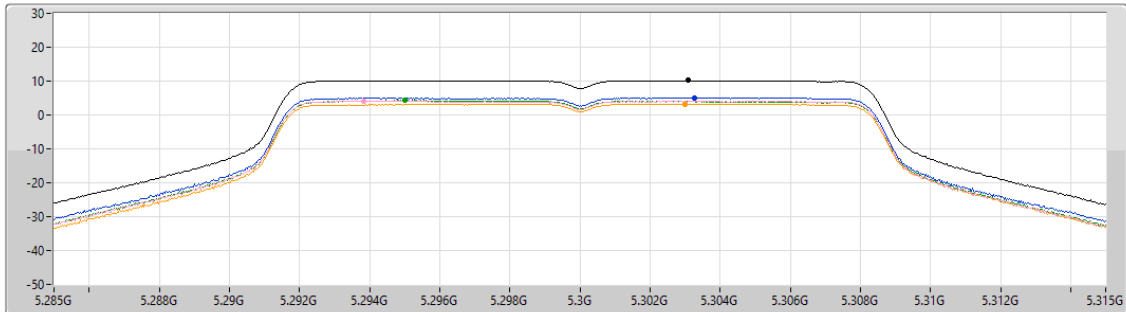

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.16	10.16	5.08	4.17	4.30	3.24

Sum
Port 1
Port 2
Port 3
Port 4


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5320MHz

12/06/2025

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

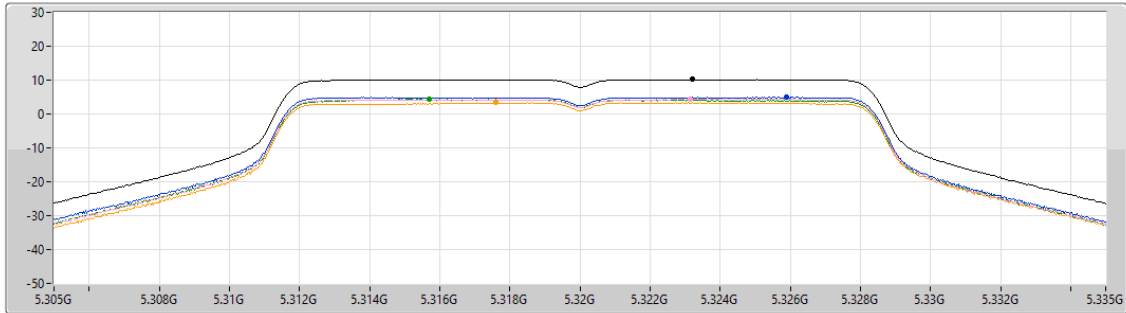

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.17	10.17	4.94	4.38	4.30	3.33

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5500MHz

12/06/2025

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

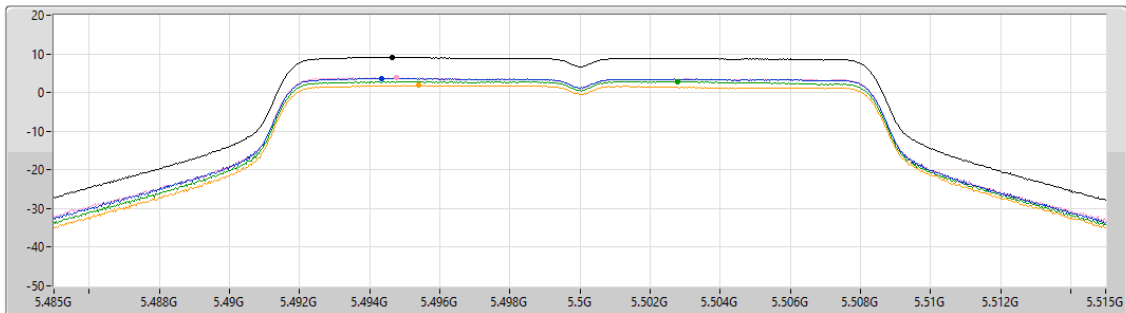

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.06	9.06	3.69	3.82	2.89	1.86

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

12/06/2025

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

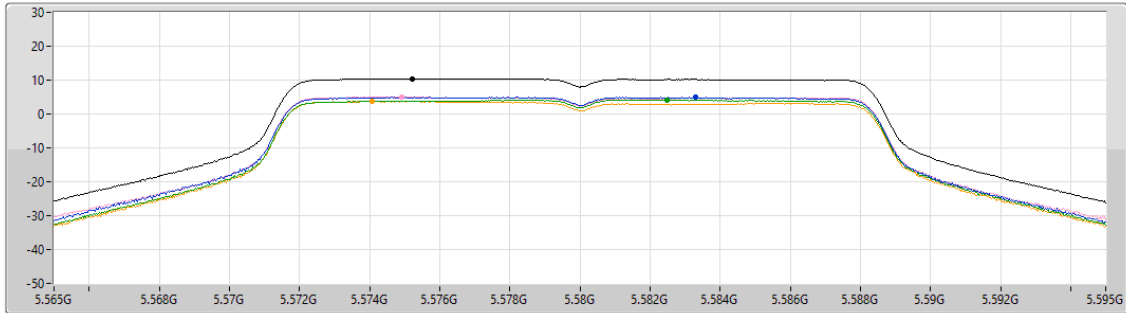

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.38	10.38	4.92	4.97	4.16	3.75


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

12/06/2025

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

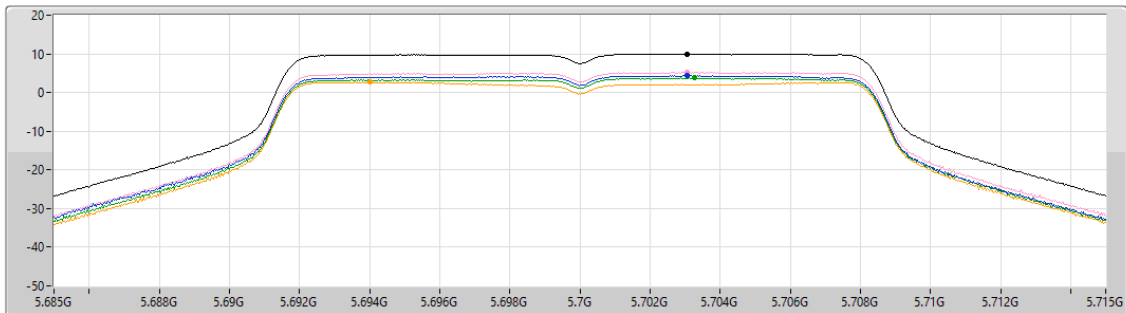

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.99	9.99	4.39	5.26	3.74	2.67

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

12/06/2025

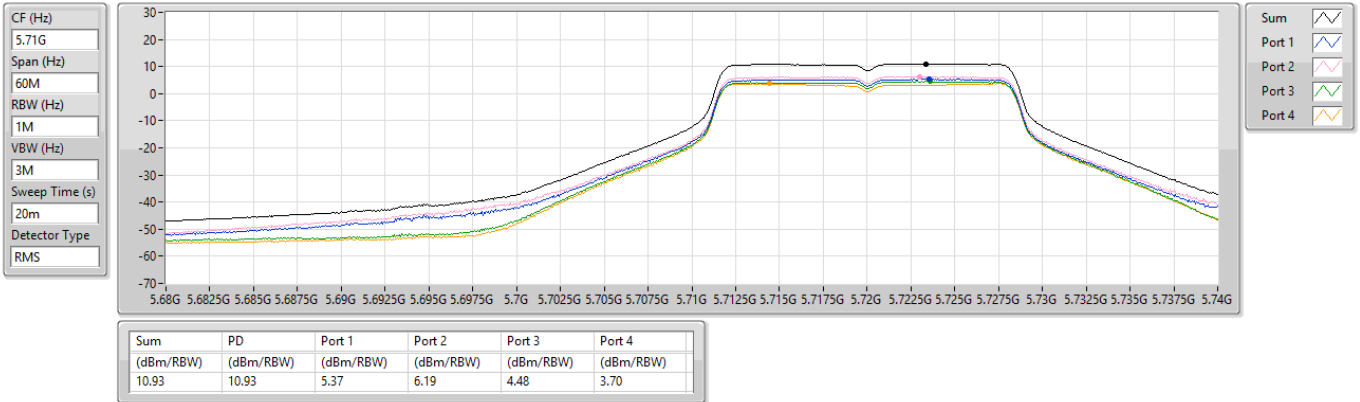


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

12/06/2025

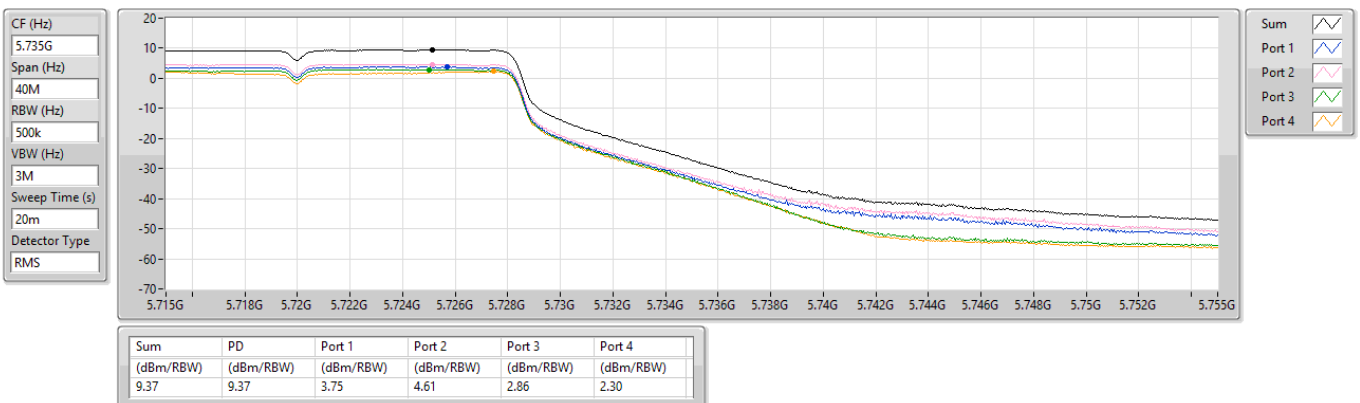


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5260MHz

12/06/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

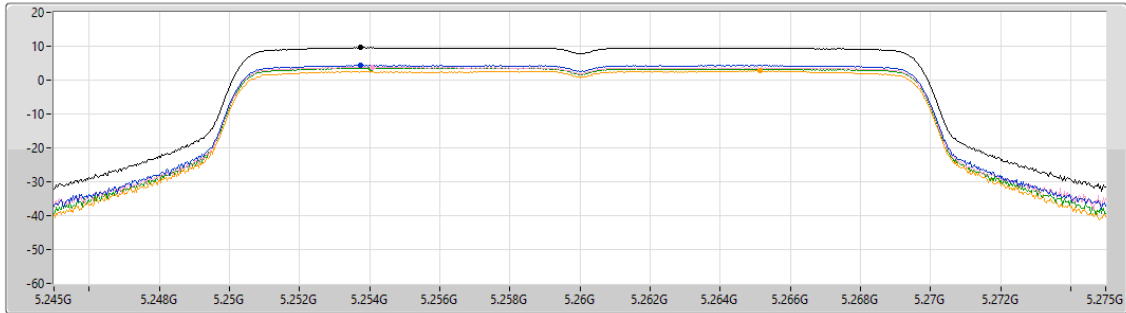

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.60	9.60	4.36	3.80	3.56	2.71


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5300MHz

12/06/2025

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

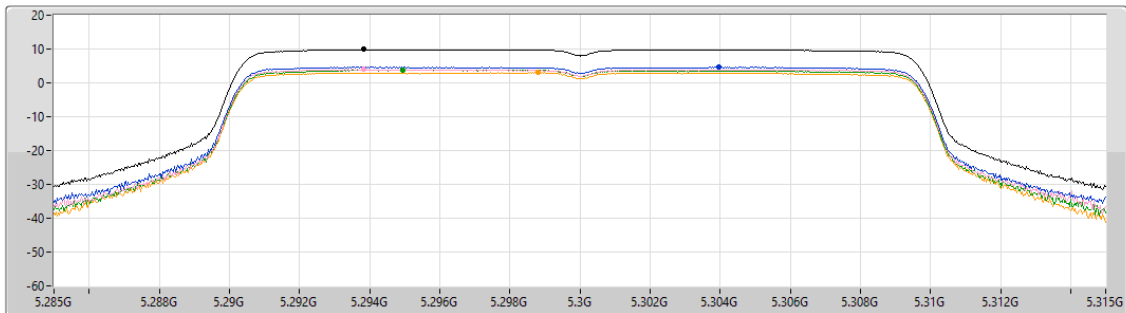

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.86	9.86	4.65	3.96	3.85	3.03


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5320MHz

12/06/2025

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

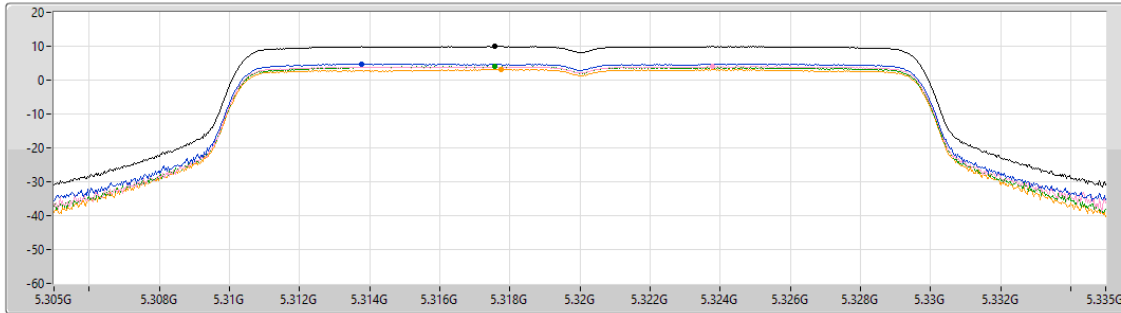

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.91	9.91	4.78	4.01	3.99	3.16

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5500MHz

12/06/2025

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

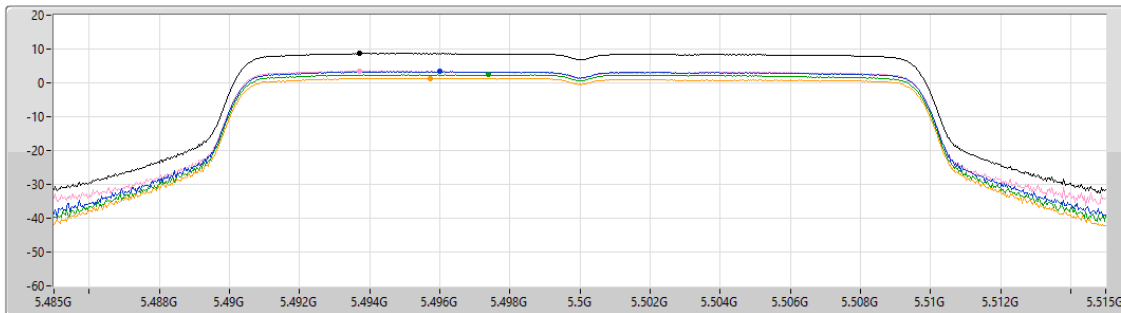

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.68	8.68	3.35	3.48	2.38	1.39

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5580MHz

12/06/2025

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

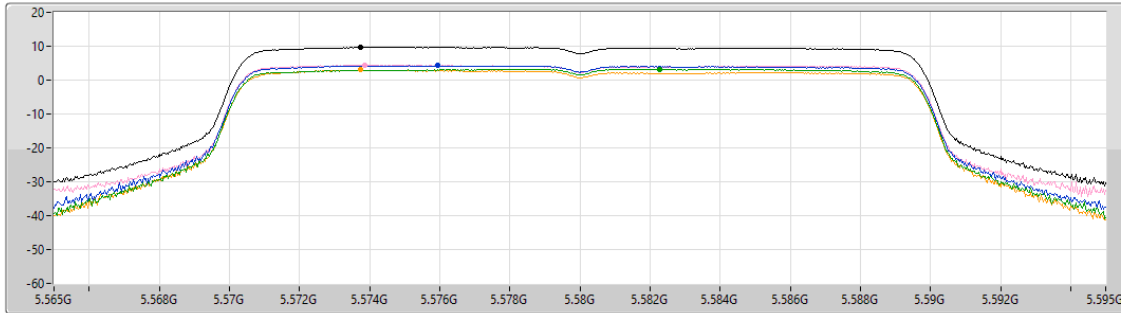

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.69	9.69	4.24	4.44	3.24	2.97


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5700MHz

12/06/2025

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

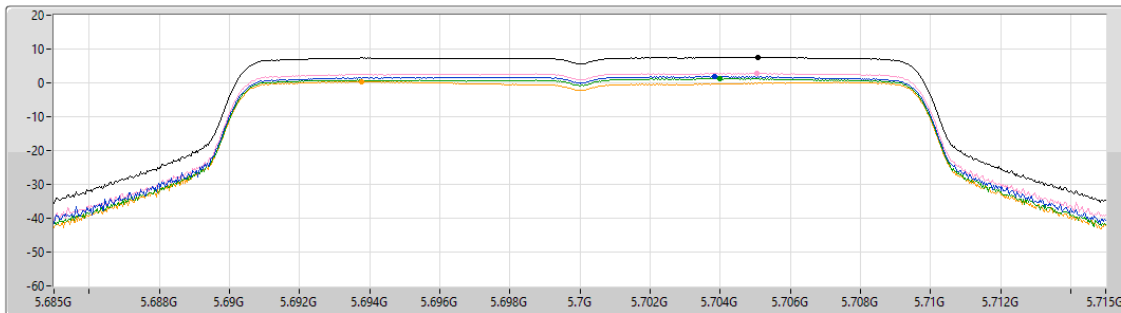

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.55	7.55	1.88	2.78	1.27	0.35

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

12/06/2025

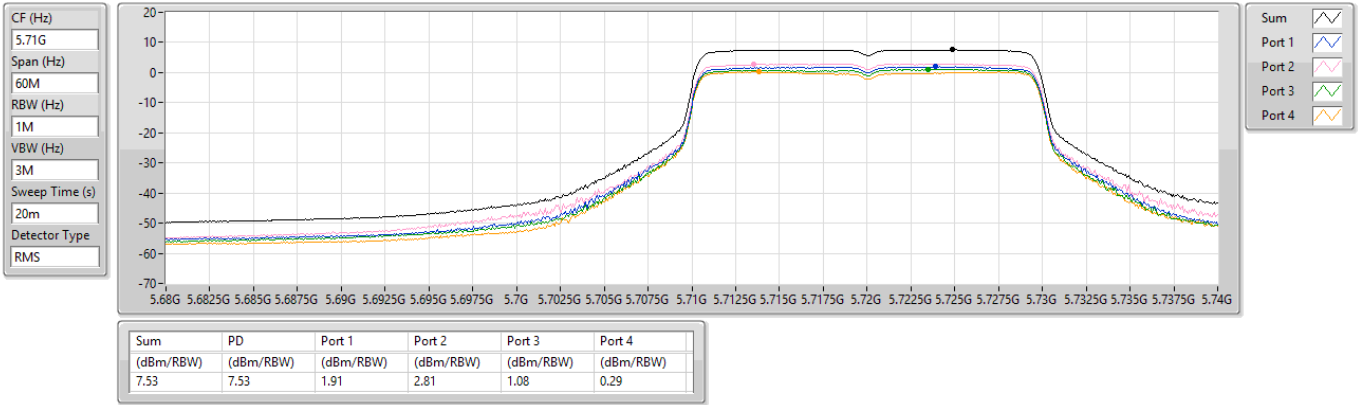


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

12/06/2025

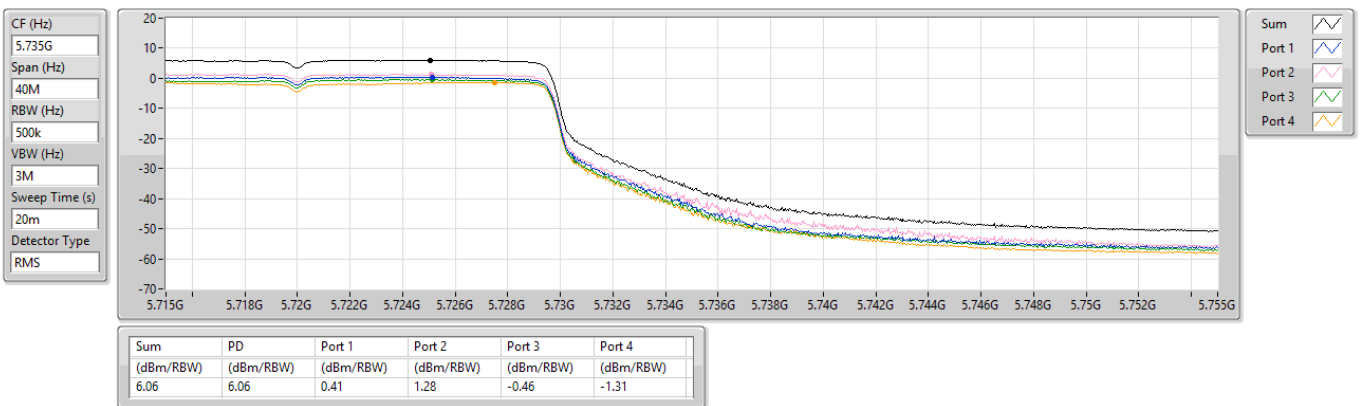


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5270MHz

12/06/2025

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

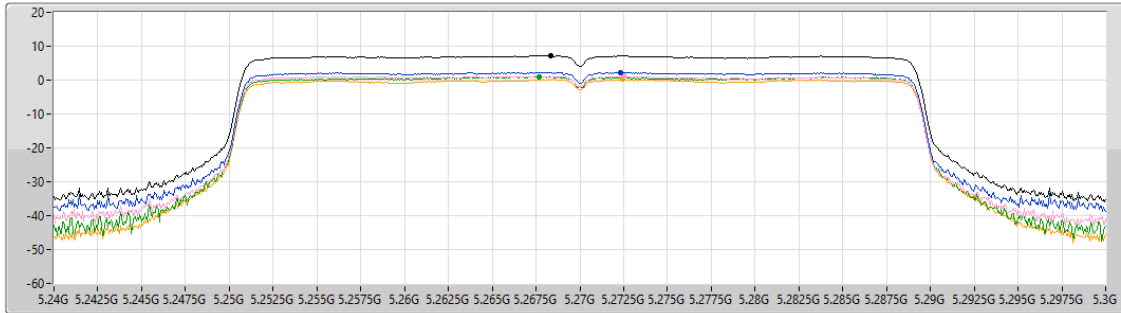

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
7.22	7.22	2.34	1.13	1.03	0.23


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5310MHz

12/06/2025

CF (Hz)
5.31G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

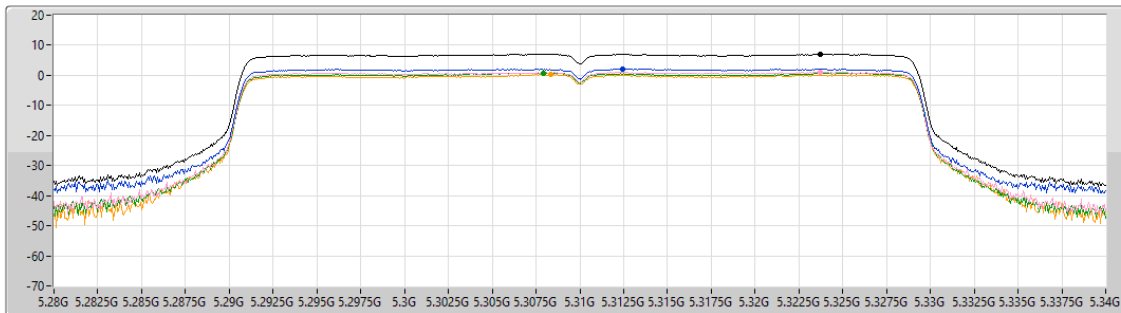


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
7.05	7.05	2.20	1.11	0.82	0.28

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5510MHz

12/06/2025

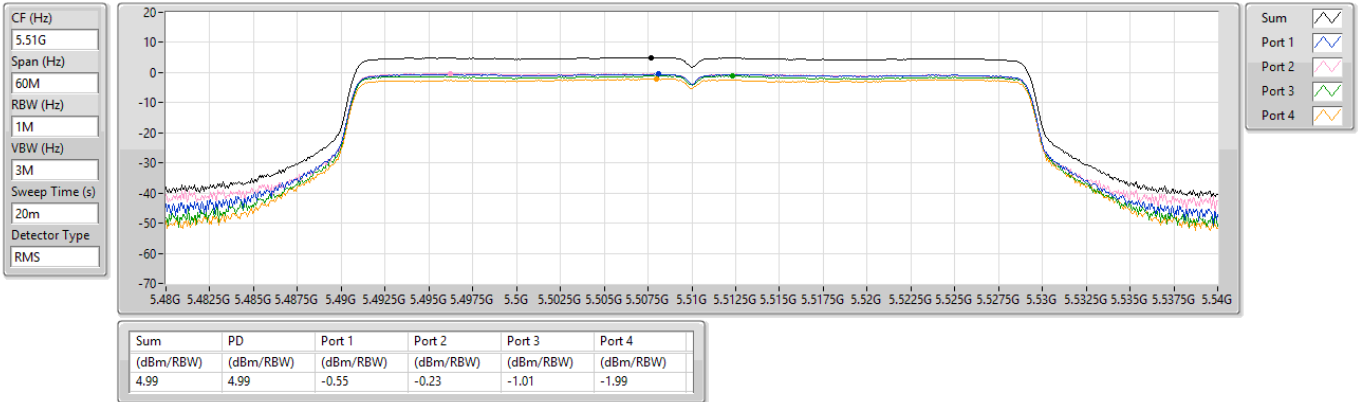


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5550MHz

12/06/2025

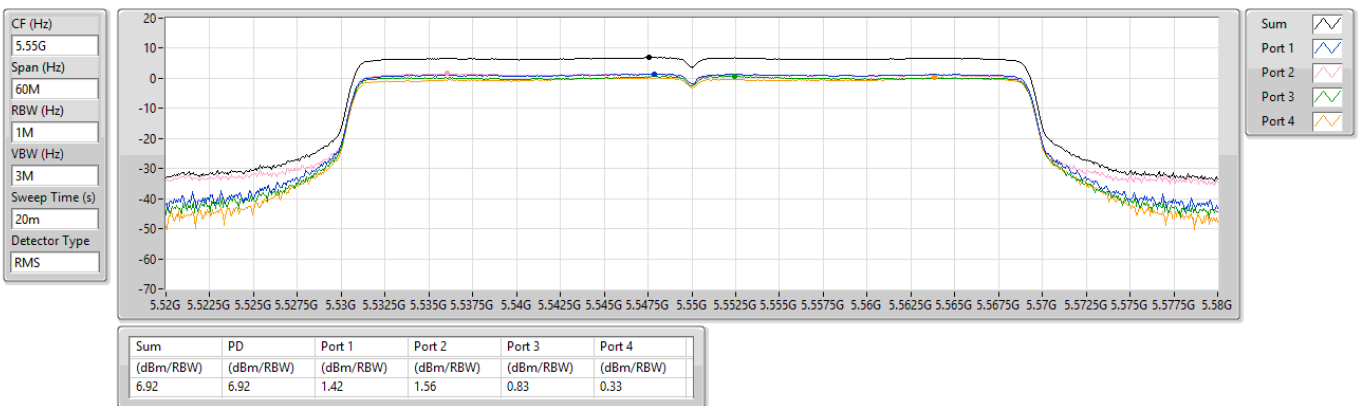


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5670MHz

12/06/2025

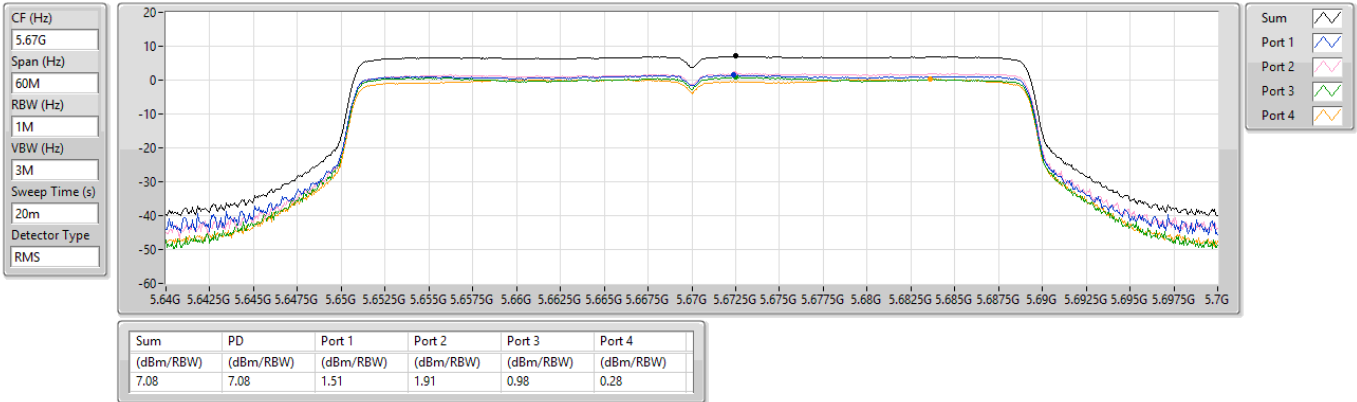


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

12/06/2025

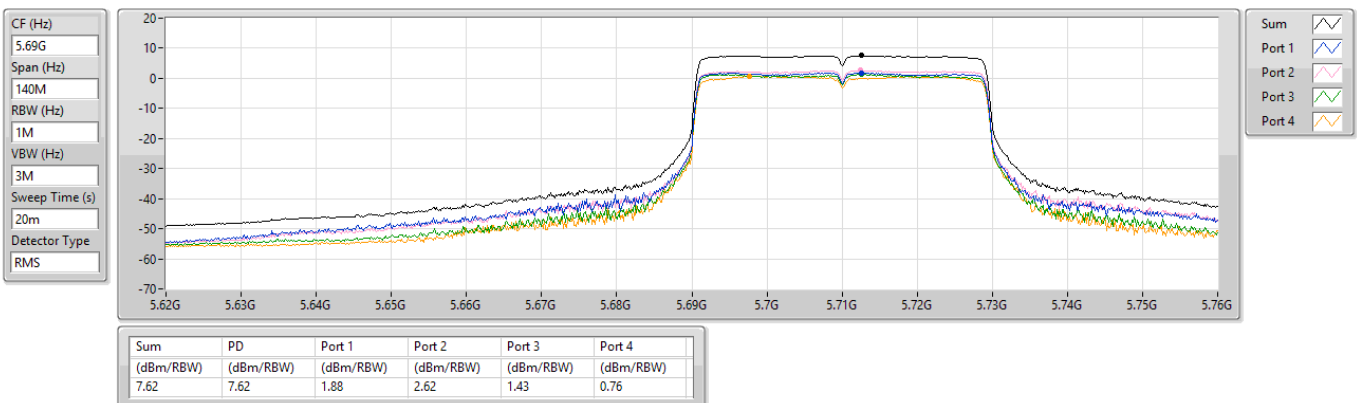


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

12/06/2025

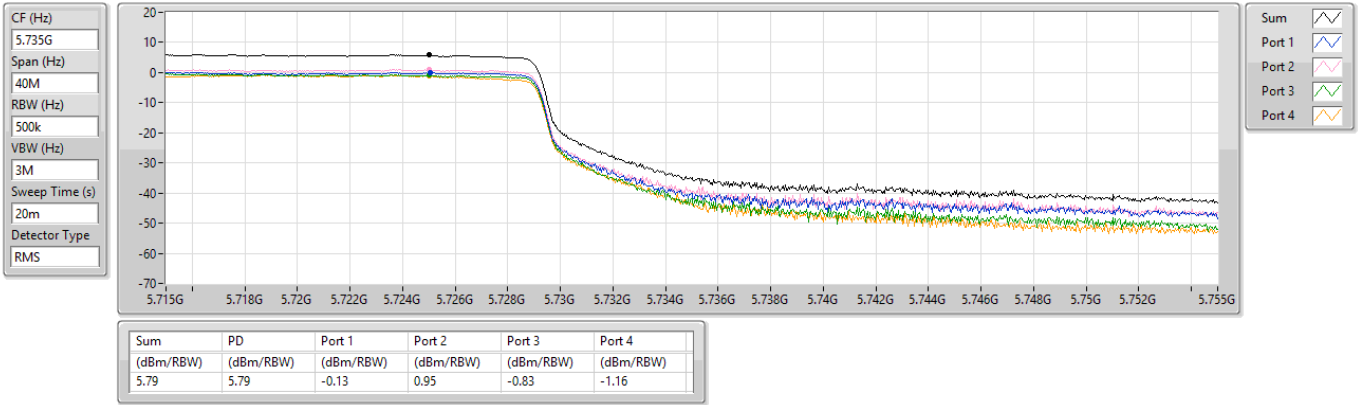


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5290MHz

12/06/2025

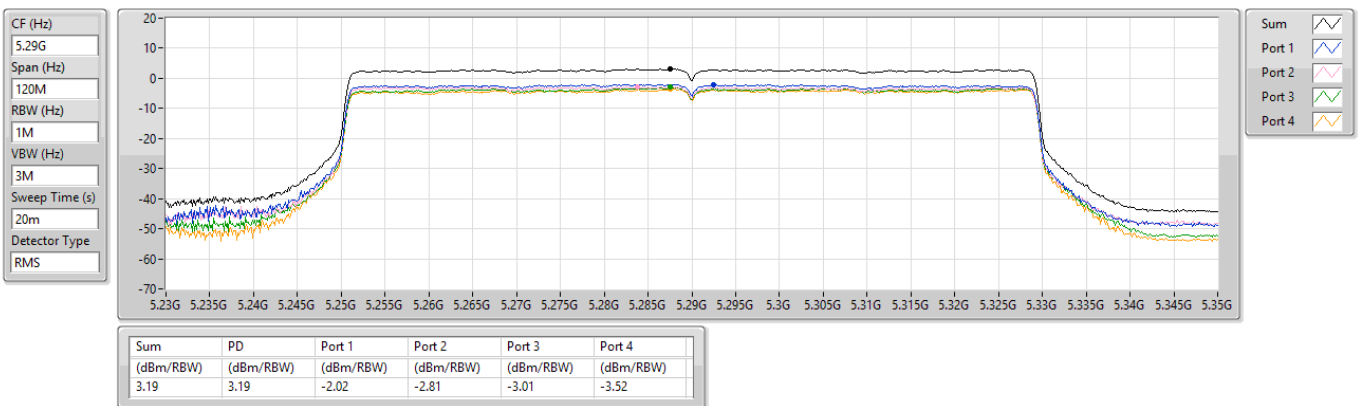


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5530MHz

12/06/2025

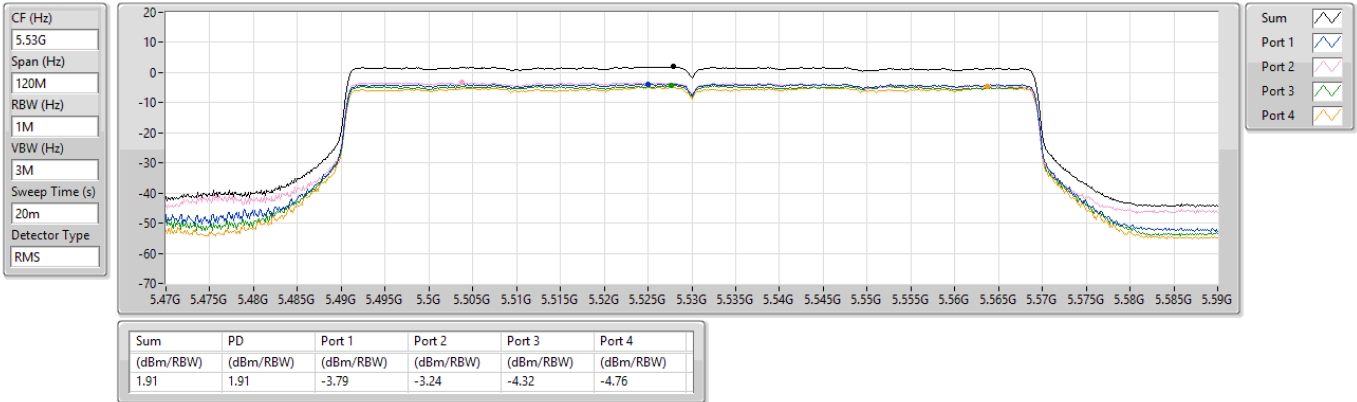


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5610MHz

12/06/2025

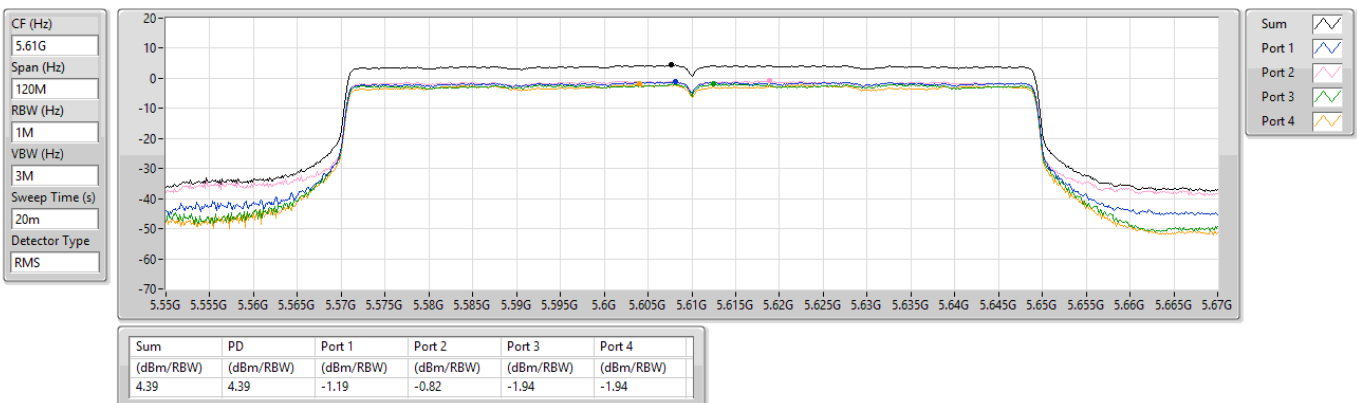


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

12/06/2025

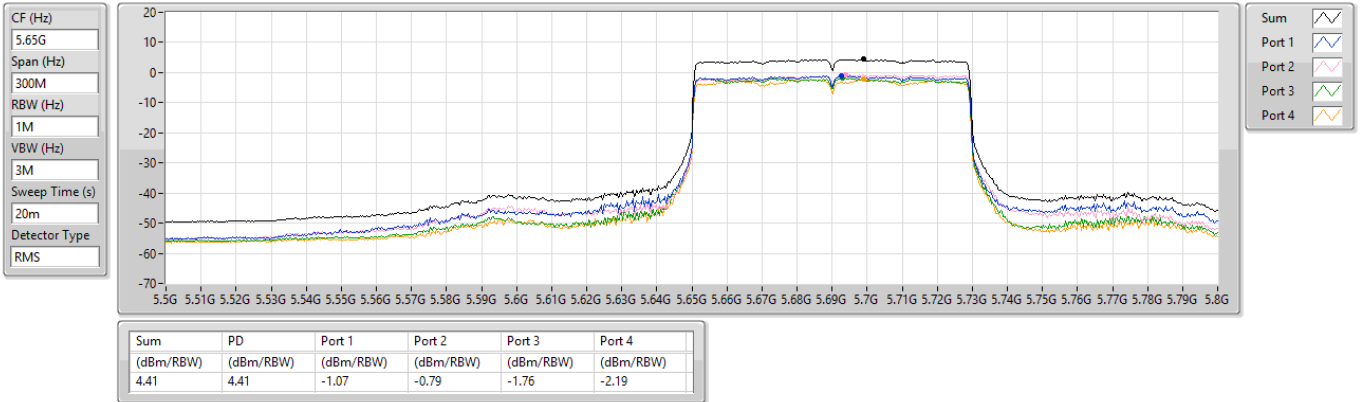


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

12/06/2025

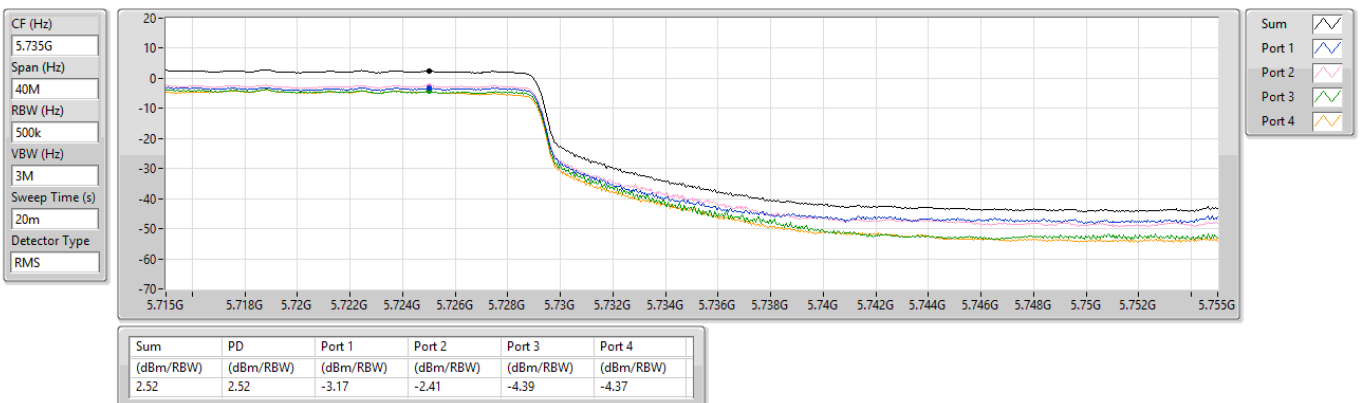


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2025

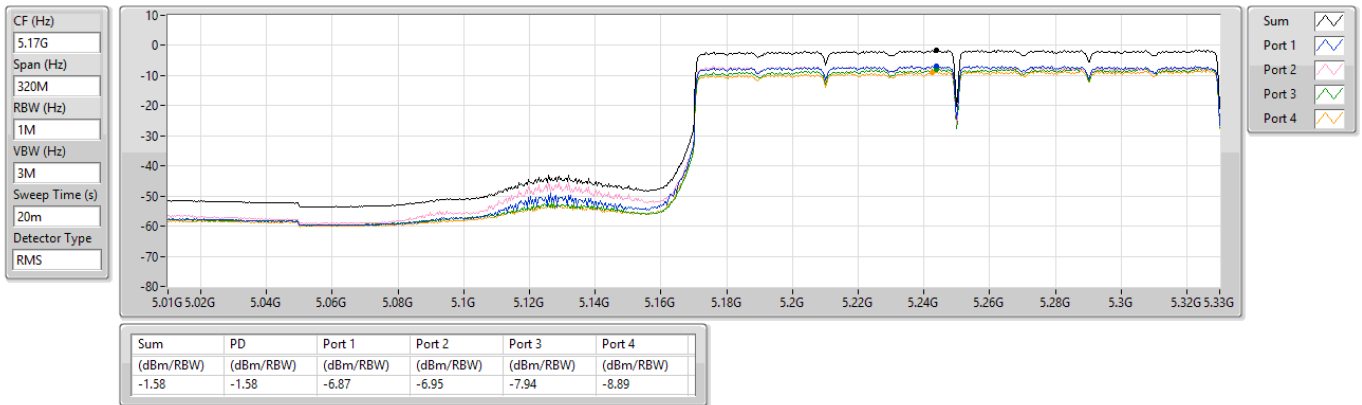


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.25-5.35GHz

12/06/2025

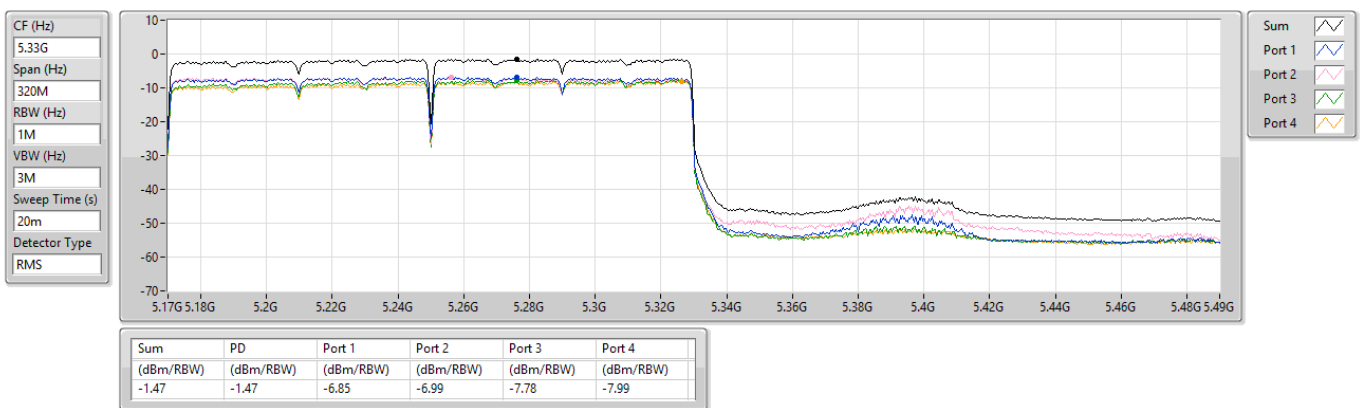


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5570MHz

12/06/2025

CF (Hz)
5.57G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

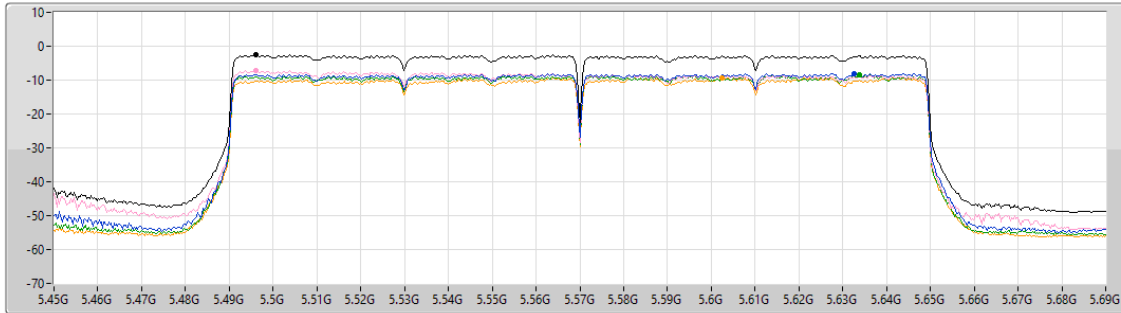

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.46	-2.46	-8.03	-7.05	-8.36	-9.28

Sum
Port 1
Port 2
Port 3
Port 4


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5260MHz

09/07/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

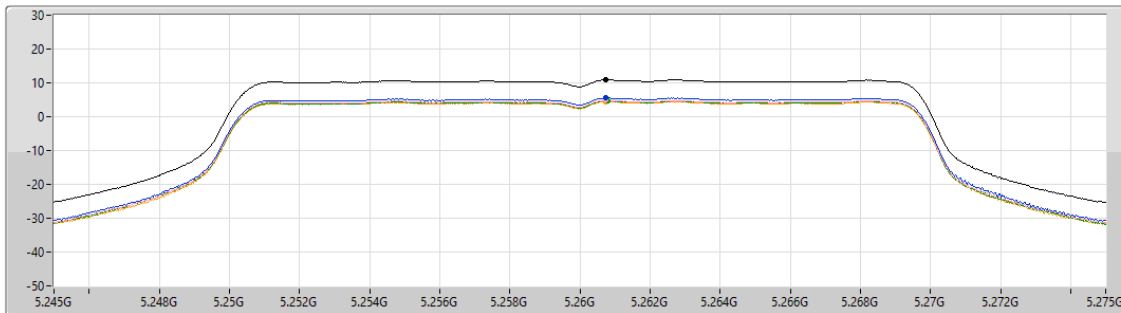

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	5.55	4.85	4.71	4.46

Sum
Port 1
Port 2
Port 3
Port 4


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5300MHz

09/07/2025

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

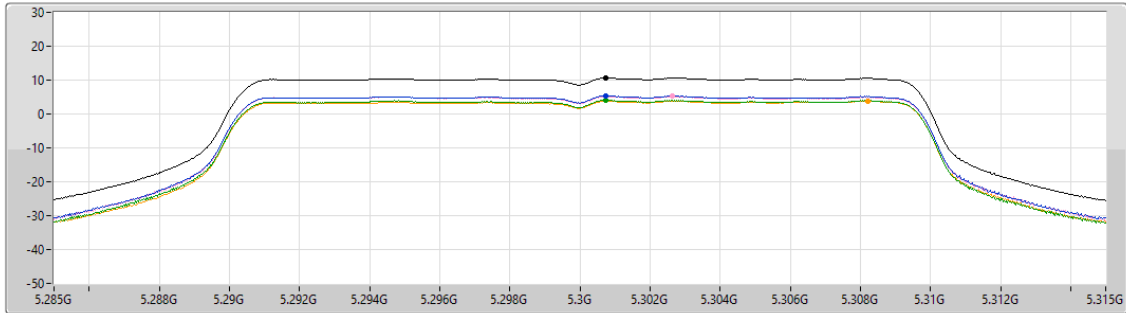

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.65	10.65	5.38	5.16	4.09	3.81


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5320MHz

09/07/2025

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

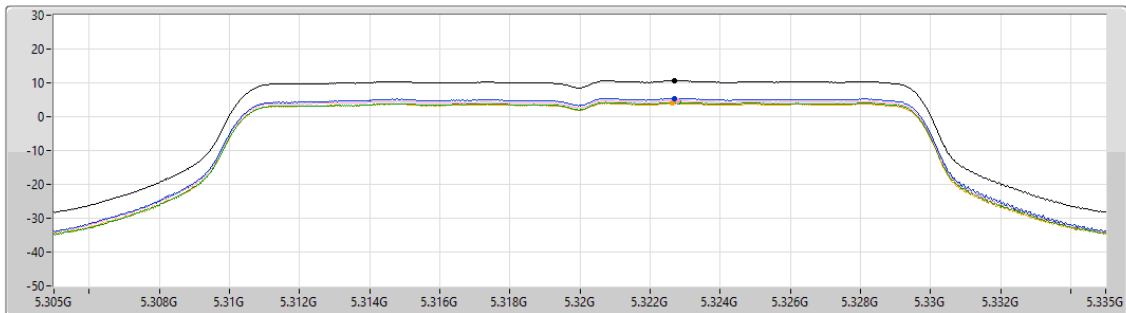


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.65	10.65	5.45	4.76	4.24	4.01

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5500MHz

09/07/2025

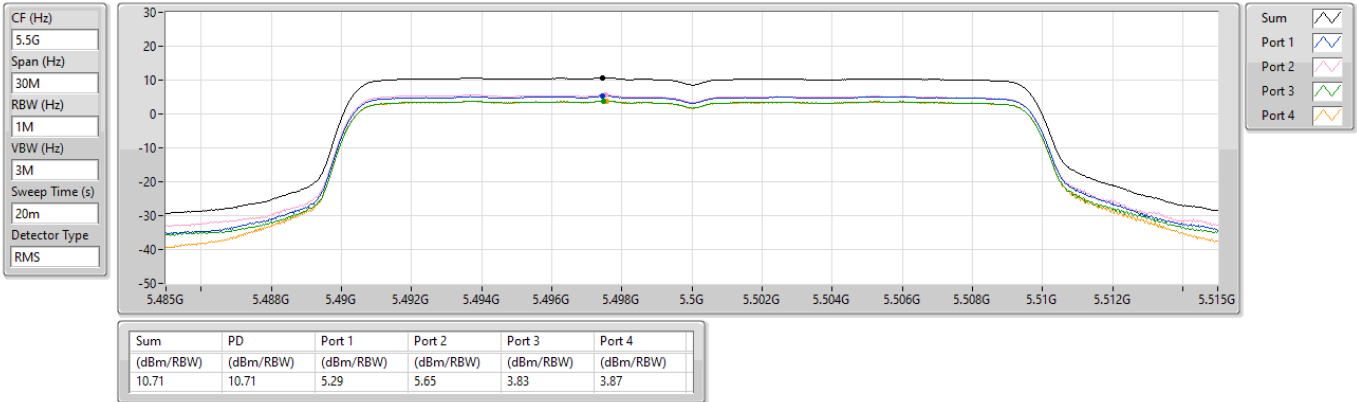


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5580MHz

09/07/2025

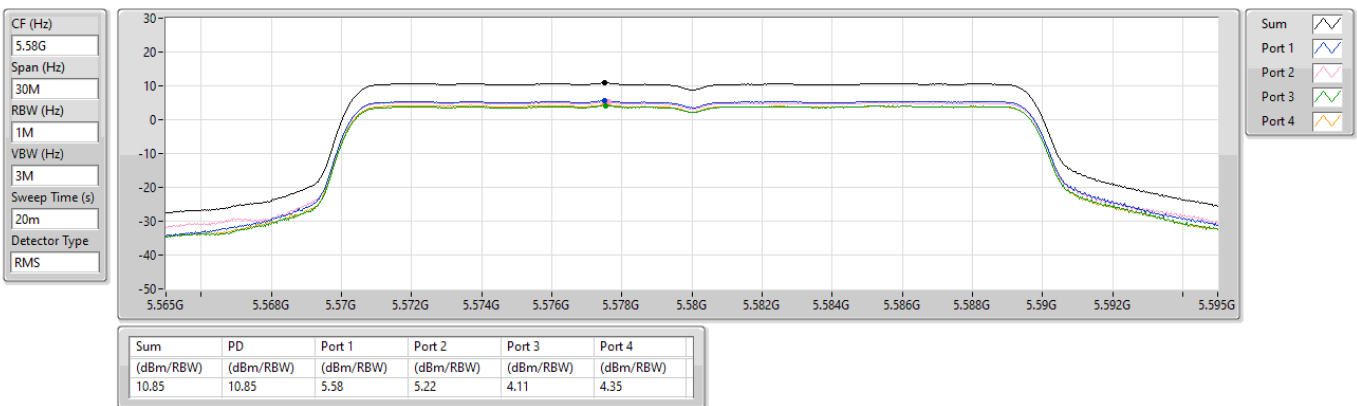


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5700MHz

09/07/2025

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

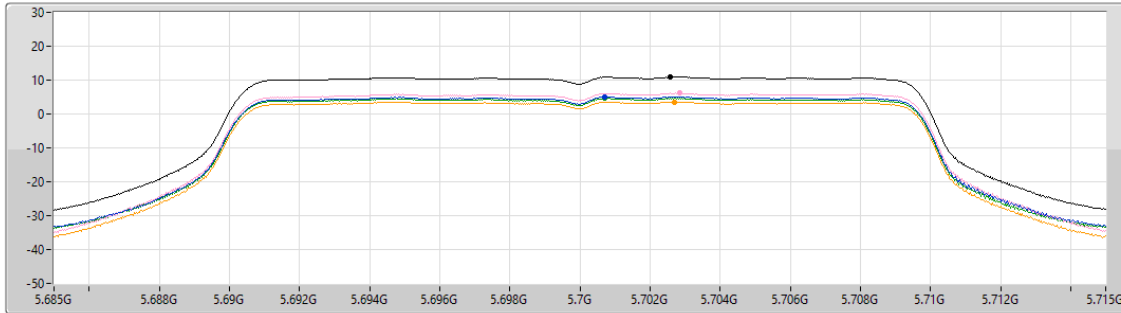

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	5.05	6.16	4.68	3.58

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

09/07/2025

CF (Hz)
5.71G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

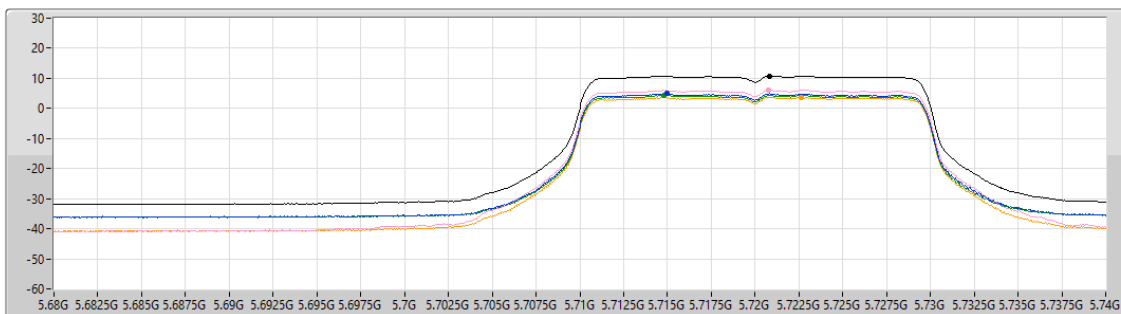

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	4.87	6.04	4.36	3.74


Sum
Port 1
Port 2
Port 3
Port 4

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

09/07/2025

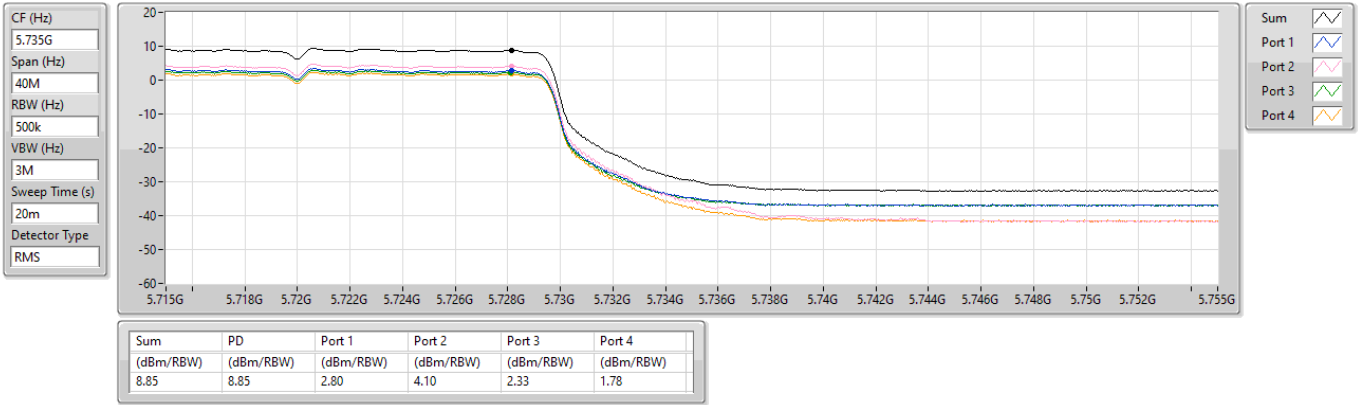


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5270MHz

09/07/2025

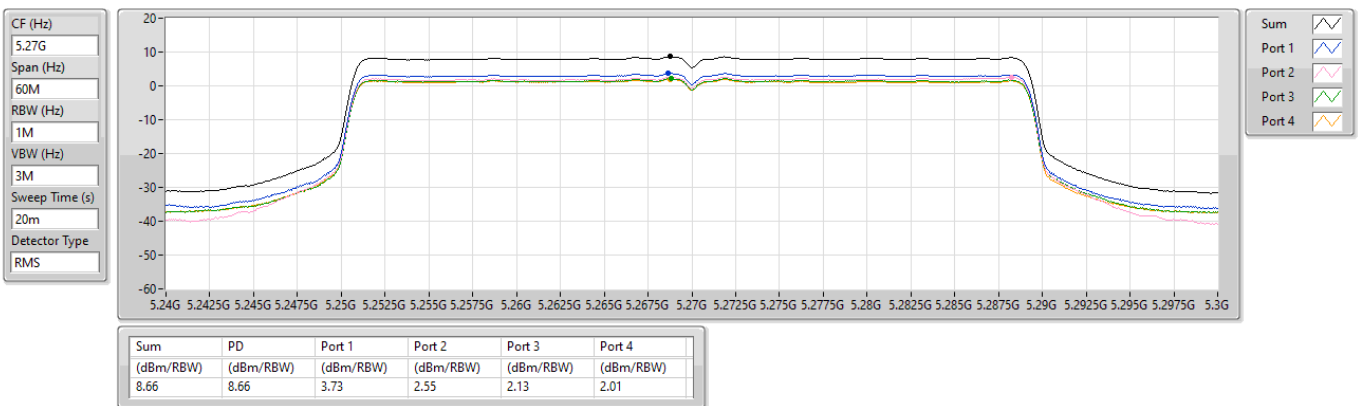


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5310MHz

09/07/2025

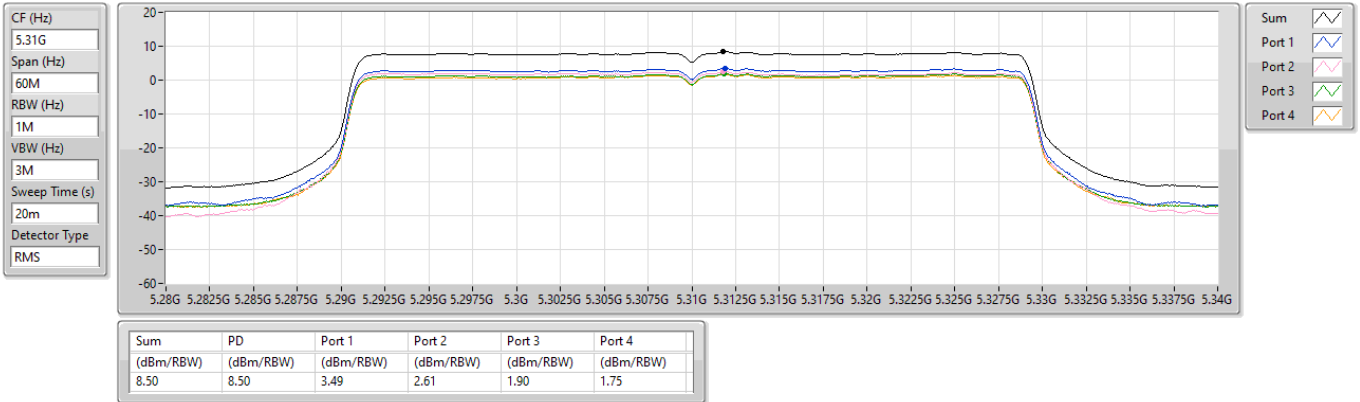


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5510MHz

09/07/2025

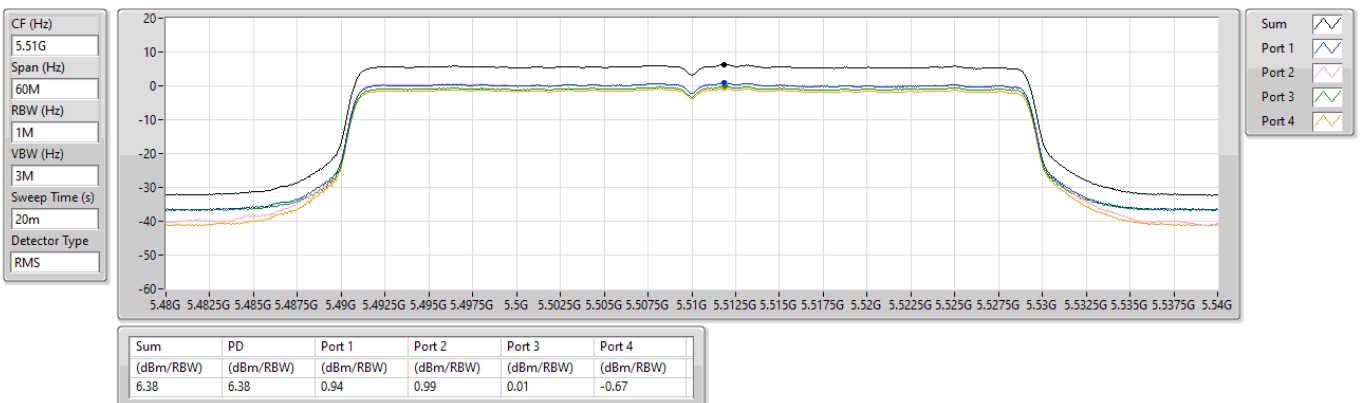


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5550MHz

09/07/2025

CF (Hz)
5.55G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

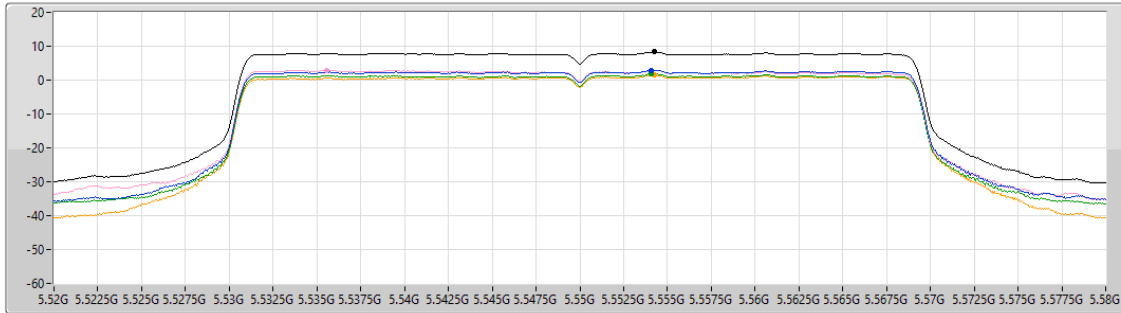

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.31	8.31	2.91	2.96	1.80	1.49


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5670MHz

09/07/2025

CF (Hz)
5.67G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

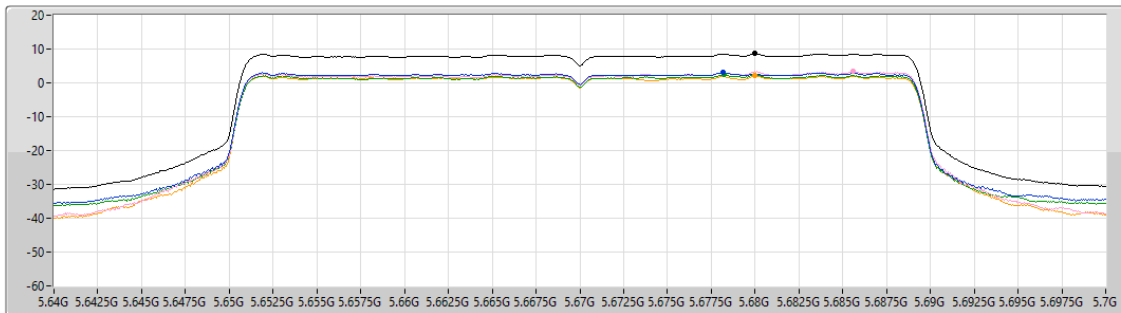

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.61	8.61	3.03	3.32	2.39	2.09

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

09/07/2025

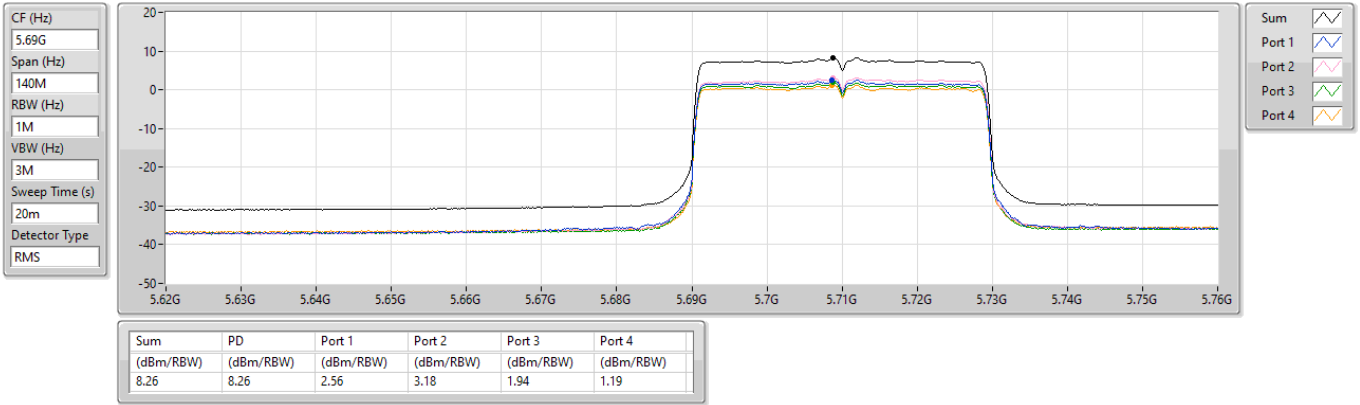


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

09/07/2025

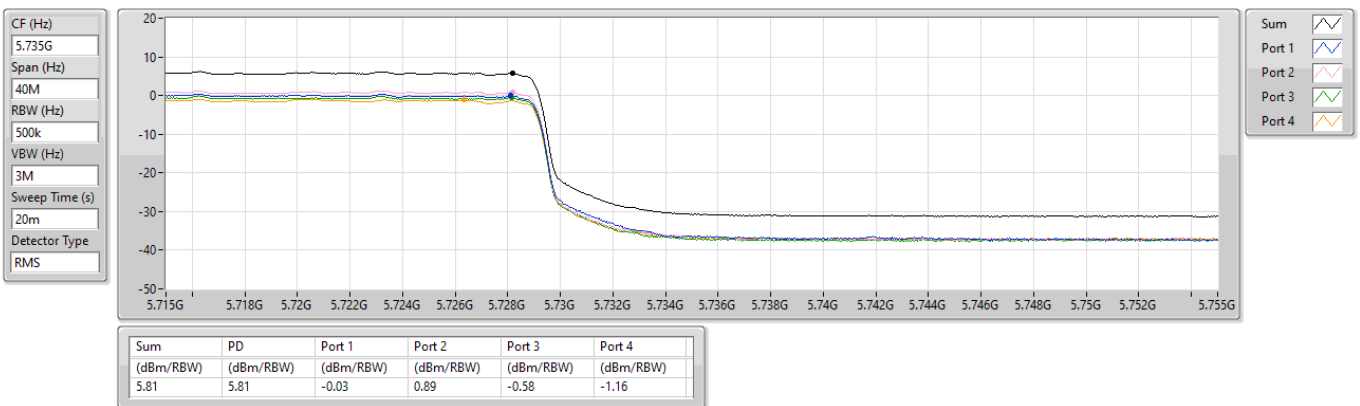


5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5290MHz

09/07/2025

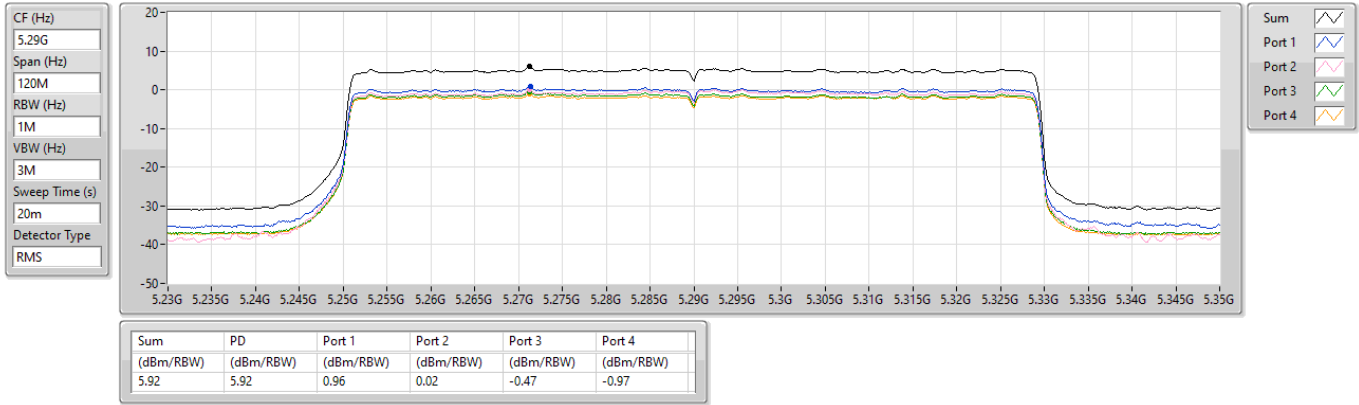


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5530MHz

10/07/2025

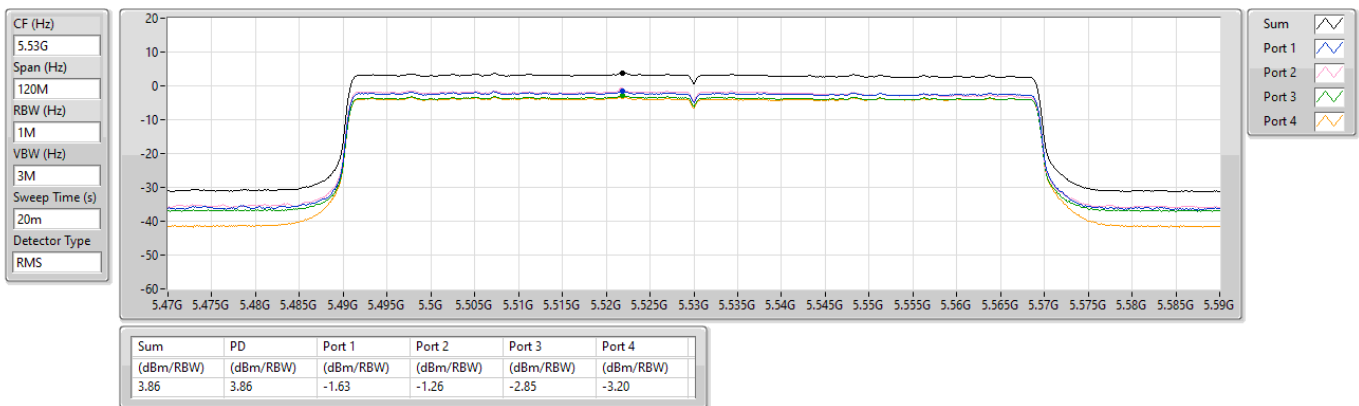


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5610MHz

10/07/2025

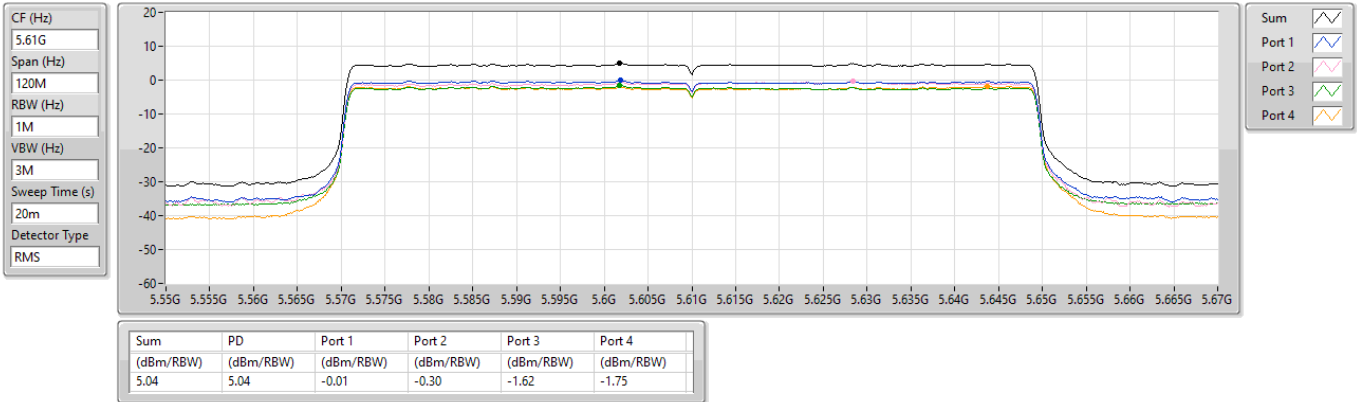


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

10/07/2025

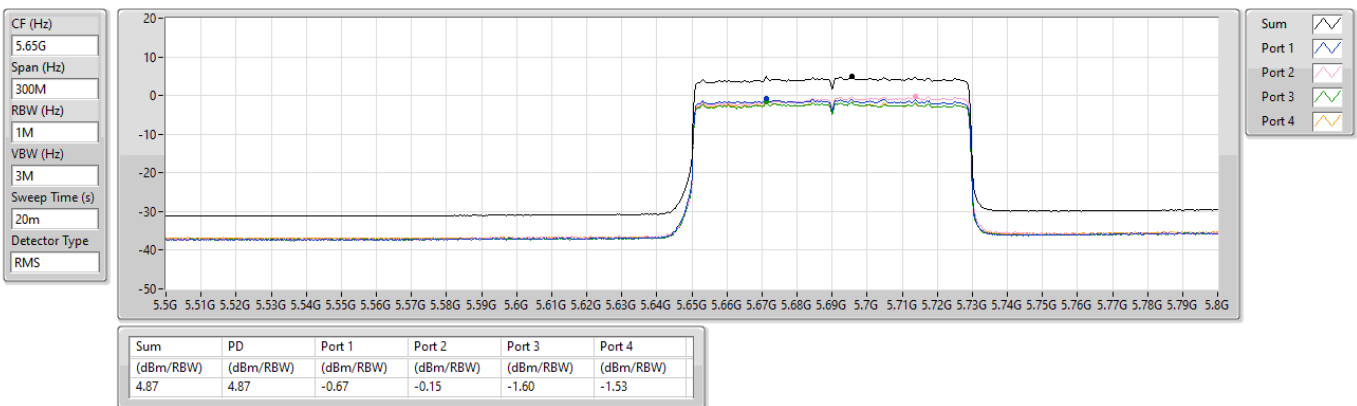


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

10/07/2025

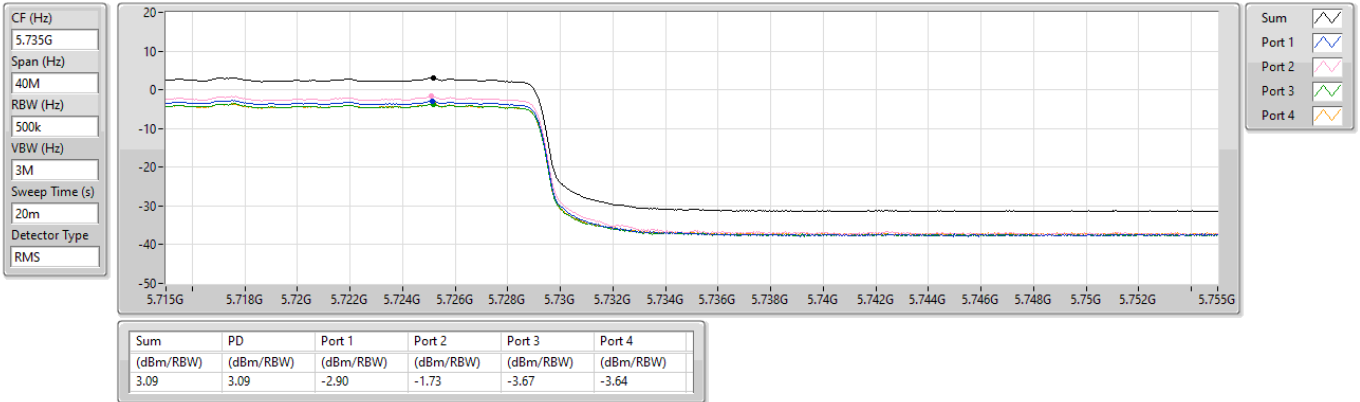


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

10/07/2025

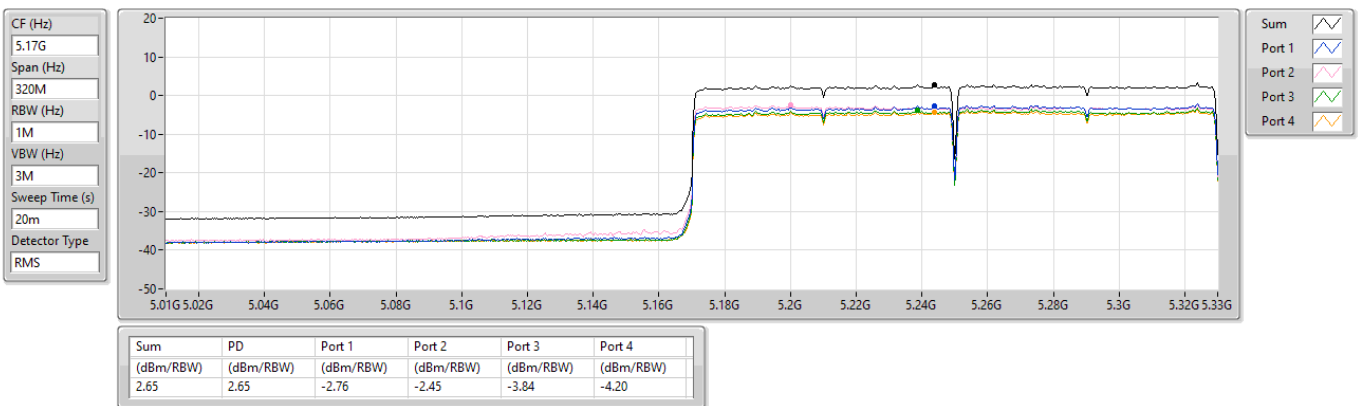


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.25-5.35GHz

10/07/2025

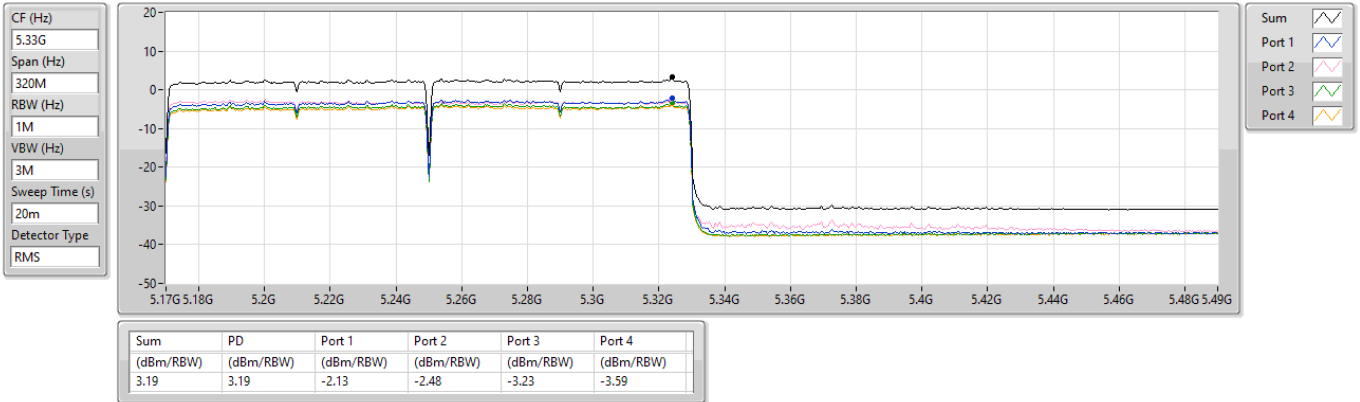


5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

5570MHz

10/07/2025

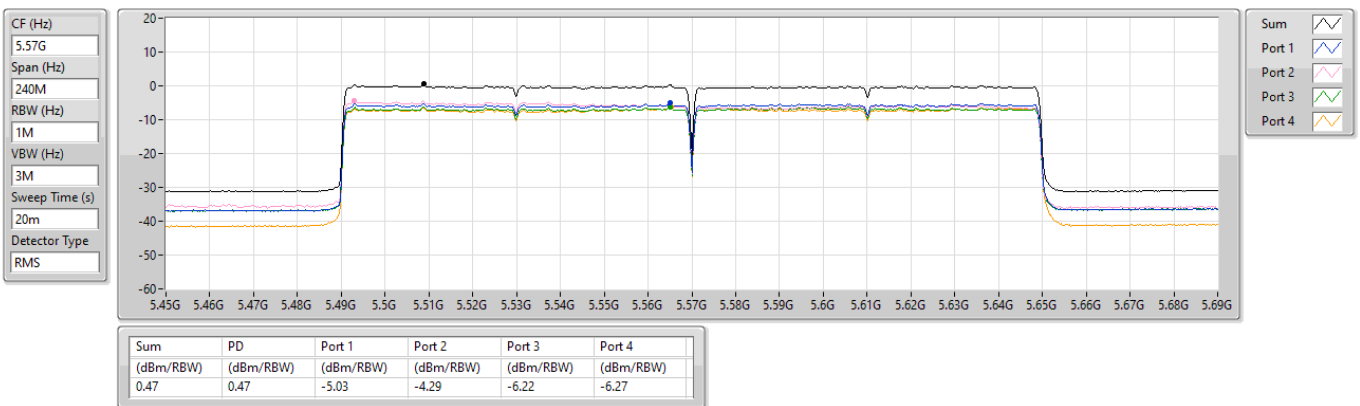




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	5.3522G	53.93	54.00	-0.07	3	Vertical	77	2.12	-

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

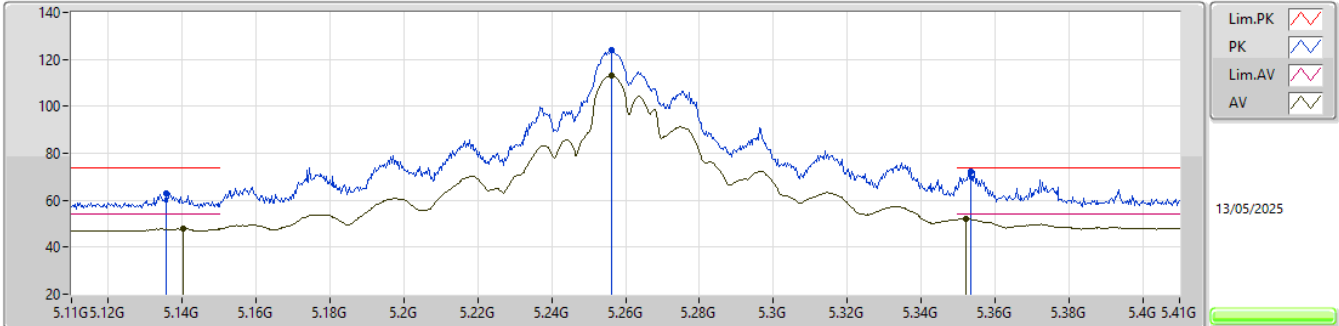


EUT_Z_4TX
Setting 25
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1355G	62.83	74.00	-11.17	53.22	3	Vertical	79	2.01	-	33.57	6.97	30.93			
AV	5.1403G	47.92	54.00	-6.08	38.30	3	Vertical	79	2.01	-	33.58	6.97	30.93			
PK	5.2561G	123.73	Inf	-Inf	113.89	3	Vertical	79	2.01	-	33.71	7.00	30.87			
AV	5.2561G	113.10	Inf	-Inf	103.26	3	Vertical	79	2.01	-	33.71	7.00	30.87			
PK	5.3536G	72.37	74.00	-1.63	62.31	3	Vertical	79	2.01	-	33.90	6.97	30.81			
AV	5.3521G	52.07	54.00	-1.93	42.01	3	Vertical	79	2.01	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX


5260MHz_TX

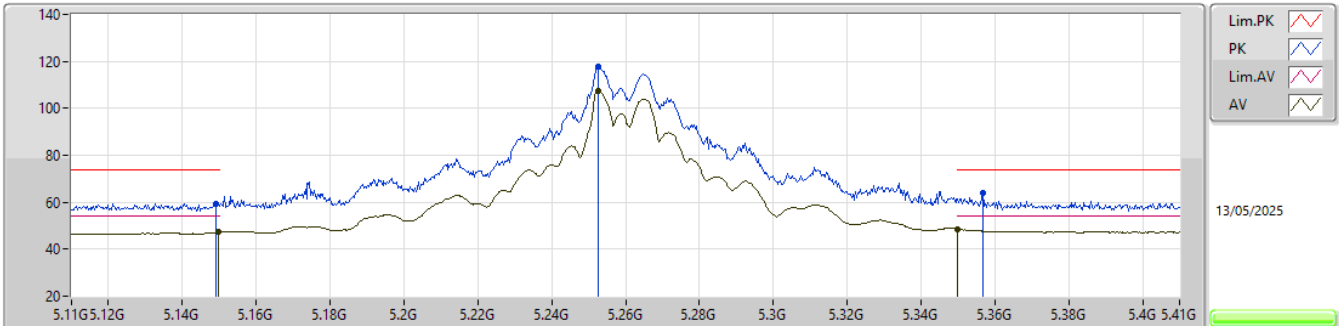EUT_Z_4TX
Setting 25
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.149G	59.28	74.00	-14.72	49.63	3	Horizontal	258	2.07	-	33.60	6.98	30.93			
AV	5.1499G	47.34	54.00	-6.66	37.69	3	Horizontal	258	2.07	-	33.60	6.98	30.93			
PK	5.2525G	117.96	Inf	-Inf	108.12	3	Horizontal	258	2.07	-	33.71	7.00	30.87			
AV	5.2525G	107.47	Inf	-Inf	97.63	3	Horizontal	258	2.07	-	33.71	7.00	30.87			
PK	5.3569G	63.90	74.00	-10.10	53.84	3	Horizontal	258	2.07	-	33.90	6.97	30.81			
AV	5.35G	48.54	54.00	-5.46	38.48	3	Horizontal	258	2.07	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

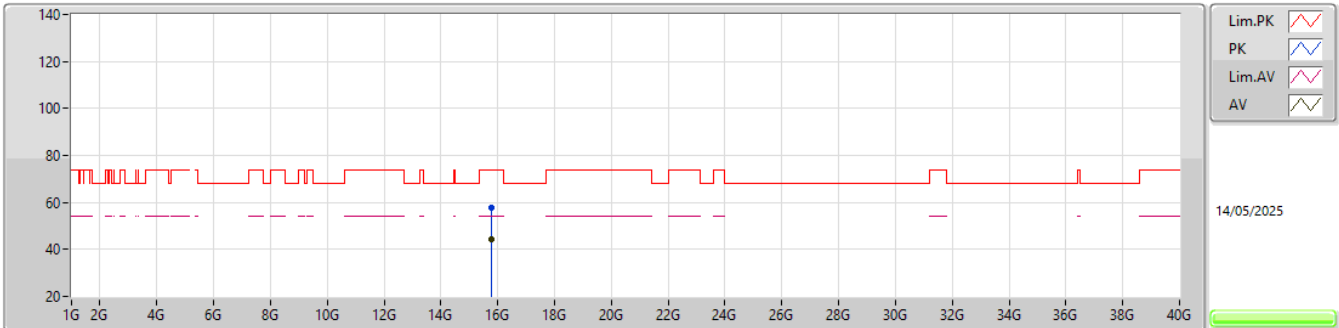


EUT_Z_4TX
Setting 25
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78924G	57.68	74.00	-16.32	40.50	3	Vertical	238	1.79	-	37.42	11.86	32.10			
AV	15.76656G	44.32	54.00	-9.68	27.07	3	Vertical	238	1.79	-	37.47	11.86	32.08			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

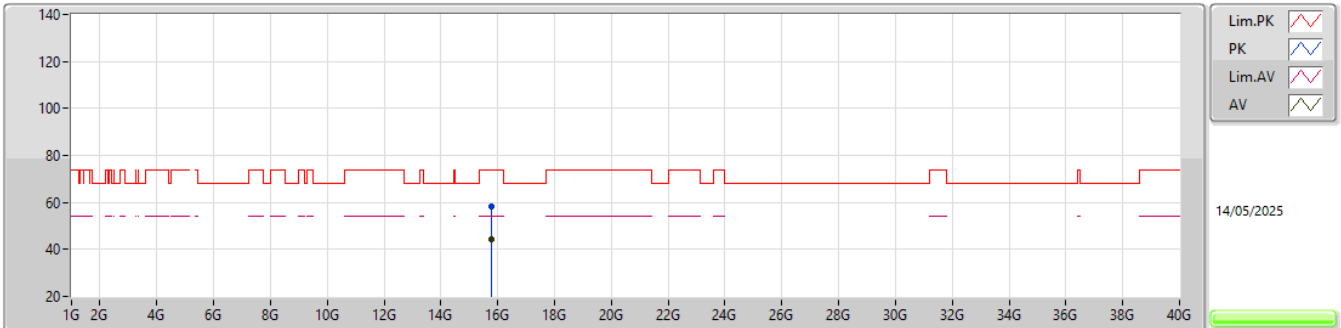


EUT_Z_4TX
Setting 25
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.77697G	58.43	74.00	-15.57	41.21	3	Horizontal	345	2.84	-	37.45	11.86	32.09			
AV	15.76995G	44.29	54.00	-9.71	27.05	3	Horizontal	345	2.84	-	37.46	11.86	32.08			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

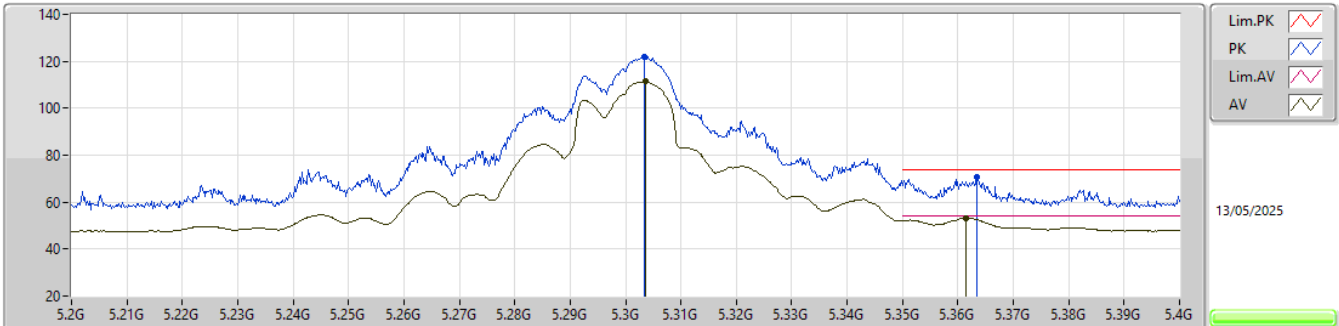


EUT_Z_4TX
Setting 23.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3034G	121.92	Inf	-Inf	111.97	3	Vertical	171	2.24	-	33.81	6.98	30.84			
AV	5.3036G	111.39	Inf	-Inf	101.44	3	Vertical	171	2.24	-	33.81	6.98	30.84			
PK	5.3634G	70.64	74.00	-3.36	60.58	3	Vertical	171	2.24	-	33.90	6.97	30.81			
AV	5.3614G	53.15	54.00	-0.85	43.09	3	Vertical	171	2.24	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

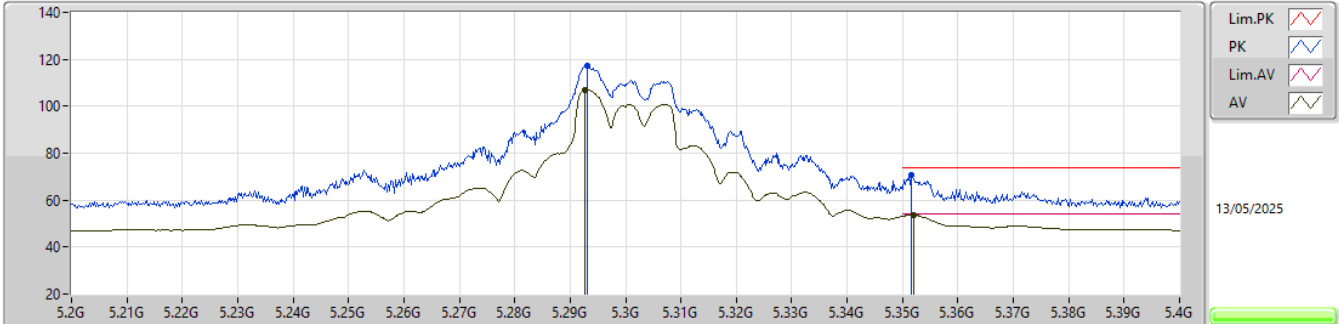


EUT_Z_4TX
Setting 23.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.293G	117.30	Inf	-Inf	107.37	3	Horizontal	352	1.94	-	33.79	6.99	30.85				
AV	5.2926G	106.98	Inf	-Inf	97.05	3	Horizontal	352	1.94	-	33.79	6.99	30.85				
PK	5.3516G	70.55	74.00	-3.45	60.49	3	Horizontal	352	1.94	-	33.90	6.97	30.81				
AV	5.352G	53.77	54.00	-0.23	43.71	3	Horizontal	352	1.94	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

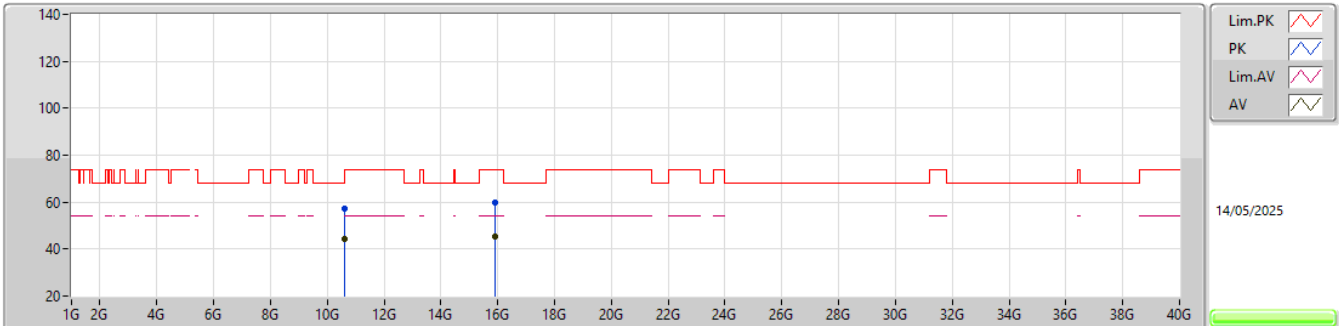


EUT_Z_4TX
Setting 23.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61011G	57.26	74.00	-16.74	38.15	3	Vertical	201	2.97	-	38.40	11.20	30.49			
AV	10.6G	44.29	54.00	-9.71	25.19	3	Vertical	201	2.97	-	38.40	11.19	30.49			
PK	15.9009G	59.58	74.00	-14.42	42.18	3	Vertical	159	1.80	-	37.70	11.87	32.17			
AV	15.89832G	45.33	54.00	-8.67	27.93	3	Vertical	159	1.80	-	37.69	11.87	32.16			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

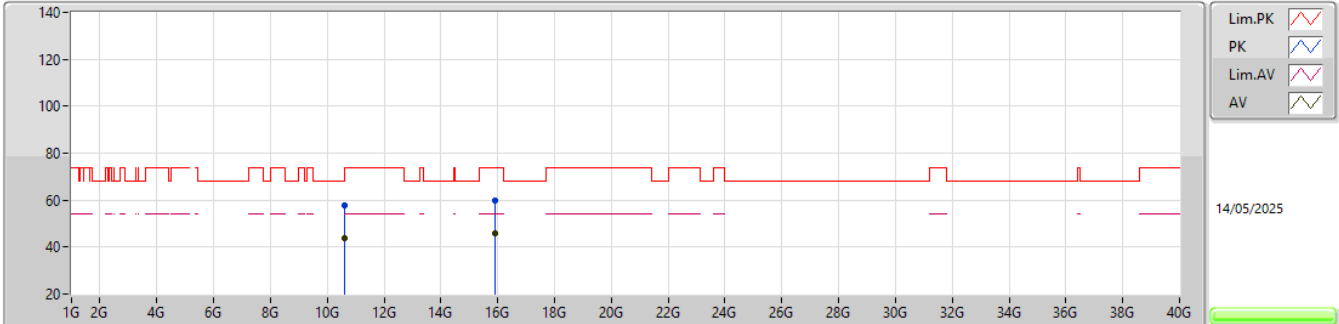


EUT_Z_4TX
Setting 23.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60074G	57.75	74.00	-16.25	38.65	3	Horizontal	183	1.26	-	38.40	11.19	30.49			
AV	10.60005G	43.76	54.00	-10.24	24.66	3	Horizontal	183	1.26	-	38.40	11.19	30.49			
PK	15.90195G	59.95	74.00	-14.05	42.56	3	Horizontal	166	1.95	-	37.69	11.87	32.17			
AV	15.89826G	46.02	54.00	-7.98	28.62	3	Horizontal	166	1.95	-	37.69	11.87	32.16			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

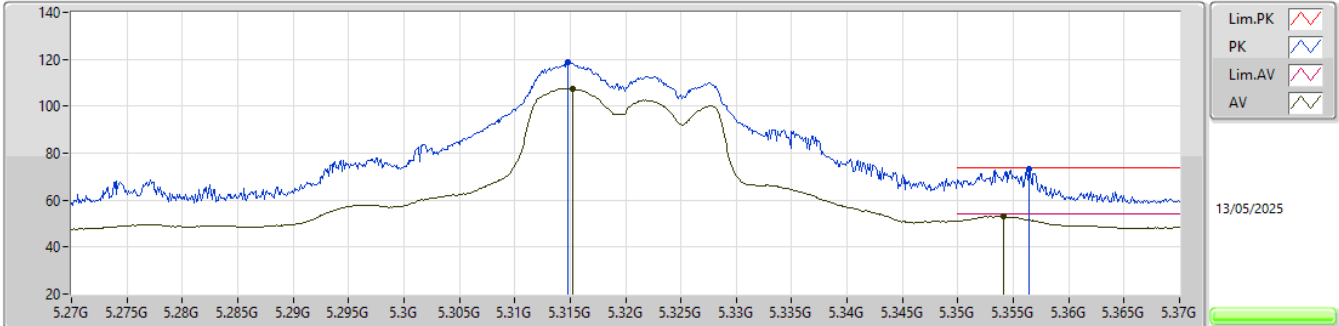


EUT_Z_4TX
Setting 18.5
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3148G	118.82	Inf	-Inf	108.84	3	Vertical	80	2.50	-	33.83	6.98	30.83				
AV	5.3152G	107.60	Inf	-Inf	97.62	3	Vertical	80	2.50	-	33.83	6.98	30.83				
PK	5.3564G	73.21	74.00	-0.79	63.15	3	Vertical	80	2.50	-	33.90	6.97	30.81				
AV	5.3541G	52.98	54.00	-1.02	42.92	3	Vertical	80	2.50	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

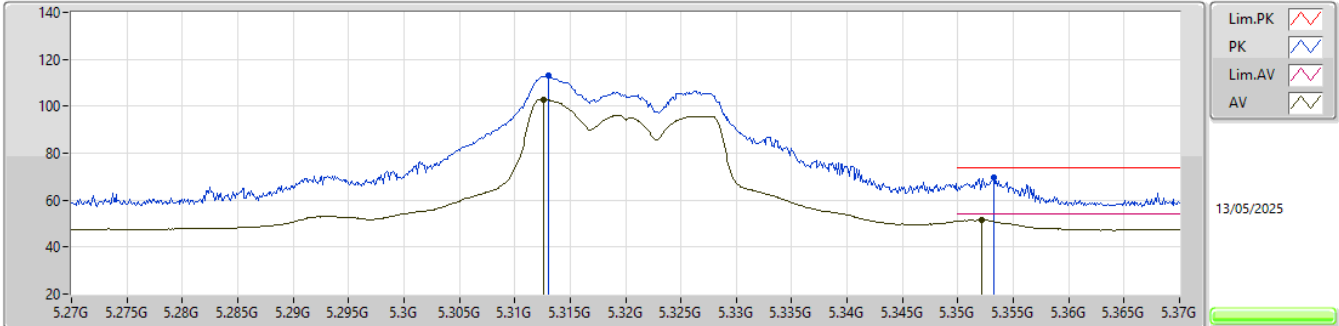


EUT_Z_4TX
Setting 18.5
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.313G	113.05	Inf	-Inf	103.07	3	Horizontal	351	2.16	-	33.83	6.98	30.83			
AV	5.3126G	102.86	Inf	-Inf	92.88	3	Horizontal	351	2.16	-	33.83	6.98	30.83			
PK	5.3532G	69.53	74.00	-4.47	59.47	3	Horizontal	351	2.16	-	33.90	6.97	30.81			
AV	5.3522G	51.52	54.00	-2.48	41.46	3	Horizontal	351	2.16	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

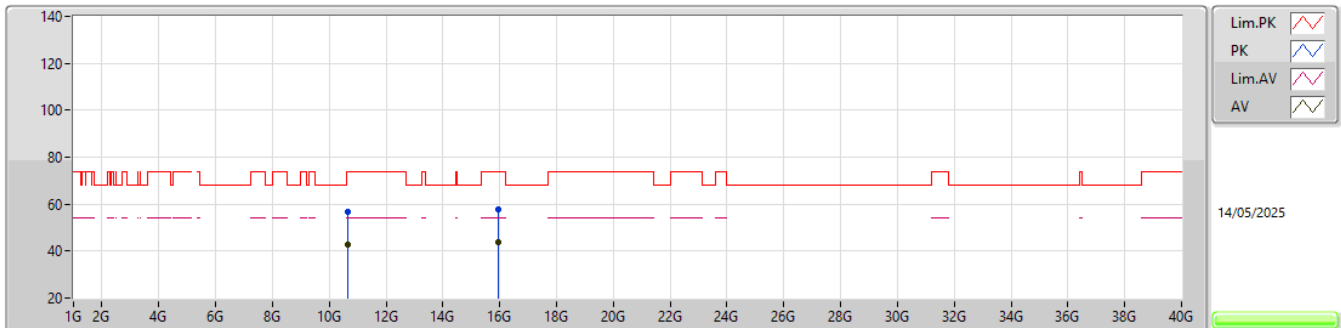


EUT Z_4TX
Setting 18.5
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6424G	56.79	74.00	-17.21	37.66	3	Vertical	240	2.03	-	38.40	11.22	30.49			
AV	10.65392G	42.93	54.00	-11.07	23.80	3	Vertical	240	2.03	-	38.39	11.23	30.49			
PK	15.94932G	57.71	74.00	-16.29	40.54	3	Vertical	232	1.16	-	37.50	11.87	32.20			
AV	15.94674G	43.62	54.00	-10.38	26.44	3	Vertical	232	1.16	-	37.51	11.87	32.20			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

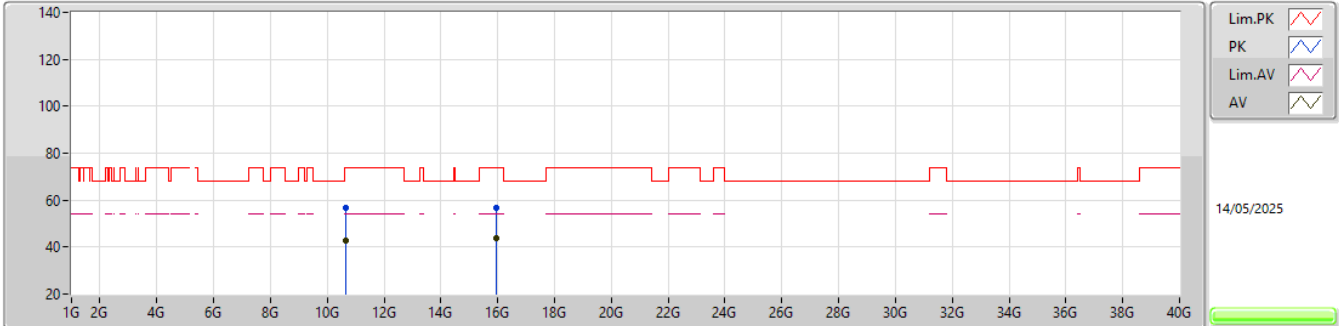


EUT_Z_4TX
Setting 18.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.64819G	56.77	74.00	-17.23	37.64	3	Horizontal	272	1.96	-	38.40	11.22	30.49				
AV	10.65395G	42.91	54.00	-11.09	23.78	3	Horizontal	272	1.96	-	38.39	11.23	30.49				
PK	15.96657G	56.92	74.00	-17.08	39.76	3	Horizontal	104	1.75	-	37.50	11.87	32.21				
AV	15.94686G	43.64	54.00	-10.36	26.46	3	Horizontal	104	1.75	-	37.51	11.87	32.20				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

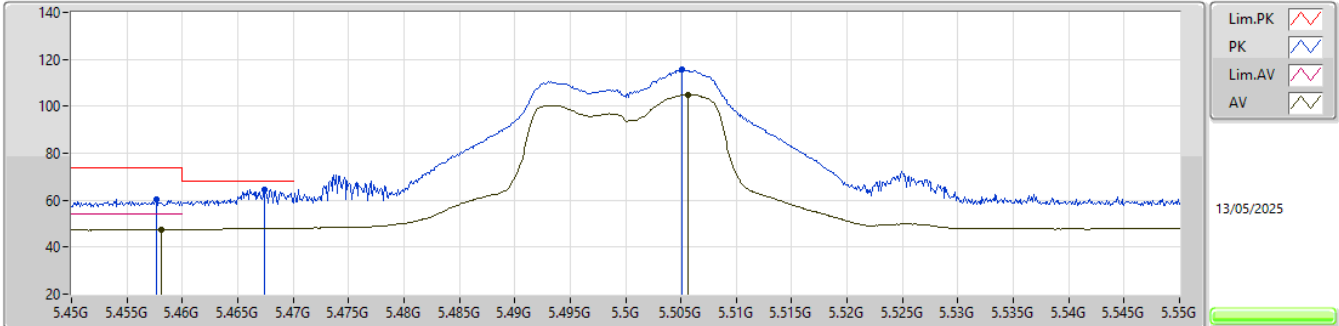


EUT_Z_4TX
Setting 15
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4577G	60.22	74.00	-13.78	49.90	3	Vertical	302	1.94	-	33.92	7.15	30.75			
AV	5.4581G	47.55	54.00	-6.45	37.23	3	Vertical	302	1.94	-	33.92	7.15	30.75			
PK	5.4674G	64.42	68.20	-3.78	54.06	3	Vertical	302	1.94	-	33.93	7.18	30.75			
PK	5.5051G	115.60	Inf	-Inf	105.01	3	Vertical	302	1.94	-	34.01	7.31	30.73			
AV	5.5056G	104.94	Inf	-Inf	94.35	3	Vertical	302	1.94	-	34.01	7.31	30.73			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

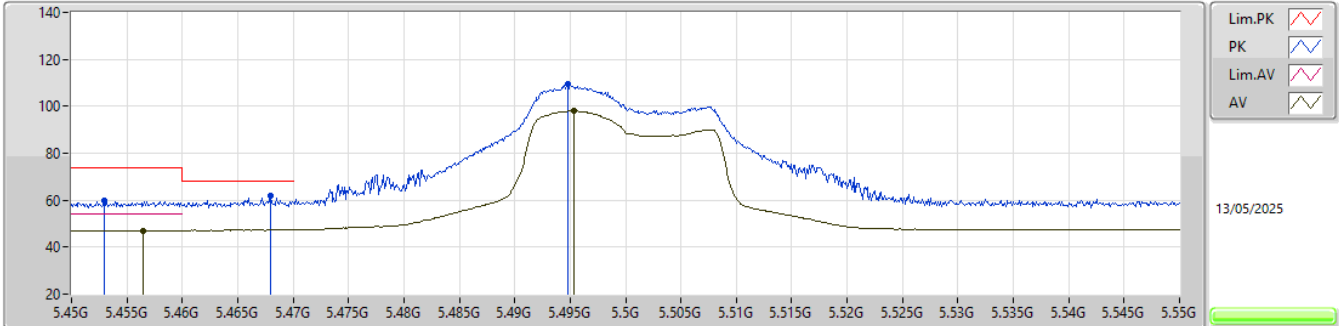


EUT_Z_4TX
Setting 15
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.453G	59.71	74.00	-14.29	49.43	3	Horizontal	307	1.80	-	33.91	7.13	30.76			
AV	5.4565G	47.13	54.00	-6.87	36.82	3	Horizontal	307	1.80	-	33.91	7.15	30.75			
PK	5.468G	61.95	68.20	-6.25	51.58	3	Horizontal	307	1.80	-	33.94	7.18	30.75			
PK	5.4948G	109.33	Inf	-Inf	98.80	3	Horizontal	307	1.80	-	33.99	7.27	30.73			
AV	5.4953G	98.14	Inf	-Inf	87.61	3	Horizontal	307	1.80	-	33.99	7.27	30.73			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

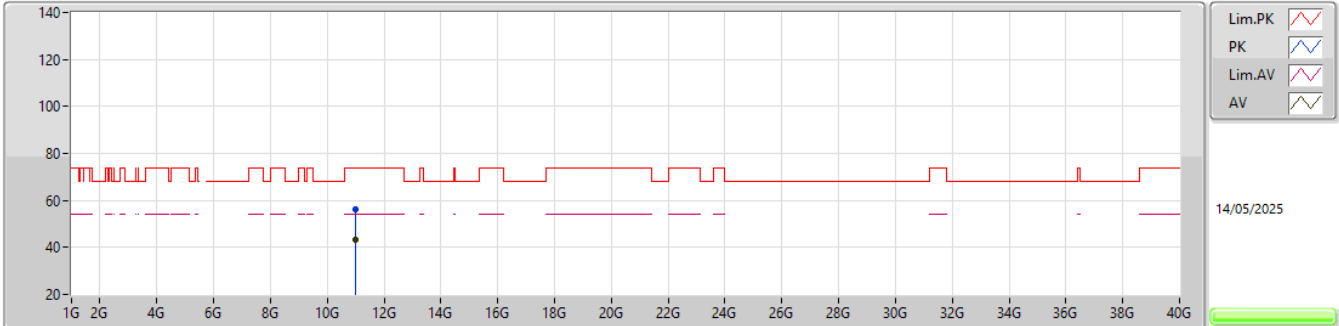


EUT_Z_4TX
Setting 15
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99697G	56.39	74.00	-17.61	37.03	3	Vertical	215	2.62	-	38.40	11.44	30.48			
AV	10.98671G	43.47	54.00	-10.53	24.11	3	Vertical	215	2.62	-	38.40	11.44	30.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

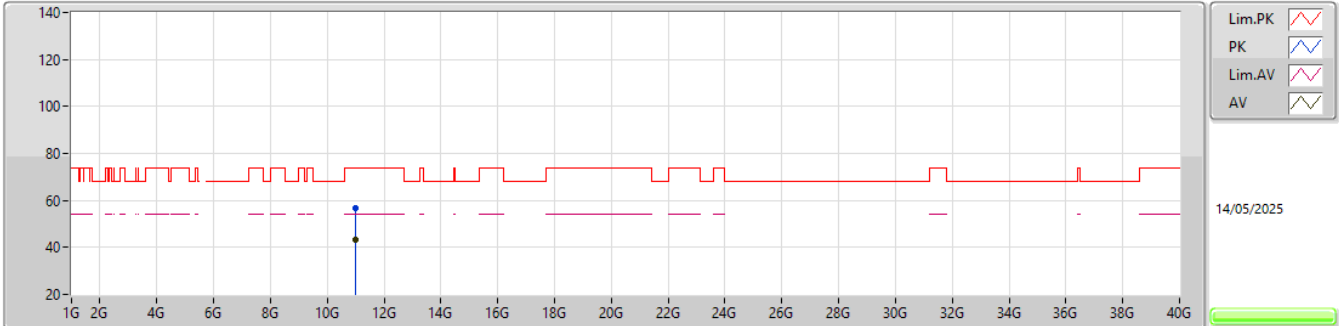


EUT_Z_4TX
Setting 15
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.98575G	56.91	74.00	-17.09	37.55	3	Horizontal	157	2.54	-	38.40	11.44	30.48			
AV	11.01125G	43.44	54.00	-10.56	24.06	3	Horizontal	157	2.54	-	38.42	11.45	30.49			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

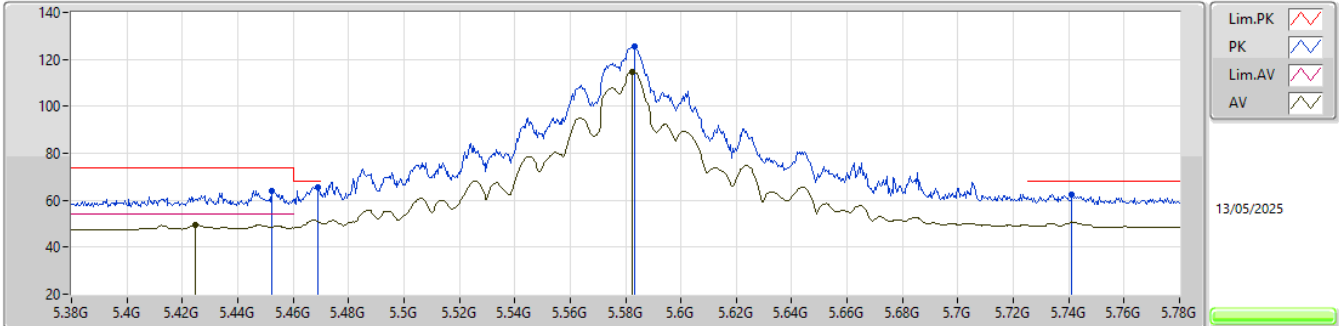


EUT_Z_4TX
Setting 25.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4524G	64.11	74.00	-9.89	53.84	3	Vertical	298	1.78	-	33.90	7.13	30.76			
AV	5.4248G	49.52	54.00	-4.48	39.35	3	Vertical	298	1.78	-	33.90	7.04	30.77			
PK	5.4688G	65.76	68.20	-2.44	55.38	3	Vertical	298	1.78	-	33.94	7.19	30.75			
PK	5.5832G	125.57	Inf	-Inf	114.69	3	Vertical	298	1.78	-	34.03	7.56	30.71			
AV	5.5824G	114.75	Inf	-Inf	103.86	3	Vertical	298	1.78	-	34.04	7.56	30.71			
PK	5.7412G	62.37	68.20	-5.83	51.29	3	Vertical	298	1.78	-	34.00	7.75	30.67			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

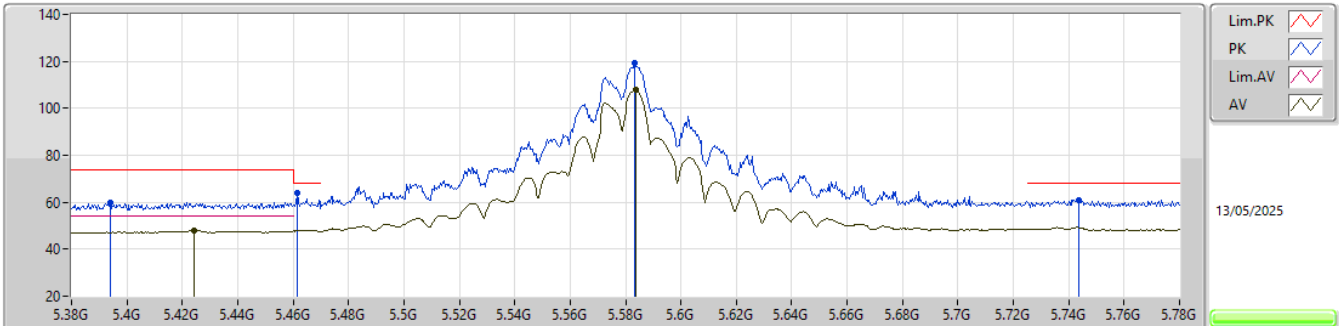


EUT_Z_4TX
Setting 25.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.394G	59.93	74.00	-14.07	49.86	3	Horizontal	15	1.78	-	33.90	6.96	30.79
AV	5.4244G	48.18	54.00	-5.82	38.01	3	Horizontal	15	1.78	-	33.90	7.04	30.77
PK	5.4616G	64.03	68.20	-4.17	53.70	3	Horizontal	15	1.78	-	33.92	7.16	30.75
PK	5.5832G	119.21	Inf	-Inf	108.33	3	Horizontal	15	1.78	-	34.03	7.56	30.71
AV	5.5836G	107.82	Inf	-Inf	96.93	3	Horizontal	15	1.78	-	34.03	7.57	30.71
PK	5.7436G	60.86	68.20	-7.34	49.78	3	Horizontal	15	1.78	-	34.00	7.75	30.67

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

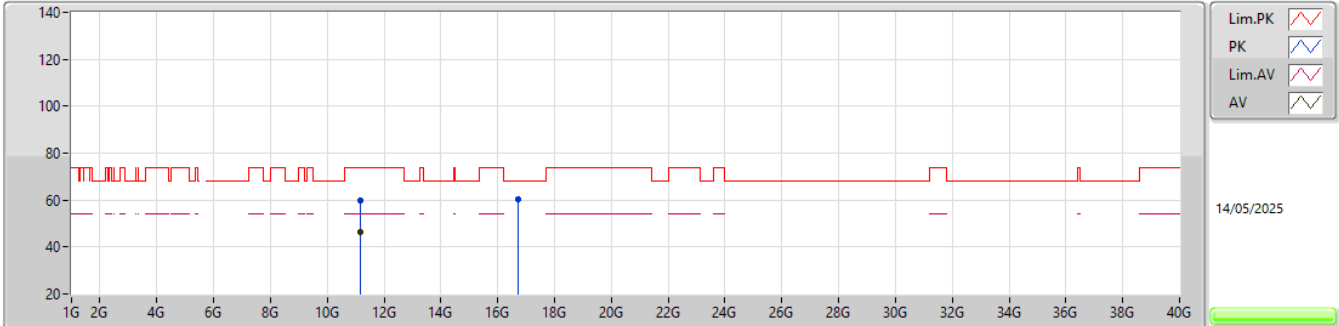


EUT_Z_4TX
Setting 25.5
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.1618G	59.98	74.00	-14.02	40.48	3	Vertical	176	2.84	-	38.50	11.55	30.55			
AV	11.16168G	46.39	54.00	-7.61	26.89	3	Vertical	176	2.84	-	38.50	11.55	30.55			
PK	16.73253G	60.57	68.20	-7.63	40.46	3	Vertical	196	2.89	-	39.97	12.22	32.08			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

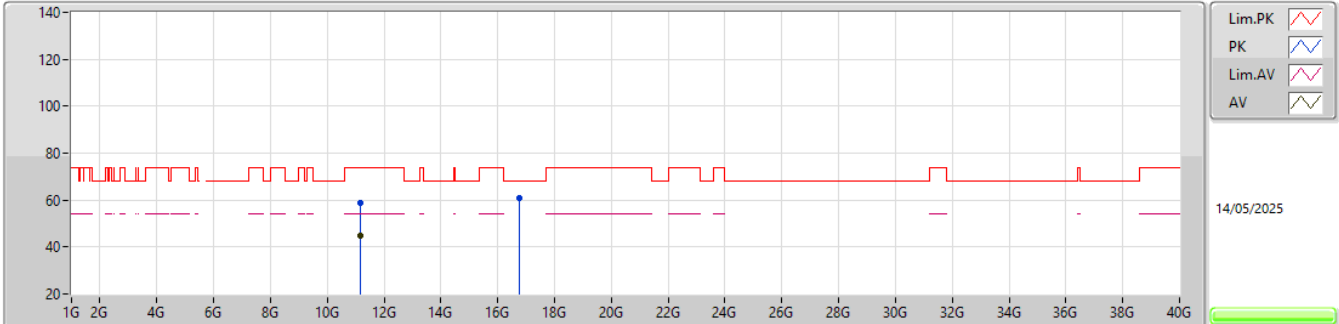


EUT_Z_4TX
Setting 25.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16249G	58.96	74.00	-15.04	39.46	3	Horizontal	149	2.96	-	38.50	11.55	30.55			
AV	11.16114G	45.07	54.00	-8.93	25.57	3	Horizontal	149	2.96	-	38.50	11.55	30.55			
PK	16.74297G	60.74	68.20	-7.46	40.61	3	Horizontal	46	1.60	-	39.99	12.22	32.08			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

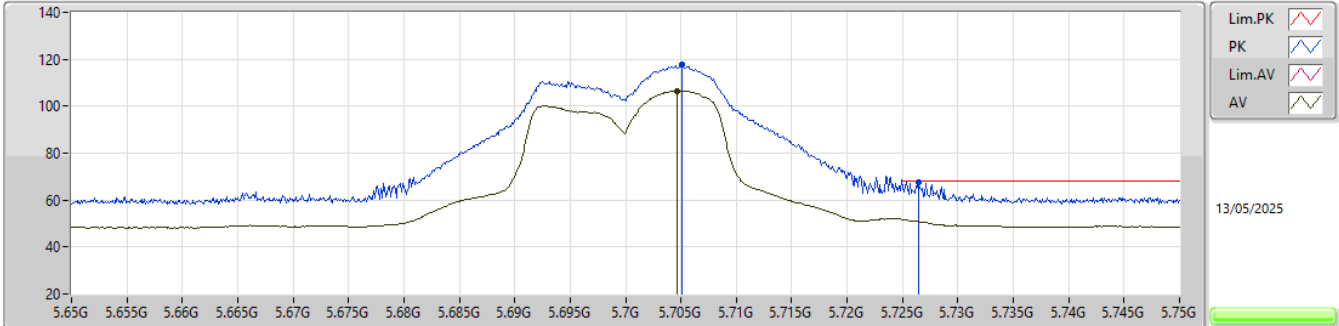


EUT_Z_4TX
Setting 16
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7051G	117.56	Inf	-Inf	106.53	3	Vertical	124	1.89	-	34.00	7.71	30.68				
AV	5.7047G	106.61	Inf	-Inf	95.58	3	Vertical	124	1.89	-	34.00	7.71	30.68				
PK	5.7264G	67.51	68.20	-0.69	56.46	3	Vertical	124	1.89	-	34.00	7.73	30.68				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

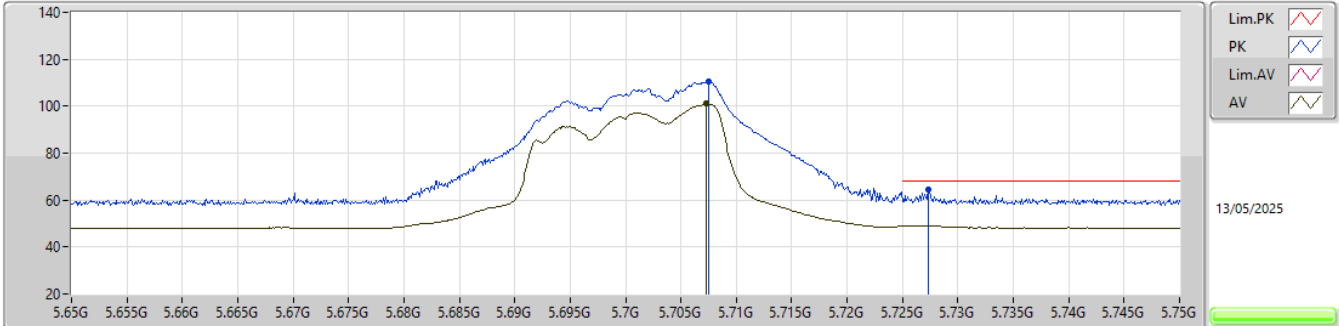


EUT_Z_4TX
Setting 16
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7075G	110.69	Inf	-Inf	99.65	3	Horizontal	195	2.00	-	34.00	7.72	30.68			
AV	5.7073G	100.97	Inf	-Inf	89.93	3	Horizontal	195	2.00	-	34.00	7.72	30.68			
PK	5.7273G	64.36	68.20	-3.84	53.31	3	Horizontal	195	2.00	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

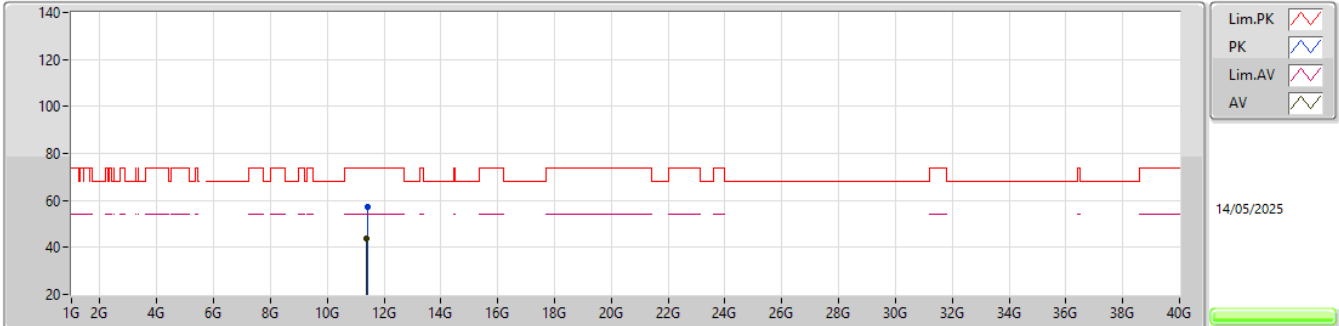


EUT_Z_4TX
Setting 16
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40699G	57.14	74.00	-16.86	37.40	3	Vertical	74	2.24	-	38.71	11.70	30.67			
AV	11.3862G	43.81	54.00	-10.19	24.08	3	Vertical	74	2.24	-	38.70	11.69	30.66			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

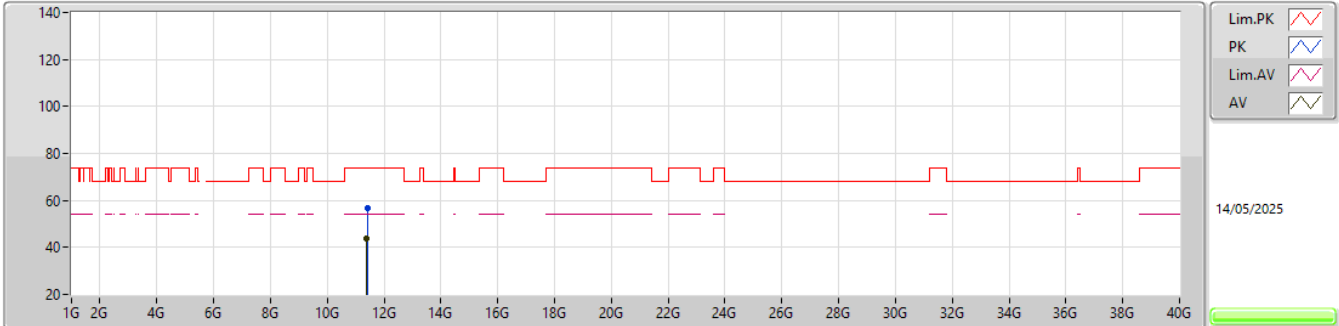


EUT_Z_4TX
Setting 16
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40468G	56.88	74.00	-17.12	37.14	3	Horizontal	263	2.67	-	38.71	11.70	30.67			
AV	11.3889G	43.80	54.00	-10.20	24.07	3	Horizontal	263	2.67	-	38.70	11.69	30.66			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

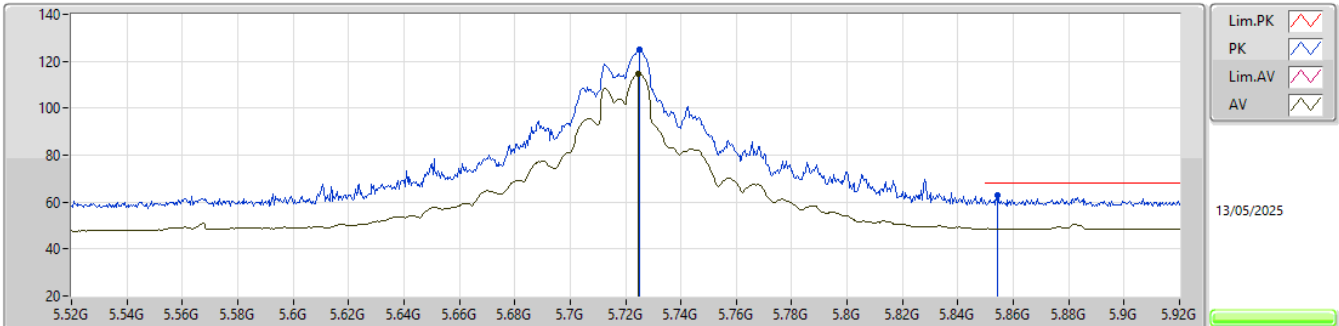EUT_Z_4TX
Setting 25.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7252G	124.88	Inf	-Inf	113.83	3	Vertical	123	1.79	-	34.00	7.73	30.68
AV	5.7248G	114.66	Inf	-Inf	103.61	3	Vertical	123	1.79	-	34.00	7.73	30.68
PK	5.8544G	62.69	68.20	-5.51	51.57	3	Vertical	123	1.79	-	33.92	7.84	30.64

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

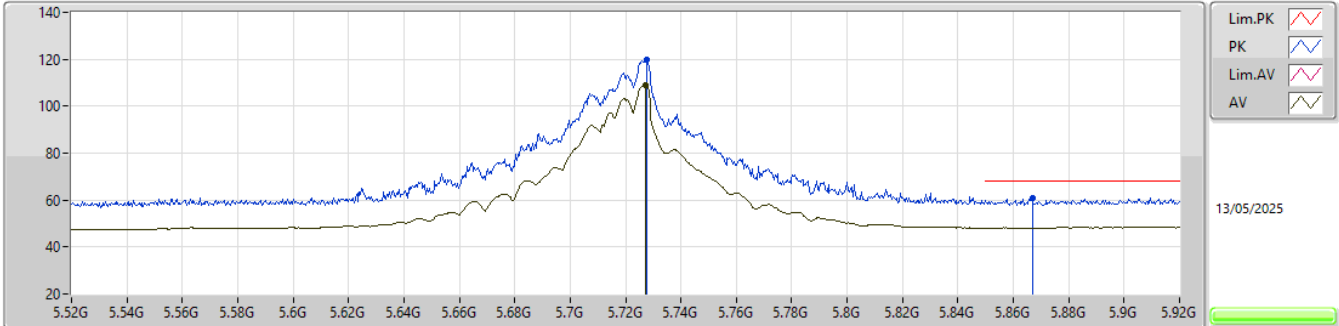

EUT_Z_4TX
Setting 25.5
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7276G	119.58	Inf	-Inf	108.53	3	Horizontal	195	1.81	-	34.00	7.73	30.68			
AV	5.7272G	109.22	Inf	-Inf	98.17	3	Horizontal	195	1.81	-	34.00	7.73	30.68			
PK	5.8668G	60.65	68.20	-7.55	49.48	3	Horizontal	195	1.81	-	33.97	7.84	30.64			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX




EUT_Z_4TX
Setting 25.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43973G	58.40	74.00	-15.60	38.58	3	Vertical	170	2.26	-	38.78	11.72	30.68			
AV	11.43994G	45.27	54.00	-8.73	25.45	3	Vertical	170	2.26	-	38.78	11.72	30.68			
PK	17.17467G	62.04	68.20	-6.16	40.09	3	Vertical	166	1.80	-	41.70	12.43	32.18			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

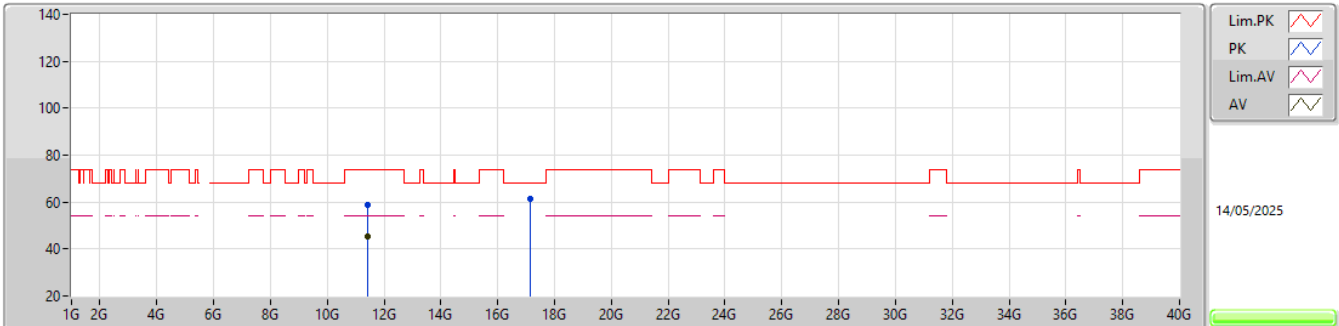


EUT_Z_4TX
Setting 25.5
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43793G	59.03	74.00	-14.97	39.21	3	Horizontal	153	2.06	-	38.78	11.72	30.68			
AV	11.43916G	45.40	54.00	-8.60	25.58	3	Horizontal	153	2.06	-	38.78	11.72	30.68			
PK	17.14905G	61.23	68.20	-6.97	39.38	3	Horizontal	264	1.80	-	41.60	12.42	32.17			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

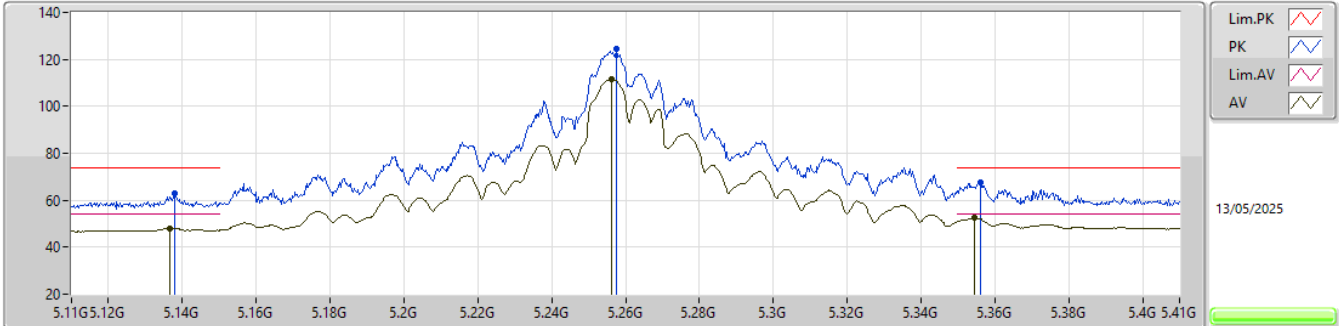


EUT_Z_4TX
Setting 24
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1379G	62.72	74.00	-11.28	53.10	3	Vertical	79	2.02	-	33.58	6.97	30.93			
AV	5.1367G	48.11	54.00	-5.89	38.50	3	Vertical	79	2.02	-	33.57	6.97	30.93			
PK	5.2576G	124.53	Inf	-Inf	114.68	3	Vertical	79	2.02	-	33.72	7.00	30.87			
AV	5.2561G	111.79	Inf	-Inf	101.95	3	Vertical	79	2.02	-	33.71	7.00	30.87			
PK	5.356G	67.76	74.00	-6.24	57.70	3	Vertical	79	2.02	-	33.90	6.97	30.81			
AV	5.3545G	52.37	54.00	-1.63	42.31	3	Vertical	79	2.02	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5260MHz_TX

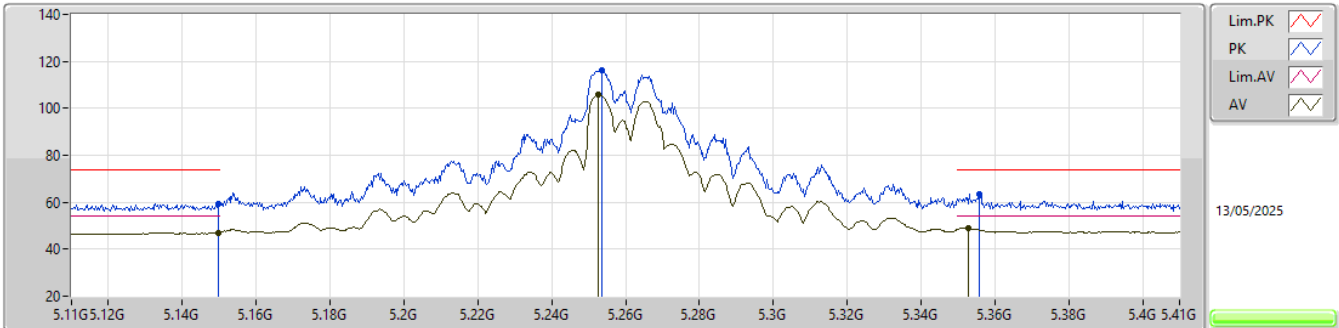EUT_Z_4TX
Setting 24
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1499G	59.46	74.00	-14.54	49.81	3	Horizontal	259	2.07	-	33.60	6.98	30.93
AV	5.1499G	47.02	54.00	-6.98	37.37	3	Horizontal	259	2.07	-	33.60	6.98	30.93
PK	5.2537G	116.43	Inf	-Inf	106.59	3	Horizontal	259	2.07	-	33.71	7.00	30.87
AV	5.2525G	105.84	Inf	-Inf	96.00	3	Horizontal	259	2.07	-	33.71	7.00	30.87
PK	5.3557G	63.43	74.00	-10.57	53.37	3	Horizontal	259	2.07	-	33.90	6.97	30.81
AV	5.3527G	49.03	54.00	-4.97	38.97	3	Horizontal	259	2.07	-	33.90	6.97	30.81

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

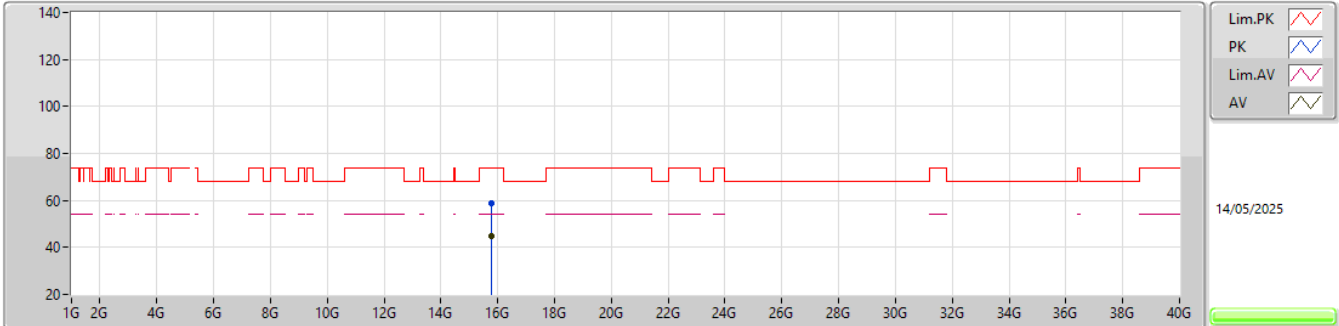


EUT_Z_4TX
Setting 24
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78093G	58.86	74.00	-15.14	41.65	3	Vertical	157	2.55	-	37.44	11.86	32.09			
AV	15.78357G	44.97	54.00	-9.03	27.77	3	Vertical	157	2.55	-	37.43	11.86	32.09			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

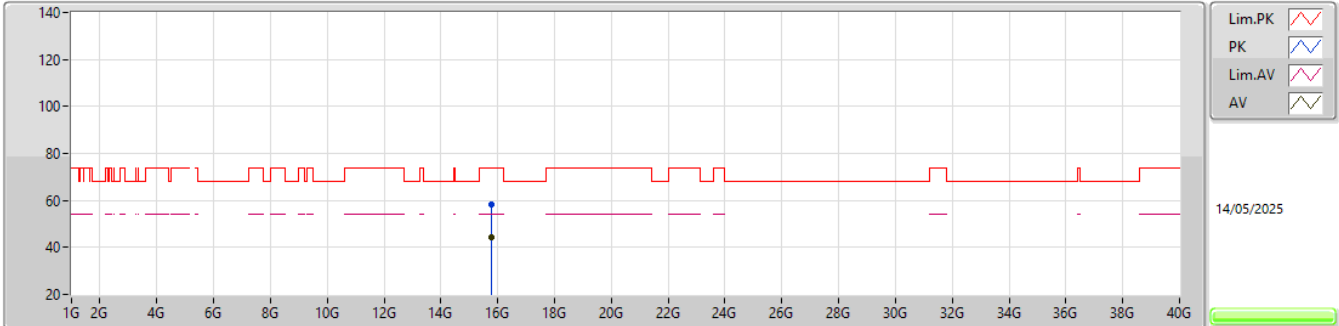


EUT_Z_4TX
Setting 24
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78462G	58.06	74.00	-15.94	40.86	3	Horizontal	254	1.00	-	37.43	11.86	32.09			
AV	15.76662G	44.08	54.00	-9.92	26.83	3	Horizontal	254	1.00	-	37.47	11.86	32.08			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

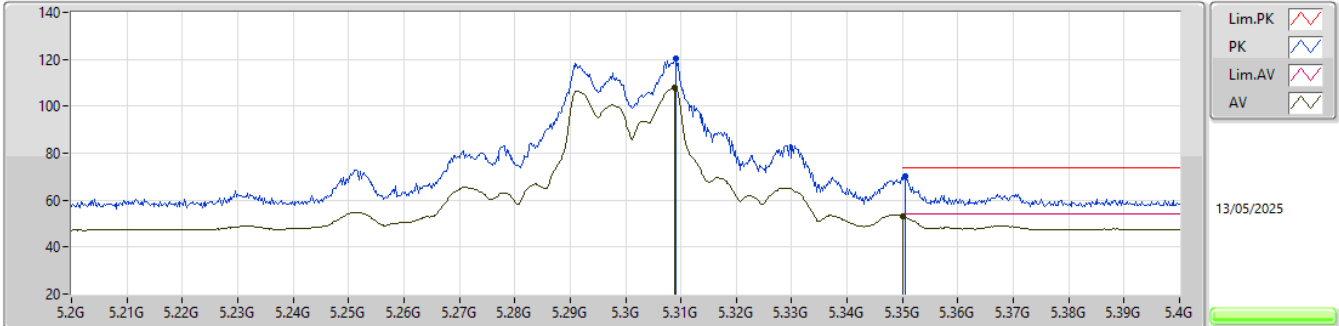


EUT_Z_4TX
Setting 21
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3092G	120.11	Inf	-Inf	110.15	3	Vertical	143	1.82	-	33.82	6.98	30.84				
AV	5.3088G	107.79	Inf	-Inf	97.83	3	Vertical	143	1.82	-	33.82	6.98	30.84				
PK	5.3504G	70.24	74.00	-3.76	60.18	3	Vertical	143	1.82	-	33.90	6.97	30.81				
AV	5.35G	53.23	54.00	-0.77	43.17	3	Vertical	143	1.82	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

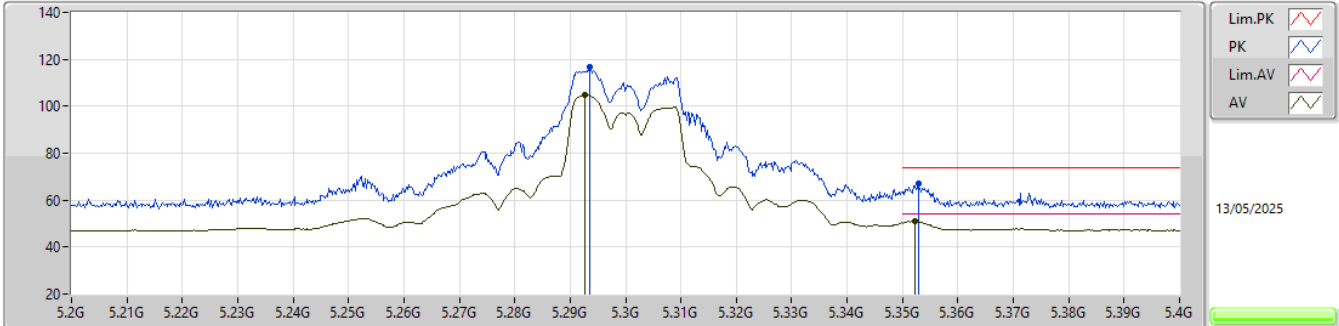


EUT_Z_4TX
Setting 21
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2936G	116.81	Inf	-Inf	106.88	3	Horizontal	351	1.94	-	33.79	6.99	30.85				
AV	5.2926G	104.82	Inf	-Inf	94.89	3	Horizontal	351	1.94	-	33.79	6.99	30.85				
PK	5.3528G	67.08	74.00	-6.92	57.02	3	Horizontal	351	1.94	-	33.90	6.97	30.81				
AV	5.3522G	51.18	54.00	-2.82	41.12	3	Horizontal	351	1.94	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

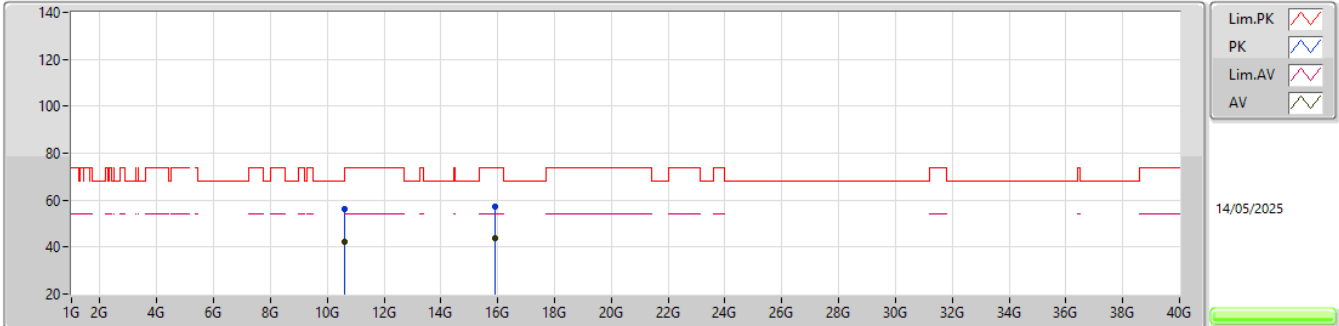


EUT_Z_4TX
Setting 21
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60138G	55.95	74.00	-18.05	36.85	3	Vertical	119	2.49	-	38.40	11.19	30.49			
AV	10.60173G	42.47	54.00	-11.53	23.37	3	Vertical	119	2.49	-	38.40	11.19	30.49			
PK	15.89115G	57.34	74.00	-16.66	39.97	3	Vertical	243	2.14	-	37.66	11.87	32.16			
AV	15.88914G	43.83	54.00	-10.17	26.46	3	Vertical	243	2.14	-	37.66	11.87	32.16			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

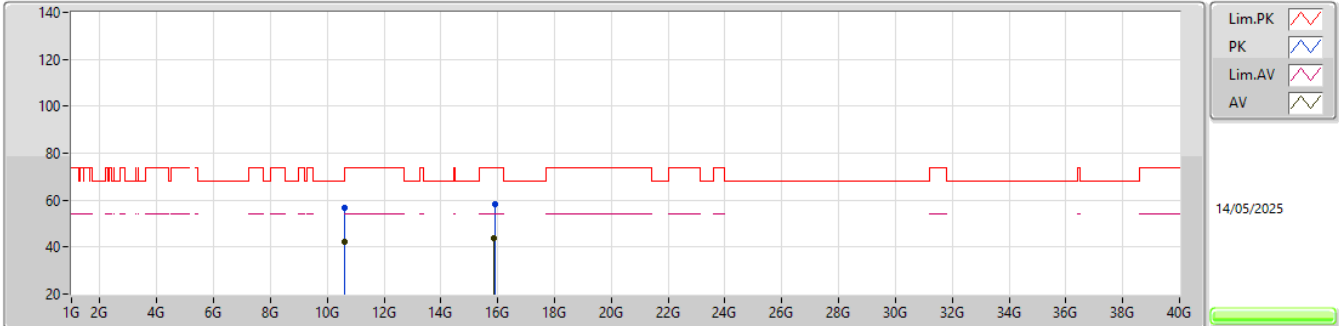


EUT_Z_4TX
Setting 21
02-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60009G	56.48	74.00	-17.52	37.38	3	Horizontal	159	2.75	-	38.40	11.19	30.49				
AV	10.60143G	42.46	54.00	-11.54	23.36	3	Horizontal	159	2.75	-	38.40	11.19	30.49				
PK	15.89139G	58.19	74.00	-15.81	40.81	3	Horizontal	74	2.45	-	37.67	11.87	32.16				
AV	15.88635G	43.83	54.00	-10.17	26.48	3	Horizontal	74	2.45	-	37.65	11.86	32.16				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

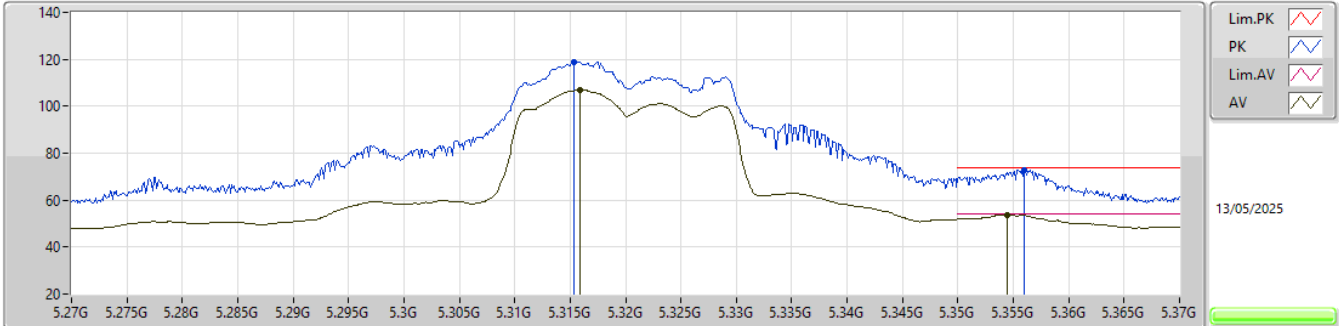


EUT_Z_4TX
Setting 18
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3153G	118.94	Inf	-Inf	108.96	3	Vertical	78	2.49	-	33.83	6.98	30.83			
AV	5.3159G	107.15	Inf	-Inf	97.17	3	Vertical	78	2.49	-	33.83	6.98	30.83			
PK	5.356G	72.99	74.00	-1.01	62.93	3	Vertical	78	2.49	-	33.90	6.97	30.81			
AV	5.3544G	53.72	54.00	-0.28	43.66	3	Vertical	78	2.49	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

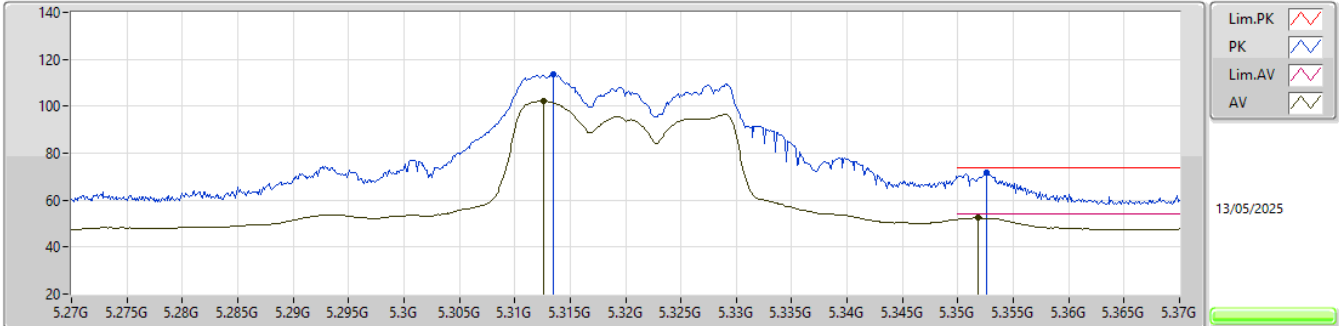


EUT_Z_4TX
Setting 18
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3135G	113.80	Inf	-Inf	103.82	3	Horizontal	351	2.16	-	33.83	6.98	30.83			
AV	5.3126G	102.29	Inf	-Inf	92.31	3	Horizontal	351	2.16	-	33.83	6.98	30.83			
PK	5.3526G	71.83	74.00	-2.17	61.77	3	Horizontal	351	2.16	-	33.90	6.97	30.81			
AV	5.3518G	52.51	54.00	-1.49	42.45	3	Horizontal	351	2.16	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5320MHz_TX

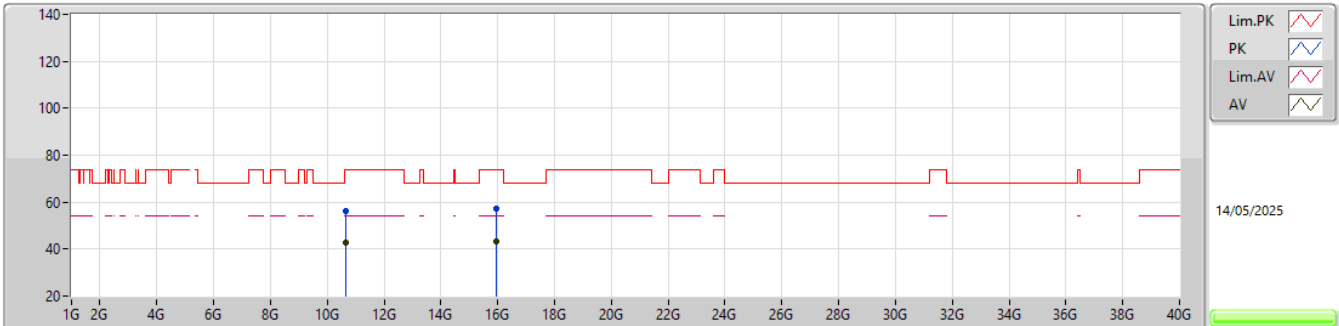EUT_Z_4TX
Setting 18
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.65482G	56.03	74.00	-17.97	36.90	3	Vertical	242	1.67	-	38.39	11.23	30.49			
AV	10.65392G	42.66	54.00	-11.34	23.53	3	Vertical	242	1.67	-	38.39	11.23	30.49			
PK	15.95664G	57.09	74.00	-16.91	39.92	3	Vertical	315	1.97	-	37.50	11.87	32.20			
AV	15.9468G	43.09	54.00	-10.91	25.91	3	Vertical	315	1.97	-	37.51	11.87	32.20			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

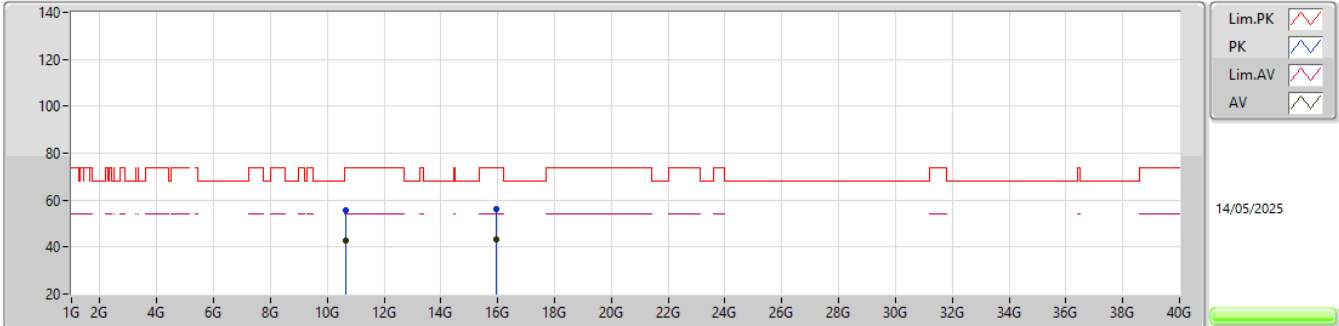


EUT_Z_4TX
Setting 18
02-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.65476G	55.86	74.00	-18.14	36.73	3	Horizontal	169	2.51	-	38.39	11.23	30.49			
AV	10.65401G	42.66	54.00	-11.34	23.53	3	Horizontal	169	2.51	-	38.39	11.23	30.49			
PK	15.95886G	56.23	74.00	-17.77	39.06	3	Horizontal	336	1.61	-	37.50	11.87	32.20			
AV	15.94677G	43.10	54.00	-10.90	25.92	3	Horizontal	336	1.61	-	37.51	11.87	32.20			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

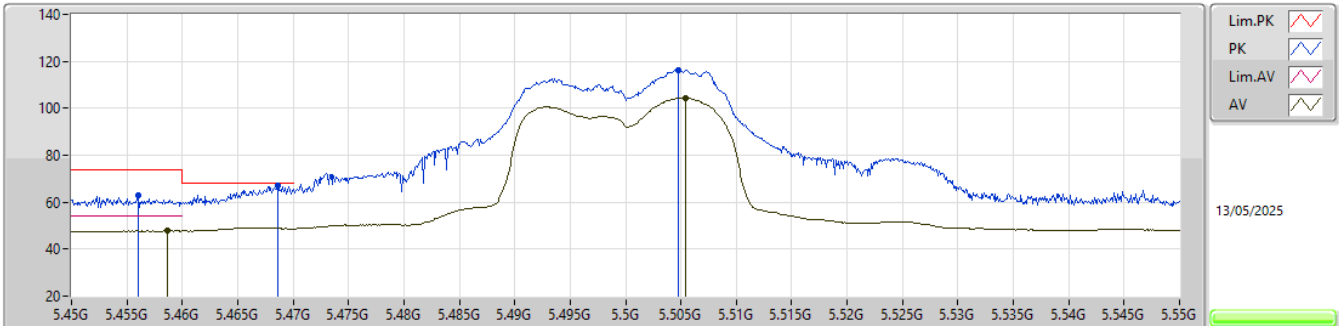


EUT_Z_4TX
Setting 15
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	62.90	74.00	-11.10	52.60	3	Vertical	301	1.94	-	33.91	7.14	30.75			
AV	5.4587G	47.82	54.00	-6.18	37.50	3	Vertical	301	1.94	-	33.92	7.15	30.75			
PK	5.4686G	66.96	68.20	-1.24	56.58	3	Vertical	301	1.94	-	33.94	7.19	30.75			
PK	5.5048G	116.43	Inf	-Inf	105.84	3	Vertical	301	1.94	-	34.01	7.31	30.73			
AV	5.5054G	104.46	Inf	-Inf	93.87	3	Vertical	301	1.94	-	34.01	7.31	30.73			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

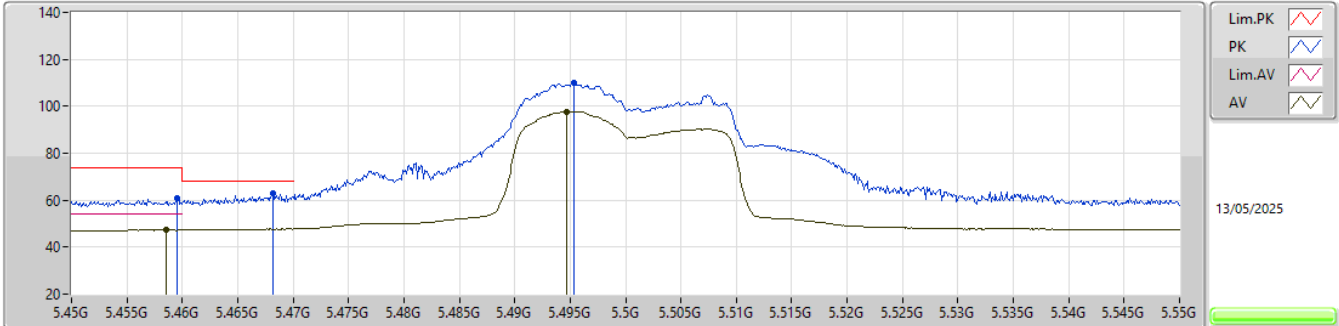


EUT_Z_4TX
Setting 15
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4595G	60.98	74.00	-13.02	50.65	3	Horizontal	306	1.80	-	33.92	7.16	30.75			
AV	5.4585G	47.30	54.00	-6.70	36.98	3	Horizontal	306	1.80	-	33.92	7.15	30.75			
PK	5.4682G	63.05	68.20	-5.15	52.67	3	Horizontal	306	1.80	-	33.94	7.19	30.75			
PK	5.4953G	109.85	Inf	-Inf	99.32	3	Horizontal	306	1.80	-	33.99	7.27	30.73			
AV	5.4947G	97.64	Inf	-Inf	87.11	3	Horizontal	306	1.80	-	33.99	7.27	30.73			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5500MHz_TX

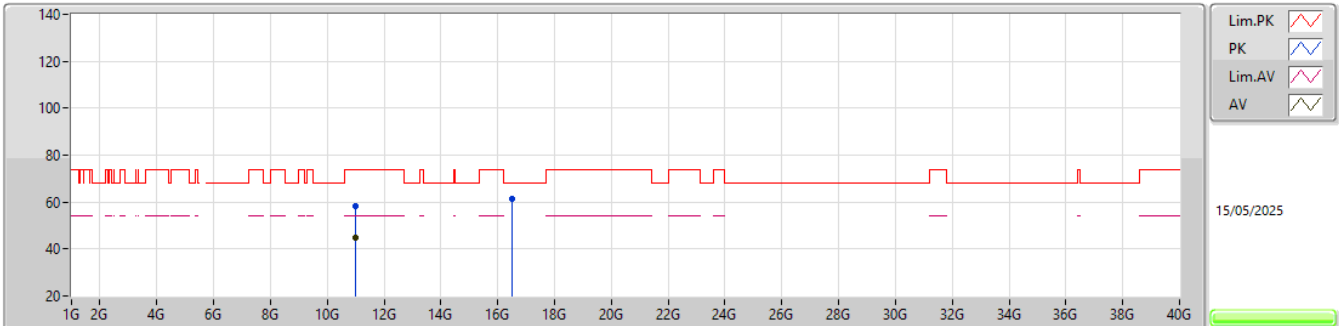EUT_Z_4TX
Setting 15
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99757G	58.52	74.00	-15.48	39.16	3	Vertical	144	2.28	-	38.40	11.44	30.48			
AV	11.00483G	44.92	54.00	-9.08	25.54	3	Vertical	144	2.28	-	38.41	11.45	30.48			
PK	16.50423G	61.15	68.20	-7.05	42.26	3	Vertical	315	1.70	-	38.83	12.11	32.05			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

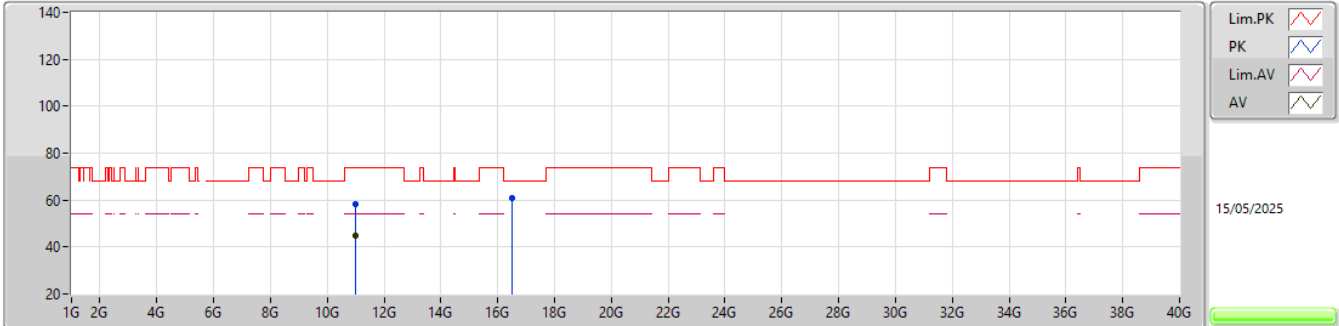


EUT_Z_4TX
Setting 15
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.01413G	58.22	74.00	-15.78	38.83	3	Horizontal	174	1.00	-	38.43	11.45	30.49			
AV	11.00495G	44.97	54.00	-9.03	25.59	3	Horizontal	174	1.00	-	38.41	11.45	30.48			
PK	16.48839G	60.93	68.20	-7.27	42.13	3	Horizontal	299	2.81	-	38.75	12.10	32.05			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5580MHz_TX

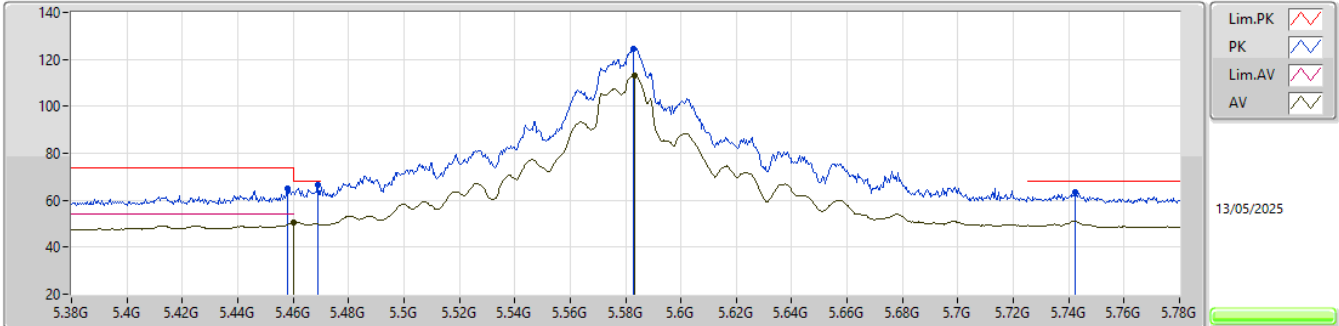EUT_Z_4TX
Setting 24
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.458G	64.91	74.00	-9.09	54.59	3	Vertical	299	1.98	-	33.92	7.15	30.75			
AV	5.46G	50.52	54.00	-3.48	40.19	3	Vertical	299	1.98	-	33.92	7.16	30.75			
PK	5.4688G	66.34	68.20	-1.86	55.96	3	Vertical	299	1.98	-	33.94	7.19	30.75			
PK	5.5828G	124.49	Inf	-Inf	113.61	3	Vertical	299	1.98	-	34.03	7.56	30.71			
AV	5.5832G	112.95	Inf	-Inf	102.07	3	Vertical	299	1.98	-	34.03	7.56	30.71			
PK	5.7424G	63.57	68.20	-4.63	52.49	3	Vertical	299	1.98	-	34.00	7.75	30.67			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

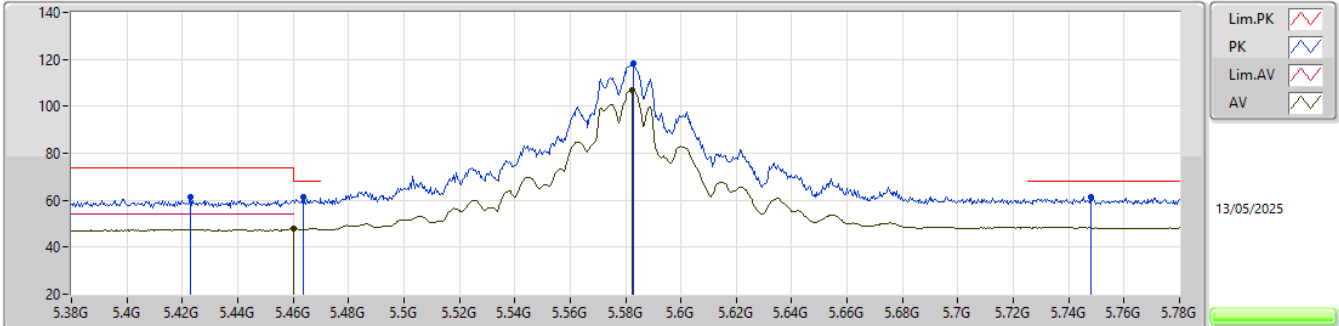


EUT_Z_4TX
Setting 24
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4228G	61.32	74.00	-12.68	51.15	3	Horizontal	249	1.73	-	33.90	7.04	30.77			
PK	5.4636G	61.41	68.20	-6.79	51.06	3	Horizontal	249	1.73	-	33.93	7.17	30.75			
AV	5.46G	47.99	54.00	-6.01	37.66	3	Horizontal	249	1.73	-	33.92	7.16	30.75			
PK	5.5828G	118.22	Inf	-Inf	107.34	3	Horizontal	249	1.73	-	34.03	7.56	30.71			
AV	5.5824G	106.96	Inf	-Inf	96.07	3	Horizontal	249	1.73	-	34.04	7.56	30.71			
PK	5.748G	61.30	68.20	-6.90	50.22	3	Horizontal	249	1.73	-	34.00	7.75	30.67			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

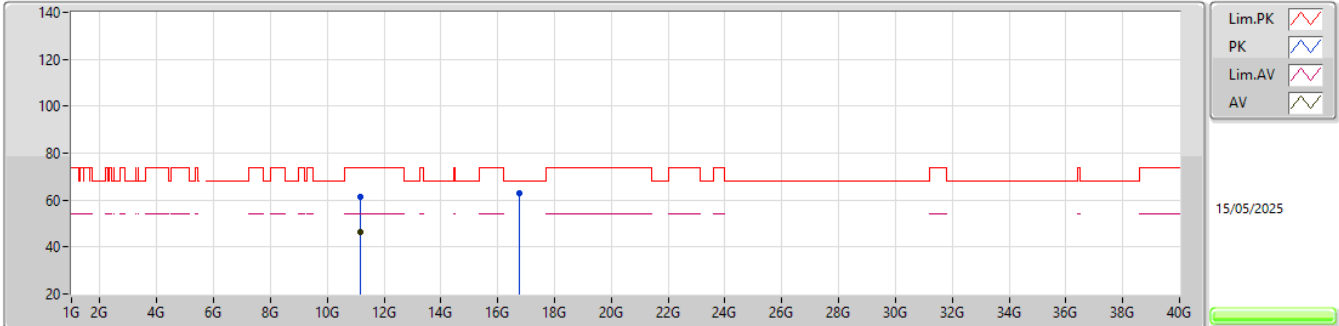


EUT_Z_4TX
Setting 24
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16205G	61.61	74.00	-12.39	42.11	3	Vertical	187	1.80	-	38.50	11.55	30.55			
AV	11.1625G	46.43	54.00	-7.57	26.93	3	Vertical	187	1.80	-	38.50	11.55	30.55			
PK	16.74385G	63.18	68.20	-5.02	43.05	3	Vertical	172	1.80	-	39.99	12.22	32.08			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

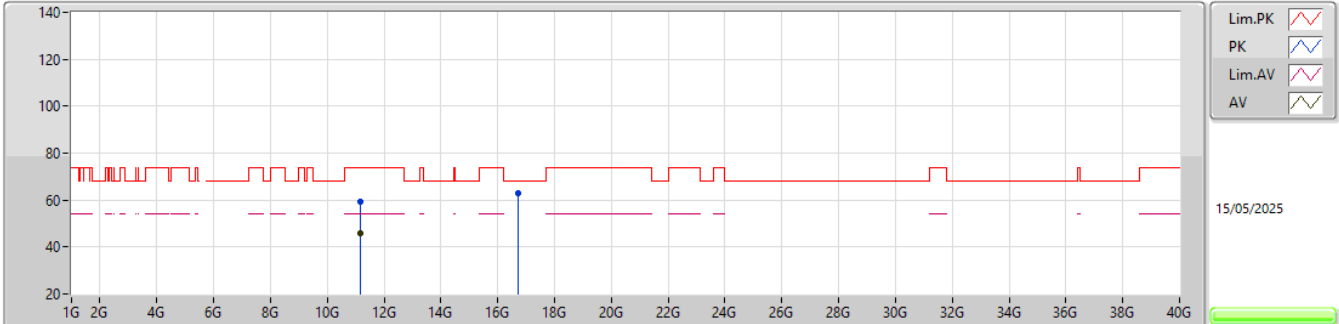


EUT_Z_4TX
Setting 24
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1697G	59.40	74.00	-14.60	39.91	3	Horizontal	250	1.51	-	38.50	11.55	30.56			
AV	11.15995G	45.86	54.00	-8.14	26.36	3	Horizontal	250	1.51	-	38.50	11.55	30.55			
PK	16.72875G	62.79	68.20	-5.41	42.69	3	Horizontal	292	1.80	-	39.96	12.22	32.08			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5700MHz_TX

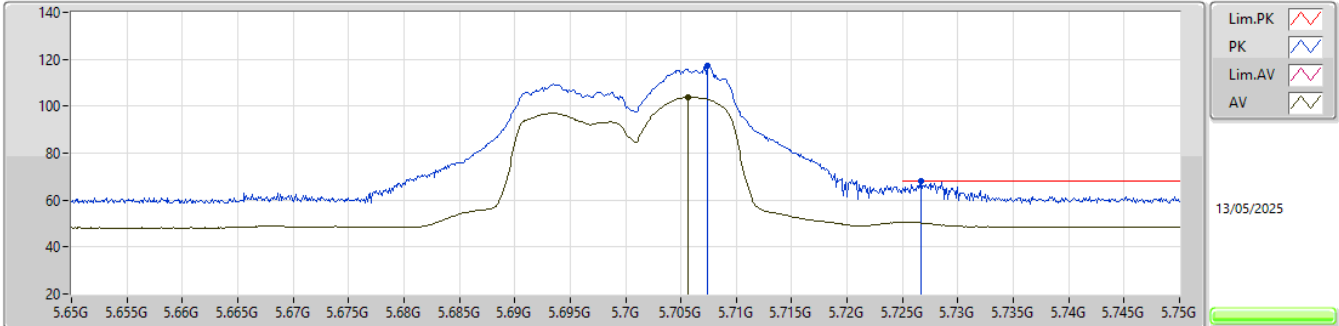EUT_Z_4TX
Setting 14
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7074G	117.15	Inf	-Inf	106.11	3	Vertical	122	1.89	-	34.00	7.72	30.68			
AV	5.7056G	103.93	Inf	-Inf	92.89	3	Vertical	122	1.89	-	34.00	7.72	30.68			
PK	5.7267G	68.11	68.20	-0.09	57.06	3	Vertical	122	1.89	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

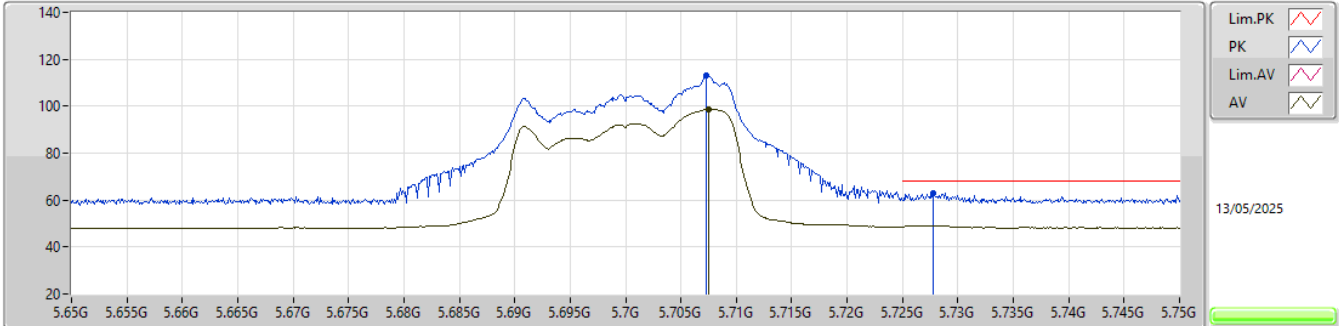


EUT_Z_4TX
Setting 14
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7073G	112.92	Inf	-Inf	101.88	3	Horizontal	195	1.82	-	34.00	7.72	30.68			
AV	5.7075G	98.75	Inf	-Inf	87.71	3	Horizontal	195	1.82	-	34.00	7.72	30.68			
PK	5.7278G	63.01	68.20	-5.19	51.95	3	Horizontal	195	1.82	-	34.00	7.74	30.68			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

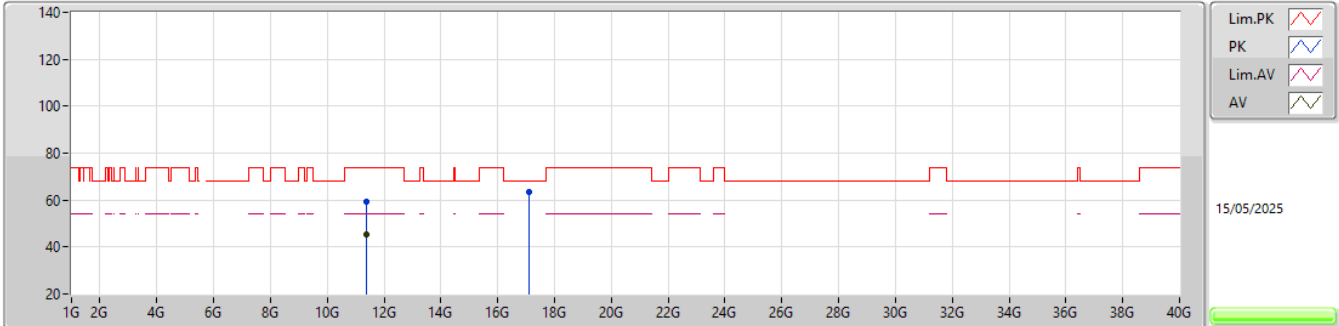


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40048G	59.22	74.00	-14.78	39.48	3	Vertical	109	1.47	-	38.70	11.70	30.66			
AV	11.39346G	45.22	54.00	-8.78	25.49	3	Vertical	109	1.47	-	38.70	11.69	30.66			
PK	17.10312G	63.33	68.20	-4.87	41.69	3	Vertical	47	1.26	-	41.41	12.39	32.16			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

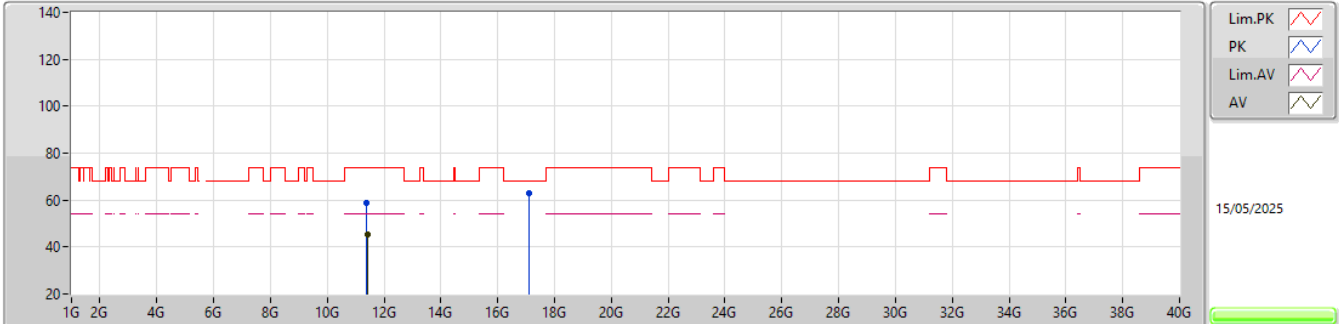


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.38989G	59.05	74.00	-14.95	39.32	3	Horizontal	54	2.03	-	38.70	11.69	30.66			
AV	11.40735G	45.26	54.00	-8.74	25.52	3	Horizontal	54	2.03	-	38.71	11.70	30.67			
PK	17.10996G	63.11	68.20	-5.09	41.43	3	Horizontal	178	2.64	-	41.44	12.40	32.16			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

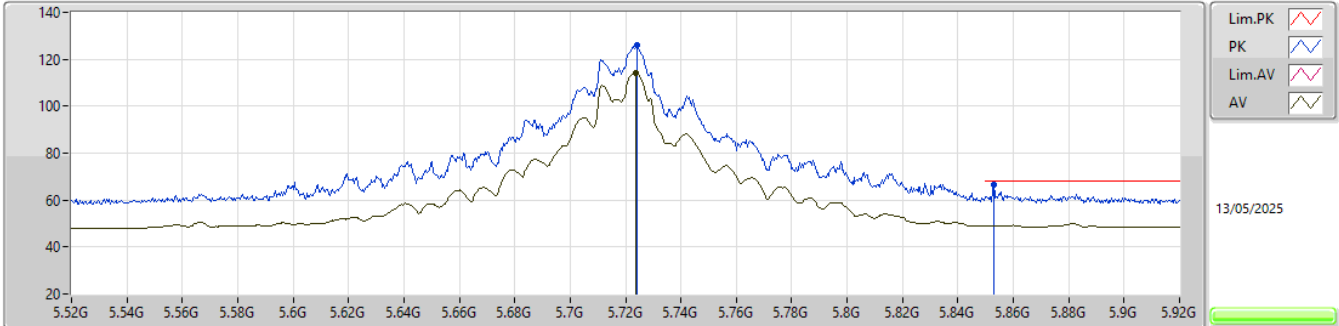


EUT_Z_4TX
Setting 14
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.724G	126.18	Inf	-Inf	115.13	3	Vertical	125	1.79	-	34.00	7.73	30.68			
AV	5.7236G	114.13	Inf	-Inf	103.08	3	Vertical	125	1.79	-	34.00	7.73	30.68			
PK	5.8528G	66.46	68.20	-1.74	55.37	3	Vertical	125	1.79	-	33.91	7.83	30.65			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

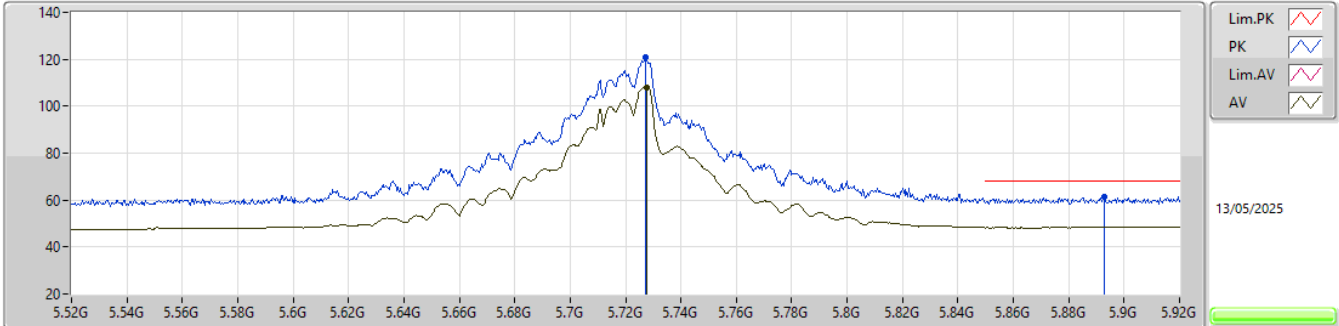


EUT_Z_4TX
Setting 14
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7272G	120.69	Inf	-Inf	109.64	3	Horizontal	194	1.80	-	34.00	7.73	30.68			
AV	5.7276G	108.10	Inf	-Inf	97.05	3	Horizontal	194	1.80	-	34.00	7.73	30.68			
PK	5.8928G	61.28	68.20	-6.92	49.99	3	Horizontal	194	1.80	-	34.07	7.86	30.64			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

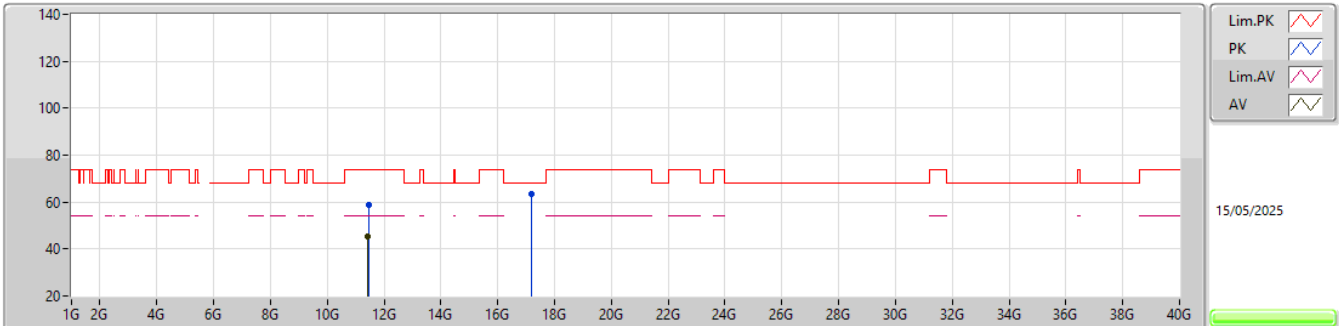


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4484G	58.66	74.00	-15.34	38.82	3	Vertical	16	2.50	-	38.80	11.73	30.69			
AV	11.42962G	45.26	54.00	-8.74	25.46	3	Vertical	16	2.50	-	38.76	11.72	30.68			
PK	17.17005G	63.50	68.20	-4.70	41.57	3	Vertical	280	2.25	-	41.68	12.43	32.18			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

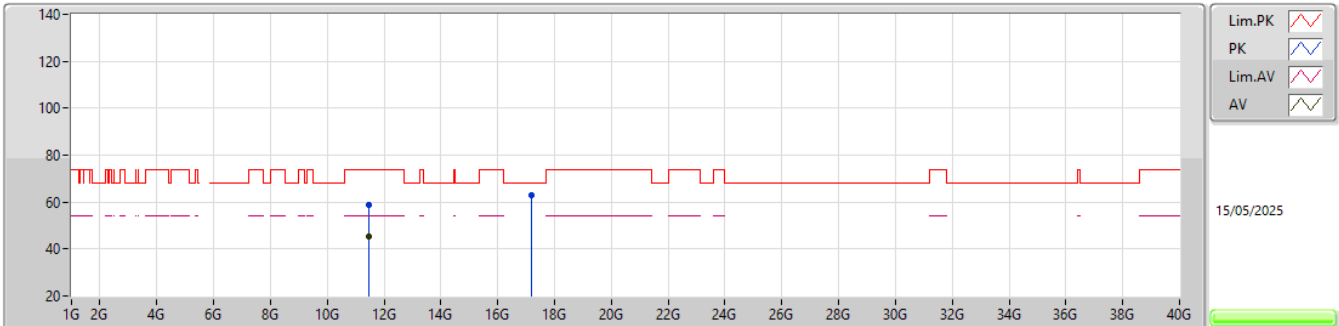


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44969G	58.76	74.00	-15.24	38.92	3	Horizontal	215	1.41	-	38.80	11.73	30.69			
AV	11.45479G	45.25	54.00	-8.75	25.39	3	Horizontal	215	1.41	-	38.82	11.73	30.69			
PK	17.16903G	63.13	68.20	-5.07	41.20	3	Horizontal	102	1.35	-	41.68	12.43	32.18			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

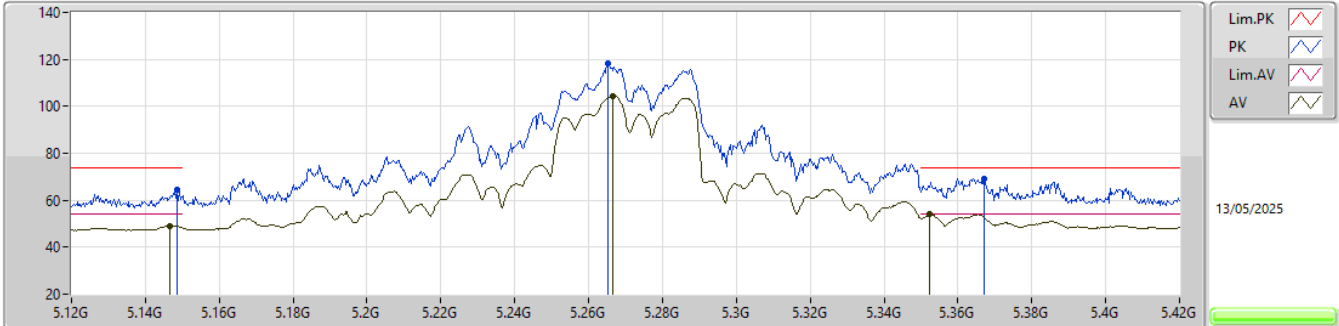


EUT_Z_4TX
Setting 21.5
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1485G	64.25	74.00	-9.75	54.60	3	Vertical	77	2.12	-	33.60	6.98	30.93			
AV	5.1467G	49.14	54.00	-4.86	39.50	3	Vertical	77	2.12	-	33.59	6.98	30.93			
PK	5.2652G	118.22	Inf	-Inf	108.36	3	Vertical	77	2.12	-	33.73	6.99	30.86			
AV	5.2664G	104.52	Inf	-Inf	94.66	3	Vertical	77	2.12	-	33.73	6.99	30.86			
PK	5.3672G	69.13	74.00	-4.87	59.06	3	Vertical	77	2.12	-	33.90	6.97	30.80			
AV	5.3522G	53.93	54.00	-0.07	43.87	3	Vertical	77	2.12	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5270MHz_TX

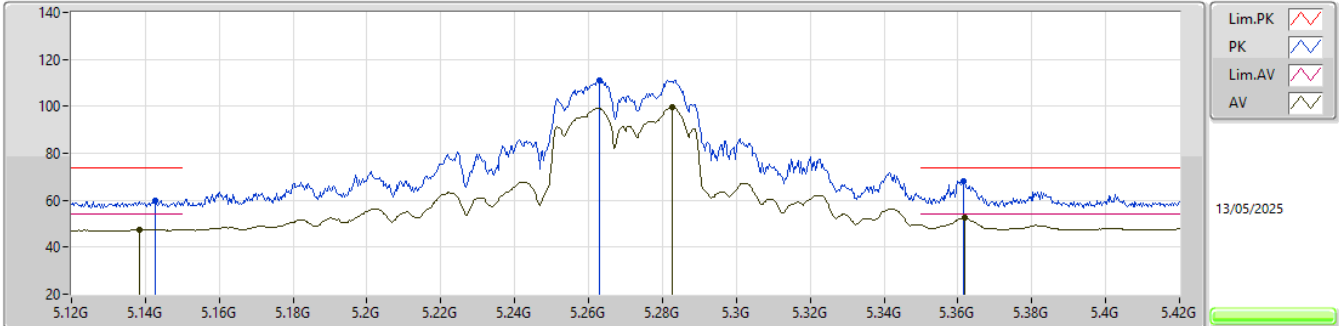EUT_Z_4TX
Setting 21.5
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1428G	59.92	74.00	-14.08	50.29	3	Horizontal	348	2.08	-	33.59	6.97	30.93			
AV	5.1383G	47.57	54.00	-6.43	37.95	3	Horizontal	348	2.08	-	33.58	6.97	30.93			
PK	5.2628G	111.23	Inf	-Inf	101.37	3	Horizontal	348	2.08	-	33.73	6.99	30.86			
AV	5.2826G	99.58	Inf	-Inf	89.67	3	Horizontal	348	2.08	-	33.77	6.99	30.85			
PK	5.3615G	68.15	74.00	-5.85	58.09	3	Horizontal	348	2.08	-	33.90	6.97	30.81			
AV	5.3618G	52.38	54.00	-1.62	42.32	3	Horizontal	348	2.08	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

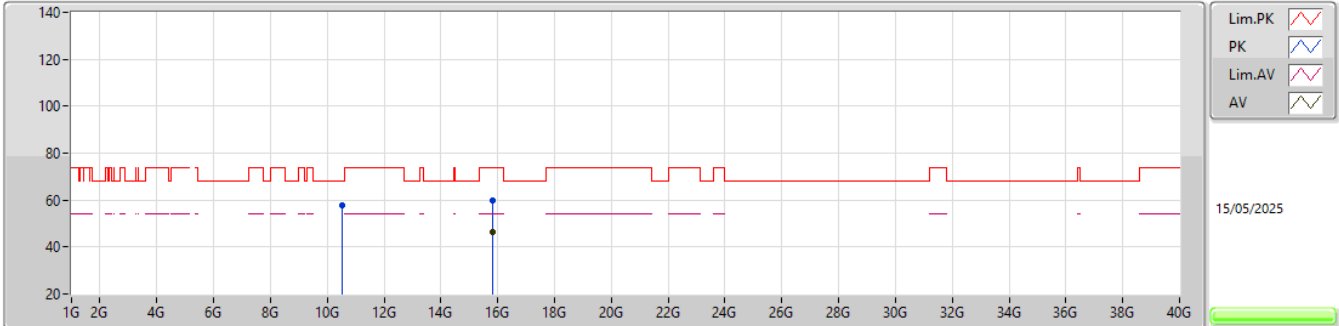


EUT_Z_4TX
Setting 21.5
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.5286G	57.77	68.20	-10.43	38.81	3	Vertical	345	1.40	-	38.30	11.15	30.49				
PK	15.8226G	59.82	74.00	-14.18	42.63	3	Vertical	298	1.38	-	37.45	11.86	32.12				
AV	15.81054G	46.25	54.00	-7.75	29.08	3	Vertical	298	1.38	-	37.42	11.86	32.11				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5270MHz_TX

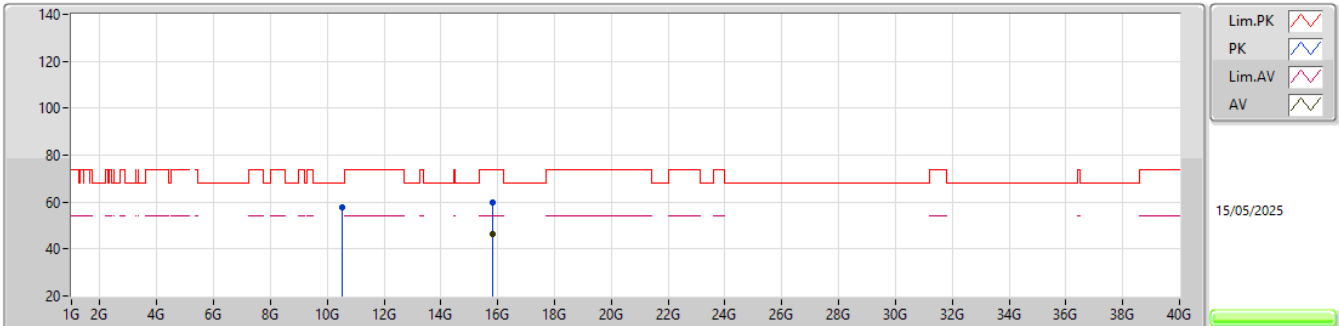EUT_Z_4TX
Setting 21.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53961G	57.89	68.20	-10.31	38.93	3	Horizontal	64	1.30	-	38.30	11.15	30.49			
PK	15.80658G	60.06	74.00	-13.94	42.90	3	Horizontal	4	1.23	-	37.41	11.86	32.11			
AV	15.80952G	46.26	54.00	-7.74	29.09	3	Horizontal	4	1.23	-	37.42	11.86	32.11			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

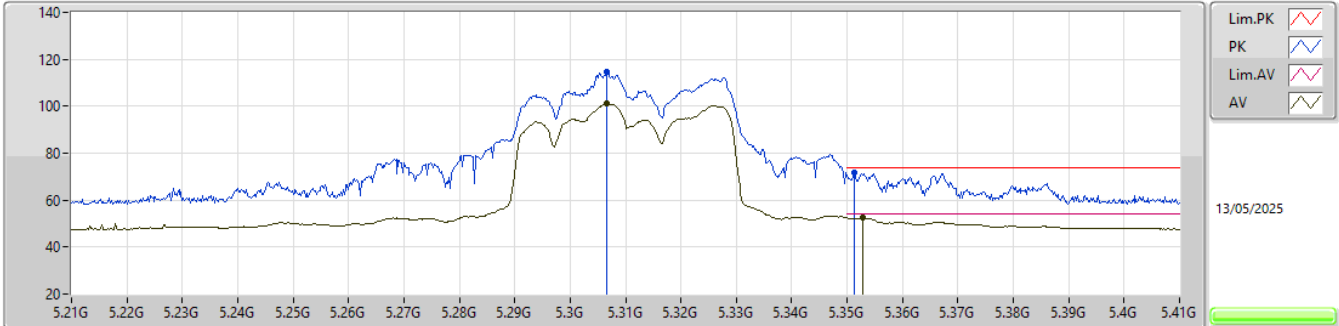


EUT_Z_4TX
Setting 18
02-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3066G	114.51	Inf	-Inf	104.56	3	Vertical	76	2.11	-	33.81	6.98	30.84				
AV	5.3066G	100.95	Inf	-Inf	91.00	3	Vertical	76	2.11	-	33.81	6.98	30.84				
PK	5.3512G	71.70	74.00	-2.30	61.64	3	Vertical	76	2.11	-	33.90	6.97	30.81				
AV	5.3528G	52.53	54.00	-1.47	42.47	3	Vertical	76	2.11	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

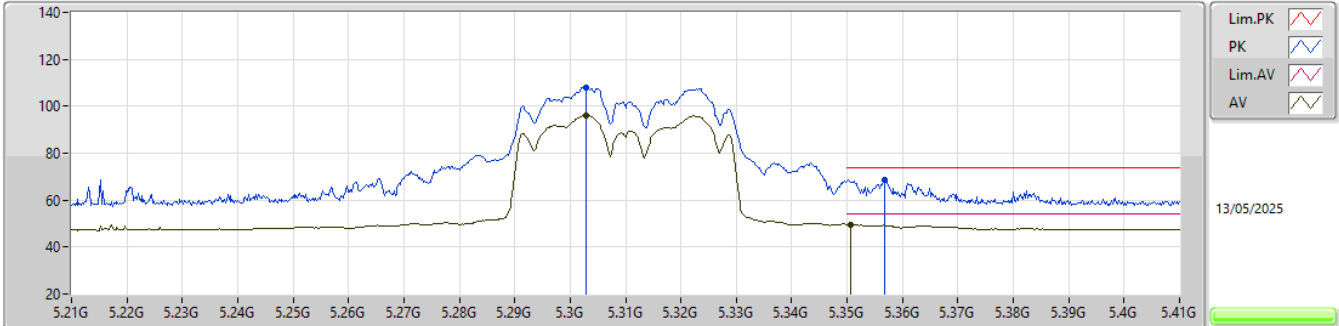


EUT_Z_4TX
Setting 18
02-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3028G	107.94	Inf	-Inf	97.99	3	Horizontal	350	1.78	-	33.81	6.98	30.84			
AV	5.3028G	95.97	Inf	-Inf	86.02	3	Horizontal	350	1.78	-	33.81	6.98	30.84			
PK	5.3506G	68.76	74.00	-5.24	58.70	3	Horizontal	350	1.78	-	33.90	6.97	30.81			
AV	5.3506G	49.72	54.00	-4.28	39.66	3	Horizontal	350	1.78	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

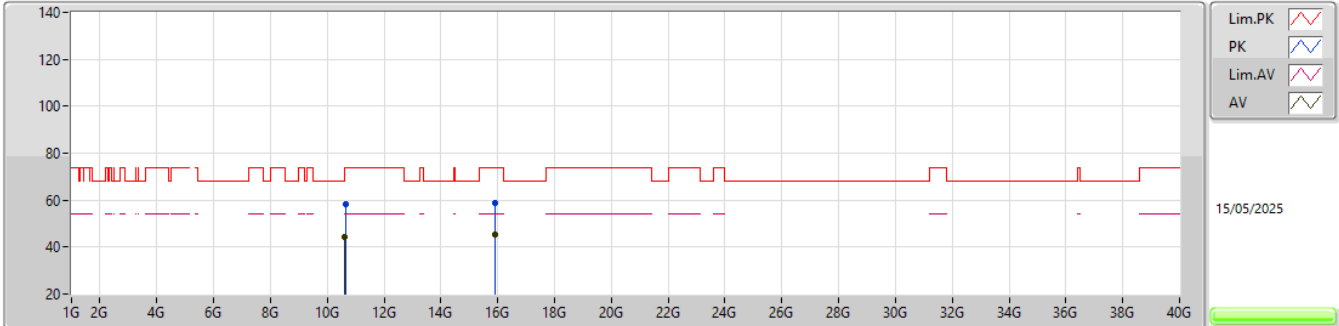


EUT_Z_4TX
Setting 18
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63362G	58.29	74.00	-15.71	39.17	3	Vertical	342	1.22	-	38.40	11.21	30.49			
AV	10.605G	44.29	54.00	-9.71	25.19	3	Vertical	342	1.22	-	38.40	11.19	30.49			
PK	15.91698G	59.05	74.00	-14.95	41.73	3	Vertical	278	2.25	-	37.63	11.87	32.18			
AV	15.91758G	45.50	54.00	-8.50	28.18	3	Vertical	278	2.25	-	37.63	11.87	32.18			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5310MHz_TX

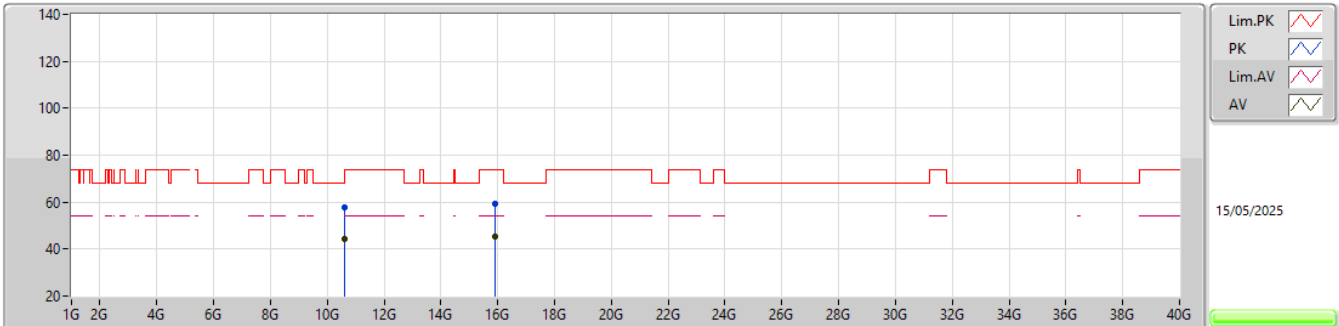EUT_Z_4TX
Setting 18
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60824G	57.73	74.00	-16.27	38.62	3	Horizontal	221	2.93	-	38.40	11.20	30.49			
AV	10.60662G	44.30	54.00	-9.70	25.19	3	Horizontal	221	2.93	-	38.40	11.20	30.49			
PK	15.91662G	59.23	74.00	-14.77	41.91	3	Horizontal	206	2.93	-	37.63	11.87	32.18			
AV	15.91887G	45.53	54.00	-8.47	28.22	3	Horizontal	206	2.93	-	37.62	11.87	32.18			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

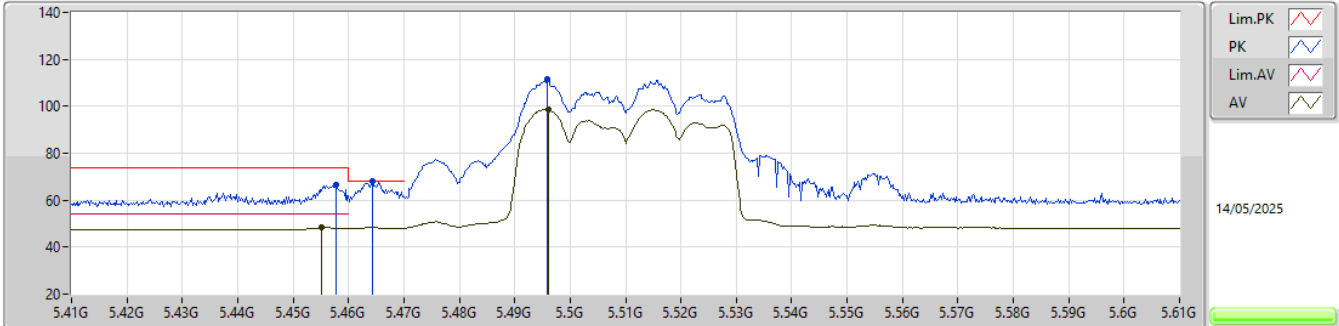


EUT_Z_4TX
Setting 14
02-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.4578G	66.38	74.00	-7.62	56.06	3	Vertical	298	1.94	-	33.92	7.15	30.75				
AV	5.4552G	48.26	54.00	-5.74	37.97	3	Vertical	298	1.94	-	33.91	7.14	30.76				
PK	5.4644G	68.01	68.20	-0.19	57.66	3	Vertical	298	1.94	-	33.93	7.17	30.75				
PK	5.4958G	111.53	Inf	-Inf	100.99	3	Vertical	298	1.94	-	33.99	7.28	30.73				
AV	5.496G	98.58	Inf	-Inf	88.04	3	Vertical	298	1.94	-	33.99	7.28	30.73				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

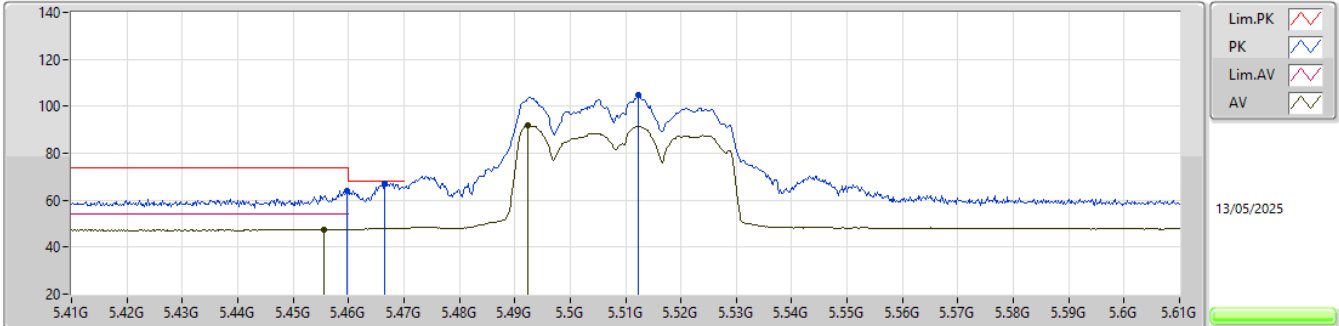


EUT_Z_4TX
Setting 14
02-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4598G	64.05	74.00	-9.95	53.72	3	Horizontal	197	1.70	-	33.92	7.16	30.75			
AV	5.4556G	47.53	54.00	-6.47	37.23	3	Horizontal	197	1.70	-	33.91	7.14	30.75			
PK	5.4666G	67.32	68.20	-0.88	56.96	3	Horizontal	197	1.70	-	33.93	7.18	30.75			
PK	5.5124G	105.05	Inf	-Inf	94.43	3	Horizontal	197	1.70	-	34.02	7.33	30.73			
AV	5.4924G	92.04	Inf	-Inf	81.53	3	Horizontal	197	1.70	-	33.98	7.26	30.73			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

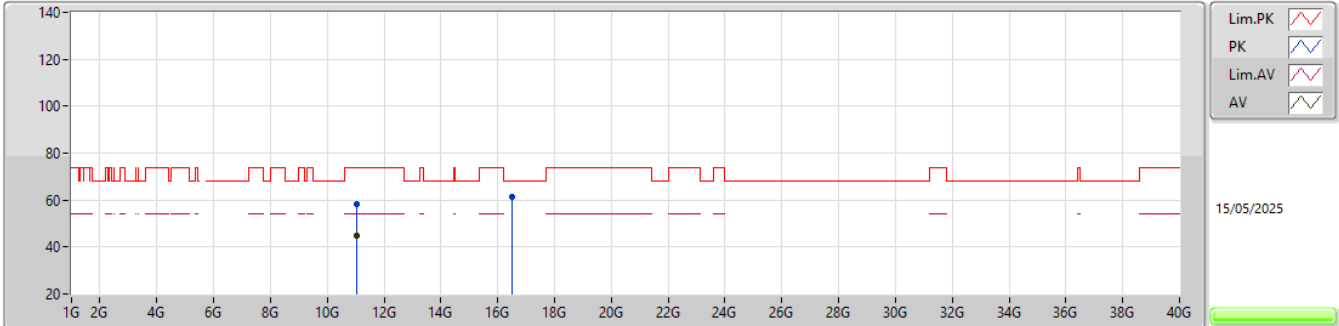


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01949G	58.27	74.00	-15.73	38.86	3	Vertical	173	2.58	-	38.44	11.46	30.49			
AV	11.03206G	44.90	54.00	-9.10	25.46	3	Vertical	173	2.58	-	38.46	11.47	30.49			
PK	16.51659G	61.43	68.20	-6.77	42.46	3	Vertical	283	2.45	-	38.90	12.12	32.05			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

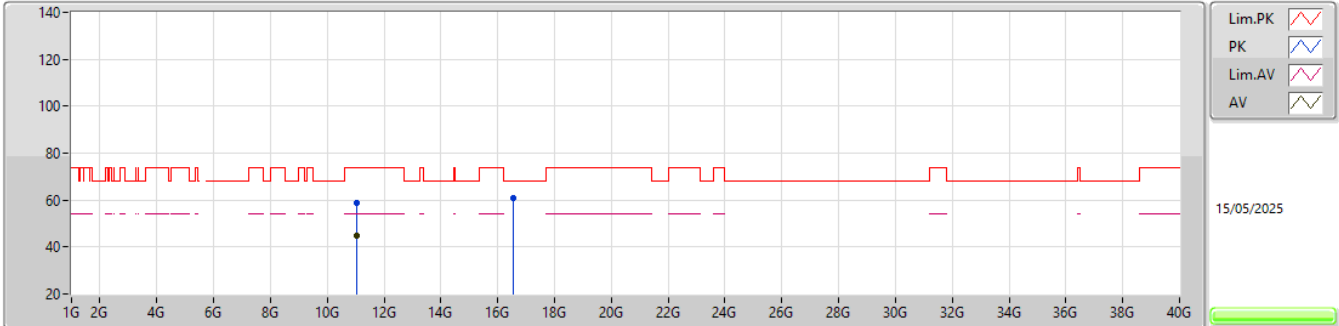


EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.03317G	58.90	74.00	-15.10	39.46	3	Horizontal	36	2.19	-	38.47	11.47	30.50				
AV	11.03248G	44.91	54.00	-9.09	25.47	3	Horizontal	36	2.19	-	38.46	11.47	30.49				
PK	16.53561G	61.07	68.20	-7.13	41.99	3	Horizontal	57	1.22	-	39.01	12.12	32.05				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5550MHz_TX

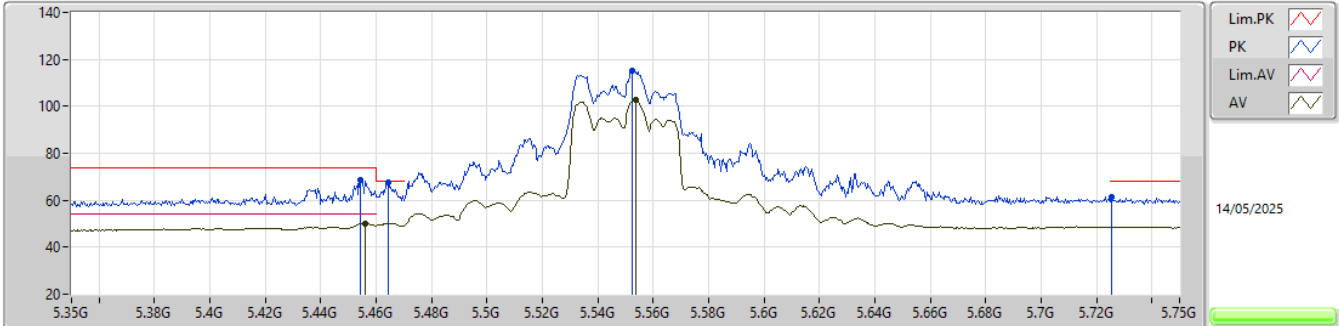EUT_Z_4TX
Setting 18
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4544G	68.52	74.00	-5.48	58.23	3	Vertical	296	1.80	-	33.91	7.14	30.76
AV	5.456G	50.14	54.00	-3.86	39.84	3	Vertical	296	1.80	-	33.91	7.14	30.75
PK	5.4644G	67.59	68.20	-0.61	57.24	3	Vertical	296	1.80	-	33.93	7.17	30.75
PK	5.5524G	115.38	Inf	-Inf	104.54	3	Vertical	296	1.80	-	34.10	7.46	30.72
AV	5.5536G	102.96	Inf	-Inf	92.12	3	Vertical	296	1.80	-	34.09	7.47	30.72
PK	5.7256G	61.17	68.20	-7.03	50.12	3	Vertical	296	1.80	-	34.00	7.73	30.68

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5550MHz_TX

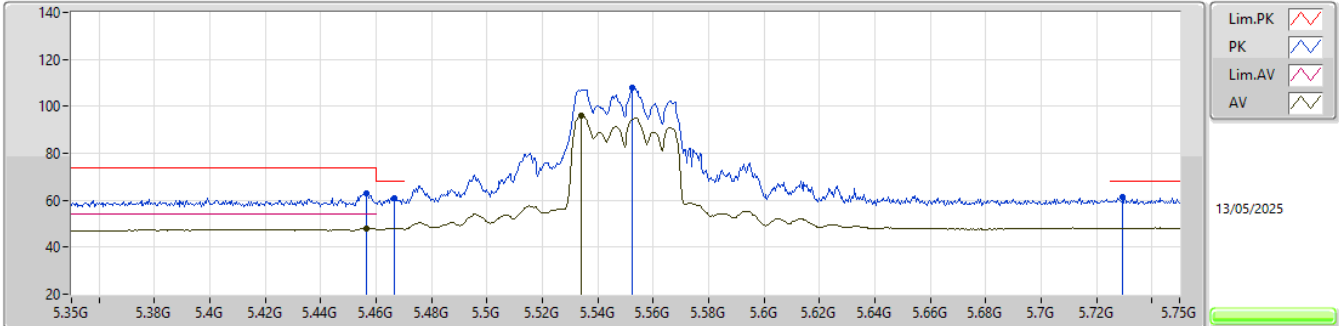EUT_Z_4TX
Setting 18
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4564G	63.06	74.00	-10.94	52.75	3	Horizontal	248	1.80	-	33.91	7.15	30.75			
AV	5.4564G	48.08	54.00	-5.92	37.77	3	Horizontal	248	1.80	-	33.91	7.15	30.75			
PK	5.4664G	60.93	68.20	-7.27	50.57	3	Horizontal	248	1.80	-	33.93	7.18	30.75			
PK	5.5524G	107.86	Inf	-Inf	97.02	3	Horizontal	248	1.80	-	34.10	7.46	30.72			
AV	5.534G	95.84	Inf	-Inf	85.09	3	Horizontal	248	1.80	-	34.07	7.40	30.72			
PK	5.7296G	61.63	68.20	-6.57	50.56	3	Horizontal	248	1.80	-	34.00	7.74	30.67			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

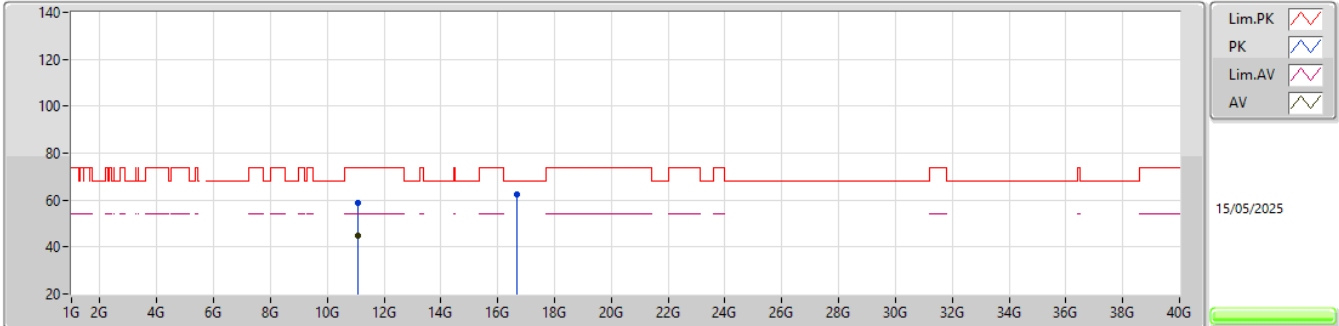


EUT_Z_4TX
Setting 18
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09007G	59.05	74.00	-14.95	39.49	3	Vertical	307	1.84	-	38.58	11.50	30.52			
AV	11.08962G	45.02	54.00	-8.98	25.46	3	Vertical	307	1.84	-	38.58	11.50	30.52			
PK	16.65723G	62.63	68.20	-5.57	42.71	3	Vertical	255	1.92	-	39.81	12.18	32.07			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

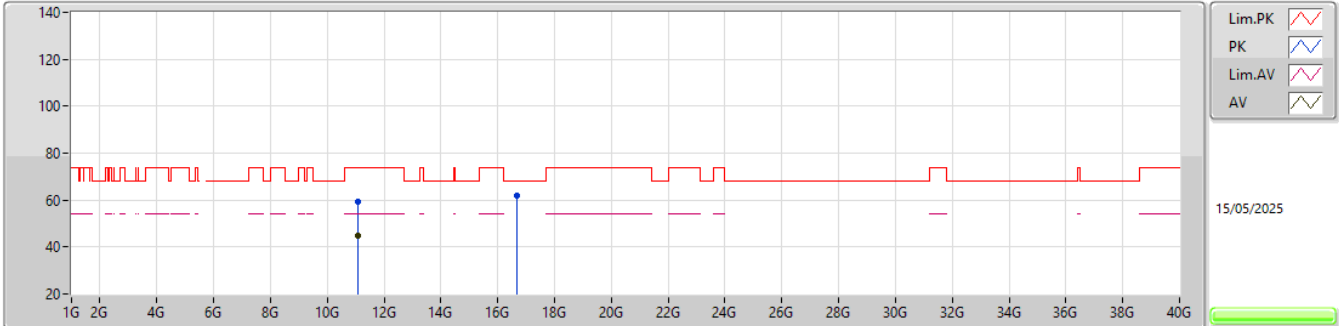


EUT_Z_4TX
Setting 18
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10105G	59.30	74.00	-14.70	39.72	3	Horizontal	290	2.18	-	38.60	11.51	30.53			
AV	11.08869G	45.03	54.00	-8.97	25.47	3	Horizontal	290	2.18	-	38.58	11.50	30.52			
PK	16.66287G	61.80	68.20	-6.40	41.86	3	Horizontal	145	1.59	-	39.83	12.18	32.07			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

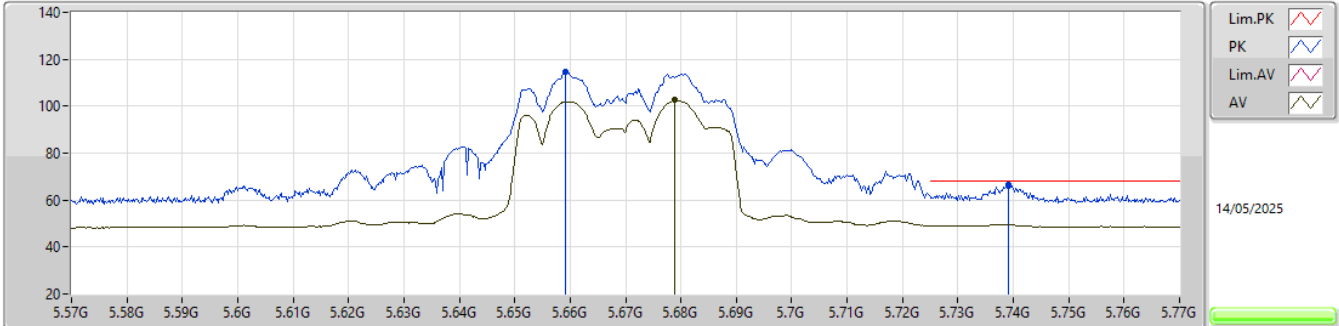


EUT_Z_4TX
Setting 17
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6592G	114.56	Inf	-Inf	103.58	3	Vertical	117	2.05	-	34.00	7.67	30.69			
AV	5.6788G	102.56	Inf	-Inf	91.56	3	Vertical	117	2.05	-	34.00	7.69	30.69			
PK	5.7392G	66.48	68.20	-1.72	55.40	3	Vertical	117	2.05	-	34.00	7.75	30.67			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5670MHz_TX

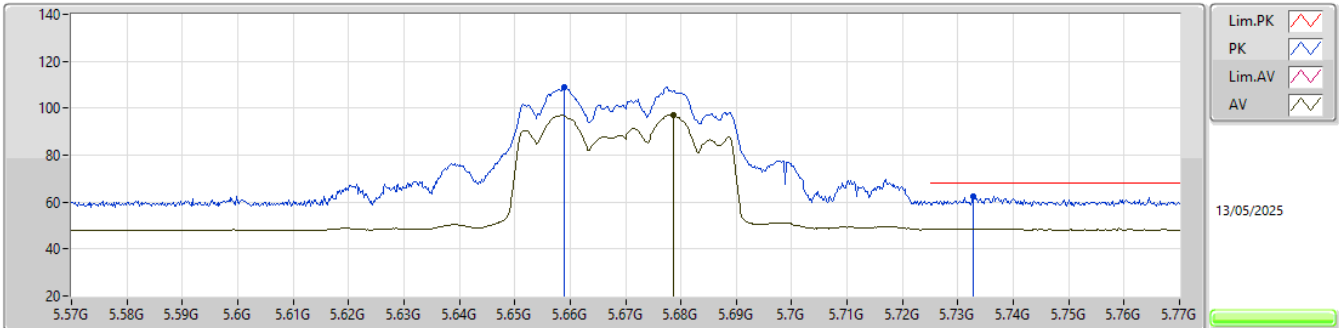EUT_Z_4TX
Setting 17
02-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.659G	109.00	Inf	-Inf	98.02	3	Horizontal	192	1.77	-	34.00	7.67	30.69			
AV	5.6786G	97.18	Inf	-Inf	86.18	3	Horizontal	192	1.77	-	34.00	7.69	30.69			
PK	5.7328G	62.51	68.20	-5.69	51.44	3	Horizontal	192	1.77	-	34.00	7.74	30.67			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

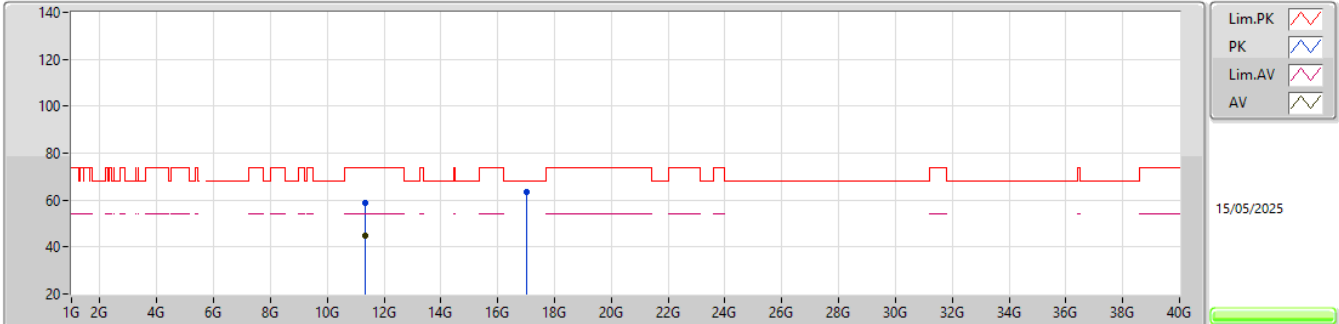


EUT_Z_4TX
Setting 17
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33913G	58.94	74.00	-15.06	39.24	3	Vertical	160	1.67	-	38.68	11.66	30.64			
AV	11.35377G	45.05	54.00	-8.95	25.32	3	Vertical	160	1.67	-	38.70	11.67	30.64			
PK	17.01504G	63.21	68.20	-4.99	41.76	3	Vertical	218	2.99	-	41.23	12.35	32.13			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

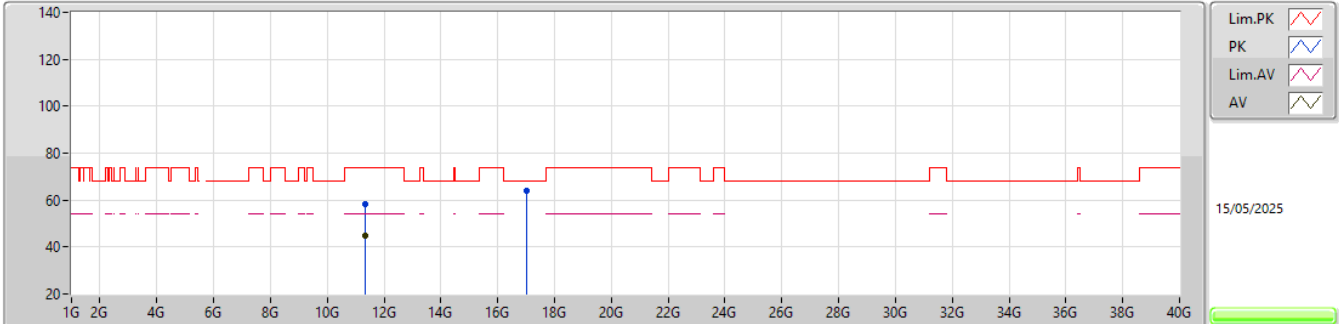


EUT_Z_4TX
Setting 17
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33814G	58.31	74.00	-15.69	38.61	3	Horizontal	43	1.37	-	38.68	11.66	30.64			
AV	11.32983G	45.01	54.00	-8.99	25.33	3	Horizontal	43	1.37	-	38.66	11.65	30.63			
PK	17.02299G	63.78	68.20	-4.42	42.30	3	Horizontal	337	1.59	-	41.25	12.36	32.13			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

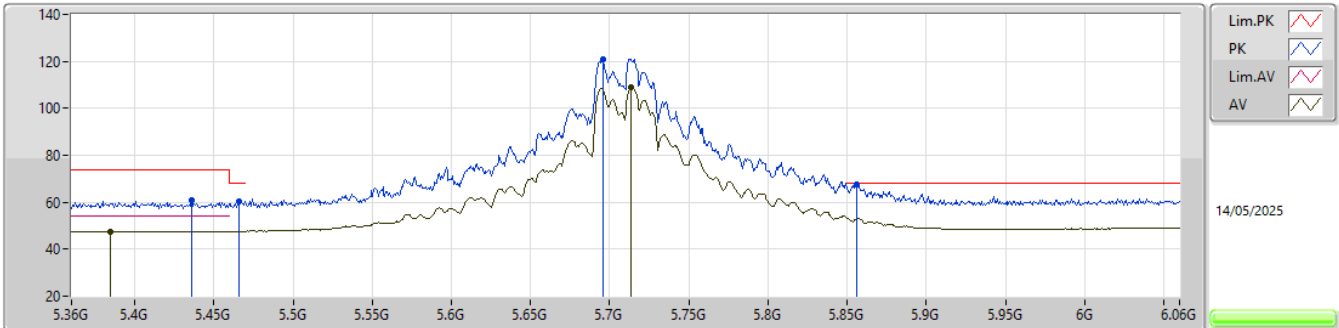


EUT_Z_4TX
Setting 24
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4356G	60.61	74.00	-13.39	50.40	3	Vertical	122	1.86	-	33.90	7.08	30.77
AV	5.3845G	47.67	54.00	-6.33	37.60	3	Vertical	122	1.86	-	33.90	6.96	30.79
PK	5.4657G	60.56	68.20	-7.64	50.20	3	Vertical	122	1.86	-	33.93	7.18	30.75
PK	5.696G	121.00	Inf	-Inf	109.97	3	Vertical	122	1.86	-	34.00	7.71	30.68
AV	5.7135G	108.83	Inf	-Inf	97.79	3	Vertical	122	1.86	-	34.00	7.72	30.68
PK	5.8563G	67.61	68.20	-0.59	56.48	3	Vertical	122	1.86	-	33.93	7.84	30.64

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

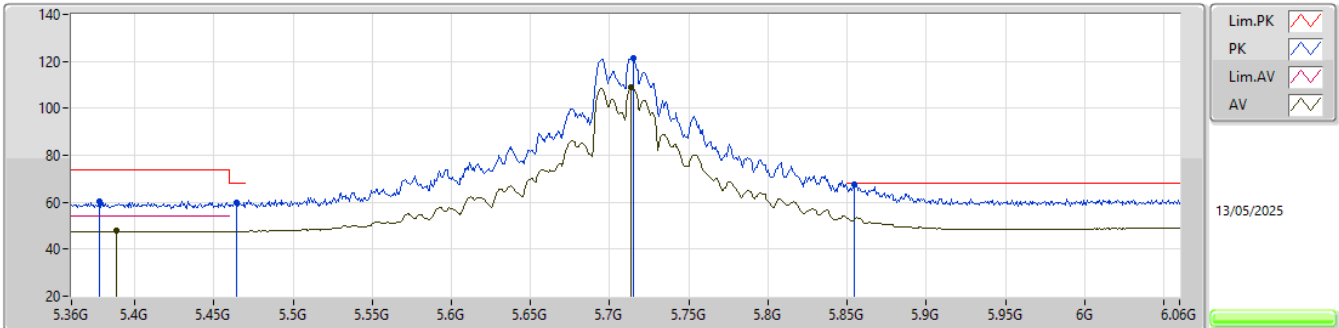EUT_Z_4TX
Setting 24
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3775G	60.46	74.00	-13.54	50.39	3	Horizontal	122	1.86	-	33.90	6.97	30.80			
AV	5.388G	47.74	54.00	-6.26	37.67	3	Horizontal	122	1.86	-	33.90	6.96	30.79			
PK	5.4643G	59.79	68.20	-8.41	49.44	3	Horizontal	122	1.86	-	33.93	7.17	30.75			
PK	5.7149G	121.14	Inf	-Inf	110.10	3	Horizontal	122	1.86	-	34.00	7.72	30.68			
AV	5.7135G	108.93	Inf	-Inf	97.89	3	Horizontal	122	1.86	-	34.00	7.72	30.68			
PK	5.8549G	67.83	68.20	-0.37	56.71	3	Horizontal	122	1.86	-	33.92	7.84	30.64			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

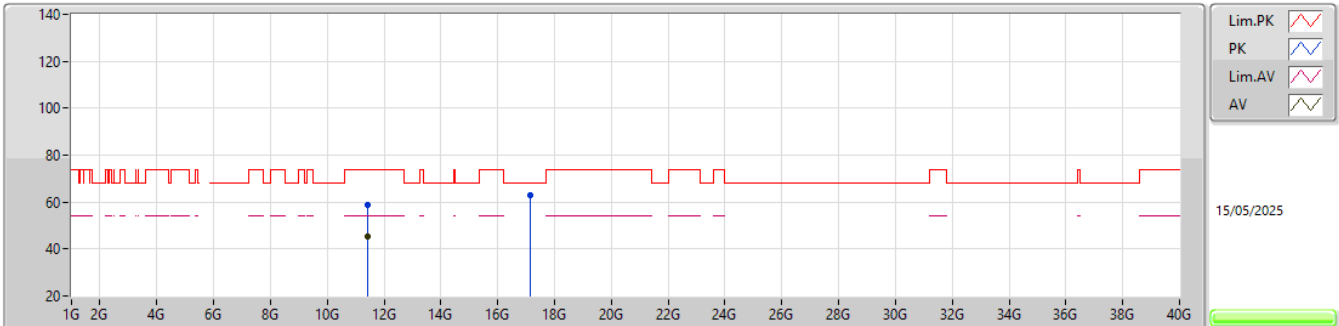


EUT_Z_4TX
Setting 24
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.42477G	58.65	74.00	-15.35	38.87	3	Vertical	189	1.70	-	38.75	11.71	30.68			
AV	11.43251G	45.10	54.00	-8.90	25.29	3	Vertical	189	1.70	-	38.77	11.72	30.68			
PK	17.14428G	63.07	68.20	-5.13	41.25	3	Vertical	65	2.38	-	41.58	12.41	32.17			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

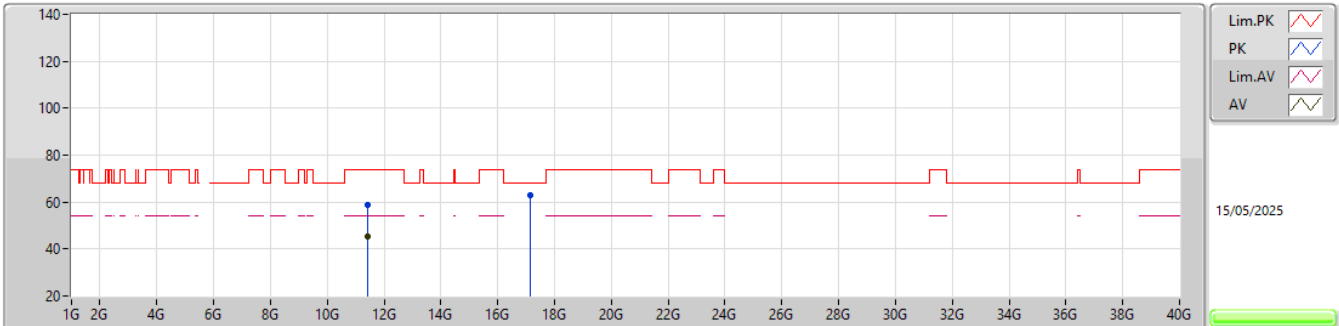


EUT_Z_4TX
Setting 24
02-D-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.42957G	58.78	74.00	-15.22	38.98	3	Horizontal	4	2.12	-	38.76	11.72	30.68			
AV	11.42966G	45.18	54.00	-8.82	25.38	3	Horizontal	4	2.12	-	38.76	11.72	30.68			
PK	17.13477G	63.04	68.20	-5.16	41.26	3	Horizontal	198	1.04	-	41.54	12.41	32.17			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5290MHz_TX

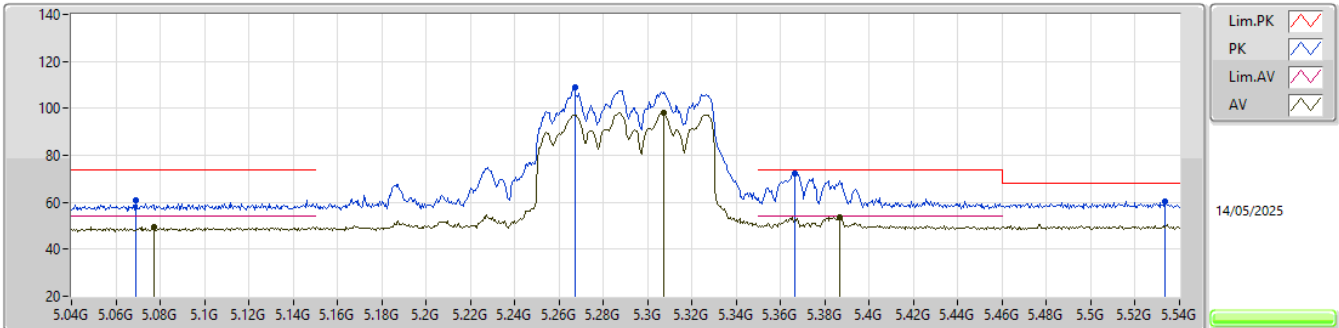EUT_Z_4TX
Setting 16
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.069G	60.64	74.00	-13.36	51.25	3	Vertical	76	2.09	-	33.44	6.92	30.97
AV	5.077G	49.54	54.00	-4.46	40.13	3	Vertical	76	2.09	-	33.45	6.93	30.97
PK	5.267G	108.81	Inf	-Inf	98.95	3	Vertical	76	2.09	-	33.73	6.99	30.86
AV	5.3075G	98.15	Inf	-Inf	88.20	3	Vertical	76	2.09	-	33.81	6.98	30.84
PK	5.3665G	72.47	74.00	-1.53	62.40	3	Vertical	76	2.09	-	33.90	6.97	30.80
AV	5.3865G	53.87	54.00	-0.13	43.80	3	Vertical	76	2.09	-	33.90	6.96	30.79
PK	5.5335G	60.38	68.20	-7.82	49.63	3	Vertical	76	2.09	-	34.07	7.40	30.72

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

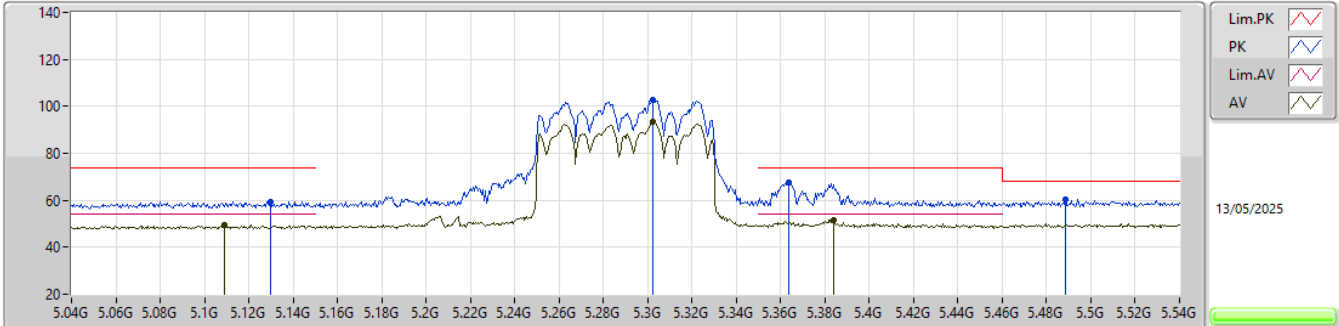


EUT_Z_4TX
Setting 16
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.13G	59.47	74.00	-14.53	49.89	3	Horizontal	350	1.79	-	33.56	6.96	30.94			
AV	5.109G	49.44	54.00	-4.56	39.92	3	Horizontal	350	1.79	-	33.52	6.95	30.95			
PK	5.3025G	102.61	Inf	-Inf	92.67	3	Horizontal	350	1.79	-	33.80	6.98	30.84			
AV	5.3025G	93.41	Inf	-Inf	83.47	3	Horizontal	350	1.79	-	33.80	6.98	30.84			
PK	5.3635G	67.47	74.00	-6.53	57.41	3	Horizontal	350	1.79	-	33.90	6.97	30.81			
AV	5.384G	51.51	54.00	-2.49	41.44	3	Horizontal	350	1.79	-	33.90	6.96	30.79			
PK	5.4885G	60.38	68.20	-7.82	49.89	3	Horizontal	350	1.79	-	33.98	7.25	30.74			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5290MHz_TX

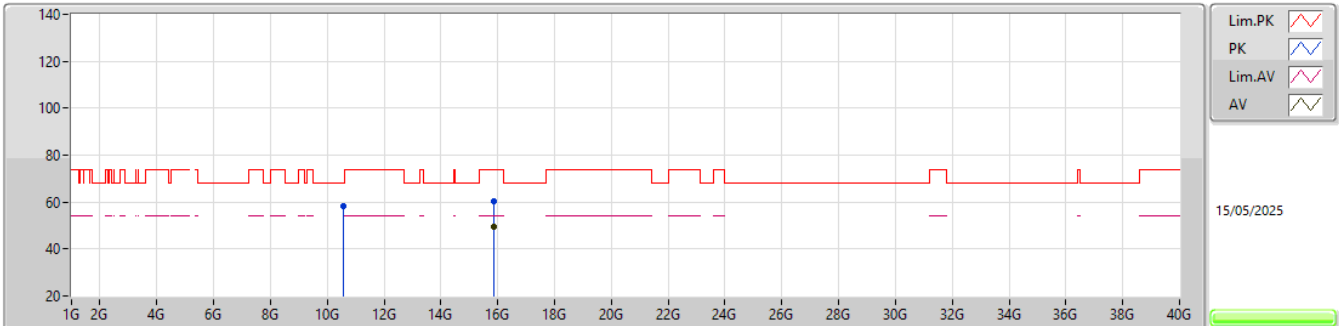EUT_Z_4TX
Setting 16
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57277G	58.16	68.20	-10.04	39.13	3	Vertical	351	1.80	-	38.35	11.17	30.49			
PK	15.86307G	60.11	74.00	-13.89	42.84	3	Vertical	137	1.19	-	37.55	11.86	32.14			
AV	15.88014G	49.51	54.00	-4.49	32.18	3	Vertical	137	1.19	-	37.62	11.86	32.15			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5290MHz_TX

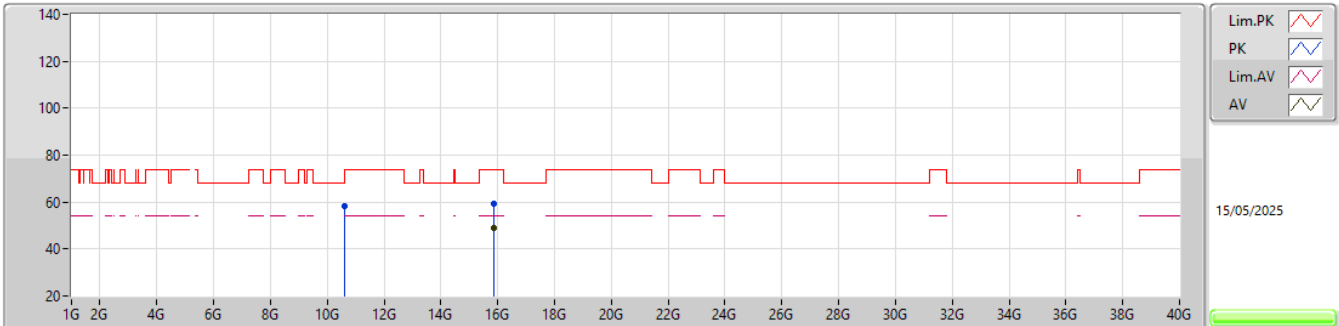EUT_Z_4TX
Setting 16
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59251G	58.41	68.20	-9.79	39.32	3	Horizontal	340	2.14	-	38.39	11.19	30.49			
PK	15.88326G	59.49	74.00	-14.51	42.16	3	Horizontal	17	2.54	-	37.63	11.86	32.16			
AV	15.85755G	48.87	54.00	-5.13	31.62	3	Horizontal	17	2.54	-	37.53	11.86	32.14			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

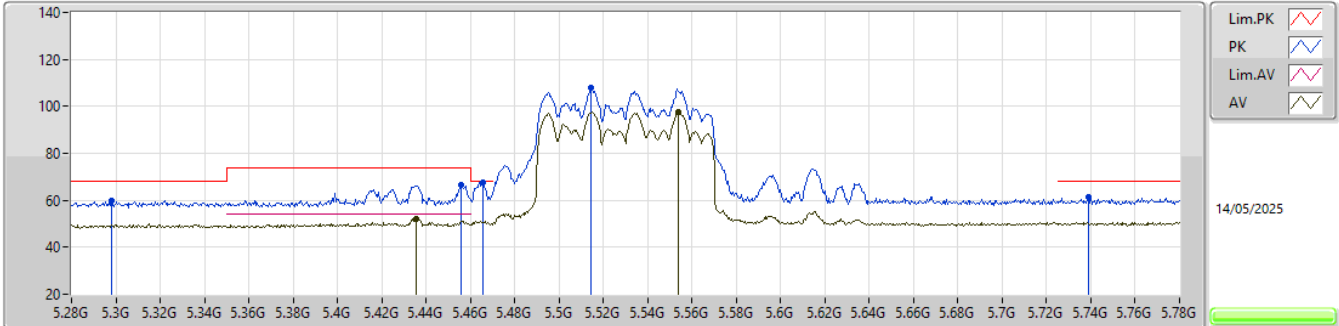


EUT_Z_4TX
Setting 14
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.298G	59.92	68.20	-8.28	49.97	3	Vertical	297	1.76	-	33.80	6.99	30.84
PK	5.456G	66.33	74.00	-7.67	56.03	3	Vertical	297	1.76	-	33.91	7.14	30.75
AV	5.4355G	52.01	54.00	-1.99	41.80	3	Vertical	297	1.76	-	33.90	7.08	30.77
PK	5.4655G	67.44	68.20	-0.76	57.08	3	Vertical	297	1.76	-	33.93	7.18	30.75
PK	5.5145G	108.15	Inf	-Inf	97.51	3	Vertical	297	1.76	-	34.03	7.34	30.73
AV	5.554G	97.58	Inf	-Inf	86.74	3	Vertical	297	1.76	-	34.09	7.47	30.72
PK	5.739G	61.27	68.20	-6.93	50.19	3	Vertical	297	1.76	-	34.00	7.75	30.67

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5530MHz_TX

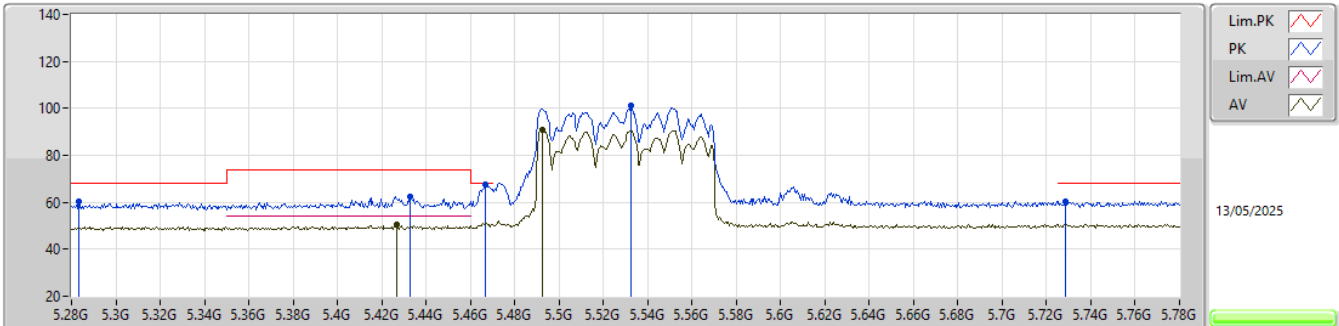EUT_Z_4TX
Setting 14
02-D-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2835G	60.25	68.20	-7.95	50.34	3	Horizontal	198	1.71	-	33.77	6.99	30.85			
PK	5.433G	62.66	74.00	-11.34	52.46	3	Horizontal	198	1.71	-	33.90	7.07	30.77			
AV	5.427G	50.40	54.00	-3.60	40.22	3	Horizontal	198	1.71	-	33.90	7.05	30.77			
PK	5.4665G	67.50	68.20	-0.70	57.14	3	Horizontal	198	1.71	-	33.93	7.18	30.75			
AV	5.4925G	90.87	Inf	-Inf	80.35	3	Horizontal	198	1.71	-	33.98	7.27	30.73			
PK	5.5325G	101.09	Inf	-Inf	90.34	3	Horizontal	198	1.71	-	34.07	7.40	30.72			
PK	5.7285G	60.59	68.20	-7.61	49.53	3	Horizontal	198	1.71	-	34.00	7.74	30.68			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

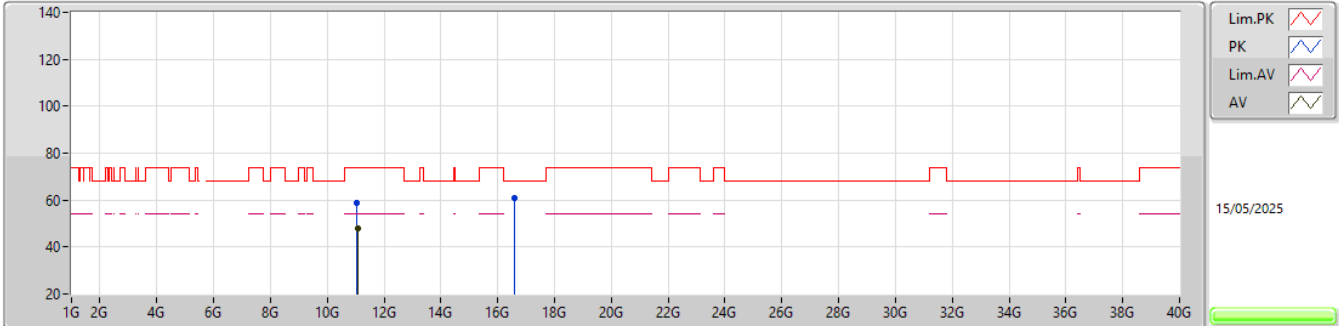

EUT_Z_4TX
Setting 14
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05292G	58.93	74.00	-15.07	39.44	3	Vertical	342	2.55	-	38.51	11.48	30.50			
AV	11.06453G	47.76	54.00	-6.24	28.25	3	Vertical	342	2.55	-	38.53	11.49	30.51			
PK	16.58556G	61.06	68.20	-7.14	41.59	3	Vertical	173	2.04	-	39.38	12.15	32.06			