

FCC TEST REPORT (15.247)

(ADDITIONAL ASSOCIATED DEVICE)

REPORT NO.: RF950803L01

MODEL NO.: MC7095

RECEIVED: Aug. 03, 2006

TESTED: Dec. 14 ~ Dec. 15, 2006

ISSUED: Dec. 18, 2006

APPLICANT: Symbol Technologies, Inc.

ADDRESS: One Symbol Plaza Holtsville, NY United
States 11742-1300

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 34 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	3
2.	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3.	GENERAL INFORMATION.....	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4	DESCRIPTION OF SUPPORT UNITS.....	11
4.	TEST TYPES AND RESULTS (FOR 802.11b & g 2412 ~ 2462MHz BAND)	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES.....	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS.....	16
5.	TEST TYPES AND RESULTS (FOR 802.11a 5745 ~ 5825MHz BAND)	19
5.1	CONDUCTED EMISSION MEASUREMENT	19
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
5.1.2	TEST INSTRUMENTS	19
5.1.3	TEST PROCEDURES.....	20
5.1.4	DEVIATION FROM TEST STANDARD	20
5.1.5	TEST SETUP	21
5.1.6	EUT OPERATING CONDITIONS.....	21
5.1.7	TEST RESULTS.....	22
5.2	RADIATED EMISSION MEASUREMENT	26
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	26
5.2.2	TEST INSTRUMENTS	27
5.2.3	TEST PROCEDURES.....	28
5.2.4	DEVIATION FROM TEST STANDARD	28
5.2.5	TEST SETUP	29
5.2.6	EUT OPERATING CONDITIONS.....	29
5.2.7	TEST RESULTS.....	30
6.	INFORMATION ON THE TESTING LABORATORIES	33
	APPENDIX-A.....	A-1

1. CERTIFICATION

PRODUCT: Enterprise Digital Assistant

MODEL: MC7095

BRAND: Symbol

APPLICANT: Symbol Technologies, Inc.

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Dec. 14 ~ Dec. 15, 2006

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia, **DATE:** Dec. 18, 2006
Andrea Hsia

TECHNICAL ACCEPTANCE : Long Chen, **DATE:** Dec. 18, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang, **DATE:** Dec. 18, 2006
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.69dB at 0.209MHz
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.91dB at 661.76MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	3.62dB
	200MHz ~ 1000MHz	3.64dB
	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Enterprise Digital Assistant
MODEL NO.	MC7095
FCC ID	H9PMC7095
POWER SUPPLY	3.7Vdc from rechargeable lithium battery 5.4Vdc from power adapter for charger 12.0Vdc from power adapter for cradle
MODULATION TYPE	Wireless LAN: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM Bluetooth: GFSK for FHSS
MODULATION TECHNOLOGY	DSSS, OFDM, FHSS
TRANSFER RATE	Wireless LAN: 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps Bluetooth: 723Kbps
FREQUENCY RANGE	Wireless LAN: 802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.180 ~ 5.250GHz , 5.745 ~ 5.825GHz Bluetooth: 2.402 ~ 2.480GHz
NUMBER OF CHANNEL	Wireless LAN: 802.11b & 802.11g: 11 802.11a: 9 Bluetooth: 79
CHANNEL SPACING	Wireless LAN: 802.11b & 802.11g: 5MHz 802.11a: 20MHz Bluetooth: 1MHz
OUTPUT POWER	Wireless LAN: 63.241mW for 802.11b 56.494mW for 802.11g 25.410mW for 5.180 ~ 5.250GHz 56.494mW for 5.745 ~ 5.825GHz Bluetooth: 0.931mW

ANTENNA TYPE	Wireless LAN: PIFA antenna with 2.0dBi gain (for 2.4GHz) PIFA antenna with 2.5dBi gain (for 5.0GHz) Bluetooth: Chip antenna with 2.0dBi gain
DATA CABLE	0.92m non-shielded cable for earphone
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Earphone, cradle, Gun, Reader

NOTE:

1. This report is a supplementary report for addition associated devices gun and reader, please refers to EUT photo for the shape.
2. The EUT is an Enterprise Digital Assistant with wireless LAN, bluetooth and mobile phone functions. This report is only covered the functions of wireless LAN. The bluetooth function is covered in another report but same standard. The mobile phone function is covered in another two test reports, which standards used are FCC Part 24 and FCC Part 22.
3. The EUT have two lithium batteries listed as below:

HEAVY BATTERY:	
BRAND:	Symbol
MODEL:	82-71364-02
RATING:	3.7Vdc, 3800mAh

MAIN BATTERY:	
BRAND:	Symbol
MODEL:	82-71363-02
RATING:	3.7Vdc, 1900mAh

4. The cradle was operated with following power adapter:

BRAND:	HIPRO
MODEL:	HP-O2040D43
INPUT:	100-240Vac, 50-60Hz, 1.5A
OUTPUT:	12Vdc, 3.33A
POWER LINE:	AC 1.8m non-shielded cable without core DC 1.8m shielded cable with one core

5. The charging cable was operated with following power adapter:

BRAND:	Delta
MODEL:	ADP-16GB A
INPUT:	100-240Vac, 50-60Hz, 0.4A
OUTPUT:	5.4Vdc, 3A
POWER LINE:	AC 0.7m non-shielded cable without core DC 1.87m non-shielded cable with one core

6. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
7. Standalone has been investigated in the pretest and final test represent the worst case.
8. Emission of Inter-modulation has been evaluated and is compliance with related rule.
9. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided to the EUT for wireless LAN function:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		


Operated in 5745 ~ 5825MHz band:

5 channels are provided to this EUT for wireless LAN function:


CHANNEL	FREQUENCY
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE C:

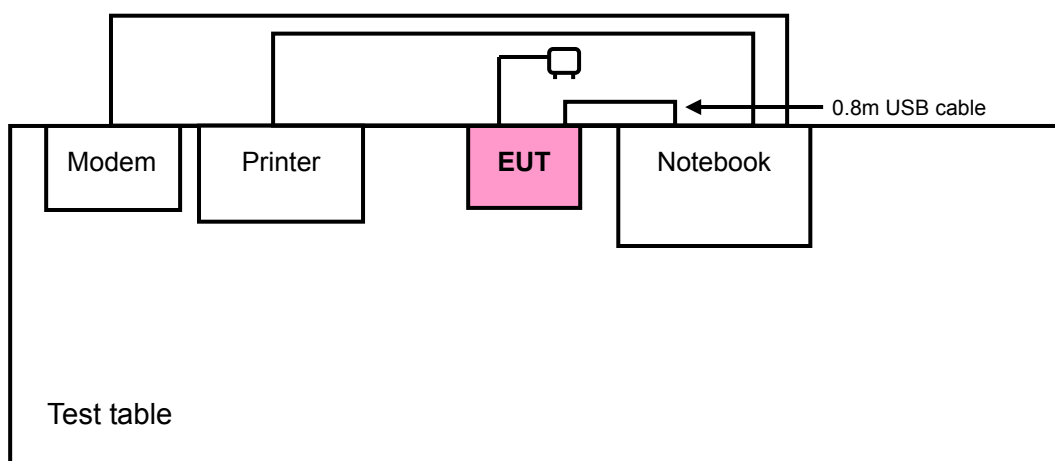

TEST MODE D:

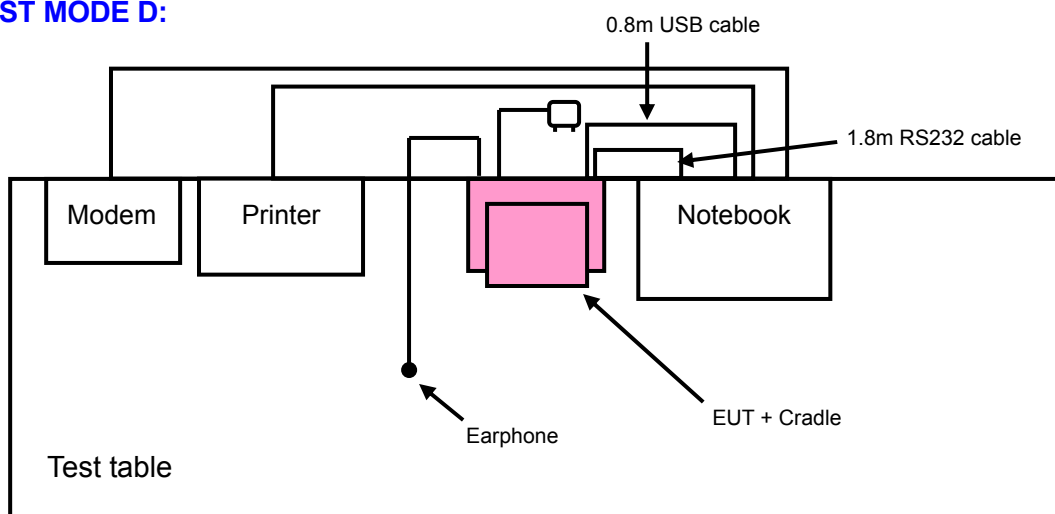

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

The tested channel of each test is chosen since it is the worst one in the original report.

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	PLC	RE<1G	RE≥1G	
C	√	√	√	The EUT with heavy battery connected with the gun, and was powered by the adapter mode: ADP-16GB A
D	√	√	-	The EUT with heavy battery connected with the earphone and reader, and was powered by the adapter model: HP-O2040D43 via cradle

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
C	802.11a	1 to 5	5	OFDM	BPSK	6
D	802.11a	1 to 5	5	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), and X, Y and Z Axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
C	802.11g	1 to 11	11	OFDM	BPSK	6	Y
C	802.11a	1 to 5	5	OFDM	BPSK	6	Y
D	802.11g	1 to 11	11	OFDM	BPSK	6	-
D	802.11a	1 to 5	5	OFDM	BPSK	6	-

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture) , and X, Y and Z Axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11g	1 to 11	11	OFDM	BPSK	6	Y
802.11a	1 to 5	1	OFDM	BPSK	6	Y

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m shielded cable without core
3	1.2 m shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (FOR 802.11b & g 2412 ~ 2462MHz BAND)

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 01, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 04, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 01, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Preamplifier Agilent	8449B	3008A01961	Oct. 15, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219268/4	Dec. 20, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	230129/4	Dec. 20, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

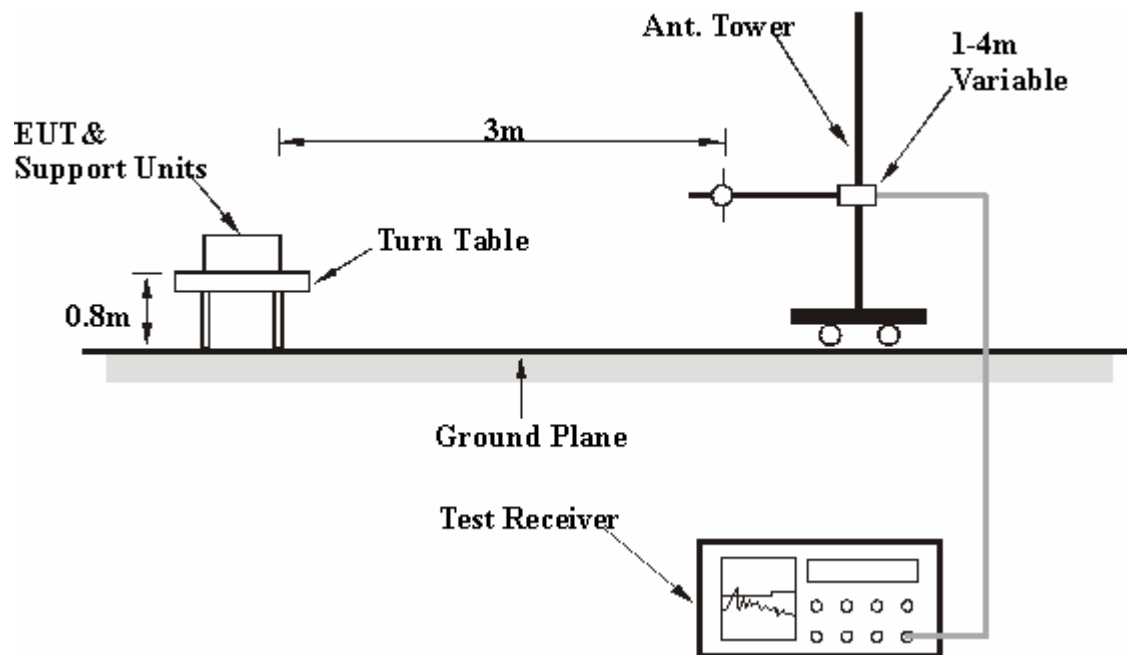

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to notebook system placed on a testing table.
- The EUT ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	C	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25degC, 65%RH, 991hPa
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.64	32.86 QP	43.50	-10.64	1.50 H	202	22.81	10.05
2	440.16	34.91 QP	46.00	-11.09	1.50 H	316	16.16	18.75
3	595.67	33.62 QP	46.00	-12.38	2.00 H	295	11.25	22.37
4	655.93	37.73 QP	46.00	-8.27	2.50 H	13	14.57	23.16
5	661.76	38.87 QP	46.00	-7.13	2.00 H	295	15.58	23.29
6	852.26	38.78 QP	46.00	-7.22	1.00 H	277	12.08	26.69
7	885.31	39.55 QP	46.00	-6.45	1.50 H	28	12.59	26.96
8	933.91	31.56 QP	46.00	-14.44	2.00 H	289	2.89	28.66
9	953.35	32.67 QP	46.00	-13.33	1.50 H	316	3.33	29.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	74.71	25.46 QP	40.00	-14.54	1.00 V	34	14.25	11.21
2	113.59	34.66 QP	43.50	-8.84	1.00 V	169	24.43	10.23
3	440.16	31.07 QP	46.00	-14.93	1.00 V	310	12.31	18.75
4	537.35	31.46 QP	46.00	-14.54	1.00 V	34	10.57	20.88
5	599.56	34.29 QP	46.00	-11.71	1.00 V	310	11.82	22.48
6	653.99	39.84 QP	46.00	-6.16	1.00 V	307	16.72	23.12
7	661.76	41.75 QP	46.00	-4.25	1.00 V	235	18.46	23.29
8	690.92	31.25 QP	46.00	-14.75	1.00 V	229	7.31	23.94
9	933.91	32.58 QP	46.00	-13.42	1.00 V	10	3.92	28.66
10	949.46	34.23 QP	46.00	-11.77	1.00 V	106	4.84	29.39

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	D	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25degC, 65%RH, 991hPa
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	113.59	29.61 QP	43.50	-13.89	2.00 H	55	19.38	10.23
2	440.16	33.74 QP	46.00	-12.26	2.00 H	142	14.99	18.75
3	541.24	32.74 QP	46.00	-13.26	1.50 H	85	11.77	20.97
4	653.99	39.43 QP	46.00	-6.57	2.00 H	145	16.32	23.12
5	663.71	40.19 QP	46.00	-5.81	1.00 H	142	16.86	23.33
6	690.92	32.17 QP	46.00	-13.83	1.50 H	49	8.23	23.94
7	731.74	33.53 QP	46.00	-12.47	1.00 H	34	8.35	25.18
8	809.50	31.40 QP	46.00	-14.60	1.00 H	28	5.27	26.13
9	933.91	31.90 QP	46.00	-14.10	1.00 H	28	3.24	28.66
10	941.68	32.89 QP	46.00	-13.11	1.50 H	223	3.86	29.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	88.32	29.93 QP	43.50	-13.57	1.00 V	331	20.55	9.39
2	115.53	36.29 QP	43.50	-7.21	1.00 V	295	25.89	10.40
3	162.18	29.46 QP	43.50	-14.04	1.00 V	250	16.19	13.27
4	523.75	31.91 QP	46.00	-14.09	1.00 V	274	11.32	20.59
5	547.07	36.61 QP	46.00	-9.39	1.00 V	46	15.51	21.10
6	584.01	31.20 QP	46.00	-14.80	1.00 V	331	9.14	22.06
7	599.56	34.34 QP	46.00	-11.66	1.00 V	121	11.87	22.48
8	661.76	40.12 QP	46.00	-5.88	1.00 V	28	16.83	23.29
9	690.92	31.41 QP	46.00	-14.59	1.00 V	250	7.47	23.94
10	943.63	37.39 QP	46.00	-8.61	1.00 V	28	8.27	29.12

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11g OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	25deg°C, 65%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.38 PK			1.13 H	187	72.76	31.62
1	*2462.00	95.14 AV			1.13 H	187	63.52	31.62
2	2483.50	59.42 PK	74.00	-14.58	1.13 H	187	27.72	31.70
2	2483.50	48.96 AV	54.00	-5.04	1.13 H	187	17.26	31.70
3	4924.00	49.00 PK	74.00	-25.00	1.23 H	200	11.56	37.44
3	4924.00	36.27 AV	54.00	-17.73	1.23 H	200	-1.17	37.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.18 PK			1.05 V	320	70.56	31.62
1	*2462.00	93.02 AV			1.05 V	320	61.40	31.62
2	2483.50	55.80 PK	74.00	-18.20	1.05 V	320	24.10	31.70
2	2483.50	46.47 AV	54.00	-7.53	1.05 V	320	14.77	31.70
3	4924.00	50.11 PK	74.00	-23.89	1.10 V	169	12.67	37.44
3	4924.00	37.74 AV	54.00	-16.26	1.10 V	169	0.30	37.44

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “* “: Fundamental frequency.

5. TEST TYPES AND RESULTS (FOR 802.11a 5745 ~ 5825MHz BAND)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 25, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

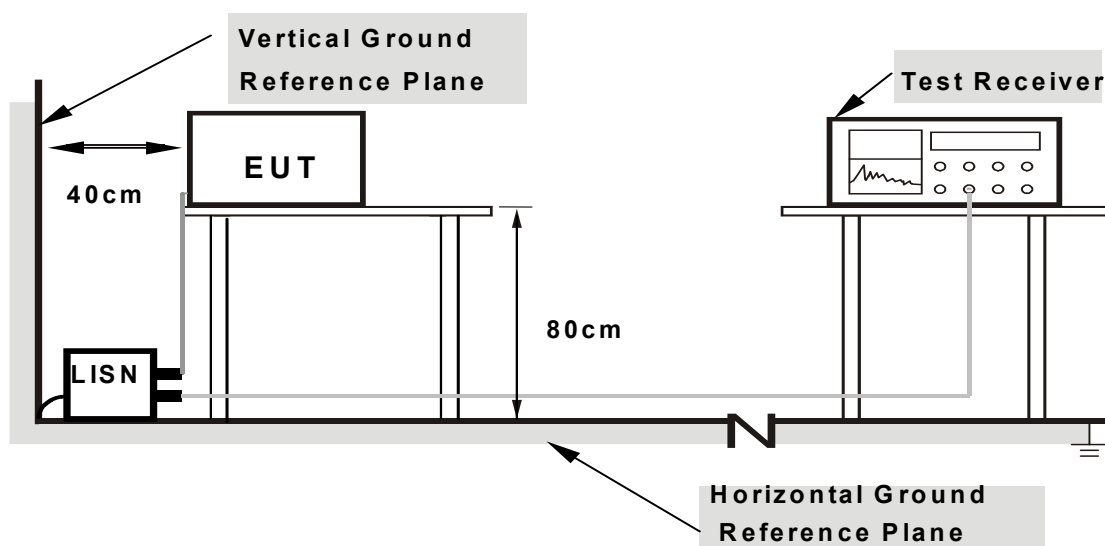

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9kHz
TEST MODE	C	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH, 991hPa
TESTED BY	Match Tsui		

NO	FREQ.	CORR.	READING VALUE		EMISSION LEVEL		LIMIT		MARGIN	
	[MHz]	FACTOR	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.194	0.10	45.24	-	45.34	-	63.88	53.88	-18.54	-
2	0.256	0.10	38.18	-	38.28	-	61.56	51.56	-23.28	-
3	0.452	0.10	28.81	-	28.91	-	56.85	46.85	-27.94	-
4	0.685	0.10	22.93	-	23.03	-	56.00	46.00	-32.97	-
5	2.438	0.24	26.24	-	26.48	-	56.00	46.00	-29.52	-
6	4.648	0.37	17.86	-	18.23	-	56.00	46.00	-37.77	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

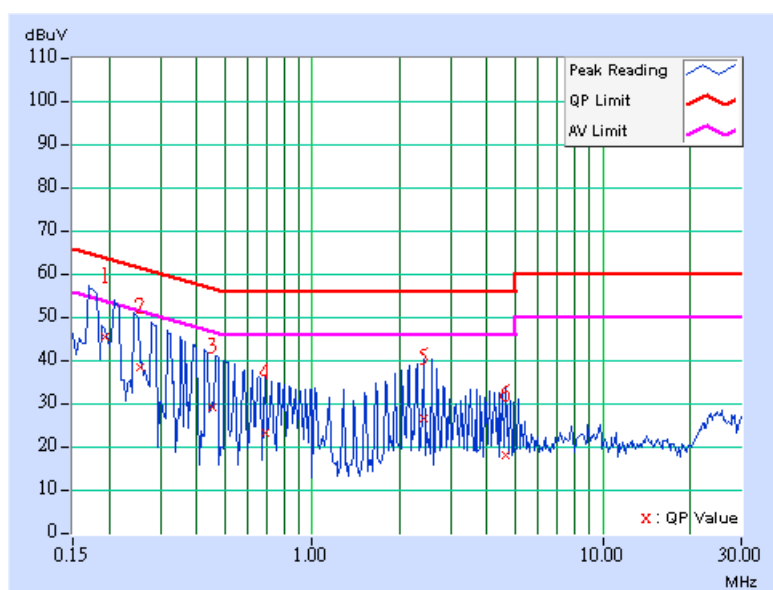

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9kHz
TEST MODE	C	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH, 991hPa
TESTED BY	Match Tsui		

NO	FREQ. [MHz]	CORR. FACTOR (dB)	READING VALUE [dB (uV)]		EMISSION LEVEL [dB (uV)]		LIMIT [dB (uV)]		MARGIN (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.10	46.01	-	46.11	-	63.72	53.72	-17.61	-
2	0.259	0.10	38.74	-	38.84	-	61.45	51.45	-22.61	-
3	0.389	0.10	29.87	-	29.97	-	58.08	48.08	-28.11	-
4	0.538	0.12	23.70	-	23.82	-	56.00	46.00	-32.18	-
5	2.063	0.21	22.34	-	22.55	-	56.00	46.00	-33.45	-
6	3.715	0.35	18.26	-	18.61	-	56.00	46.00	-37.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

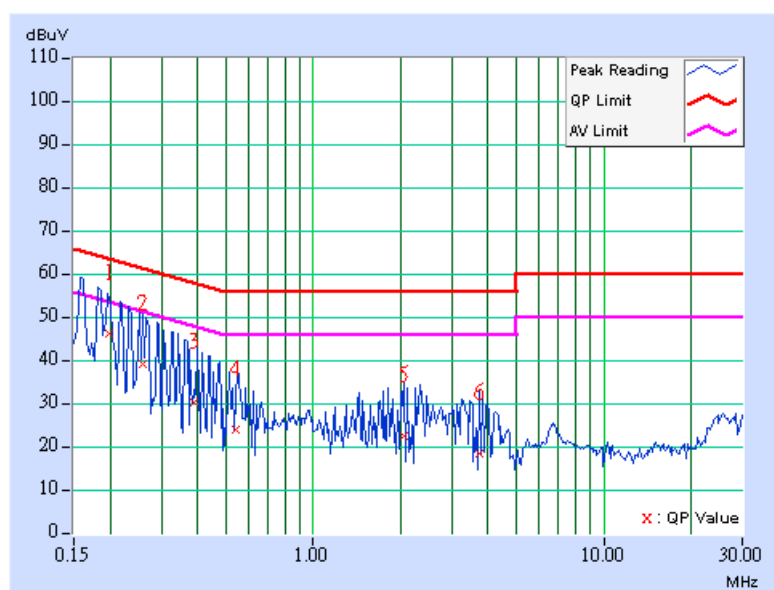

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9kHz
TEST MODE	D	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH, 991hPa
TESTED BY	Match Tsui		

NO	FREQ.	CORR.	READING VALUE		EMISSION LEVEL		LIMIT		MARGIN	
		FACTOR	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.10	49.47	-	49.57	-	63.26	53.26	-13.69	-
2	0.314	0.10	40.14	-	40.24	-	59.86	49.86	-19.62	-
3	0.416	0.10	34.52	-	34.62	-	57.54	47.54	-22.92	-
4	0.627	0.10	31.71	-	31.81	-	56.00	46.00	-24.19	-
5	4.391	0.37	39.78	-	40.15	-	56.00	46.00	-15.85	-
6	24.777	0.91	27.39	-	28.30	-	60.00	50.00	-31.70	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

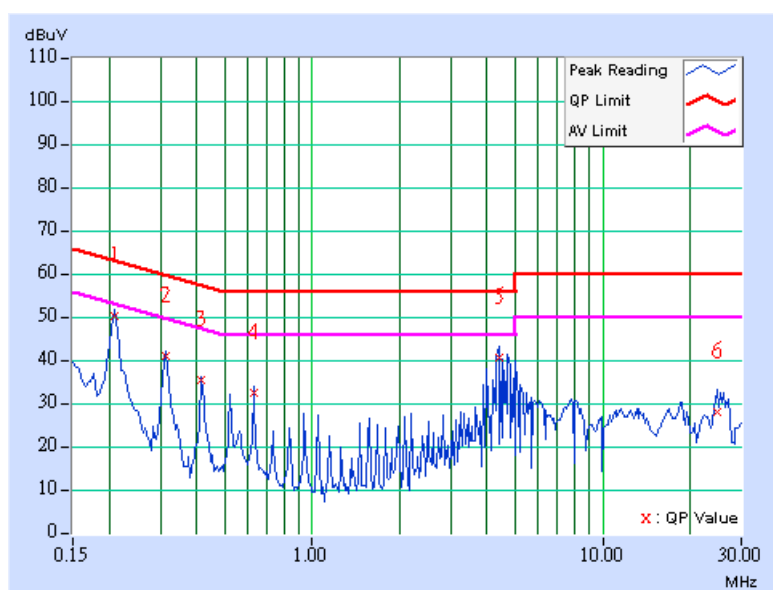

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9kHz
TEST MODE	D	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH, 991hPa
TESTED BY	Match Tsui		

NO	FREQ.	CORR.	READING VALUE		EMISSION LEVEL		LIMIT		MARGIN	
		FACTOR	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.10	49.29	-	49.39	-	63.26	53.26	-13.87	-
2	0.314	0.10	40.40	-	40.50	-	59.86	49.86	-19.36	-
3	0.420	0.10	35.63	-	35.73	-	57.46	47.46	-21.72	-
4	0.630	0.14	30.07	-	30.21	-	56.00	46.00	-25.79	-
5	4.391	0.38	39.35	-	39.73	-	56.00	46.00	-16.27	-
6	27.188	0.92	26.56	-	27.48	-	60.00	50.00	-32.52	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

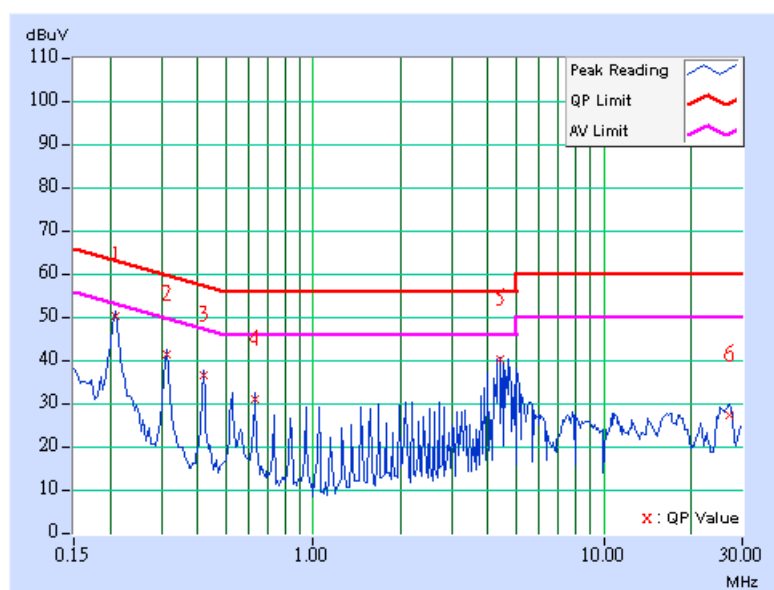

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 01, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 04, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 01, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Preamplifier Agilent	8449B	3008A01961	Oct. 15, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219268/4	Dec. 20, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	230129/4	Dec. 20, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	900619	Nov. 13, 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

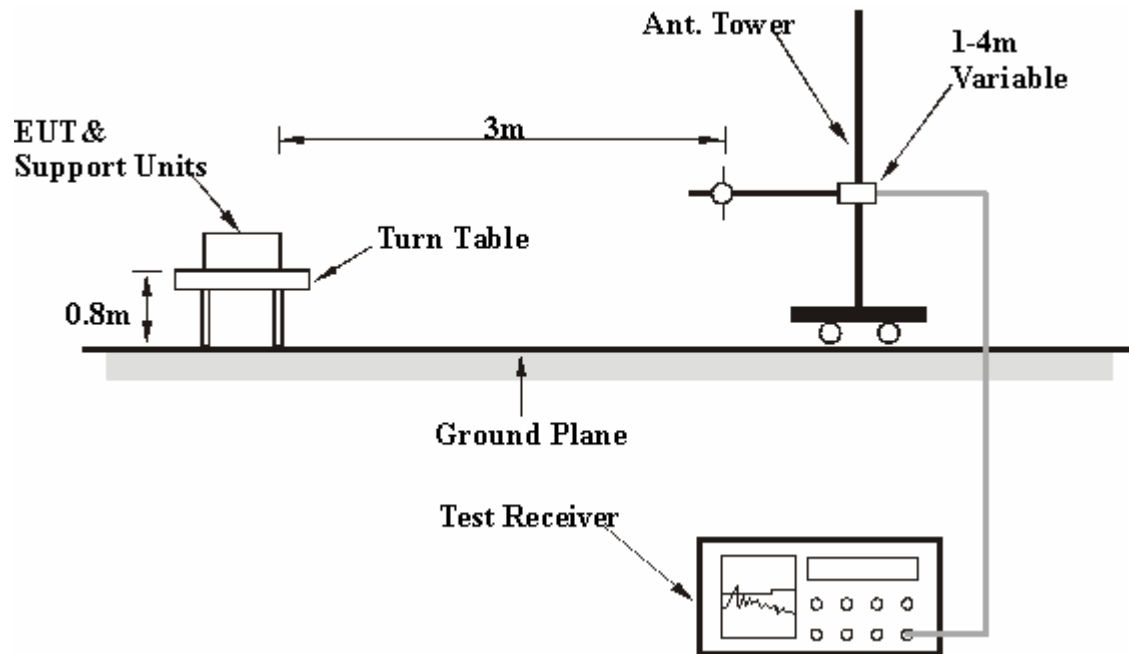

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	C	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25degC, 65%RH, 991hPa
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	113.59	31.96 QP	43.50	-11.54	2.00 H	52	21.74	10.23
2	440.16	36.11 QP	46.00	-9.89	1.00 H	61	17.35	18.75
3	597.62	31.90 QP	46.00	-14.10	1.50 H	121	9.47	22.42
4	652.04	39.84 QP	46.00	-6.16	1.50 H	322	16.77	23.07
5	657.88	39.09 QP	46.00	-6.91	2.00 H	190	15.89	23.20
6	933.91	31.07 QP	46.00	-14.93	2.00 H	88	2.41	28.66
7	947.52	32.21 QP	46.00	-13.79	1.50 H	88	2.90	29.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.82	25.27 QP	40.00	-14.73	1.00 V	259	13.56	11.71
2	115.53	33.91 QP	43.50	-9.59	1.00 V	298	23.51	10.40
3	541.24	31.13 QP	46.00	-14.87	1.00 V	298	10.16	20.97
4	603.45	33.82 QP	46.00	-12.18	1.00 V	295	11.29	22.52
5	653.99	40.07 QP	46.00	-5.93	1.00 V	298	16.95	23.12
6	665.65	41.72 QP	46.00	-4.28	1.00 V	259	18.34	23.38
7	696.75	31.84 QP	46.00	-14.16	2.00 V	349	7.77	24.07
8	933.91	33.82 QP	46.00	-12.18	1.00 V	16	5.15	28.66
9	947.52	33.37 QP	46.00	-12.63	1.00 V	259	4.07	29.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	D	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25degC, 65%RH, 991hPa
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	113.59	29.05 QP	43.50	-14.45	2.00 H	73	18.83	10.23
2	440.16	34.85 QP	46.00	-11.15	2.00 H	103	16.10	18.75
3	545.13	33.47 QP	46.00	-12.53	1.50 H	121	12.41	21.06
4	653.99	39.01 QP	46.00	-6.99	2.00 H	127	15.89	23.12
5	663.71	38.46 QP	46.00	-7.54	1.50 H	268	15.13	23.33
6	690.92	32.80 QP	46.00	-13.20	1.00 H	355	8.86	23.94
7	793.95	31.52 QP	46.00	-14.48	2.00 H	19	5.55	25.97
8	937.80	32.61 QP	46.00	-13.39	2.00 H	127	3.77	28.85
9	939.74	33.80 QP	46.00	-12.20	1.00 H	355	4.86	28.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	90.26	31.70 QP	43.50	-11.80	1.00 V	262	22.55	9.15
2	115.53	36.04 QP	43.50	-7.46	1.00 V	4	25.64	10.40
3	549.02	35.08 QP	46.00	-10.92	1.00 V	28	13.94	21.14
4	589.84	31.32 QP	46.00	-14.68	1.00 V	238	9.11	22.22
5	601.50	37.70 QP	46.00	-8.30	1.00 V	130	15.19	22.50
6	652.04	40.38 QP	46.00	-5.62	1.00 V	262	17.31	23.07
7	661.76	42.09 QP	46.00	-3.91	1.00 V	133	18.80	23.29
8	799.78	31.10 QP	46.00	-14.90	1.00 V	4	5.11	26.00
9	935.85	33.96 QP	46.00	-12.04	1.00 V	262	5.20	28.76
10	945.57	36.56 QP	46.00	-9.44	1.00 V	127	7.35	29.21

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	25deg°C, 65%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5725.00	68.20 PK	80.25	-12.05	1.12 H	147	29.28	38.92
1	5725.00	57.56 AV	71.36	-13.80	1.12 H	147	18.64	38.92
2	*5745.00	100.25 PK			1.12 H	147	61.27	38.98
2	*5745.00	91.36 AV			1.12 H	147	52.38	38.98
3	#11490.00	60.32 PK	74.00	-13.68	1.07 H	136	9.13	51.19
3	#11490.00	47.35 AV	54.00	-6.65	1.07 H	136	-3.84	51.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5725.00	70.36 PK	84.65	-14.29	1.10 V	178	31.44	38.92
1	5725.00	58.65 AV	75.17	-16.52	1.10 V	178	19.73	38.92
2	*5745.00	104.65 PK			1.10 V	178	65.67	38.98
2	*5745.00	95.17 AV			1.10 V	178	56.19	38.98
3	#11490.00	60.32 PK	74.00	-13.68	1.07 V	330	9.13	51.19
3	#11490.00	47.98 AV	54.00	-6.02	1.07 V	330	-3.21	51.19

- NOTE:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247.

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab: Web Site: www.adt.com.tw

Tel: 886-3-3183232

Fax: 886-3-3185050

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.