

**Engineering Test Report No. 2004506-01 Rev A**

|                      |                                                                                                                                                                                                                                                                                     |                                                  |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Report Date          | February 5, 2021                                                                                                                                                                                                                                                                    |                                                  |
| Manufacturer Name    | Chamberlain Group, Inc.                                                                                                                                                                                                                                                             |                                                  |
| Manufacturer Address | 300 Windsor Dr<br>Oak Brook, IL 60523                                                                                                                                                                                                                                               |                                                  |
| Model No.            | CAPXM                                                                                                                                                                                                                                                                               |                                                  |
| Date Received        | December 10, 2020                                                                                                                                                                                                                                                                   |                                                  |
| Test Dates           | December 11, 2020 to February 5, 2021                                                                                                                                                                                                                                               |                                                  |
| Specifications       | FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247<br>FCC "Code of Federal Regulations" Title 47, Part 15, Subpart 15B<br>Innovation, Science, and Economic Development Canada, RSS-247<br>Innovation, Science, and Economic Development Canada, RSS-GEN |                                                  |
| Test Facility        | Elite Electronic Engineering, Inc.<br>1516 Centre Circle,<br>Downers Grove, IL 60515                                                                                                                                                                                                | FCC Reg. Number: 269750<br>IC Reg. Number: 2987A |
| Signature            |                                                                                                                                                                                                    |                                                  |
| Tested by            | Javier Cardenas                                                                                                                                                                                                                                                                     |                                                  |
| Signature            |                                                                                                                                                                                                    |                                                  |
| Approved by          | Raymond J. Klouda,<br>Registered Professional Engineer of Illinois – 44894                                                                                                                                                                                                          |                                                  |
| PO Number            | 4900072392                                                                                                                                                                                                                                                                          |                                                  |

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 and RSS-GEN test specifications. The data presented in this test report pertains to the EUT on the test date(s) specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

## Table of Contents

|      |                                                                       |    |
|------|-----------------------------------------------------------------------|----|
| 1.   | Report Revision History .....                                         | 3  |
| 2.   | Introduction .....                                                    | 4  |
| 2.1. | Scope of Tests .....                                                  | 4  |
| 2.2. | Purpose .....                                                         | 4  |
| 2.3. | Identification of the EUT .....                                       | 4  |
| 3.   | Power Input .....                                                     | 4  |
| 4.   | Grounding .....                                                       | 4  |
| 5.   | Support Equipment .....                                               | 4  |
| 6.   | Interconnect Leads .....                                              | 5  |
| 7.   | Modifications Made to the EUT .....                                   | 5  |
| 8.   | Modes of Operation .....                                              | 5  |
| 9.   | Test Specifications .....                                             | 5  |
| 10.  | Test Plan .....                                                       | 5  |
| 11.  | Deviation, Additions to, or Exclusions from Test Specifications ..... | 6  |
| 12.  | Laboratory Conditions .....                                           | 6  |
| 13.  | Summary .....                                                         | 6  |
| 14.  | Sample Calculations .....                                             | 6  |
| 15.  | Statement of Conformity .....                                         | 7  |
| 16.  | Certification .....                                                   | 7  |
| 17.  | Photographs of EUT .....                                              | 8  |
| 18.  | Equipment List .....                                                  | 9  |
| 19.  | Block Diagram of Test Setup .....                                     | 10 |
| 20.  | Receiver Radiated Emissions Test .....                                | 11 |
| 21.  | Transmitter Conducted Emissions Test (AC Mains) .....                 | 21 |
| 22.  | 20dB Bandwidth .....                                                  | 28 |
| 23.  | Occupied Bandwidth (99%) .....                                        | 32 |
| 24.  | Carrier Frequency Separation .....                                    | 36 |
| 25.  | Number of Carrier Channels .....                                      | 38 |
| 26.  | Average Time of Occupancy .....                                       | 40 |
| 27.  | Maximum Peak Conducted Output Power .....                             | 44 |
| 28.  | Effective Isotropic Radiated Power (EIRP) .....                       | 48 |
| 29.  | Duty Cycle Factor Measurements .....                                  | 53 |
| 30.  | Case Spurious Radiated Emissions .....                                | 55 |
| 31.  | Band-Edge Compliance .....                                            | 69 |
| 32.  | Scope of Accreditation .....                                          | 75 |

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

| Revision | Date                              | Description                                                                                                                                                                                                              |
|----------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| –        | 09 FEB 2021                       | Initial Release of Engineering Test Report No. 2004506-01                                                                                                                                                                |
| A        | 18 FEB 2021<br>By Javier Cardenas | <ul style="list-style-type: none"><li>• Throughout the report: “Rev A” was added to the report number in the header.</li><li>• Section 5: The model number of the power supply was updated to “QX72W240300D3.”</li></ul> |

## 2. Introduction

### 2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Chamberlain Group, Inc. Access Control Device (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Chamberlain Group, Inc. located in Oak Brook, IL.

### 2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart 15B, Section 15.107 and 15.109 for Receivers and Part 15, Subpart C, Sections 15.247 for a Frequency Hopping Spread Spectrum intentional radiator operating within the 902-928MHz band.

The test series was also performed to determine if the EUT meets the RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for a Frequency Hopping Spread Spectrum intentional radiator operating within the 902-928MHz band.

Testing was performed in accordance with ANSI C63.10-2013.

### 2.3. Identification of the EUT

The EUT was identified as follows:

| EUT Identification           |                                         |
|------------------------------|-----------------------------------------|
| Product Description          | Access Control Device                   |
| Model/Part No.               | CAPXM                                   |
| S/N                          | SMP-76795 & SMP-76780                   |
| Device Type                  | Frequency Hopping Transmission Device   |
| Band of Operation            | 902-928MHz                              |
| Software/Firmware Version    | Version 1.0                             |
| Conducted Output Power       | 11.64dBm                                |
| 20dB Bandwidth               | 207.8kHz                                |
| Occupied Bandwidth (99% CBW) | 192.8kHz                                |
| Size of EUT                  | 43cm Height x 15cm Width x 10.5cm Depth |

The EUT listed above was used throughout the test series.

## 3. Power Input

The EUT obtained 24VDC power via an AC/DC switching power supply. The power supply was connected to the AC mains on the input side.

## 4. Grounding

The EUT was not connected to ground.

## 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

| Description        | Model #       | S/N |
|--------------------|---------------|-----|
| Hitho Power Supply | QX72W240300D3 | NA  |

## 6. Interconnect Leads

The following interconnect cables were submitted with the test item:

| Item     | Description                         |
|----------|-------------------------------------|
| Ethernet | Connects EUT to online directories. |

## 7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

## 8. Modes of Operation

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes:

| Mode            | Description                                                            |
|-----------------|------------------------------------------------------------------------|
| Tx              | 902.24MHz, Power 11.64dBm                                              |
|                 | 914.74MHz, Power 11.16dBm                                              |
|                 | 926.74MHz, Power 11.62dBm                                              |
| Hopping Enabled | Hopping on 50 Channels                                                 |
| Standby         | 310MHz, 315MHz, 390MHz, 433.3MHz, 433.92MHz, 434.54MHz and 900MHz band |

## 9. Test Specifications

The tests were performed to selected portions of, and in accordance with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 test specification(s).

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart B
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019 KDB 558074 D01v05r02
- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices"
- RSS-Gen Issue 5, March 2019, Amendment 1, Innovation, Science, and Economic Development Canada, "Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

## 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Chamberlain Group, Inc. and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247, and ANSI C63.4-2014 specification(s).

## 11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

## 12. Laboratory Conditions

| Ambient Parameters   | Value     |
|----------------------|-----------|
| Temperature          | 23°C      |
| Relative Humidity    | 17%       |
| Atmospheric Pressure | 1013.9mb. |

## 13. Summary

The following EMC tests were performed, and the results are shown below:

| Test Description                                | Requirements                   | Test Methods         | S/N       | Results  |
|-------------------------------------------------|--------------------------------|----------------------|-----------|----------|
| Receiver Radiated Emissions Test                | FCC 15B 15.107<br>ISED RSS-GEN | ANSI C63.4:<br>2014  | SMP-76780 | Conforms |
| Transmitter Conducted Emissions Test (AC Mains) | FCC 15B 15.207<br>ISED RSS-GEN | ANSI C63.10:<br>2013 | SMP-76780 | Conforms |
| 20dB Bandwidth                                  | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Occupied Bandwidth (99%)                        | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Carrier Frequency Separation                    | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Number of Carrier Channels                      | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Average Time of Occupancy                       | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Maximum Peak Conducted Output Power             | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Effective Isotropic Radiated Power (EIRP)       | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Duty Cycle Factor Measurements                  | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | —        |
| Case Spurious Radiated Emissions                | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |
| Band-Edge Compliance                            | FCC 15C 15.247<br>ISED RSS-247 | ANSI C63.10:<br>2013 | SMP-76795 | Conforms |

## 14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dBuV)} = MTR \text{ (dBuV)} + CF \text{ (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

Formula 1:  $FS \text{ (dBuV/m)} = MTR \text{ (dBuV)} + AF \text{ (dB/m)} + CF \text{ (dB)} + (- PA \text{ (dB)}) + DC \text{ (dB)}$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

Formula 2:  $FS \text{ (uV/m)} = \text{AntiLog} [(FS \text{ (dBuV/m)})/20]$


## 15. Statement of Conformity

The Chamberlain Group, Inc. Access Control Device, Model No. CAPXM, Serial No. SMP-76795, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247.

## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 17. Photographs of EUT

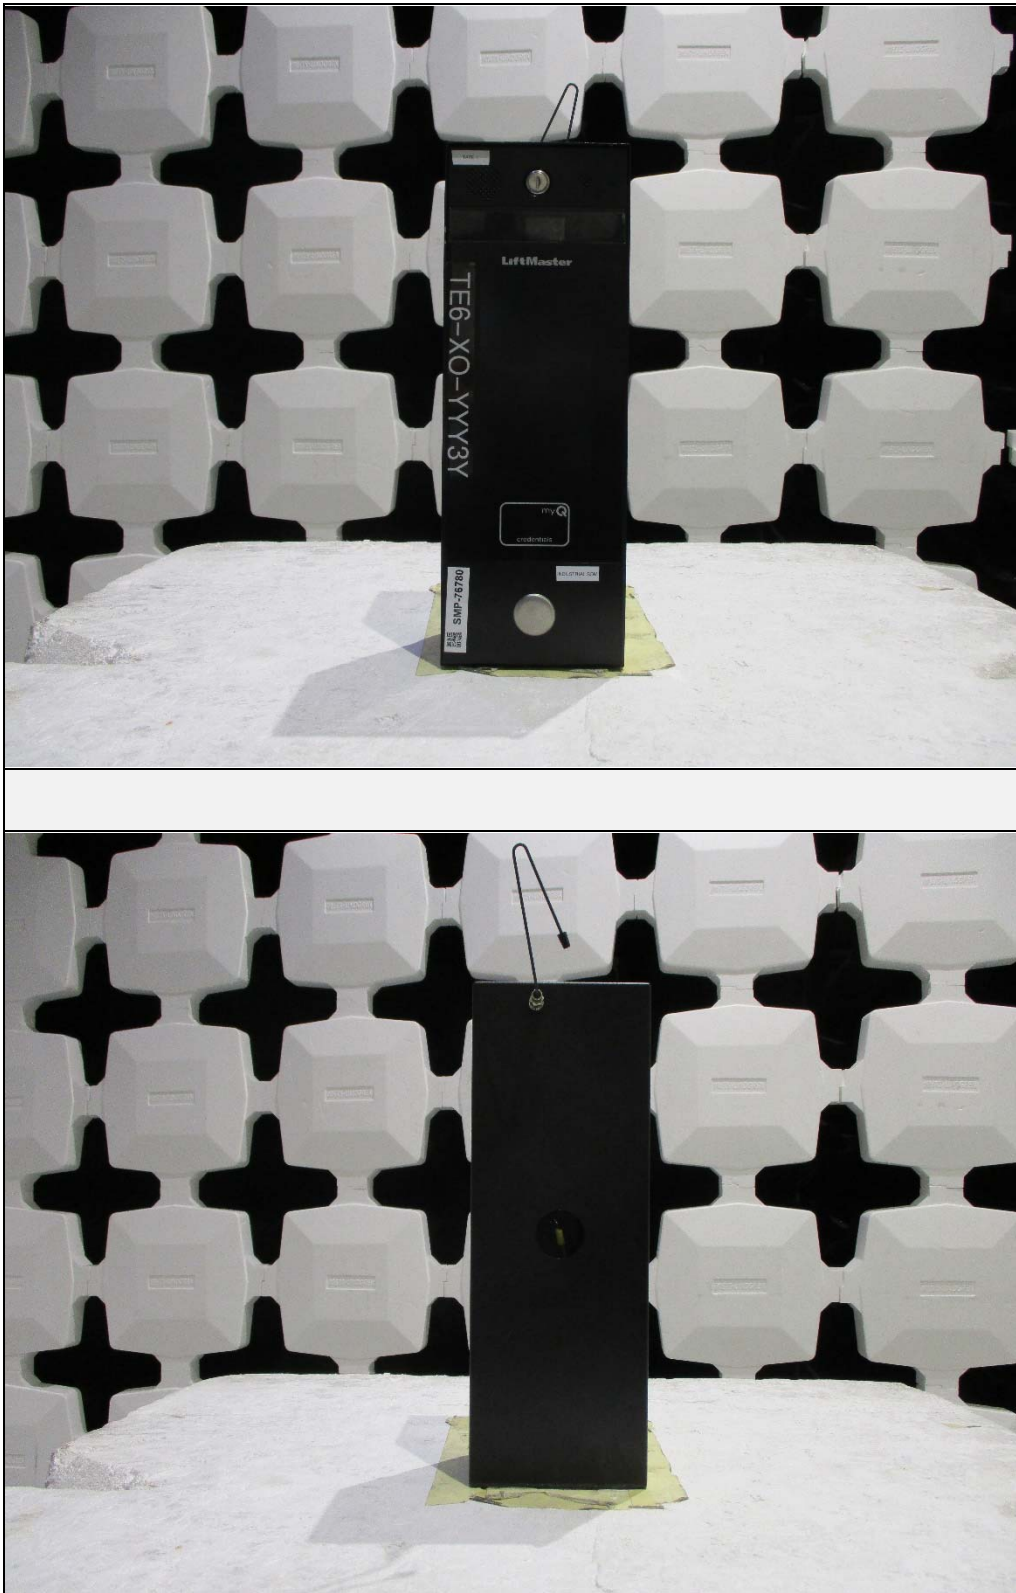

## 18. Equipment List

| Eq ID | Equipment Description           | Manufacturer       | Model No.              | Serial No. | Frequency Range | Cal Date   | Due Date   |
|-------|---------------------------------|--------------------|------------------------|------------|-----------------|------------|------------|
| APW3  | PREAMPLIFIER                    | PLANAR ELECTRONICS | PE2-35-120-5R0-10-12   | PL2924     | 1GHZ-20GHZ      | 3/23/2020  | 3/23/2021  |
| CDZ2  | LAB WORKSTATION                 | ELITE              | LWS-10                 |            | WINDOWS 10      | CNR        |            |
| GRE1  | SIGNAL GENERATOR                | AGILENT            | E4438C                 | MY42081749 | 250KHZ-6GHZ     | 2/25/2020  | 2/25/2021  |
| NTA4  | BILOG ANTENNA                   | TESEQ              | 6112D                  | 46660      | 20-2000GHZ      | 10/5/2020  | 10/5/2021  |
| NWQ0  | DOUBLE RIDGED WAVEGUIDE ANTENNA | ETS LINDGREN       | 3117                   | 66657      | 1GHZ-18GHZ      | 5/13/2020  | 5/13/2022  |
| PLF6  | CISPR16 50UH LISN               | ELITE              | CISPR16/15A            | 007        | .15-30MHz       | 4/21/2020  | 4/21/2021  |
| PLF7  | CISPR16 50UH LISN               | ELITE              | CISPR16/15A            | 008        | .15-30MHz       | 4/21/2020  | 4/21/2021  |
| RBD0  | EMI TEST RECIEVER               | ROHDE & SCHWARZ    | ESU40                  | 100010     | 20Hz-40GHz      | 8/27/2020  | 8/27/2021  |
| RBG2  | EMI ANALYZER                    | ROHDE & SCHWARZ    | ESW44                  | 101591     | 2HZ-44GHZ       | 3/23/2020  | 3/23/2021  |
| RBG3  | EMI ANALYZER                    | ROHDE & SCHWARZ    | ESW44                  | 101592     | 2HZ-44GHZ       | 4/24/2020  | 4/24/2021  |
| T1D2  | 10DB 20W ATTENUATOR             | NARDA              | 768-10                 | ---        | DC-11GHZ        | 1/10/2020  | 1/10/2022  |
| T2DN  | 20DB, 25W ATTENUATOR            | WEINSCHL           | 46-20-34               | BS2147     | DC-18GHZ        | 1/10/2020  | 1/10/2022  |
| T2S7  | 20DB 25W ATTENUATOR             | WEINSCHL           | 46-20-34               | BU8139     | DC-18GHZ        | 3/10/2020  | 3/10/2022  |
| T2SG  | 20DB 25W ATTENUATOR             | WEINSCHL           | 46-20-34               | CD5016     | DC-18GHZ        | 1/9/2020   | 1/9/2022   |
| VBR8  | CISPR EN FCC CE VOLTAGE.exe     |                    |                        |            |                 | N/A        |            |
| XLT32 | 5W, 50 OHM TERMINATION          | JFW INDUSTRIES     | 50T-199 N M            | ---        | DC-18 GHZ       | 10/30/2019 | 10/30/2021 |
| XPQ4  | HIGH PASS FILTER                | K&L MICROWAVE      | 11SH10-4800/X20000-O/O | 1          | 4.8-20GHZ       | 9/6/2019   | 9/6/2021   |


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## 19. Block Diagram of Test Setup

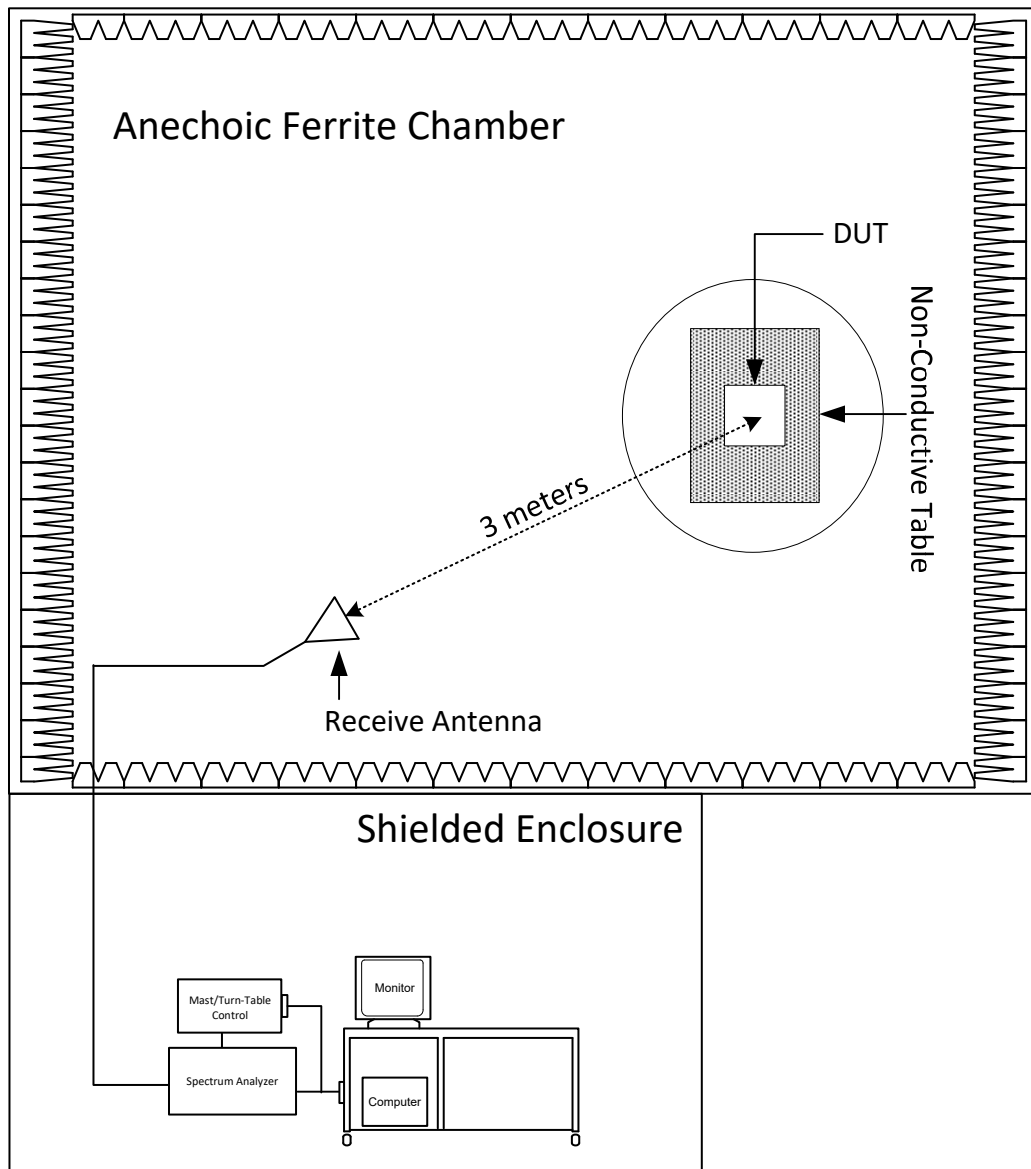

Radiated Measurements Test Setup

## 20. Receiver Radiated Emissions Test

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Standby                 |


| Test Setup Details                     |                                                                                                                                                               |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Setup Format                           | Tabletop                                                                                                                                                      |
| Height of Support                      | NA                                                                                                                                                            |
| Type of Test Site                      | Semi-Anechoic Chamber                                                                                                                                         |
| Type of Antennas Used                  | Below 1GHz: Bilog (or equivalent)<br>Above 1GHz: Double-ridged waveguide (or equivalent)                                                                      |
| Highest Internal Frequency of the EUT: | 2.4GHz                                                                                                                                                        |
| Highest Measurement Frequency:         | 12.5GHz                                                                                                                                                       |
| Notes                                  | The cables were manually maximized during the preliminary emissions sweeps.<br>The cable arrangement which resulted in the worst-case emissions was utilized. |

| Requirements                                                                                                                           |                                    |
|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: |                                    |
| Frequency of Emission (MHz)                                                                                                            | Field Strength ( $\mu\text{V/m}$ ) |
| 30-88                                                                                                                                  | 100                                |
| 88-216                                                                                                                                 | 150                                |
| 216-960                                                                                                                                | 200                                |
| Above 960                                                                                                                              | 500                                |


| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Since a quasi-peak detector and an average detector requires a long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.</p> <p>The EUT was placed on a non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 12.5GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.</p> <p>Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:</p> <ol style="list-style-type: none"> <li>1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog</li> </ol> |

| Procedures                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 2)                                                                                                                    | To ensure that maximum or worst case, emission levels were measured, the following steps were taken: <ul style="list-style-type: none"> <li>a) The EUT was rotated so that all sides were exposed to the receiving antenna.</li> <li>b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.</li> <li>c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.</li> <li>d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.</li> </ul> |


| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

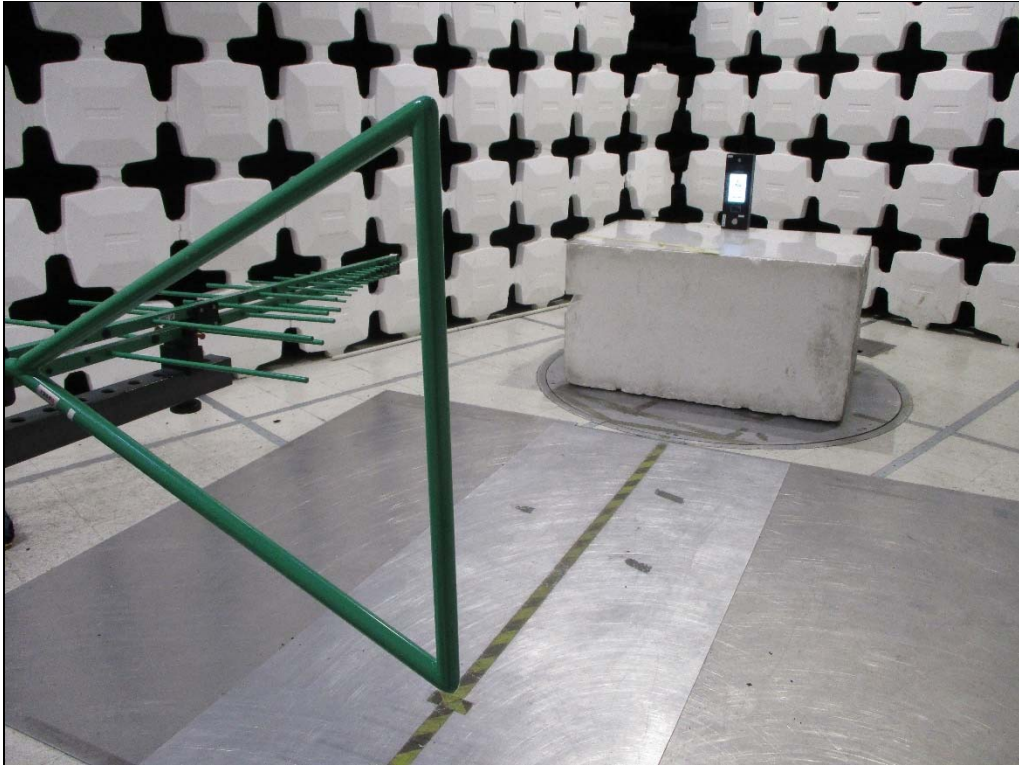


Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization

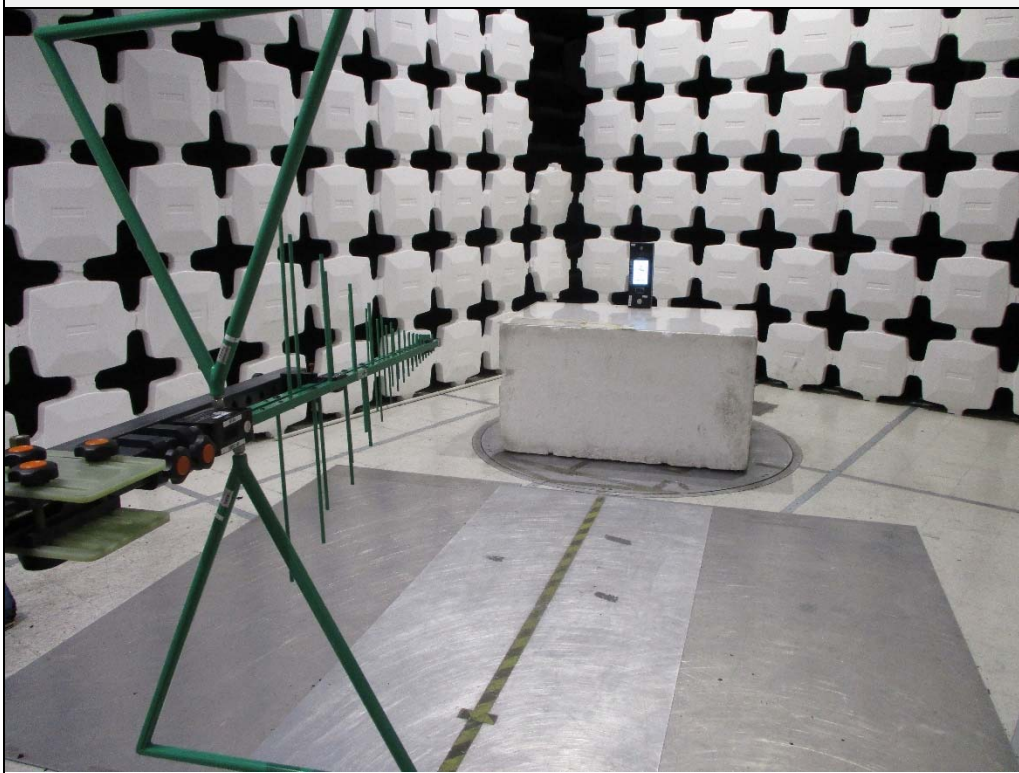

Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

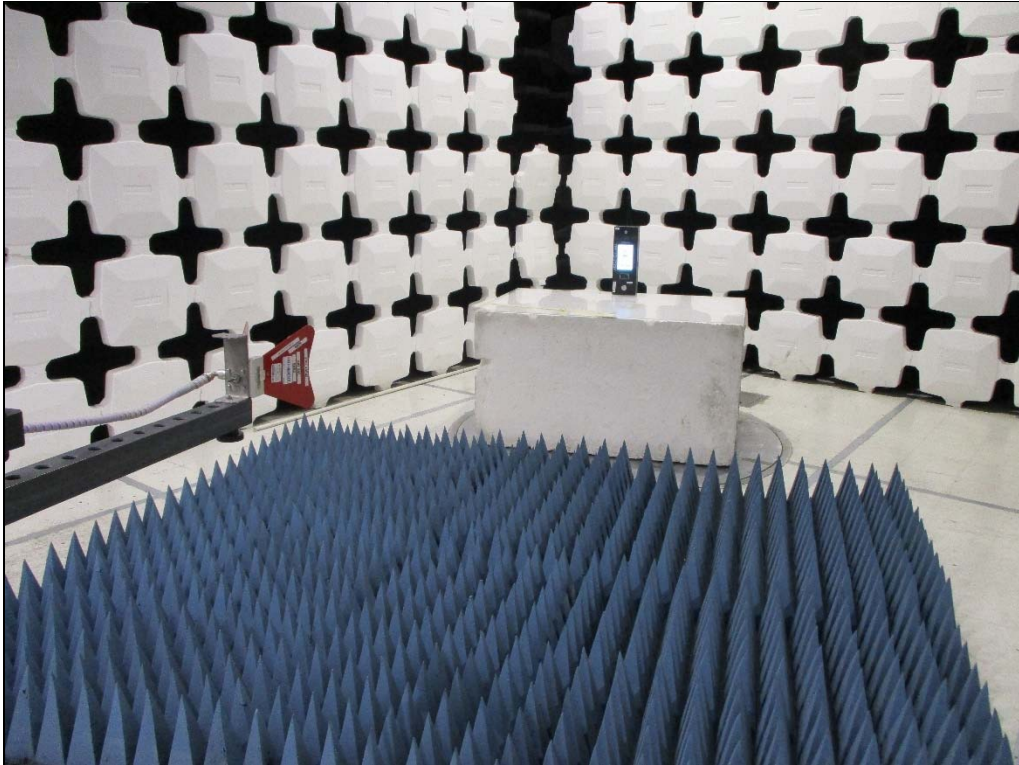

Test Setup for Radiated Emissions: 1GHz to 12.5GHz, Horizontal Polarization

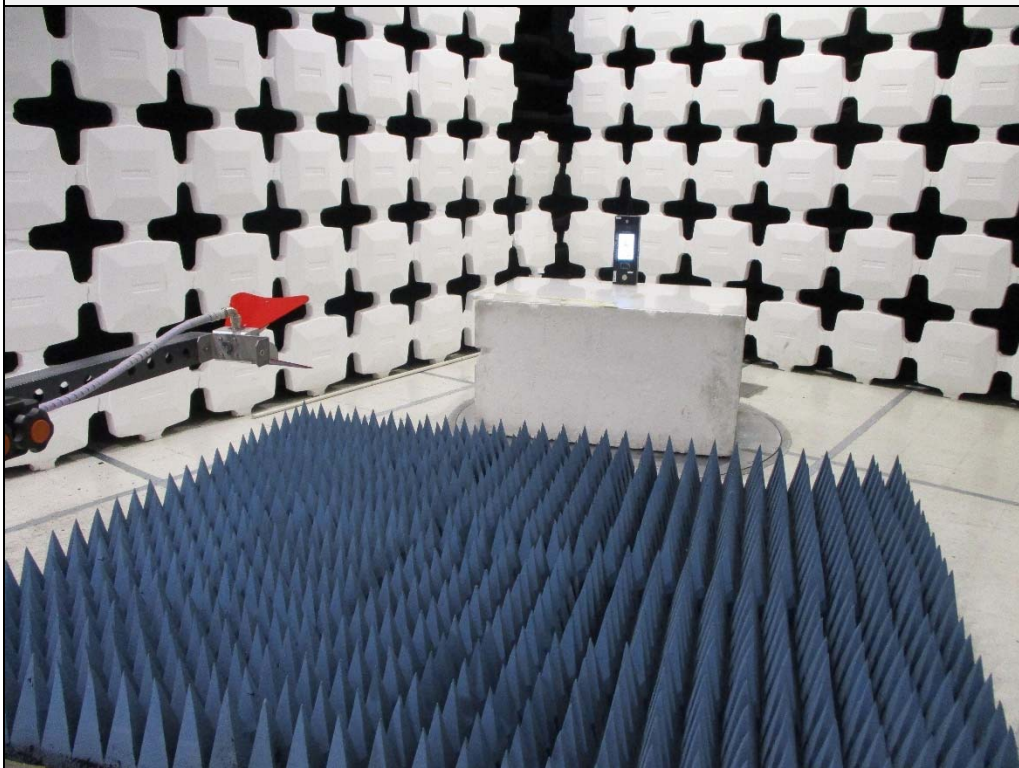

Test Setup for Radiated Emissions: 1GHz to 12.5GHz, Vertical Polarization



## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019


Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Scan Type : Stepped Scan  
Test RBW : 120 kHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 08:54:09 AM

| Freq<br>MHz | Peak<br>Mtr Rdg<br>dBuV | QP<br>Mtr Rdg<br>dBuV | Ant<br>Fac<br>dB | Amp<br>Fac<br>dB | Cbl<br>Fac<br>dB | Dist<br>Corr<br>dB | Peak<br>Total<br>dBuV/m | QP<br>Total<br>dBuV/m | QP<br>Limit<br>dBuV/m | QP<br>Lim Mrg<br>dB | Ant<br>Pol | Mast<br>Ht<br>cm | Azim<br>° |
|-------------|-------------------------|-----------------------|------------------|------------------|------------------|--------------------|-------------------------|-----------------------|-----------------------|---------------------|------------|------------------|-----------|
| 30.240      | 11.8                    | 6.2                   | 24.8             | 0.0              | 0.4              | 0.0                | 37.0                    | 31.4                  | 40.0                  | -8.6                | H          | 120              | 315       |
| 33.660      | 13.9                    | 6.0                   | 22.8             | 0.0              | 0.4              | 0.0                | 37.1                    | 29.1                  | 40.0                  | -10.9               | H          | 120              | 225       |
| 37.200      | 14.5                    | 5.3                   | 20.8             | 0.0              | 0.4              | 0.0                | 35.7                    | 26.5                  | 40.0                  | -13.5               | H          | 120              | 135       |
| 61.440      | 17.5                    | 1.9                   | 12.4             | 0.0              | 0.4              | 0.0                | 30.3                    | 14.7                  | 40.0                  | -25.3               | V          | 200              | 0         |
| 87.960      | 12.9                    | -2.3                  | 14.6             | 0.0              | 0.4              | 0.0                | 27.8                    | 12.7                  | 40.0                  | -27.3               | H          | 340              | 225       |
| 90.700      | 20.5                    | 12.3                  | 15.2             | 0.0              | 0.4              | 0.0                | 36.1                    | 27.8                  | 43.5                  | -15.7               | V          | 200              | 0         |
| 145.420     | 11.2                    | -4.5                  | 16.9             | 0.0              | 0.6              | 0.0                | 28.7                    | 13.0                  | 43.5                  | -30.5               | V          | 340              | 135       |
| 151.180     | 21.9                    | 11.4                  | 17.1             | 0.0              | 0.6              | 0.0                | 39.5                    | 29.1                  | 43.5                  | -14.4               | V          | 340              | 135       |
| 155.920     | 14.0                    | 8.0                   | 17.2             | 0.0              | 0.6              | 0.0                | 31.8                    | 25.8                  | 43.5                  | -17.7               | H          | 340              | 180       |
| 200.020     | 15.9                    | 11.9                  | 15.4             | 0.0              | 0.8              | 0.0                | 32.1                    | 28.1                  | 43.5                  | -15.4               | V          | 200              | 225       |
| 211.660     | 21.2                    | 1.0                   | 15.1             | 0.0              | 0.8              | 0.0                | 37.1                    | 16.9                  | 43.5                  | -26.7               | H          | 120              | 90        |
| 272.100     | 13.8                    | 2.6                   | 18.4             | 0.0              | 0.8              | 0.0                | 32.9                    | 21.7                  | 46.0                  | -24.3               | H          | 120              | 90        |
| 450.000     | 15.4                    | 0.9                   | 22.7             | 0.0              | 1.1              | 0.0                | 39.2                    | 24.8                  | 46.0                  | -21.2               | V          | 120              | 90        |
| 453.480     | 15.9                    | 9.4                   | 22.9             | 0.0              | 1.1              | 0.0                | 39.9                    | 33.5                  | 46.0                  | -12.5               | V          | 120              | 0         |
| 513.960     | 16.7                    | 11.3                  | 24.2             | 0.0              | 1.1              | 0.0                | 42.0                    | 36.7                  | 46.0                  | -9.3                | H          | 340              | 45        |
| 574.440     | 11.9                    | 1.6                   | 24.8             | 0.0              | 1.1              | 0.0                | 37.8                    | 27.6                  | 46.0                  | -18.4               | V          | 120              | 0         |
| 634.920     | 9.7                     | -2.9                  | 25.0             | 0.0              | 1.2              | 0.0                | 35.9                    | 23.3                  | 46.0                  | -22.7               | V          | 200              | 0         |
| 649.980     | 10.8                    | -1.2                  | 24.8             | 0.0              | 1.2              | 0.0                | 36.9                    | 24.9                  | 46.0                  | -21.1               | V          | 120              | 0         |

# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019


Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Ant. Polarization(s) : V  
Scan Type : Stepped Scan  
Test RBW : 120 kHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 08:54:09 AM

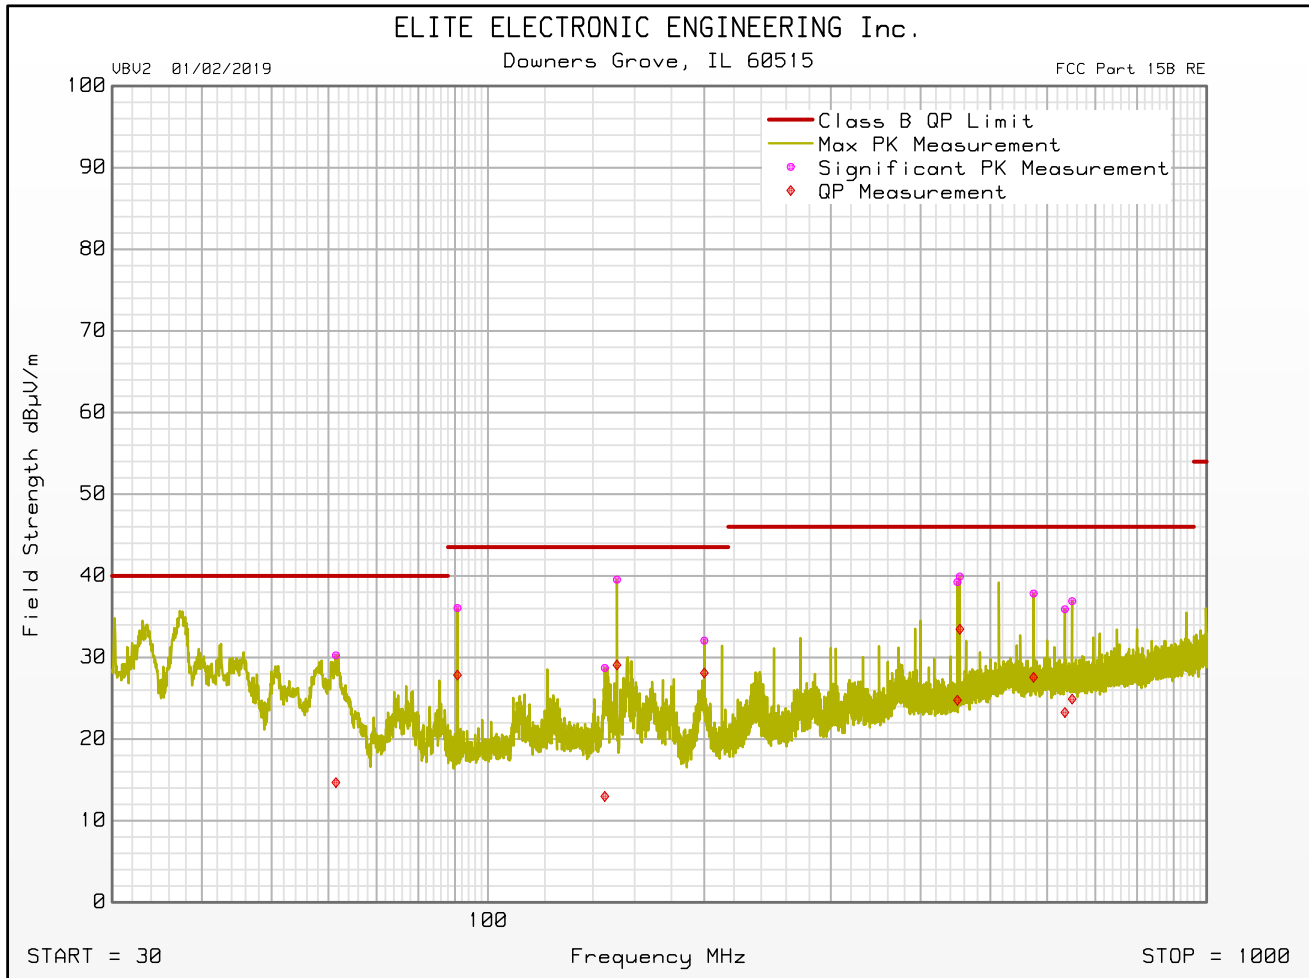

# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019

Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Ant. Polarization(s) : H  
Scan Type : Stepped Scan  
Test RBW : 120 kHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 08:54:09 AM

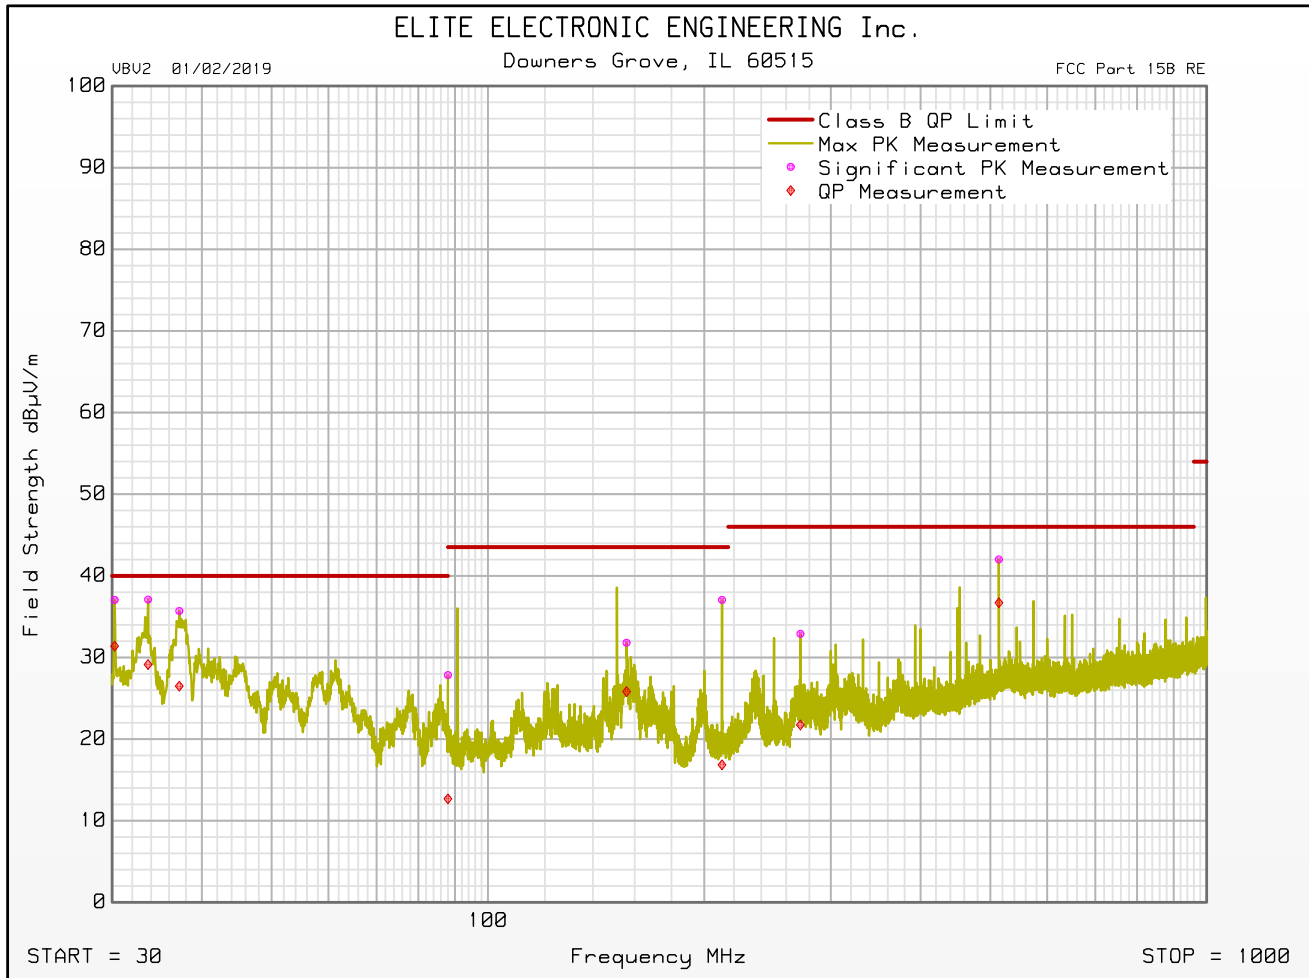



## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019


Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 09:44:07 AM

| Freq<br>MHz | Peak<br>Mtr<br>Rdg<br>dBuV | Average<br>Mtr Rdg<br>dBuV | Ant<br>Fac<br>dB | Amp<br>Fac<br>dB | Cbl<br>Fac<br>dB | Dist<br>Corr<br>dB | Peak<br>Total<br>dBuV/m | Peak<br>Limit<br>dBuV/m | Peak<br>Lim<br>Mrg<br>dB | Average<br>Total<br>dBuV/m | Average<br>Limit<br>dBuV/m | Average<br>Lim Mrg<br>dB | Ant<br>Pol | Mast<br>Ht<br>cm | Azim<br>° |
|-------------|----------------------------|----------------------------|------------------|------------------|------------------|--------------------|-------------------------|-------------------------|--------------------------|----------------------------|----------------------------|--------------------------|------------|------------------|-----------|
| 1058.500    | 54.0                       | 45.3                       | 29.1             | -41.0            | 1.6              | 0.0                | 43.7                    | 74.0                    | -30.2                    | 35.0                       | 54.0                       | -19.0                    | V          | 200              | 0         |
| 1851.500    | 61.2                       | 35.5                       | 31.5             | -41.0            | 2.2              | 0.0                | 53.9                    | 74.0                    | -20.1                    | 28.1                       | 54.0                       | -25.8                    | H          | 340              | 90        |
| 2442.000    | 52.1                       | 35.8                       | 33.6             | -40.5            | 2.6              | 0.0                | 47.7                    | 74.0                    | -26.2                    | 31.5                       | 54.0                       | -22.5                    | V          | 200              | 0         |
| 5179.000    | 47.6                       | 34.5                       | 37.6             | -40.2            | 3.9              | 0.0                | 48.9                    | 74.0                    | -25.1                    | 35.8                       | 54.0                       | -18.2                    | H          | 340              | 180       |
| 5798.500    | 50.0                       | 34.2                       | 37.8             | -40.4            | 4.1              | 0.0                | 51.5                    | 74.0                    | -22.5                    | 35.7                       | 54.0                       | -18.2                    | V          | 200              | 90        |
| 12158.500   | 48.1                       | 34.3                       | 41.8             | -39.7            | 6.1              | 0.0                | 56.3                    | 74.0                    | -17.7                    | 42.5                       | 54.0                       | -11.5                    | H          | 340              | 90        |

# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019

Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Ant. Polarization(s) : V  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 09:44:07 AM

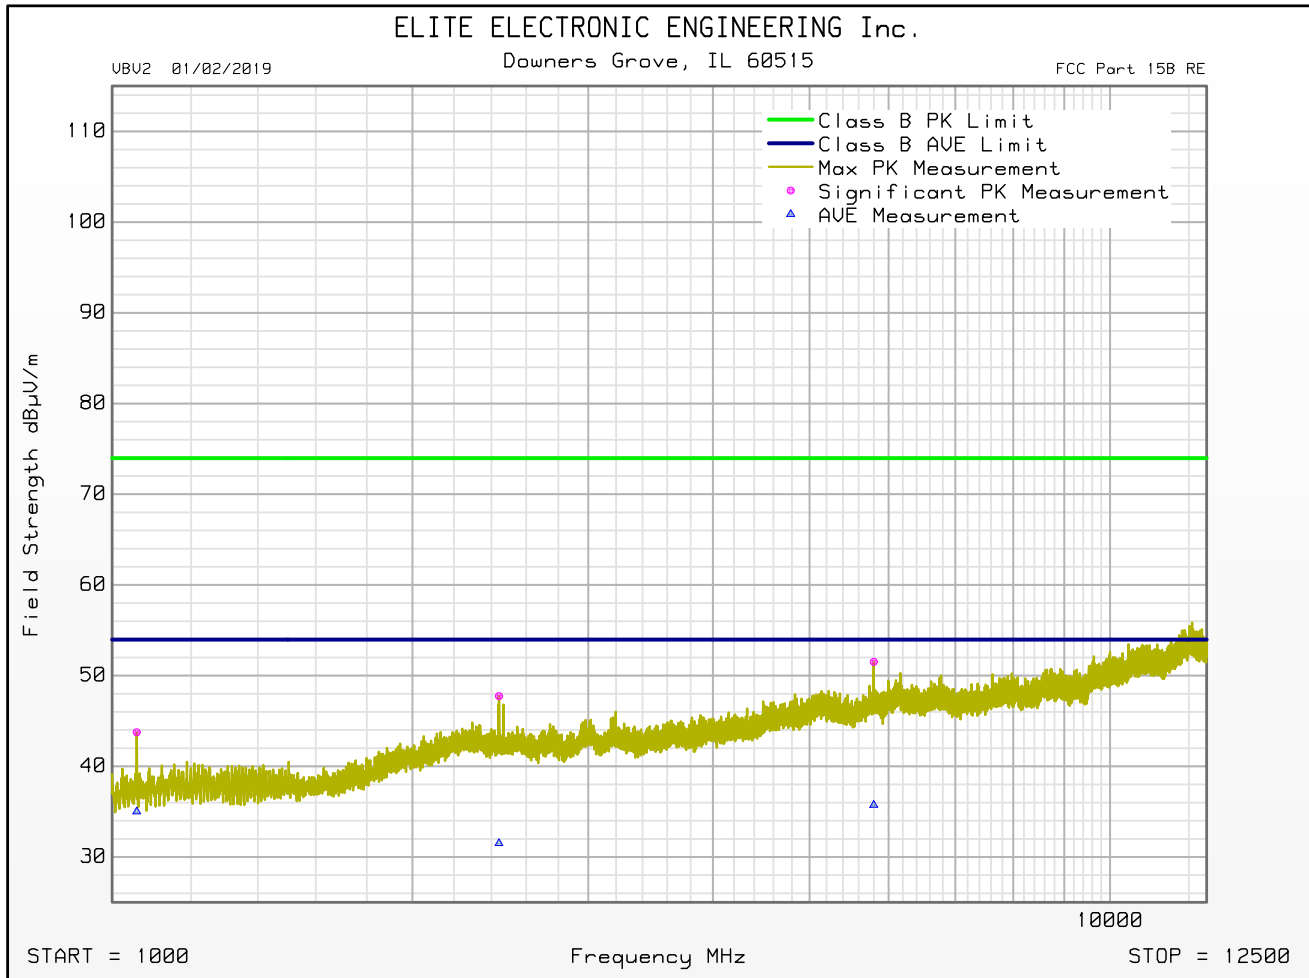




## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 01/02/2019

Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
Serial Number : SMP-76780  
DUT Mode : Standby  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Ant. Polarization(s) : H  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes : NA  
Test Engineer : J. Cardenas  
Test Date : Feb 04, 2021 09:44:07 AM

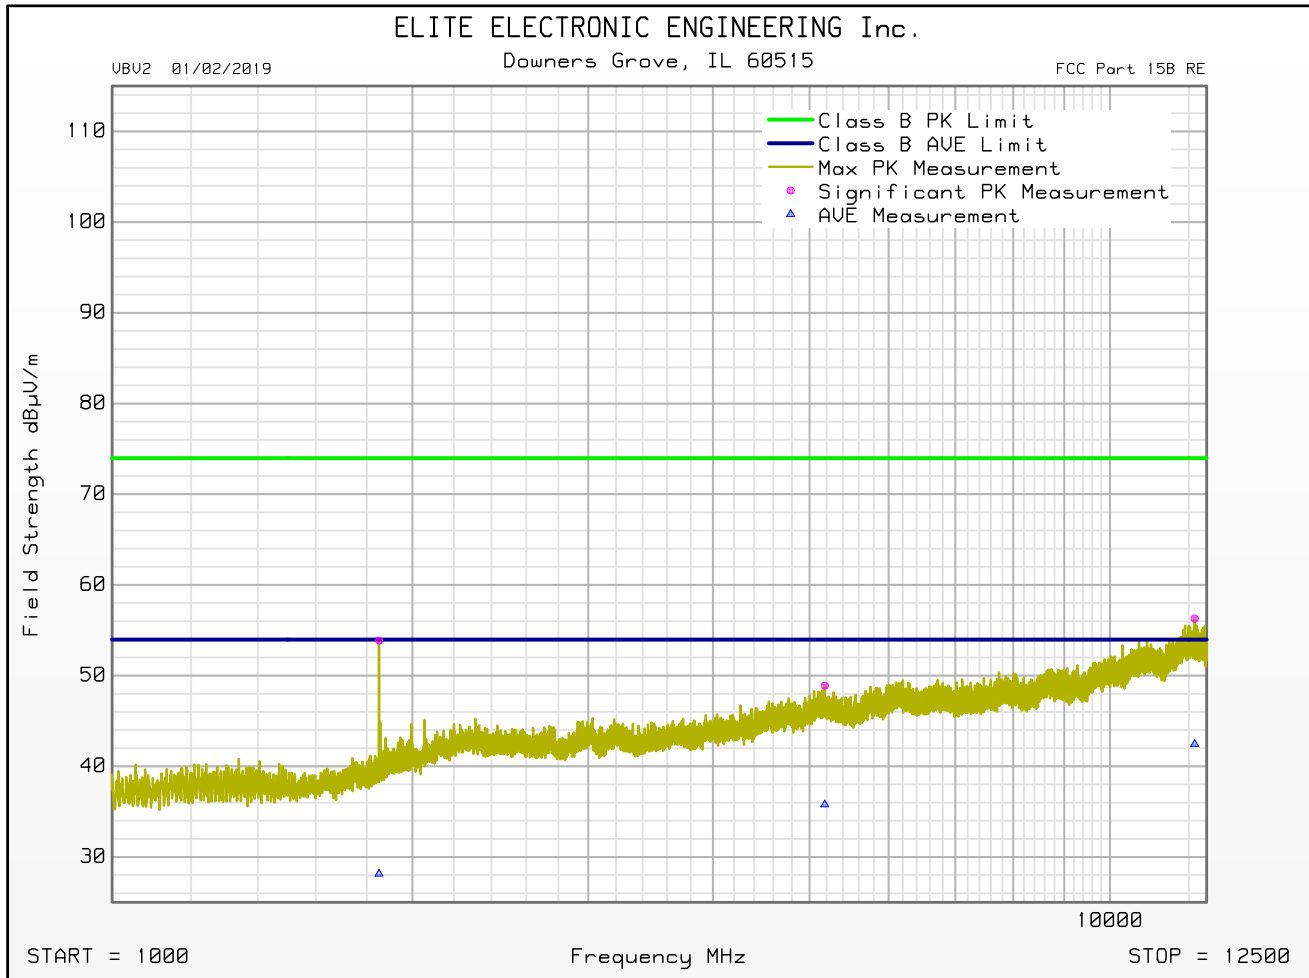

## 21. Transmitter Conducted Emissions Test (AC Mains)

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Hopping Enabled         |

| Test Setup Details |                                             |
|--------------------|---------------------------------------------|
| Setup Format       | Tabletop                                    |
| Height of Support  | NA                                          |
| Type of Test Site  | Semi-Anechoic Chamber or Shielded Enclosure |
| Note               | None                                        |

| Requirements                                                                                                                                                    |                                  |         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------|
| All radio frequency voltages on the power lines for any frequency or frequencies of an intentional radiator shall not exceed the limits in the following table: |                                  |         |
| Frequency of Emission<br>(MHz)                                                                                                                                  | Conducted Limits<br>(dB $\mu$ V) |         |
|                                                                                                                                                                 | Quasi-peak                       | Average |
| 0.15-05                                                                                                                                                         | 66 to 56*                        | 56-46*  |
| 0.5-5                                                                                                                                                           | 56                               | 46      |
| 5-30                                                                                                                                                            | 60                               | 50      |


### Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.


- 1) The EUT was operated in the Hopping Enabled mode.
- 2) Measurements were first made on the 120VAC, 60Hz high line.
- 3) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- 7) Steps (3) through (6) were repeated on the 120VAC, 60Hz neutral line.

### Measurement Uncertainty

| Measurement Type                                      | Expanded Measurement Uncertainty |
|-------------------------------------------------------|----------------------------------|
| Conducted disturbance (mains port) (150 kHz – 30 MHz) | 2.7                              |

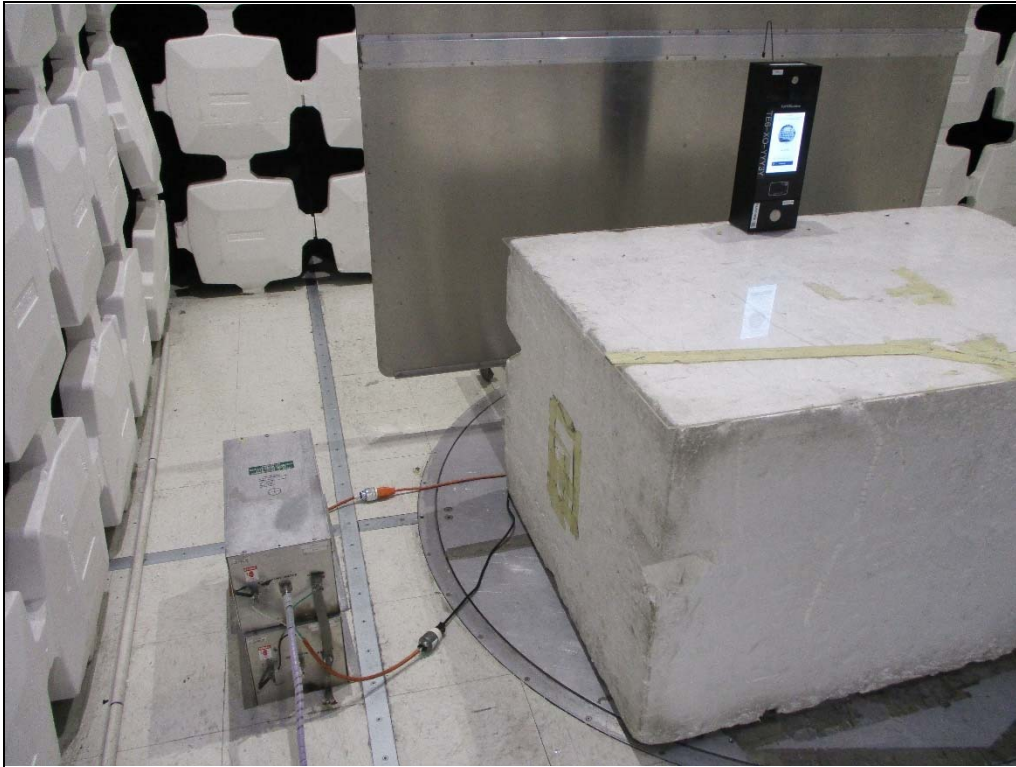

Test Setup for Conducted Emissions

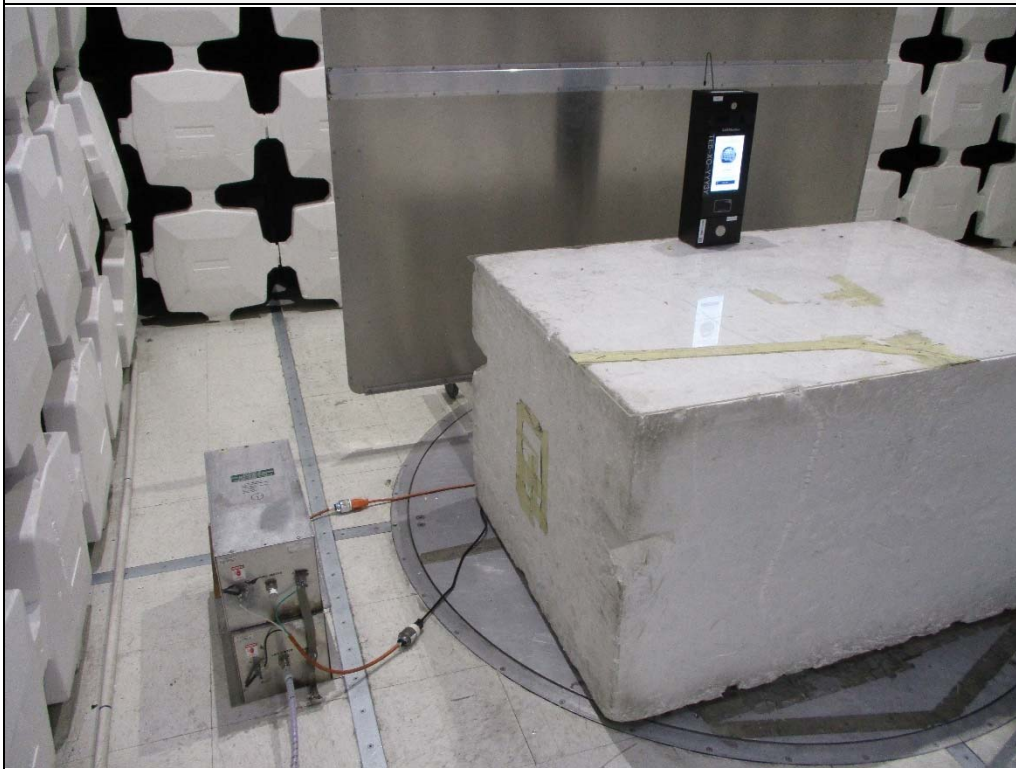

Test Setup for Conducted Emissions

## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.  
 Model : CAPXM  
 DUT Revision : 1.0  
 Serial Number : SMP-76780  
 DUT Mode : Hopping Enabled  
 Line Tested : 120VAC, 60Hz  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes : Hitoh Power Supply  
 Test Engineer : J. Cardenas  
 Limit : Class B  
 Test Date : Feb 04, 2021 10:36:54 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dBμV | Quasi-peak Limit dBμV | Excessive Quasi-peak Emissions | Average Level dBμV | Average Limit dBμV | Excessive Average Emissions |
|----------|-----------------------|-----------------------|--------------------------------|--------------------|--------------------|-----------------------------|
| 0.155    | 49.8                  | 65.8                  |                                | 34.3               | 55.8               |                             |
| 0.428    | 34.2                  | 57.3                  |                                | 29.1               | 47.3               |                             |
| 0.536    | 25.3                  | 56.0                  |                                | 17.4               | 46.0               |                             |
| 0.795    | 25.9                  | 56.0                  |                                | 15.0               | 46.0               |                             |
| 1.381    | 25.5                  | 56.0                  |                                | 16.6               | 46.0               |                             |
| 2.291    | 23.8                  | 56.0                  |                                | 17.2               | 46.0               |                             |
| 3.982    | 25.0                  | 56.0                  |                                | 13.1               | 46.0               |                             |
| 5.000    | 22.6                  | 56.0                  |                                | 11.0               | 46.0               |                             |
| 9.113    | 23.4                  | 60.0                  |                                | 14.6               | 50.0               |                             |
| 24.436   | 24.8                  | 60.0                  |                                | 18.7               | 50.0               |                             |

# FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
DUT Revision : 1.0  
Serial Number : SMP-76780  
DUT Mode : Hopping Enabled  
Line Tested : 120VAC, 60Hz  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes : Hitoh Power Supply  
Test Engineer : J. Cardenas  
Limit : Class B  
Test Date : Feb 04, 2021 10:36:54 AM

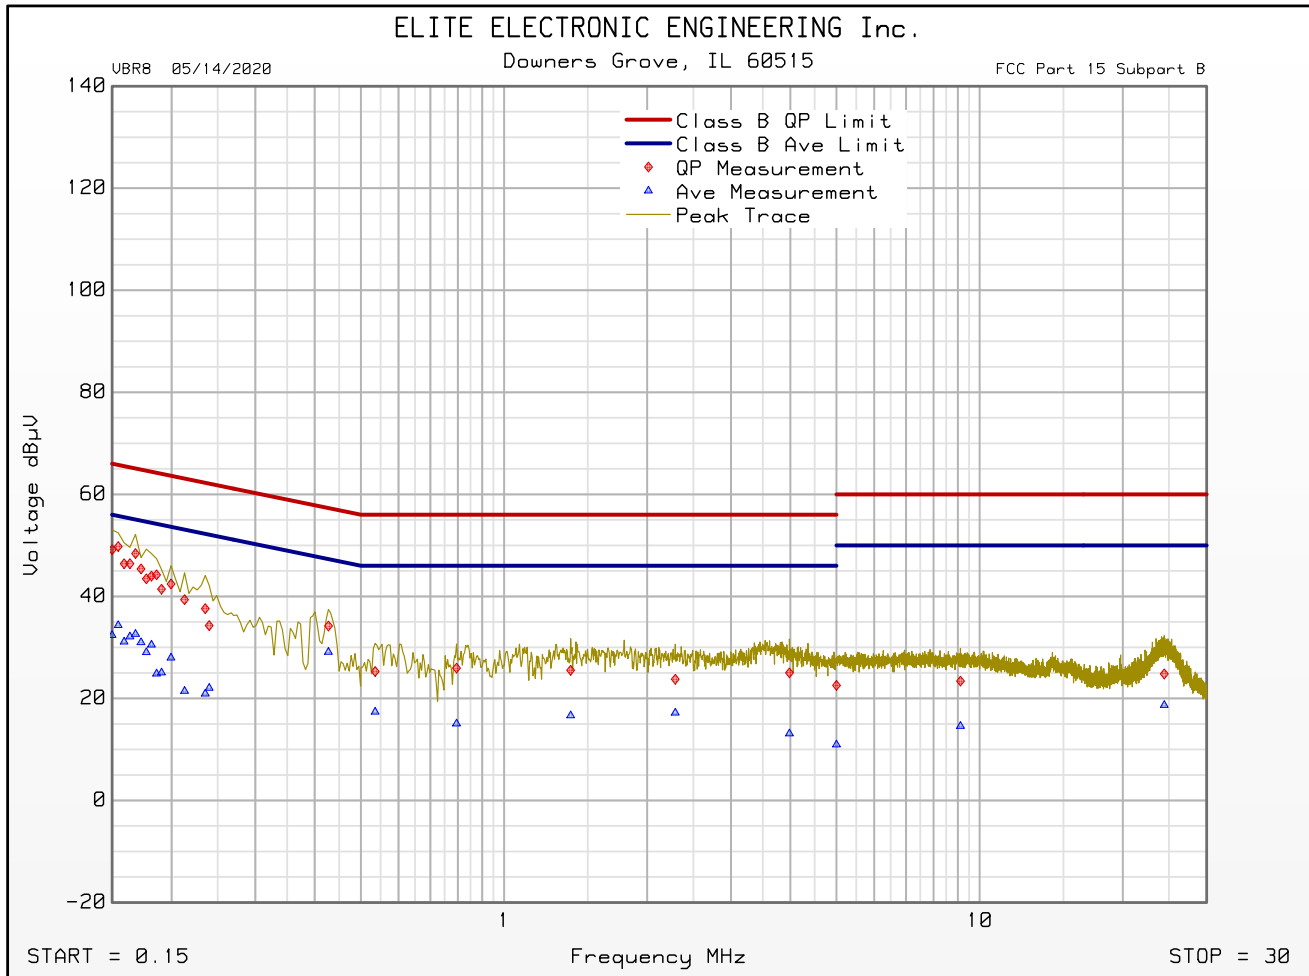

Emissions Meet QP Limit  
Emissions Meet Ave Limit



## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
DUT Revision : 1.0  
Serial Number : SMP-76780  
DUT Mode : Hopping Enabled  
Line Tested : Neutral  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes : Hitoh Power Supply  
Test Engineer : J. Cardenas  
Limit : Class B  
Test Date : Feb 04, 2021 10:30:37 AM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dBμV | Quasi-peak Limit dBμV | Excessive Quasi-peak Emissions | Average Level dBμV | Average Limit dBμV | Excessive Average Emissions |
|----------|-----------------------|-----------------------|--------------------------------|--------------------|--------------------|-----------------------------|
| 0.155    | 50.1                  | 65.8                  |                                | 34.0               | 55.8               |                             |
| 0.423    | 35.7                  | 57.4                  |                                | 27.7               | 47.4               |                             |
| 0.550    | 24.9                  | 56.0                  |                                | 14.6               | 46.0               |                             |
| 1.249    | 25.4                  | 56.0                  |                                | 18.8               | 46.0               |                             |
| 1.606    | 26.5                  | 56.0                  |                                | 17.3               | 46.0               |                             |
| 2.156    | 25.7                  | 56.0                  |                                | 13.8               | 46.0               |                             |
| 3.797    | 24.8                  | 56.0                  |                                | 14.9               | 46.0               |                             |
| 5.000    | 21.8                  | 56.0                  |                                | 14.2               | 46.0               |                             |
| 9.365    | 22.9                  | 60.0                  |                                | 15.2               | 50.0               |                             |
| 24.386   | 26.0                  | 60.0                  |                                | 19.1               | 50.0               |                             |

# FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.  
Model : CAPXM  
DUT Revision : 1.0  
Serial Number : SMP-76780  
DUT Mode : Hopping Enabled  
Line Tested : Neutral  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes : Hitoh Power Supply  
Test Engineer : J. Cardenas  
Limit : Class B  
Test Date : Feb 04, 2021 10:30:37 AM

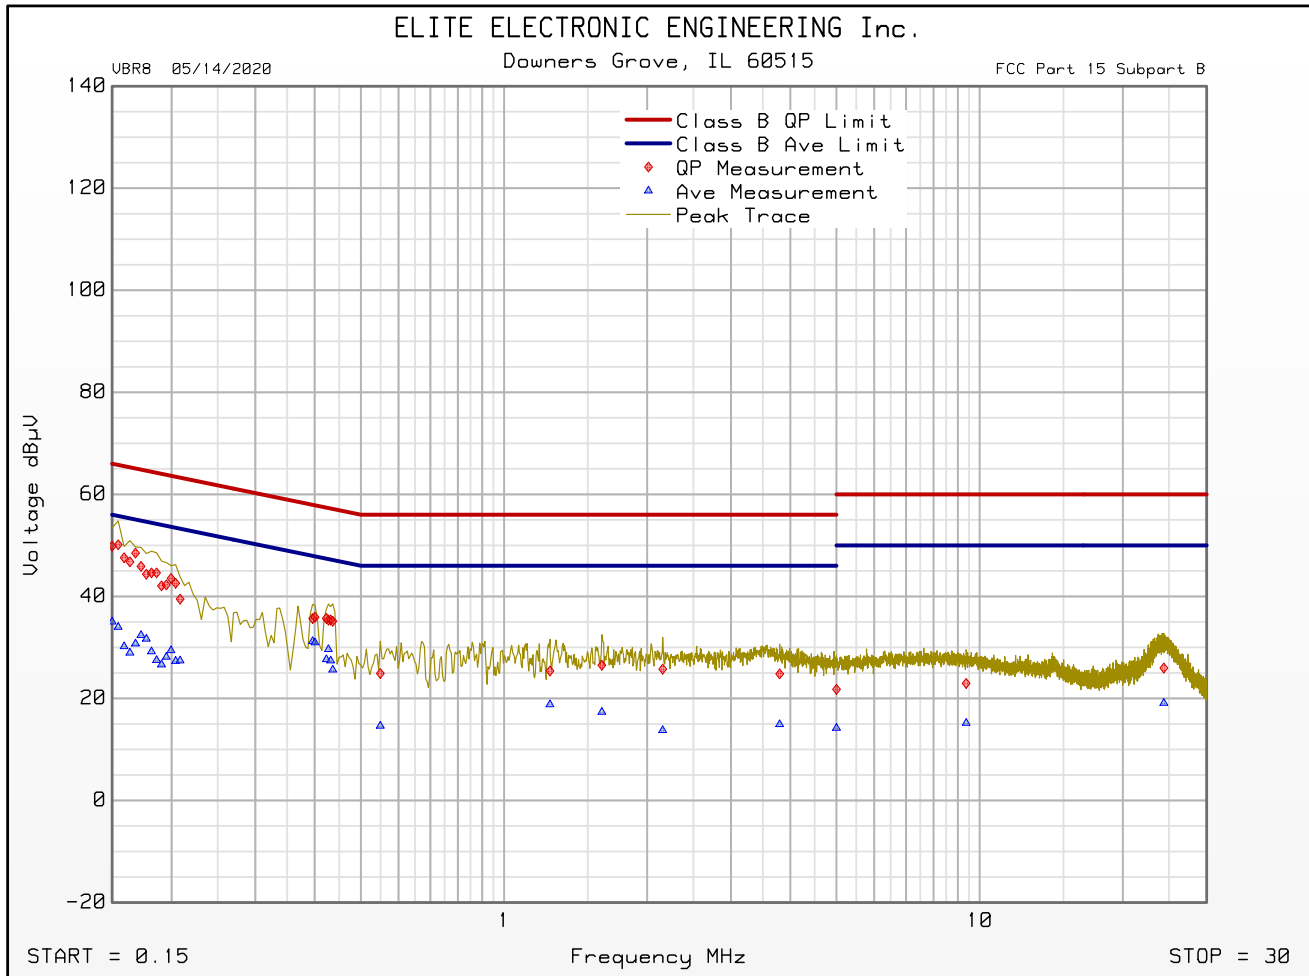

Emissions Meet QP Limit  
Emissions Meet Ave Limit

## 22. 20dB Bandwidth

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Tx                      |


| Test Setup Details    |                   |
|-----------------------|-------------------|
| Setup Format          | Tabletop          |
| Height of Support     | NA                |
| Measurement Method    | Antenna Conducted |
| Type of Test Site     | Shielded Chamber  |
| Type of Antennas Used | NA                |
| Notes                 | None              |

| Requirements                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------|
| Systems using frequency hopping techniques, operating in the 902-928MHz band, are allowed a maximum 20dB bandwidth of 500kHz. |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The antenna port of the EUT was connected to the spectrum analyzer through 60dB of attenuation.</p> <p>With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to <math>\geq 1\%</math> of the 20 dB BW. The span was set to approximately 2 to 3 times the 20 dB bandwidth.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.</p> |


| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 902.24MHz               |
| Parameters        | 20dB BW = 207.8kHz      |
| Notes             | None                    |

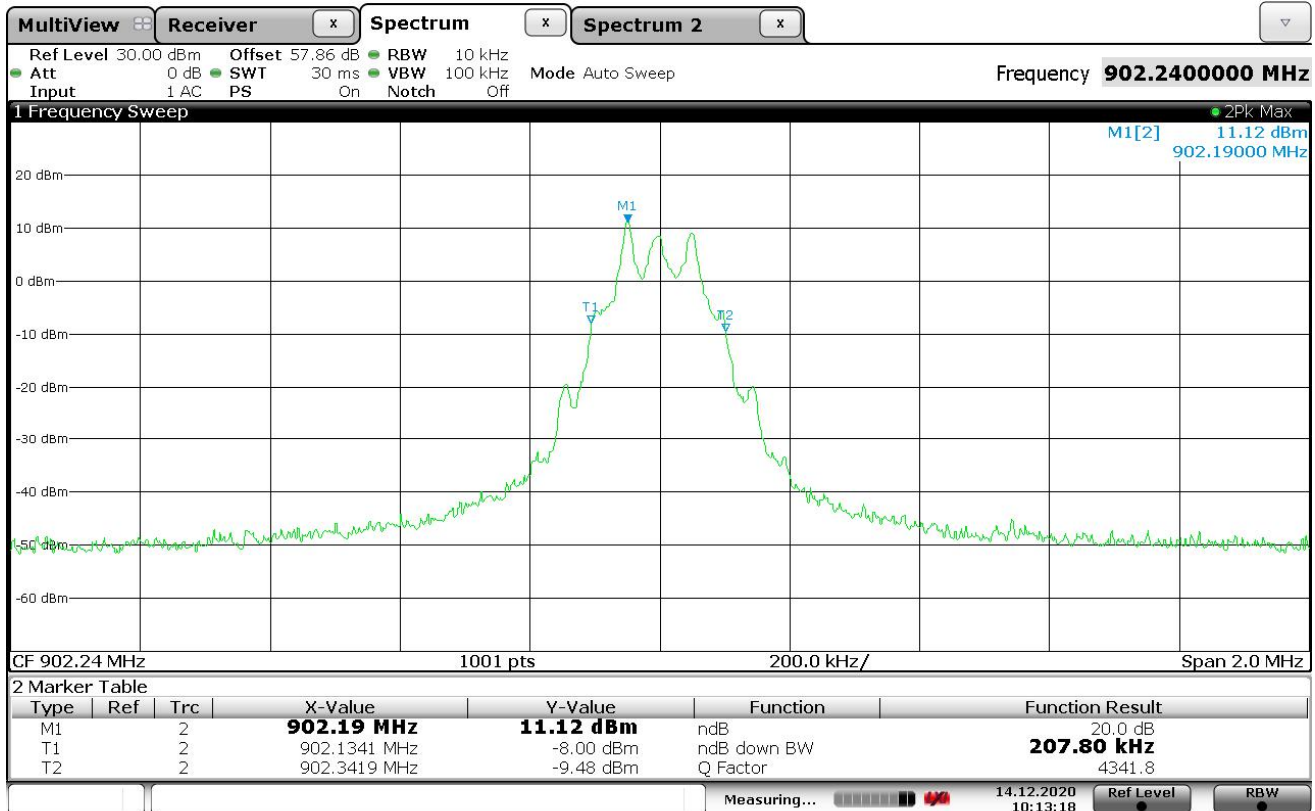


Date: 14.DEC.2020 10:13:18

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 914.74MHz               |
| Parameters        | 20dB BW = 205.8kHz      |
| Notes             | None                    |

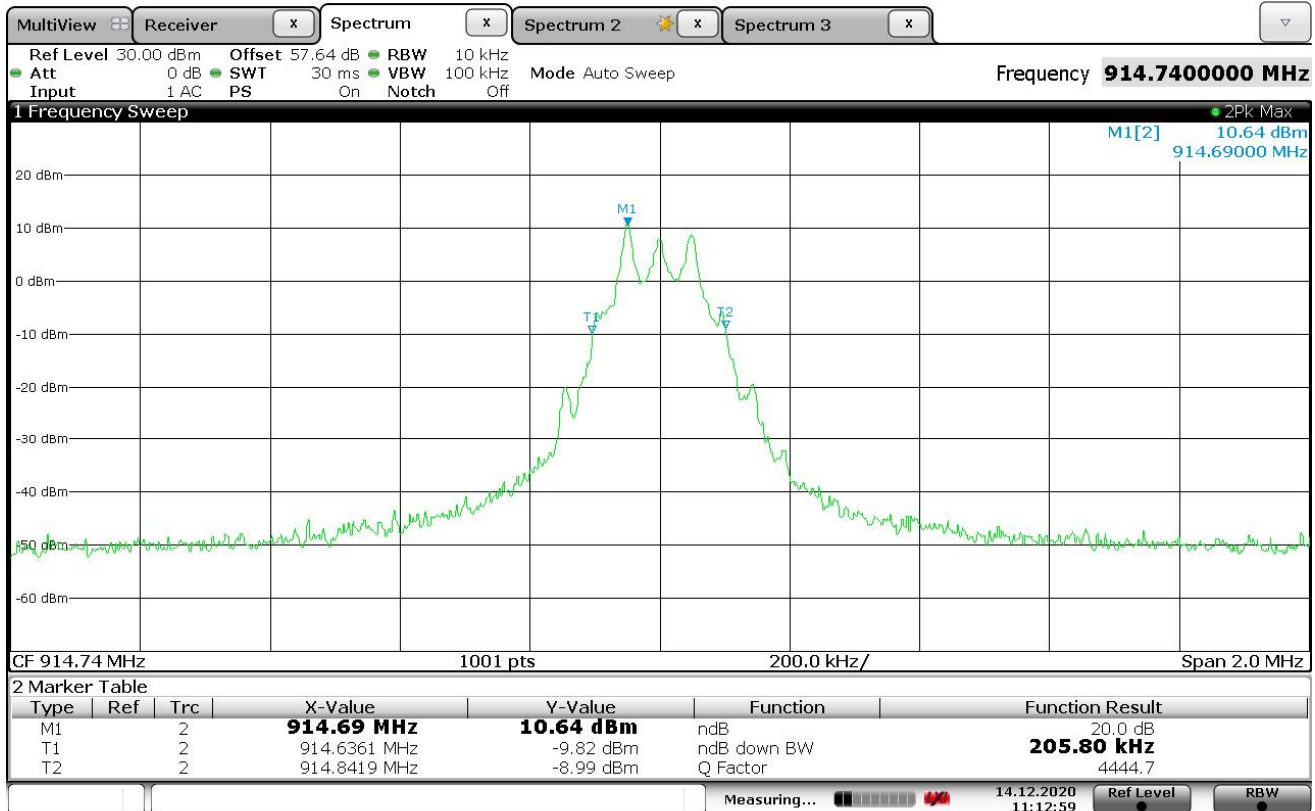

Date: 14.DEC.2020 11:13:00

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 926.74MHz               |
| Parameters        | 20dB BW = 201.8kHz      |
| Notes             | None                    |

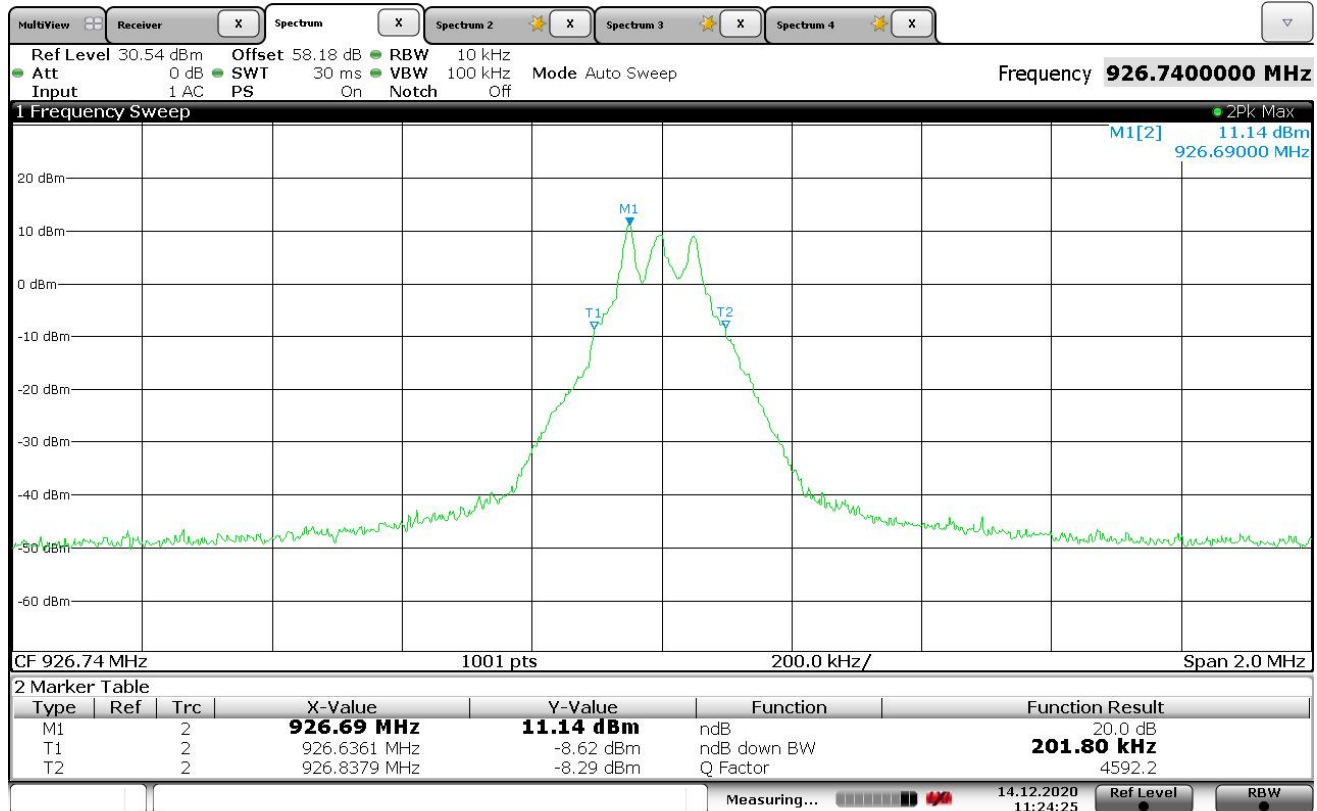

Date: 14.DEC.2020 11:24:25

### 23. Occupied Bandwidth (99%)


| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Tx                      |

| Test Setup Details    |                   |
|-----------------------|-------------------|
| Setup Format          | Tabletop          |
| Height of Support     | NA                |
| Measurement Method    | Antenna Conducted |
| Type of Test Site     | Shielded Chamber  |
| Type of Antennas Used | NA                |
| Notes                 | None              |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The antenna port of the EUT was connected to the spectrum analyzer through 50dB of attenuation.</p> <p>The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 1% to 5% of the actual occupied / x dB bandwidth, the video bandwidth (VBW) was set 3 times greater than the RBW, and the span was set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.</p> |


| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 902.24MHz               |
| Parameters        | OBW = 192.8kHz          |
| Notes             | None                    |

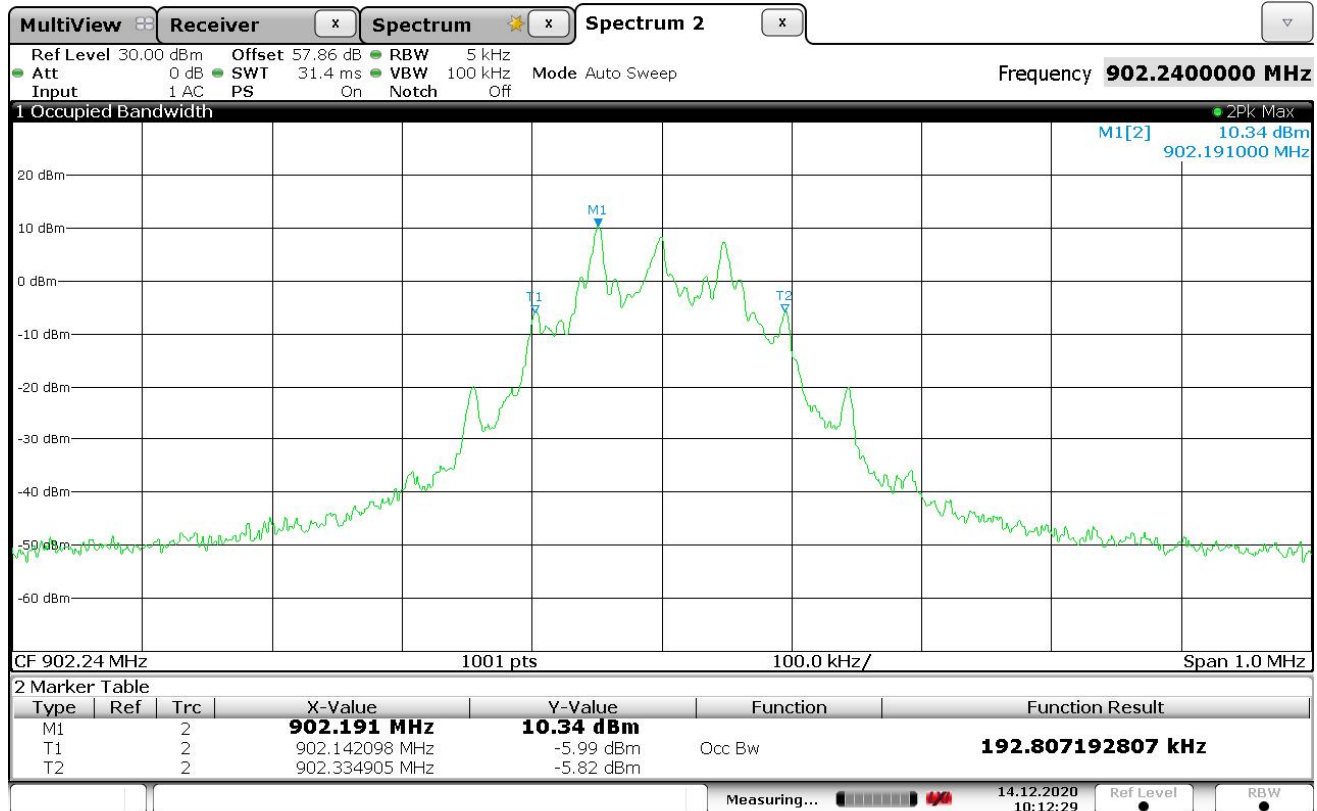


Date: 14.DEC.2020 10:12:30

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 914.74MHz               |
| Parameters        | OBW = 192.8kHz          |
| Notes             | None                    |

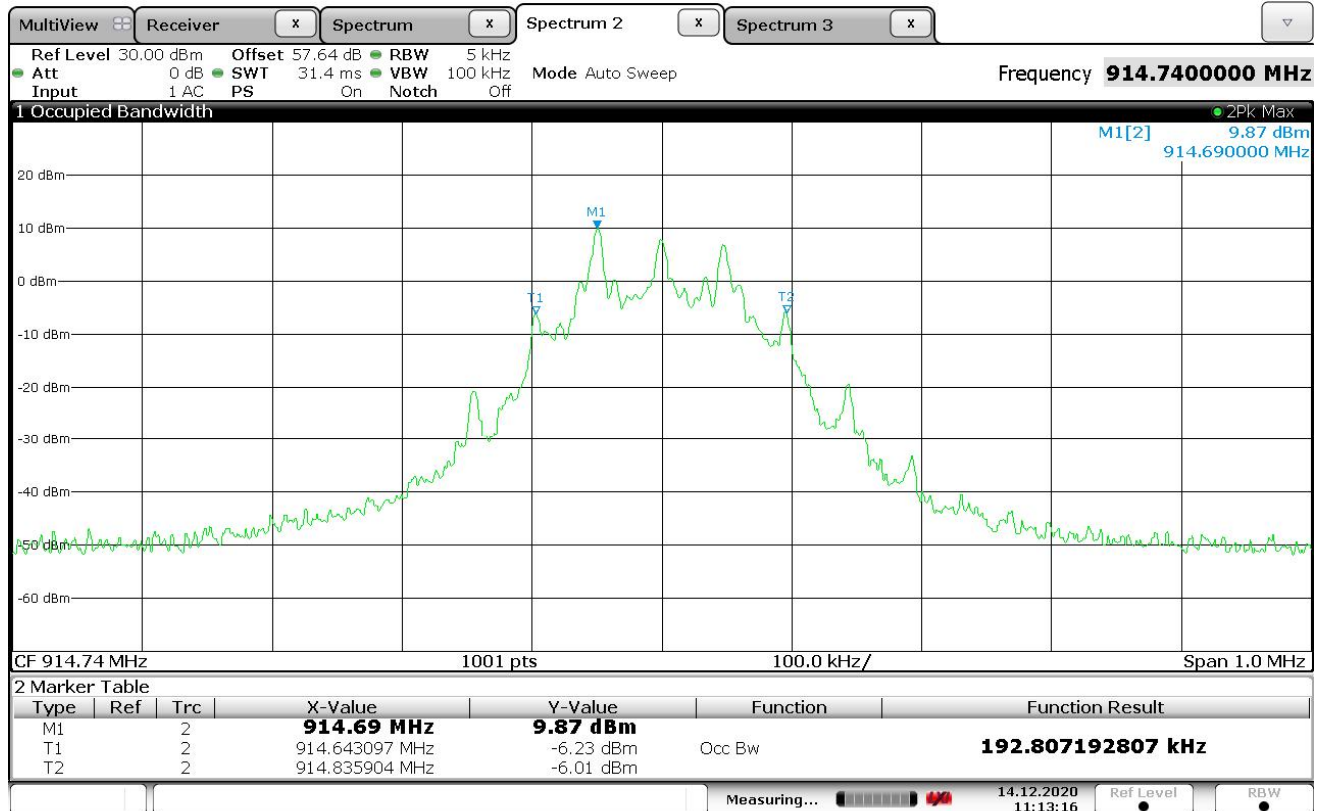

Date: 14.DEC.2020 11:13:15

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 926.74MHz               |
| Parameters        | OBW = 188.8kHz          |
| Notes             | None                    |

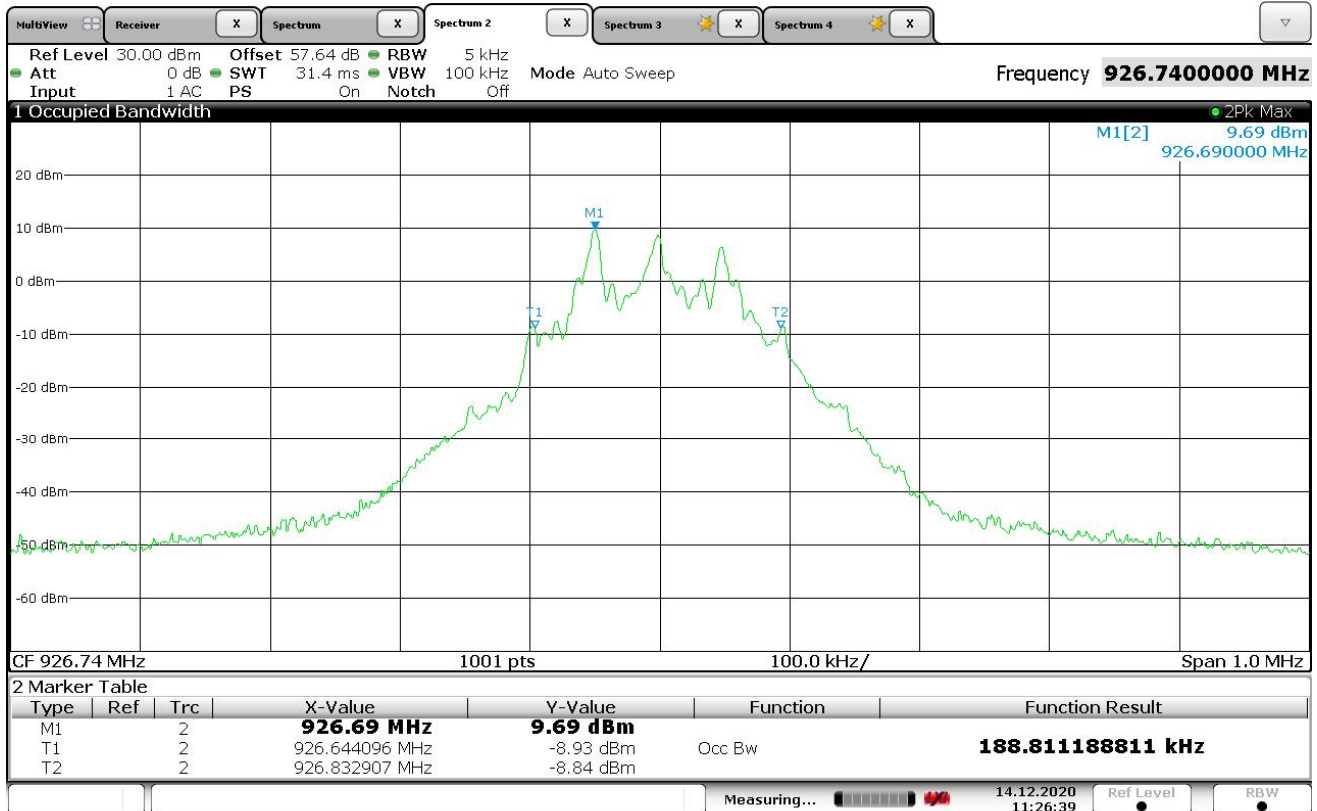

Date: 14.DEC.2020 11:26:39

## 24. Carrier Frequency Separation

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Hopping Enabled         |


| Test Setup Details    |                    |
|-----------------------|--------------------|
| Setup Format          | Tabletop           |
| Height of Support     | NA                 |
| Measurement Method    | Antenna Conducted  |
| Type of Test Site     | Shielded Enclosure |
| Type of Antennas Used | NA                 |
| Notes                 | None               |

| Requirements                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Channel carrier frequencies shall be separated by a minimum of 25kHz or the 20dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The antenna port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. Span was set wide enough to capture the peaks of two adjacent channels. The resolution bandwidth was set to approximately 30% of the channel spacing. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels.</p> <p>When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.</p> |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Test Details |                         |
|--------------|-------------------------|
| Manufacturer | Chamberlain Group, Inc. |
| Model        | CAPXM                   |
| S/N          | SMP-76795               |
| Mode         | Hopping Enabled         |
| Parameters   | Separation = 503.5kHz   |
| Notes        | None                    |

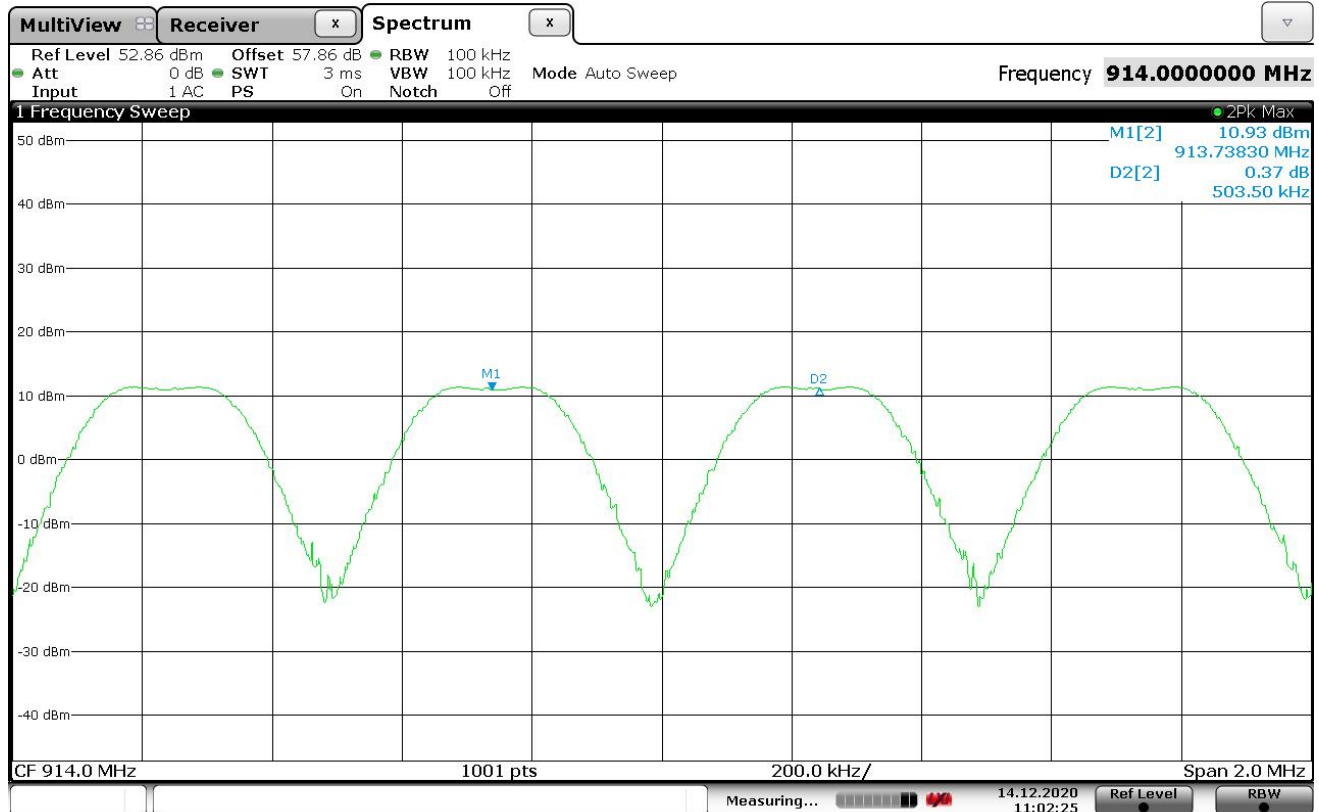

Date: 14.DEC.2020 11:02:25

## 25. Number of Carrier Channels

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Hopping Enabled         |


| Test Setup Details    |                   |
|-----------------------|-------------------|
| Setup Format          | Tabletop          |
| Height of Support     | NA                |
| Measurement Method    | Antenna Conducted |
| Type of Test Site     | Shielded Chamber  |
| Type of Antennas Used | NA                |
| Notes                 | None              |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Requirements                                          |
|-------------------------------------------------------|
| The system shall use at least 50 hopping frequencies. |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The antenna port of the EUT was connected to the spectrum analyzer through 60dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.</p> <p>The resolution bandwidth (RBW) was set to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.</p> <p>The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.</p> |

| Test Details |                         |
|--------------|-------------------------|
| Manufacturer | Chamberlain Group, Inc. |
| Model        | CAPXM                   |
| S/N          | SMP-76795               |
| Mode         | Hopping Enabled         |
| Parameters   | 50 channels             |
| Notes        | None                    |

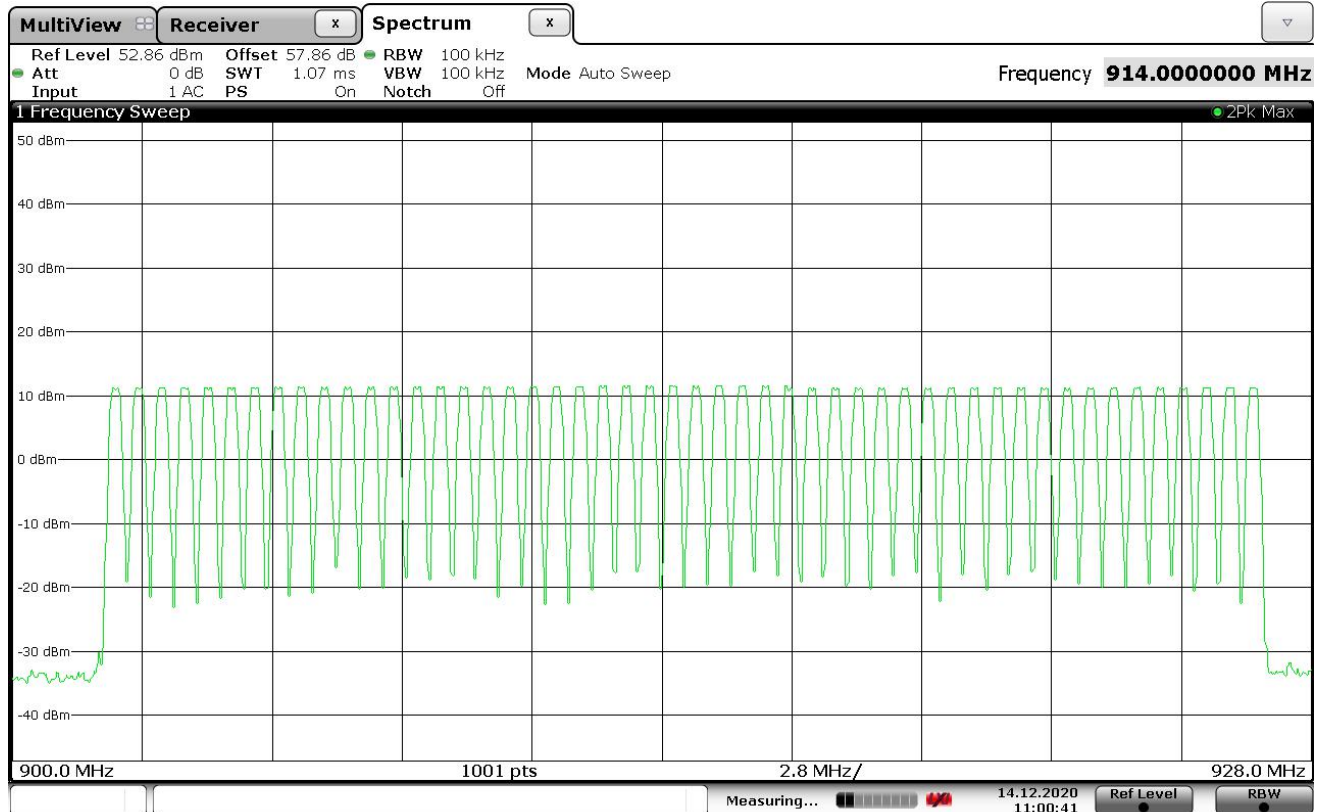

Date: 14.DEC.2020 11:00:41

## 26. Average Time of Occupancy

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Hopping Enabled         |


| Test Setup Details    |                   |
|-----------------------|-------------------|
| Setup Format          | Tabletop          |
| Height of Support     | NA                |
| Measurement Method    | Antenna Conducted |
| Type of Test Site     | Shielded Chamber  |
| Type of Antennas Used | NA                |
| Notes                 | None              |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Requirements                                                                                                   |
|----------------------------------------------------------------------------------------------------------------|
| The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The antenna port of the EUT was connected to the spectrum analyzer through 60dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. The spectrum analyzer was set to zero span centered on a hopping channel. The resolution bandwidth (RBW) was set <math>\geq</math> to the channel spacing. The sweep was set to capture the entire dwell time per hopping channel. The peak detector and 'Max-Hold' function were engaged. The analyzer's display was plotted using a 'screen dump' utility.</p> |

| Test Details |                                                               |
|--------------|---------------------------------------------------------------|
| Manufacturer | Chamberlain Group, Inc.                                       |
| Model        | CAPXM                                                         |
| S/N          | SMP-76795                                                     |
| Mode         | Hopping Enabled                                               |
| Parameters   | Average Time of Occupancy Measured = 85 x 1.3msec = 110.5msec |
| Notes        | None                                                          |

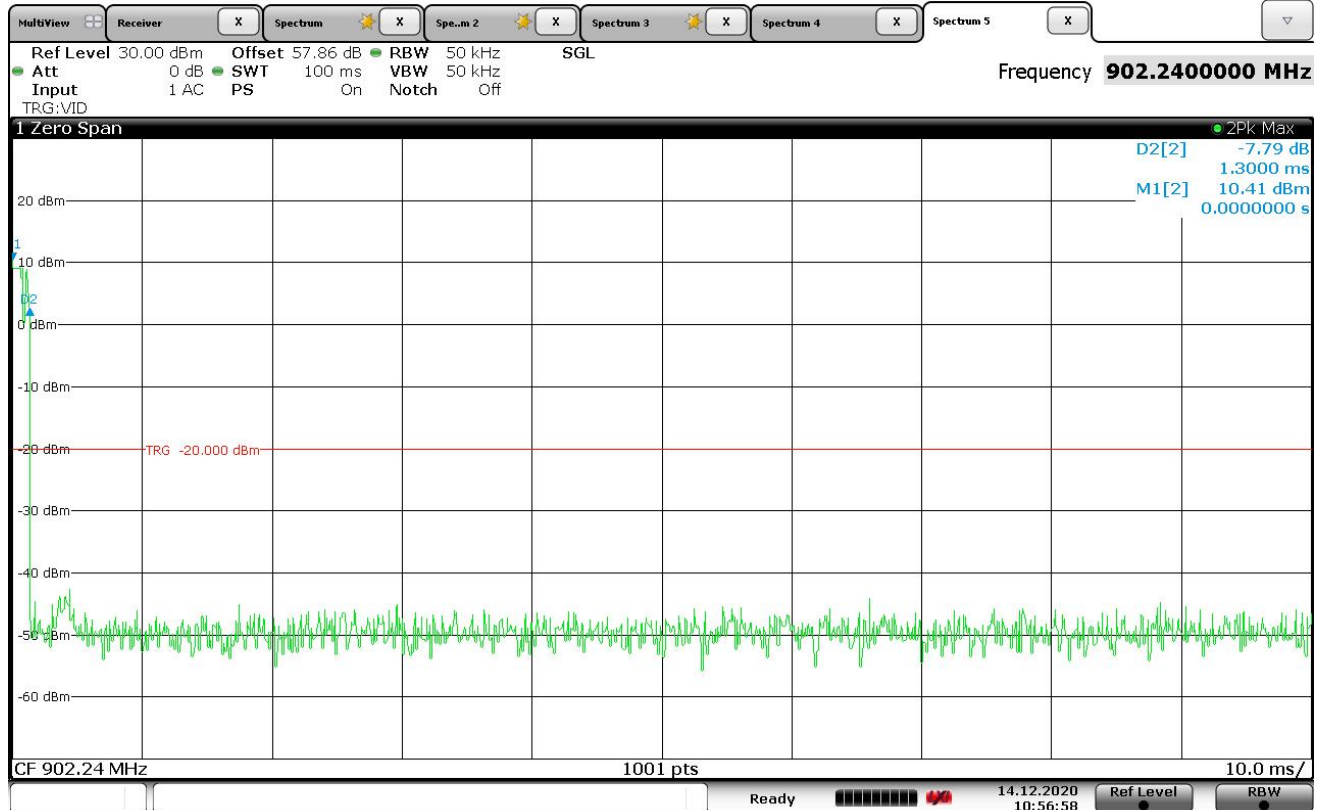

Date: 14.DEC.2020 10:56:59



Date: 14.DEC.2020 11:05:54

## 27. Maximum Peak Conducted Output Power


| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Tx                      |

| Test Setup Details |                   |
|--------------------|-------------------|
| Setup Format       | Tabletop          |
| Height of Support  | NA                |
| Measurement Method | Antenna Conducted |
| Type of Test Site  | Shielded Chamber  |
| Notes              | None              |

| Requirements                                  |
|-----------------------------------------------|
| The output power shall not exceed 1W (30dBm). |


| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The antenna port of the EUT was connected to the spectrum analyzer through 60dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle, and high hopping frequencies. |

| Test Details      |                                  |
|-------------------|----------------------------------|
| Manufacturer      | Chamberlain Group, Inc.          |
| Model             | CAPXM                            |
| S/N               | SMP-76795                        |
| Mode              | Tx                               |
| Carrier Frequency | 902.24MHz                        |
| Parameters        | Output Power = 14.6mW (11.64dBm) |
| Notes             | None                             |

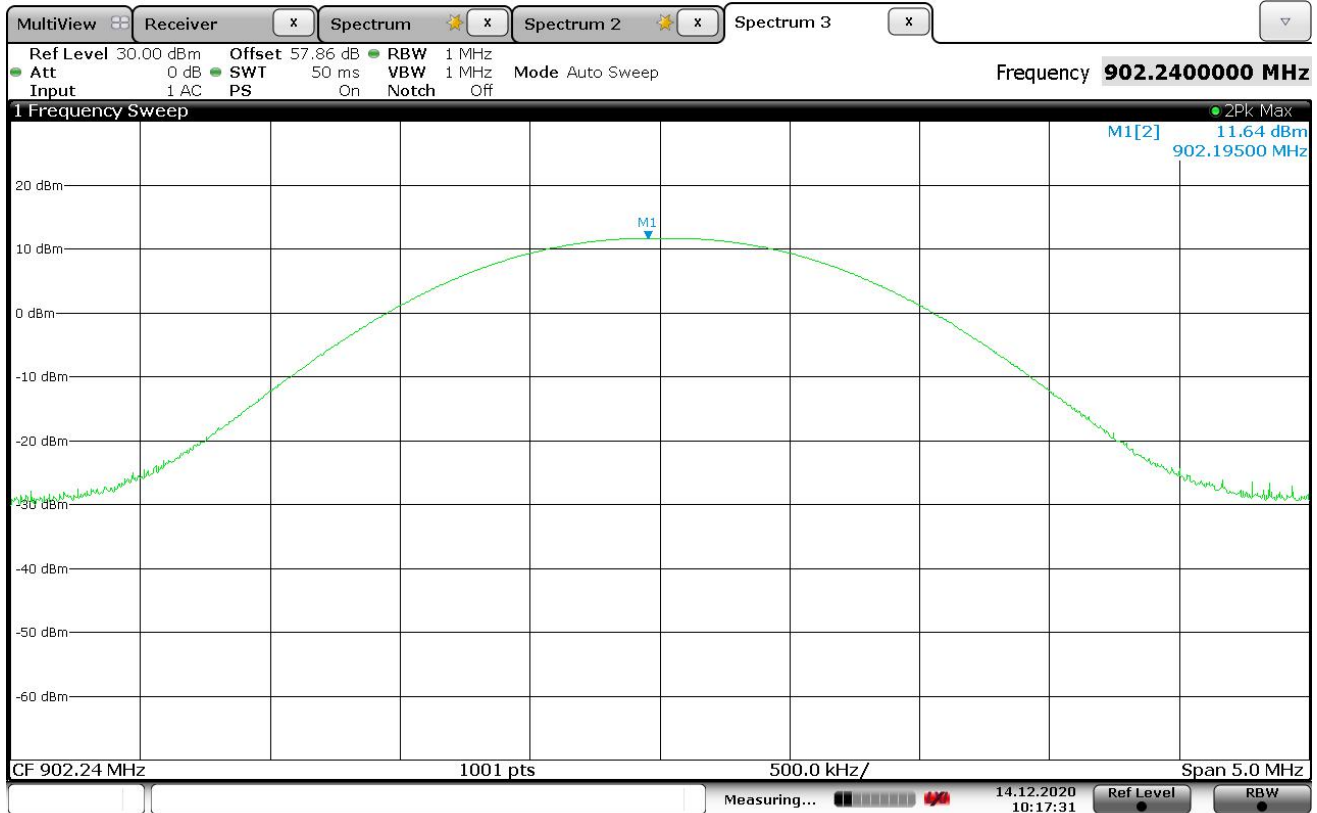


Date: 14.DEC.2020 10:17:30

| Test Details      |                                  |
|-------------------|----------------------------------|
| Manufacturer      | Chamberlain Group, Inc.          |
| Model             | CAPXM                            |
| S/N               | SMP-76795                        |
| Mode              | Tx                               |
| Carrier Frequency | 914.74MHz                        |
| Parameters        | Output Power = 13.1mW (11.16dBm) |
| Notes             | None                             |

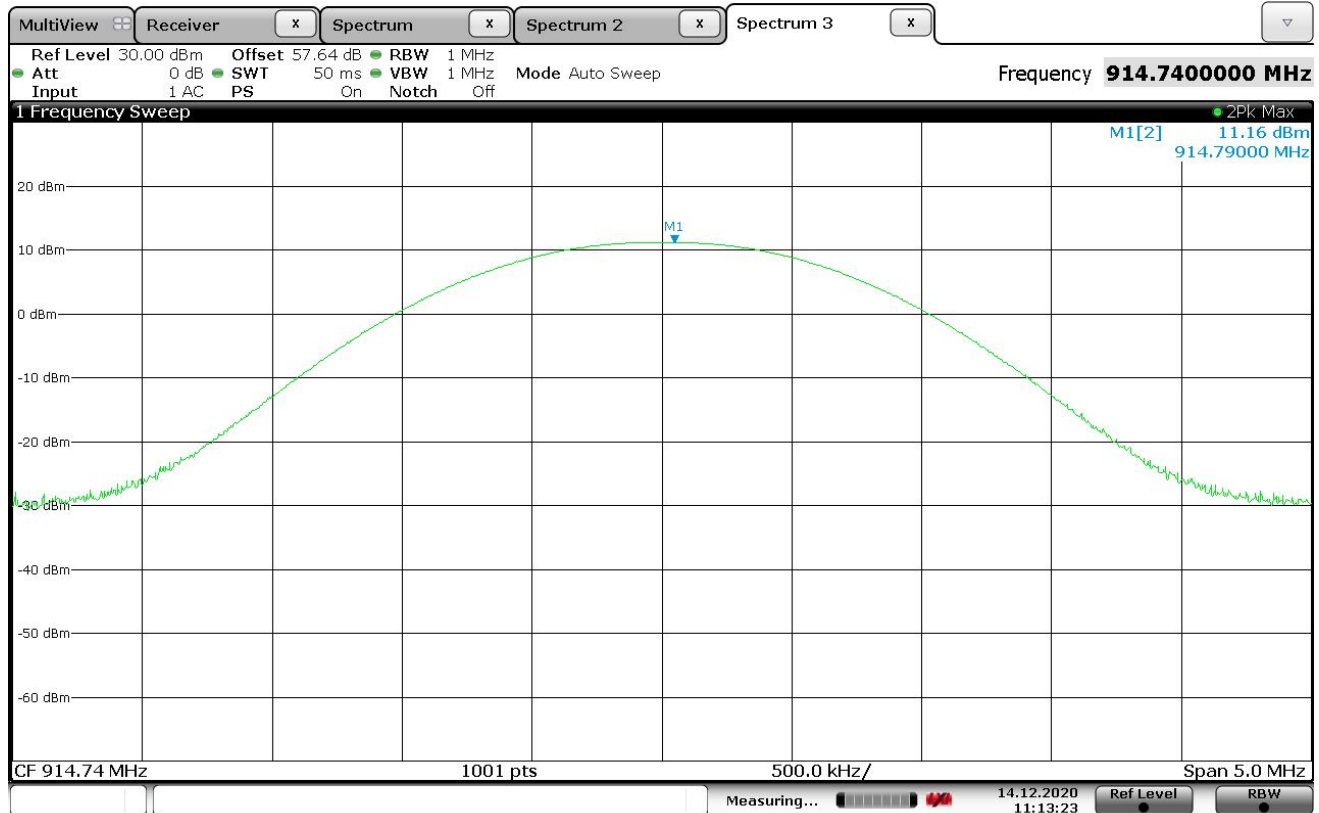

Date: 14.DEC.2020 11:13:23

| Test Details      |                                 |
|-------------------|---------------------------------|
| Manufacturer      | Chamberlain Group, Inc.         |
| Model             | CAPXM                           |
| S/N               | SMP-76795                       |
| Mode              | Tx                              |
| Carrier Frequency | 926.74MHz                       |
| Parameters        | Output Power = 14.5W (11.62dBm) |
| Notes             | None                            |

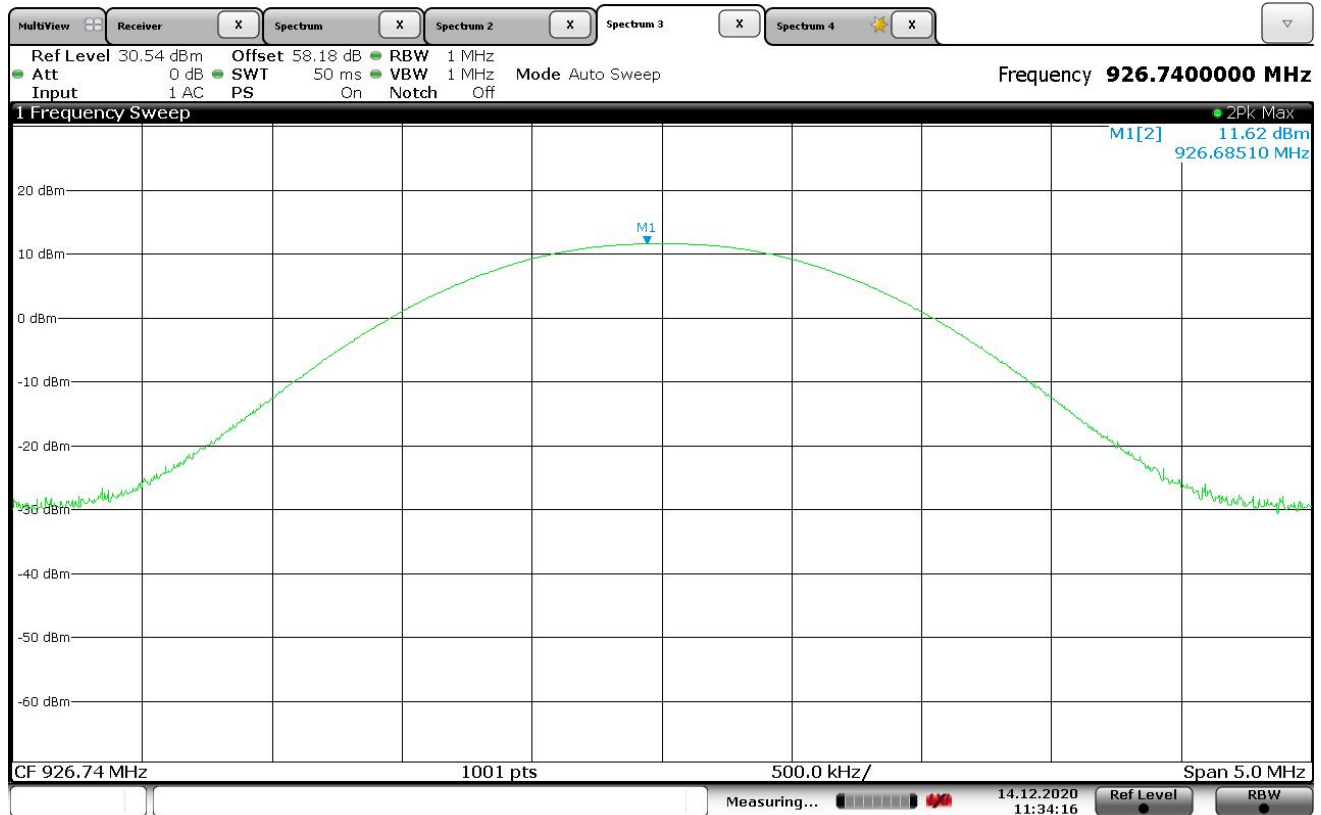

Date: 14.DEC.2020 11:34:16

## 28. Effective Isotropic Radiated Power (EIRP)

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Tx                      |

| Test Setup Details    |                                                                                          |
|-----------------------|------------------------------------------------------------------------------------------|
| Setup Format          | Tabletop                                                                                 |
| Height of Support     | NA                                                                                       |
| Measurement Method    | Radiated                                                                                 |
| Type of Test Site     | Semi-Anechoic Chamber                                                                    |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent)<br>Above 1GHz: Double-ridged waveguide (or equivalent) |
| Notes                 | None                                                                                     |

| Requirements                                  |
|-----------------------------------------------|
| The output power shall not exceed 4W (36dBm). |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle, and high hopping frequencies.</p> <p>The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.</p> |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 902.24MHz               |
| Parameters        | EIRP = 17.4mW (12.4dBm) |
| Notes             | None                    |

| Freq.<br>(MHz) | Ant<br>Pol | Wide BW<br>Meter<br>Reading<br>(dBuV) | Matched<br>Sig. Gen.<br>Reading<br>(dBm) | Equivalent<br>Antenna<br>Gain<br>(dB) | Cable<br>Loss<br>(dB) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------|------------|---------------------------------------|------------------------------------------|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 902.24         | H          | 78.9                                  | 9.2                                      | 2.2                                   | 2.0                   | 9.3           | 36.0           | -26.7          |
| 902.24         | V          | 77.3                                  | 12.3                                     | 2.2                                   | 2.0                   | 12.4          | 36.0           | -23.6          |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 914.74MHz               |
| Parameters        | EIRP = 12.0mW (10.8dBm) |
| Notes             | None                    |

| Freq.<br>(MHz) | Ant<br>Pol | Wide BW<br>Meter<br>Reading<br>(dBuV) | Matched<br>Sig. Gen.<br>Reading<br>(dBm) | Equivalent<br>Antenna<br>Gain<br>(dB) | Cable<br>Loss<br>(dB) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------|------------|---------------------------------------|------------------------------------------|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 914.74         | H          | 78.4                                  | 9.2                                      | 2.2                                   | 2.1                   | 9.3           | 36.0           | -26.7          |
| 914.74         | V          | 77.2                                  | 10.7                                     | 2.2                                   | 2.1                   | 10.8          | 36.0           | -25.2          |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Tx                      |
| Carrier Frequency | 926.74MHz               |
| Parameters        | EIRP = 16.2mW (12.1dBm) |
| Notes             | None                    |

| Freq.<br>(MHz) | Ant<br>Pol | Wide BW<br>Meter<br>Reading<br>(dBuV) | Matched<br>Sig. Gen.<br>Reading<br>(dBm) | Equivalent<br>Antenna<br>Gain<br>(dB) | Cable<br>Loss<br>(dB) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------|------------|---------------------------------------|------------------------------------------|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 926.74         | H          | 79.9                                  | 10.4                                     | 2.2                                   | 2.1                   | 10.5          | 36.0           | -25.5          |
| 926.74         | V          | 78.8                                  | 12.0                                     | 2.2                                   | 2.1                   | 12.1          | 36.0           | -23.9          |

## 29. Duty Cycle Factor Measurements


| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Hopping Enabled         |

| Test Setup Details |                   |
|--------------------|-------------------|
| Setup Format       | Tabletop          |
| Height of Support  | NA                |
| Measurement Method | Antenna Conducted |
| Type of Test Site  | Shielded Chamber  |
| Notes              | None              |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The duty cycle factor is used to convert peak detected readings to average readings when pulsed modulation is employed. This factor is computed from the time domain trace of the pulse modulation signal.</p> <p>With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero-span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of the “on-time”. The trace is recorded.</p> <p>Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero-span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).</p> |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Test Details      |                         |
|-------------------|-------------------------|
| Manufacturer      | Chamberlain Group, Inc. |
| Model             | CAPXM                   |
| S/N               | SMP-76795               |
| Mode              | Hopping Enabled         |
| Carrier Frequency | 902.24MHz               |
| Parameters        | On time = 1.3msec       |
| Notes             | None                    |

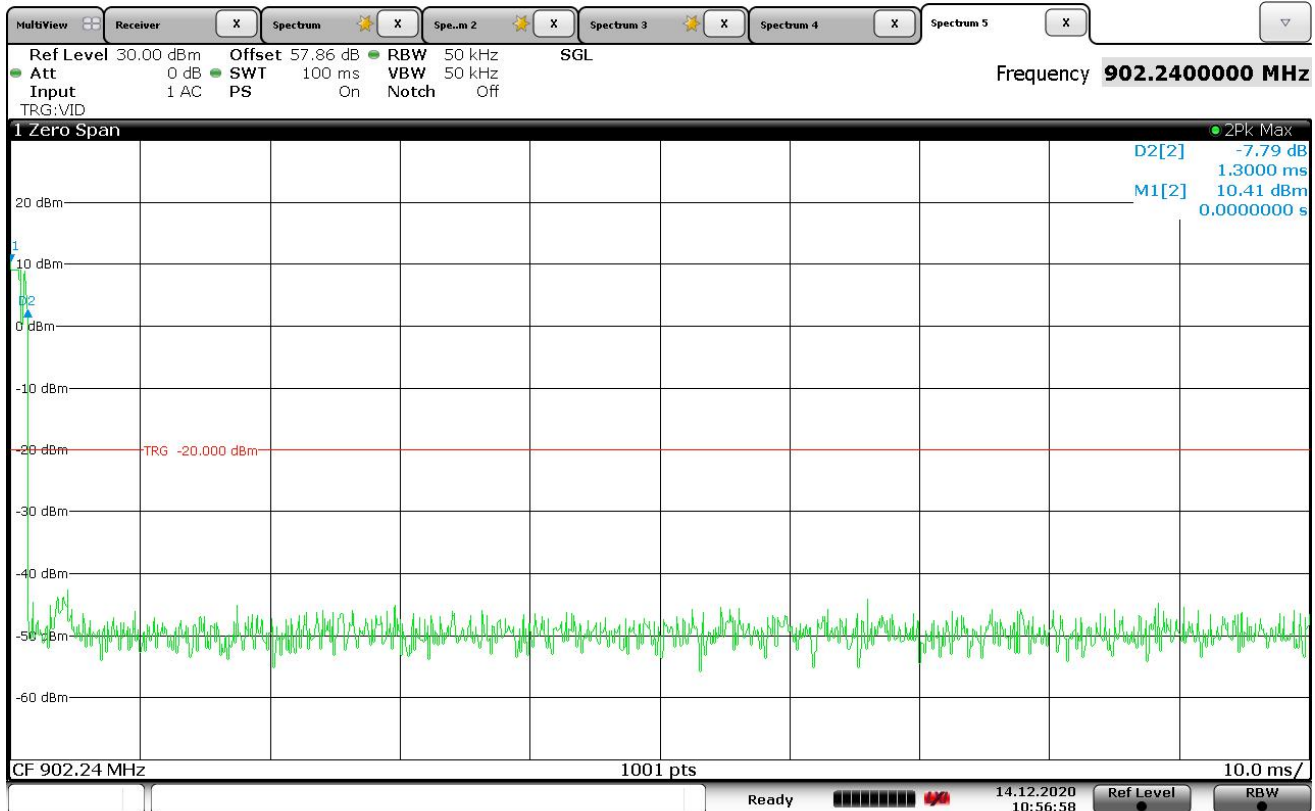

Date: 14.DEC.2020 10:56:59

$$\text{Duty Cycle Factor} = 20 \log \left( \frac{1.3\text{msec}}{100\text{msec}} \right) = -37.721$$

### 30. Case Spurious Radiated Emissions

| Test Information |                         |
|------------------|-------------------------|
| Manufacturer     | Chamberlain Group, Inc. |
| Product          | Access Control Device   |
| Model            | CAPXM                   |
| Serial No        | SMP-76795               |
| Mode             | Tx                      |

| Test Setup Details    |                                                                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Setup Format          | Tabletop                                                                                                                                                   |
| Height of Support     | NA                                                                                                                                                         |
| Measurement Method    | Radiated                                                                                                                                                   |
| Type of Test Site     | Semi-Anechoic Chamber                                                                                                                                      |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent)<br>Above 1GHz: Double-ridged waveguide (or equivalent)                                                                   |
| Notes                 | The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized. |

| Measurement Uncertainty                                                                                               |                                  |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Measurement Type                                                                                                      | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)     | 3.1                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)    | 3.2                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3                              |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4                              |

| Procedures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.</p> <p>Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.</p> <p>The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.</p> <p>1) For all harmonics not in the restricted bands, the following procedure was used:</p> <p>a) The field strength of the fundamental was measured using a bilog antenna. The bilog antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. A</p> |

peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
    - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
    - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
    - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
  - d) All harmonics not in the restricted bands must be at least 20 dB (30dB for DTS systems where average power was used) below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
- a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels were measured, the following steps were taken when taking all measurements:
    - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
    - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
    - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
  - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
  - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment

under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).

- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from  $20 \cdot \log(\text{dwell time}/100\text{msec})$ . These readings must be no greater than the limits specified in 15.209(a).



Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Horizontal



Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Vertical