

**Engineering Test Report No. 2102570-01**

Report Date	July 22, 2021	
Manufacturer Name	Chamberlain	
Manufacturer Address	300 Windsor Dr Oak Brook, IL 60523	
Model No.	Mini-clicker	
Date Received	July 20, 2021	
Test Dates	July 20, 2021 through July 22, 2021	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231(b) Innovation, Science, and Economic Development Canada, RSS-210 Innovation, Science, and Economic Development Canada, RSS-GEN	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature	MARK E. LONGINOTTI	Nathaniel Bouchie
Tested by	Mark Longinotti, Nathaniel Bouchie	
Signature	Raymond J. Klouda	
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	4900077402	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 and RSS-Gen test specification(s). The data presented in this test report pertains to the EUT on the test date(s) specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Table of Contents

1.	Report Revision History	3
2.	Introduction	4
2.1.	Scope of Tests	4
2.2.	Purpose	4
2.3.	Identification of the EUT	4
3.	Power Input	5
4.	Grounding	5
5.	Support Equipment	5
6.	Interconnect Leads	5
7.	Modifications Made to the EUT	5
8.	Modes of Operation	5
9.	Test Specifications	5
10.	Test Plan	6
11.	Deviation, Additions to, or Exclusions from Test Specifications	6
12.	Laboratory Conditions	6
13.	Summary	6
14.	Sample Calculations	6
15.	Statement of Conformity	7
16.	Certification	7
17.	Photographs of EUT	8
18.	Block Diagram of Test Setup	10
19.	Equipment List	11
20.	Periodic Operation Measurements	12
21.	Duty Cycle Factor Measurements	17
22.	Spurious Radiated Emissions	29
23.	Occupied Bandwidth Measurements	48
24.	Case Spurious Radiated Emissions (Spot Checks)	55
25.	Scope of Accreditation	62

**This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.**

1. Report Revision History

Revision	Date	Description
–	5 AUG 2021	Initial Release of Engineering Test Report No. 2102570-01

2. Introduction

2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Chamberlain Mini-clickers, (hereinafter referred to as the Equipment Under Test (EUT)). The EUTs were manufactured and submitted for testing by Chamberlain located in Oak Brook, IL.

2.2. Purpose

The EUT was originally tested with nine (9) separate transmit codes (see UL EMC Report 2012-87-EM-F0042) and was certified under FCC ID: HBW8360 and IC: 2666A-8360. The manufacturer has since added three (3) new transmit codes to the EUT. The new transmit codes were: Xtreme Garage, transmit at 303MHz, Sommer, transmit at 310MHz, and Ryobi, transmit at 372.5MHz.

The purpose of this test series was to determine if the EUT, when transmitting the three new codes, meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.231(b) and to perform spot checks on the original codes to determine if the original transmit codes continue to meet the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.231(b).

The test series was also performed to determine if the EUT, when transmitting the three new codes, meets the RF emission requirements of the Innovation, Science, and Economic Development Canada RSS-Gen and RSS-210, Annex A, and to perform spot checks on the original codes to determine if the original transmit codes continue to meet the Innovation, Science, and Economic Development Canada RSS-Gen and RSS-210, Annex A.

Testing was performed in accordance with ANSI C63.10-2013.

2.3. Identification of the EUT

The EUTs were identified as follows:

EUT Identification	
Product Description	Mini-clicker
S/N	S/N 10 was assigned to the EUT programmed to transmit the Xtreme Garage Code (303MHz)
	S/N 11 was assigned to the EUT programmed to transmit the Sommer Code (310MHz)
	S/N 12 was assigned to the EUT programmed to transmit the Ryobi Code (372.5MHz)
	S/N SMP-81251 was assigned to the EUT programmed to transmit the CGI 310/315/390MHz NEW Rolling Code (E)
	S/N SMP-81252 was assigned to the EUT programmed to transmit the Wayne-Dalton 372.5MHz NEW, Rolling Code (Keeloq based)
	S/N SMP-81254 was assigned to the EUT programmed to transmit the Genie 390 MHz NEW, IntelliCode (Keeloq based)
Band of Operation	303MHz – 390MHz

20dB Bandwidth	16.0 kHz (Xtreme Garage Code) 33.99 kHz (Sommer Code) 22.0 kHz (Ryobi Code)
99% Bandwidth	18.8 kHz (Xtreme Garage Code) 98.83 kHz (Sommer Code) 37.66 kHz (Ryobi Code)
Software/Firmware Version	Version 1
Size of EUT	6cm x 3cm x 1cm

The EUTs listed above were used throughout the test series.

3. Power Input

The EUTs were powered by 3VDC from an internal DL2032 battery.

4. Grounding

The EUTs were not connected to ground.

5. Support Equipment

No support equipment was used during the tests.

6. Interconnect Leads

No interconnect leads were used during the tests.

7. Modifications Made to the EUT

No modifications were made to the EUTs during the testing.

8. Modes of Operation

Mode	Description
Tx On	The EUT was powered on and set to transmit at one of the following frequencies: 1. Genie 390 MHz NEW, IntelliCode (Keeloq based) 2. CGI 310/315/390MHz NEW Rolling Code (E) 3. Wayne-Dalton 372.5MHz NEW, Rolling Code (Keeloq based) 4. Xtreme Garage, 303 MHz, Fixed code 5. Sommer, 310 MHz, New Rolling code (Keeloq based) 6. Ryobi, 372.5 MHz, New Rolling code (Keeloq based)

9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- RSS-210 Issue 10, December 2019, "License-Exempt Radio Apparatus: Category I Equipment"

- RSS-Gen Issue 5, April 2018, Amendment 1, March 2019, Amendment 2, February 2021, Innovation, Science, and Economic Development Canada, "Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

10. Test Plan

No test plan was provided. Instructions were provided by personnel from Chamberlain and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231, Innovation, Science, and Economic Development Canada, RSS-210, and ANSI C63.10-2013 test specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	35%
Atmospheric Pressure	1022mb

13. Summary

The following EMC tests were performed and the results are shown below:

Test Description	Requirements	Test Methods	Results
Periodic Operation Measurements	FCC 15C ISED RSS-210	ANSI C63.10-2013	Conforms
Duty Cycle Factor Measurements	FCC 15C ISED RSS-210	ANSI C63.10-2013	---
Spurious Radiated Emissions	FCC 15C ISED RSS-210	ANSI C63.10-2013	Conforms
Occupied Bandwidth Measurements	FCC 15C ISED RSS-210	ANSI C63.10-2013	Conforms
Spurious Radiated Emissions (Spot Checks)	FCC 15C ISED RSS-210	ANSI C63.10-2013	Conforms

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: VL (dBuV)} = \text{MTR (dBuV)} + \text{CF (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: FS (dBuV/m)} = \text{MTR (dBuV)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The

Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

$$\text{Formula 2: FS (uV/m) = AntiLog [(FS (dBuV/m))/20]}$$

15. Statement of Conformity

The Chamberlain Mini-clicker, when transmitting the three new codes, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, Annex A.

In addition, spurious radiated emissions spot checks performed on the original transmit codes determined that the Chamberlain Mini-clicker, when transmitting the original transmit codes, continues to meet the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210, Annex A.

16. Certification


Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.231 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUTs on the test date specified. Any electrical or mechanical modifications made to the EUTs subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT





18. Block Diagram of Test Setup

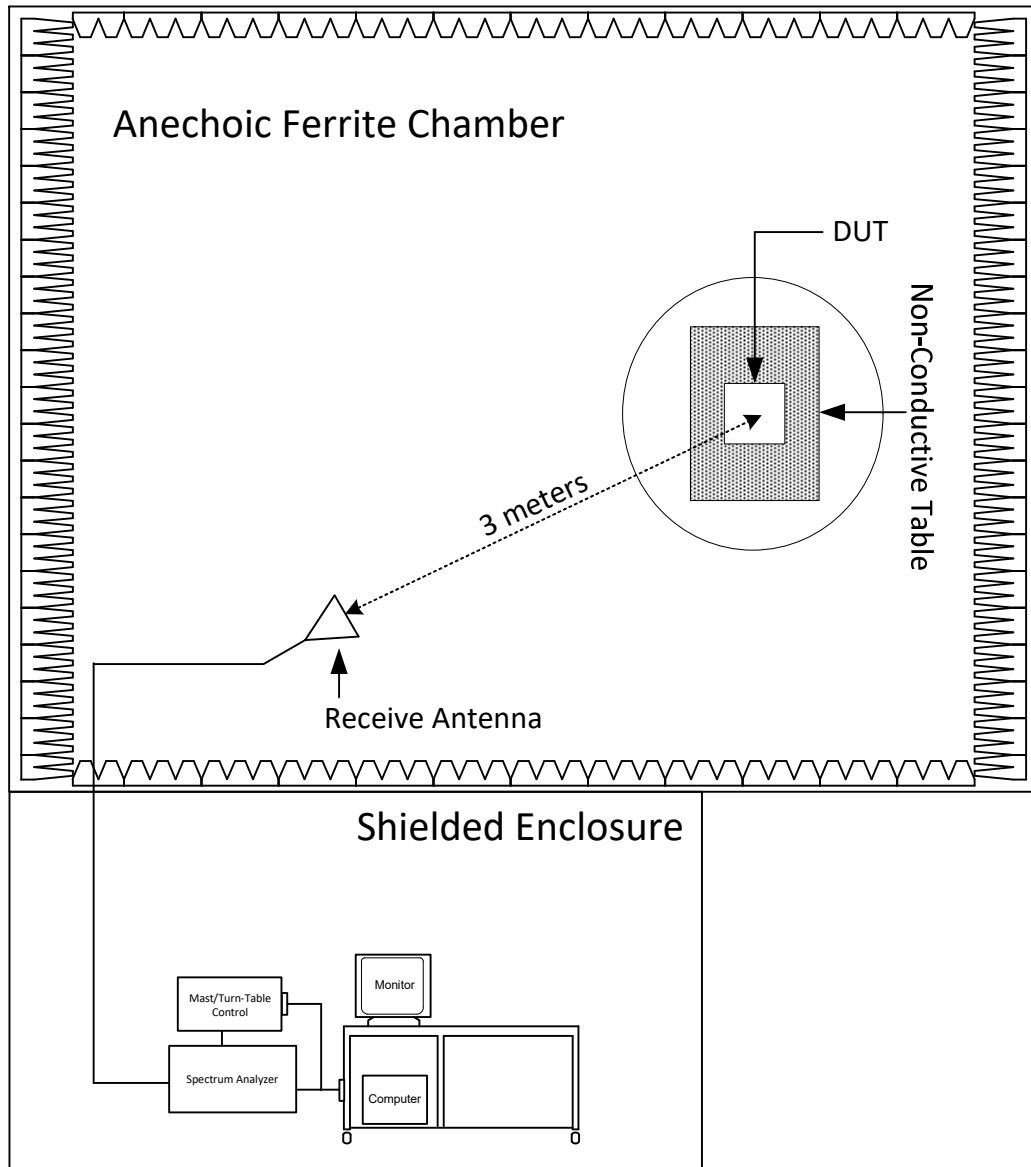

Radiated Measurements Test Setup

19. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
CDZ3	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	10/5/2020	10/5/2021
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/7/2020	4/7/2022
PHA0	MAGNETIC FIELD PROBE	ELECTRO-METRICS	EM-6882	134	22-230MHZ	NOTE 1	
RBG0	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101533	10HZ-44GHZ	3/2/2021	3/2/2022
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	3/11/2021	3/11/2022
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	

N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

20. Periodic Operation Measurements

Test Information	
Manufacturer	Chamberlain
Product	Mini-clicker
Mode	Tx On
Test Date	07/20/2021


Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	N/A
Test site used	N/A
Note	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. A transmitter activated automatically shall cease transmission within 5 seconds after activation. Transmission of set-up information for security systems may exceed said transmission duration limits, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data. Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour. Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.


Procedures
The spectrum analyzer was setup to display the time domain trace. The EUT was set to transmit normally. The spectrum analyzer was used to record the amount of time that the EUT remained active following activation.

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Operation Time < 600msec
Notes	None

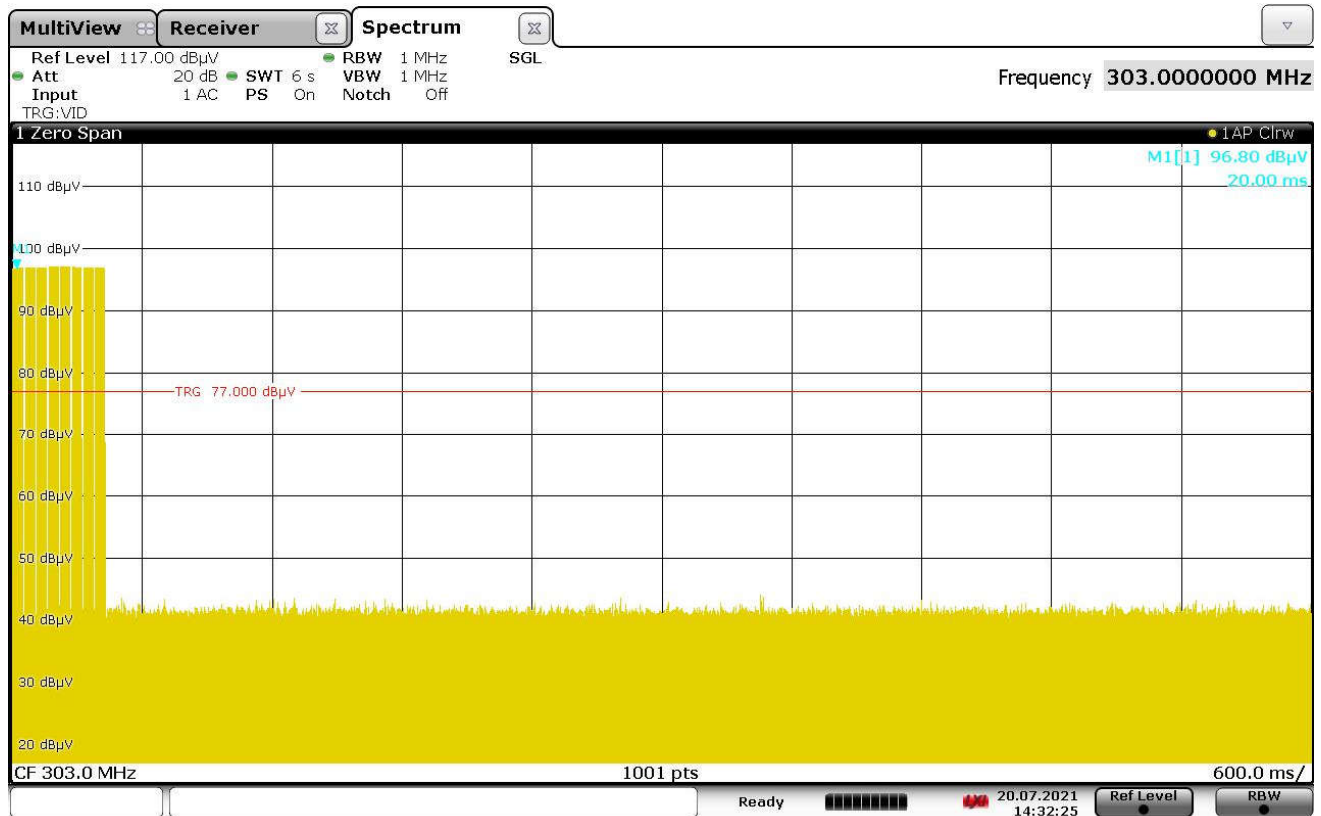


14:32:25 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Operation Time < 1.2sec
Notes	None

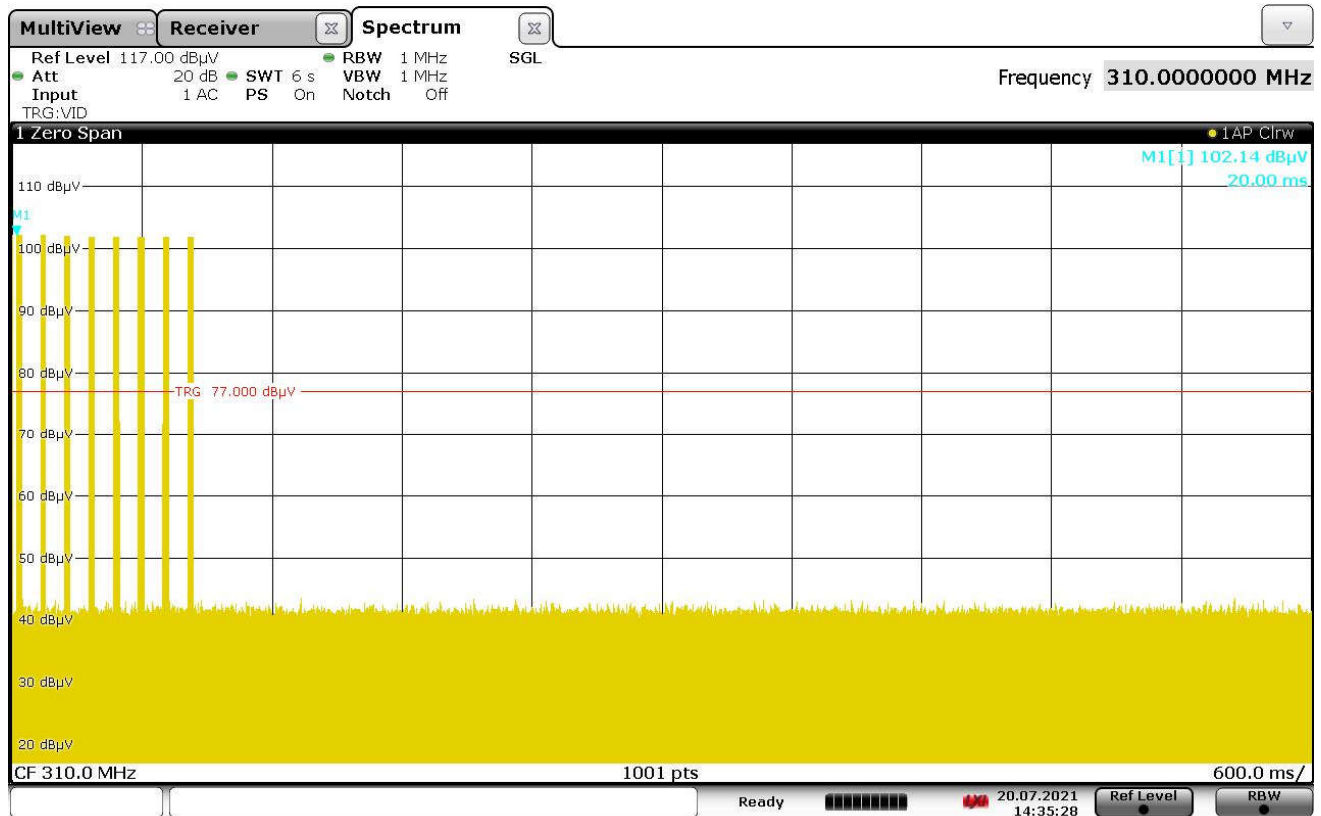

14:35:29 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Operation Time < 1.2sec
Notes	None

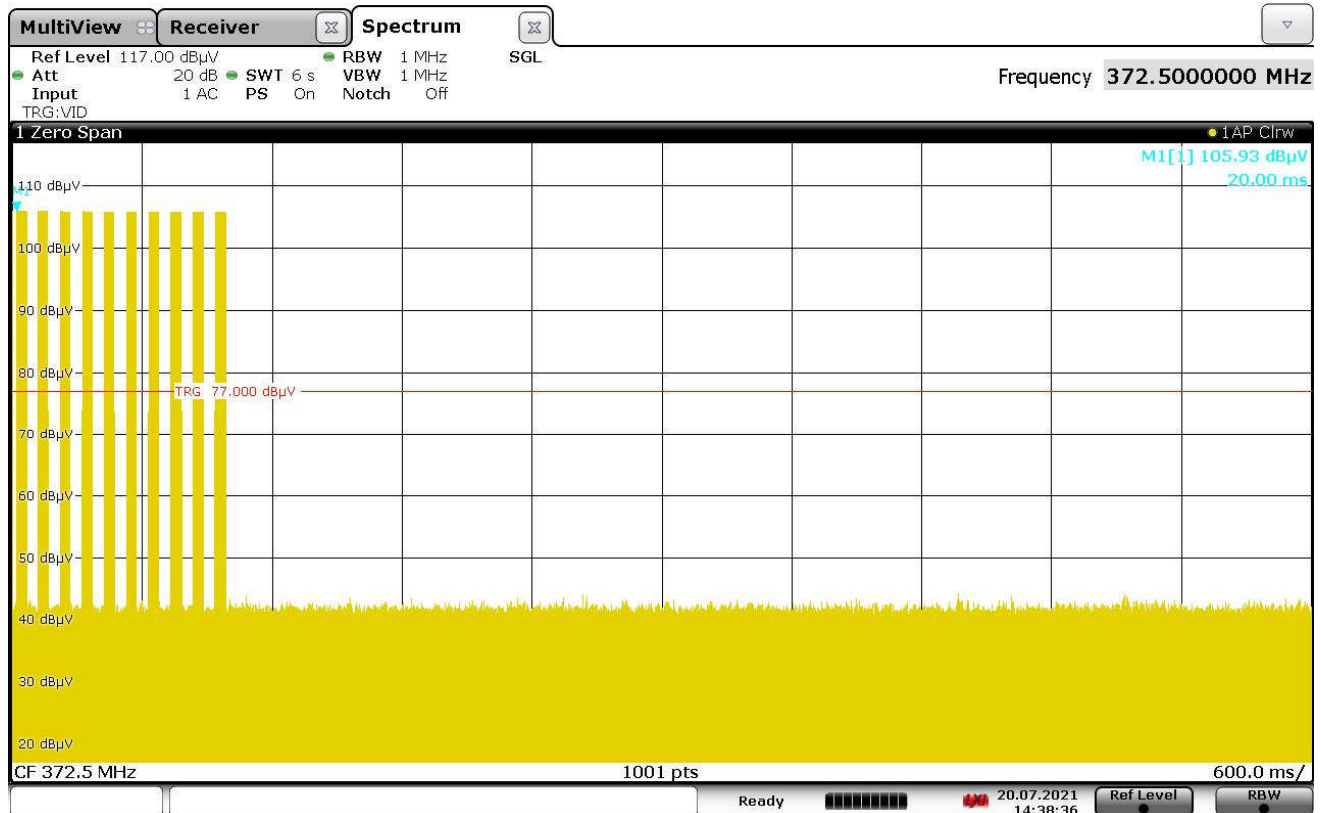

14:38:37 20.07.2021

21. Duty Cycle Factor Measurements


Test Information	
Manufacturer	Chamberlain
Product	Mini-clicker
Mode	Tx On
Test Date	07/20/2021

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	N/A
Test site used	N/A
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4


Procedures
The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal. The following procedure was used to measure the duty cycle: 1) With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. 2) The pulse width is measured and a plot of this measurement is recorded. 3) Next the number of pulses in the word period is measured and a plot is recorded. 4) Finally the length of the word period is measured and a third plot is recorded. If the word period exceeds 100msec, the word period is limited to 100msec. 5) The pulse width and number of pulses for the word period are used to compute the on-time. The duty cycle is then computed as the (on-time/ word period). 6) The duty cycle factor is computed from the duty cycle.

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Narrow Pulses = 564usec
Notes	None

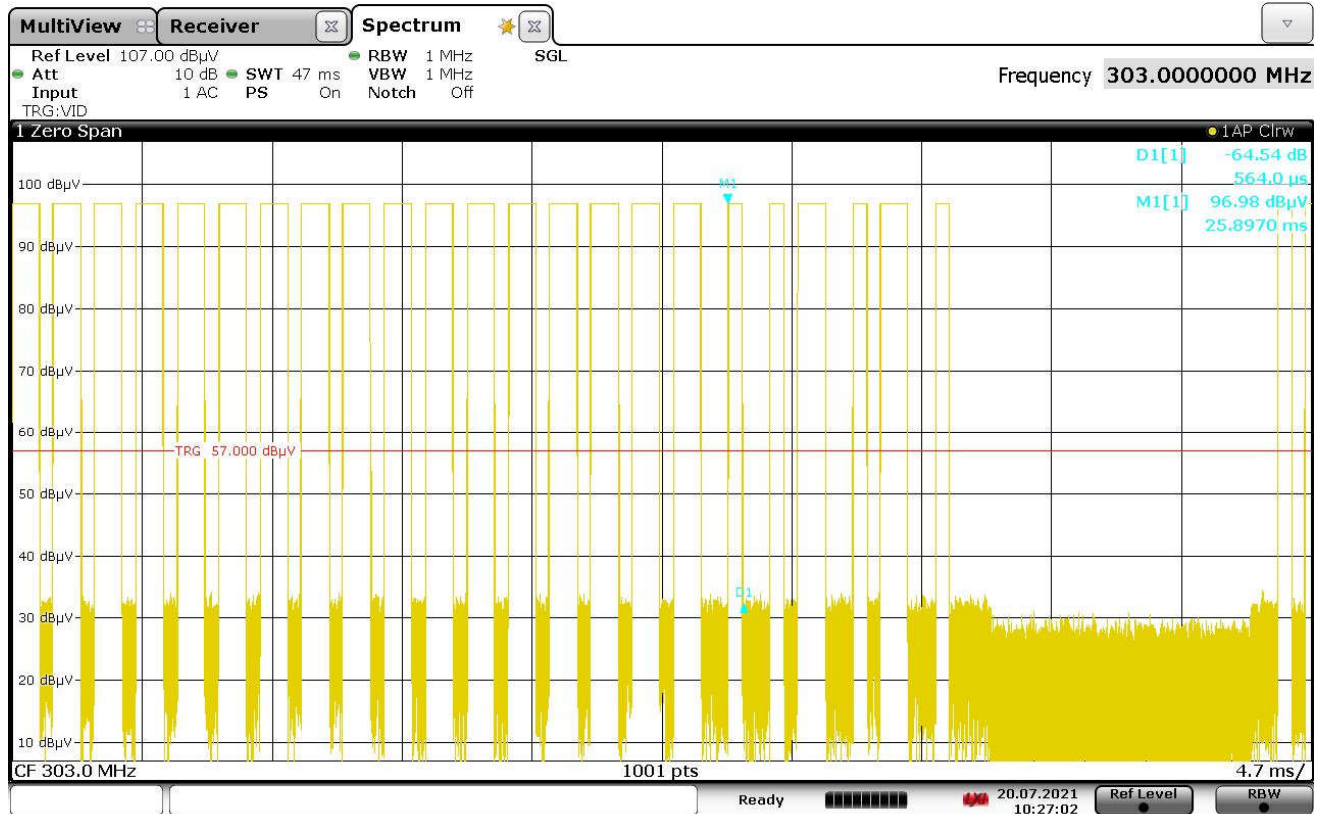


10:27:03 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Wide Pulses = 987usec
Notes	None

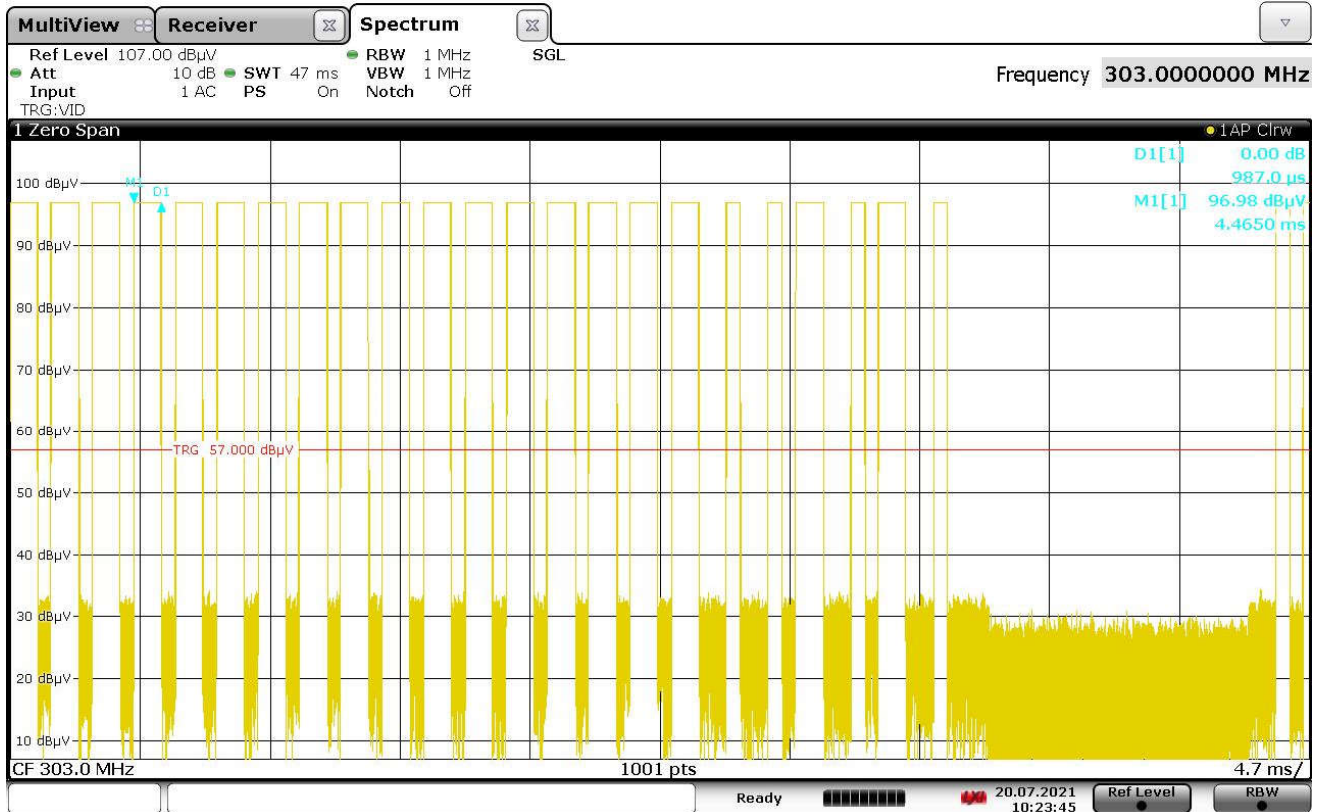

10:23:46 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	10
Mode	Tx On
Carrier Frequency	303 MHz, Xtreme Garage Code
Parameters	Word Length = 54.0ms
Notes	None

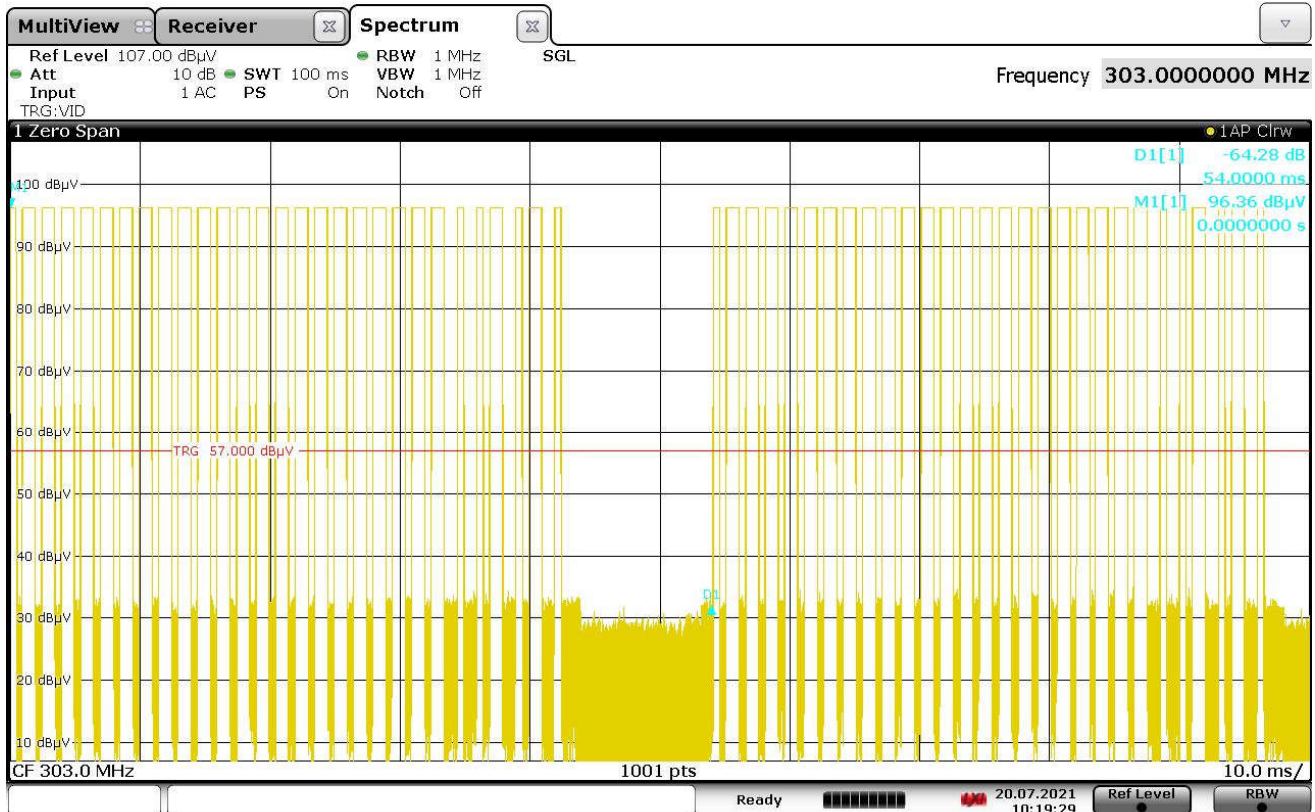


10:19:30 20.07.2021

Number of wide pulses in a word = 19

Number of narrow pulses in a word = 4


$$\text{Duty Cycle Factor} = 20 \log \left(\frac{\text{On-Time}}{\text{Word Length}} \right) = 20 * \log \left(\frac{19 * 0.987 + 4 * 0.564}{54.0} \right) = -8.2 \text{ dB}$$

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Narrow Pulse = 100usec
Notes	None

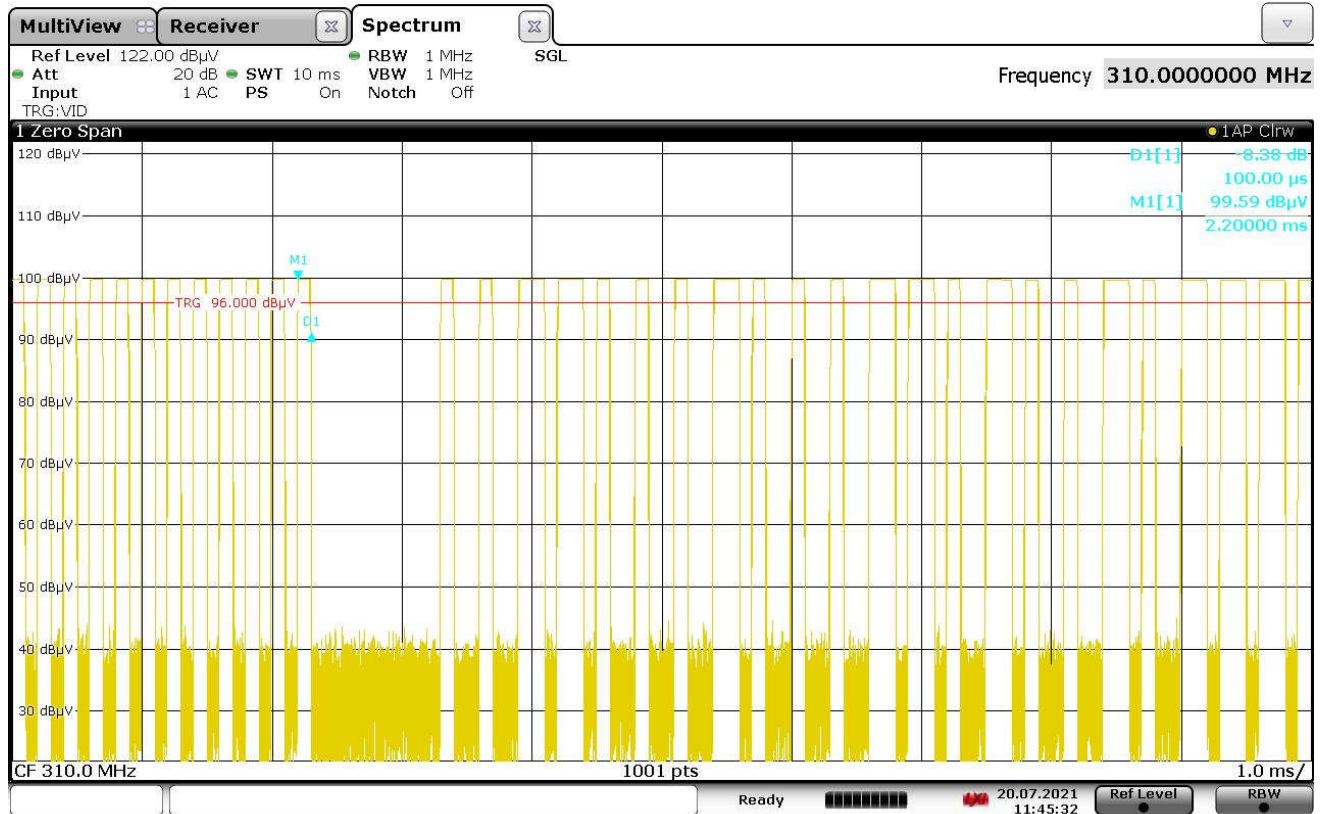


11:45:33 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Wide Pulse = 200usec
Notes	None

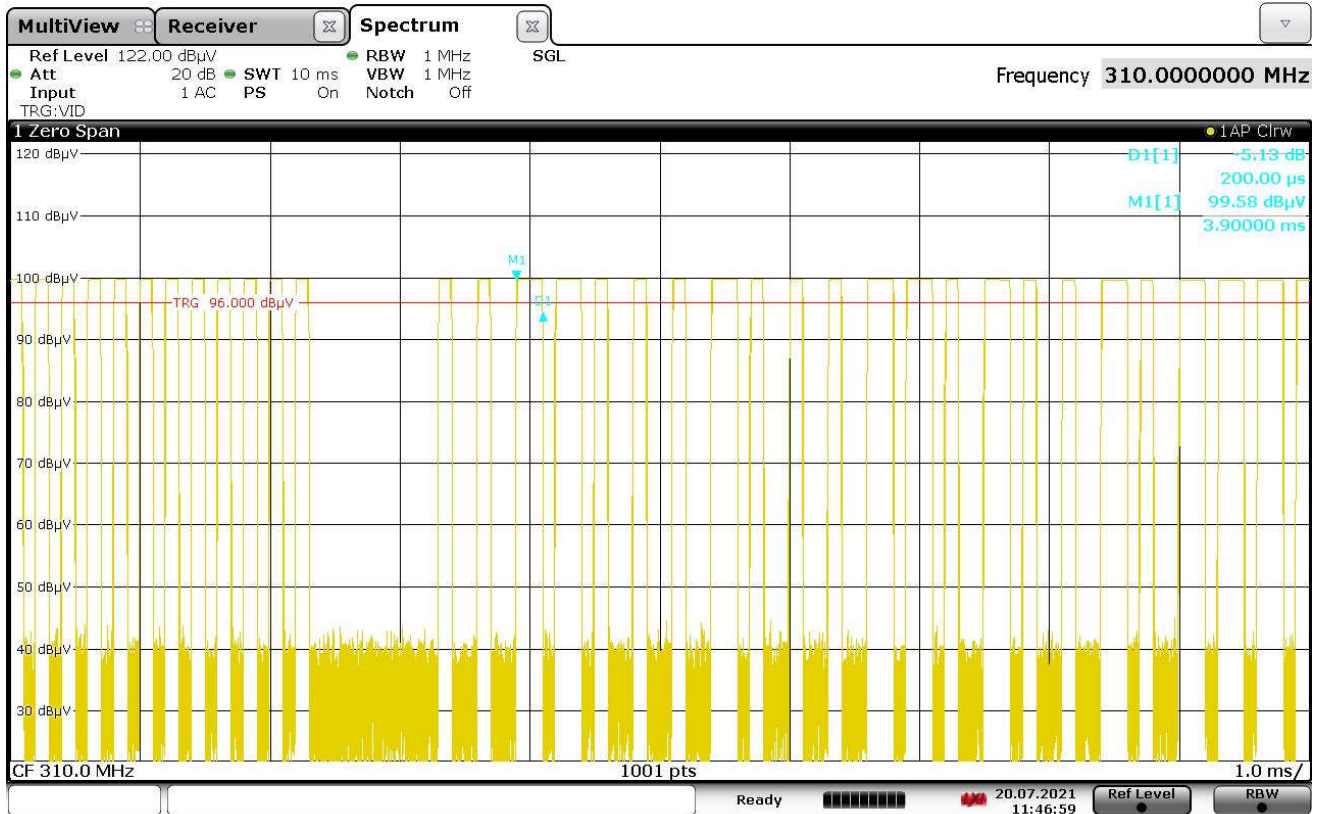

11:47:00 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Duty Cycle Correction Factor
Notes	None

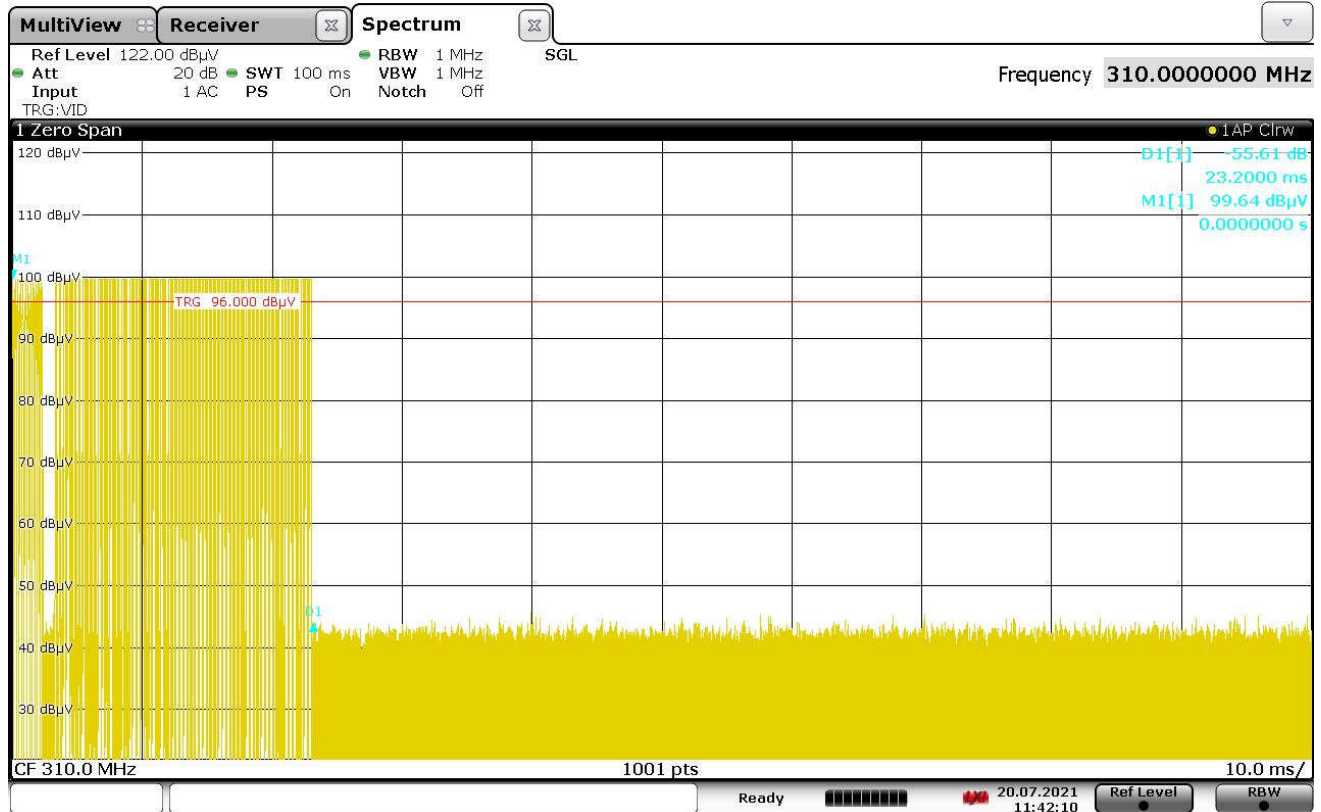

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	11
Mode	Tx On
Carrier Frequency	310 MHz, Sommer Code
Parameters	Duty Cycle Correction Factor (zoom)
Notes	None




11:48:23 20.07.2021

31 short pulses

47 long pulses


$$\text{Duty Cycle Factor} = 20 \log \left(\frac{\text{On - Time}}{\text{Word Length (100msec)}} \right) = 20 * \log \left(\frac{31 * .1 + 47 * .2}{100} \right) = -18.06 \text{ dB}$$

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Narrow Pulse = 200usec
Notes	None

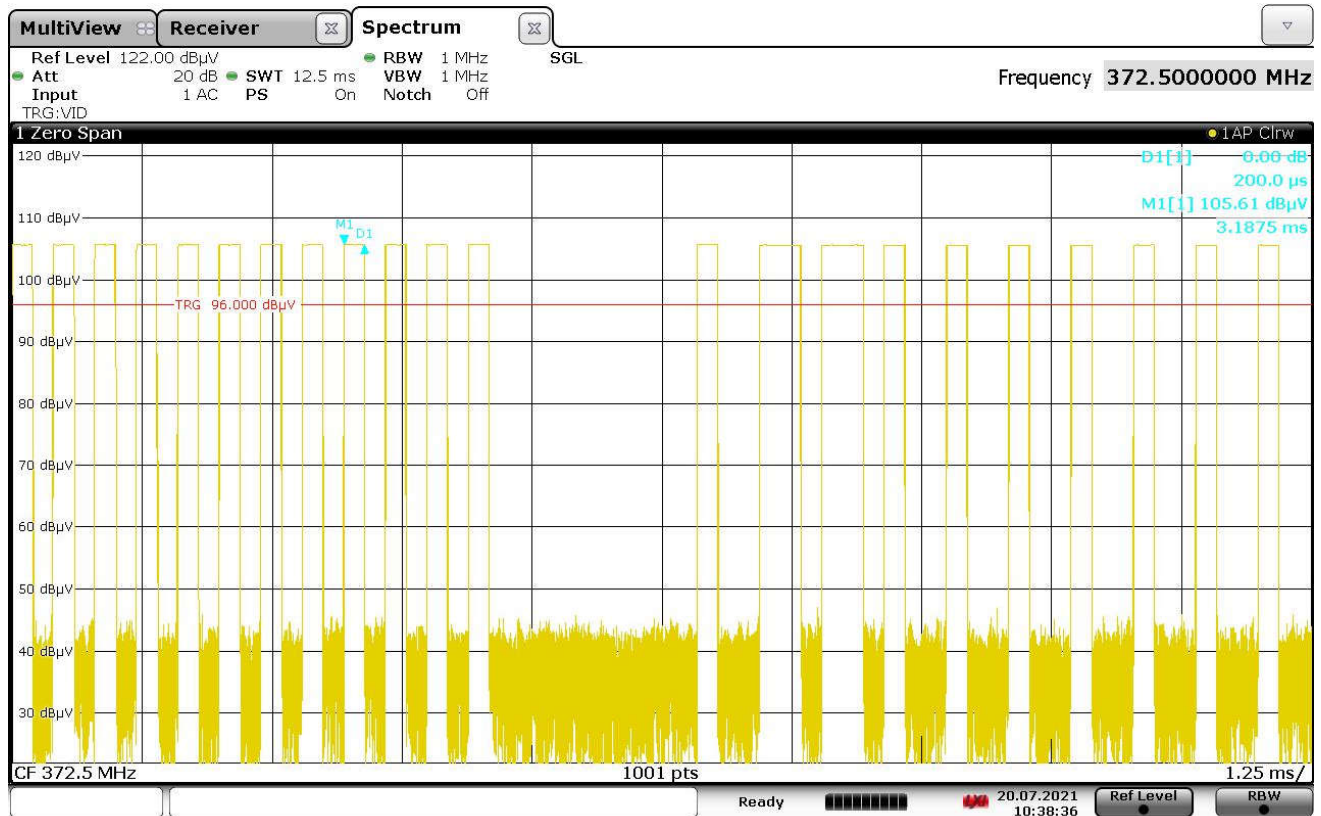


10:38:36 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Wide Pulse = 400usec
Notes	None

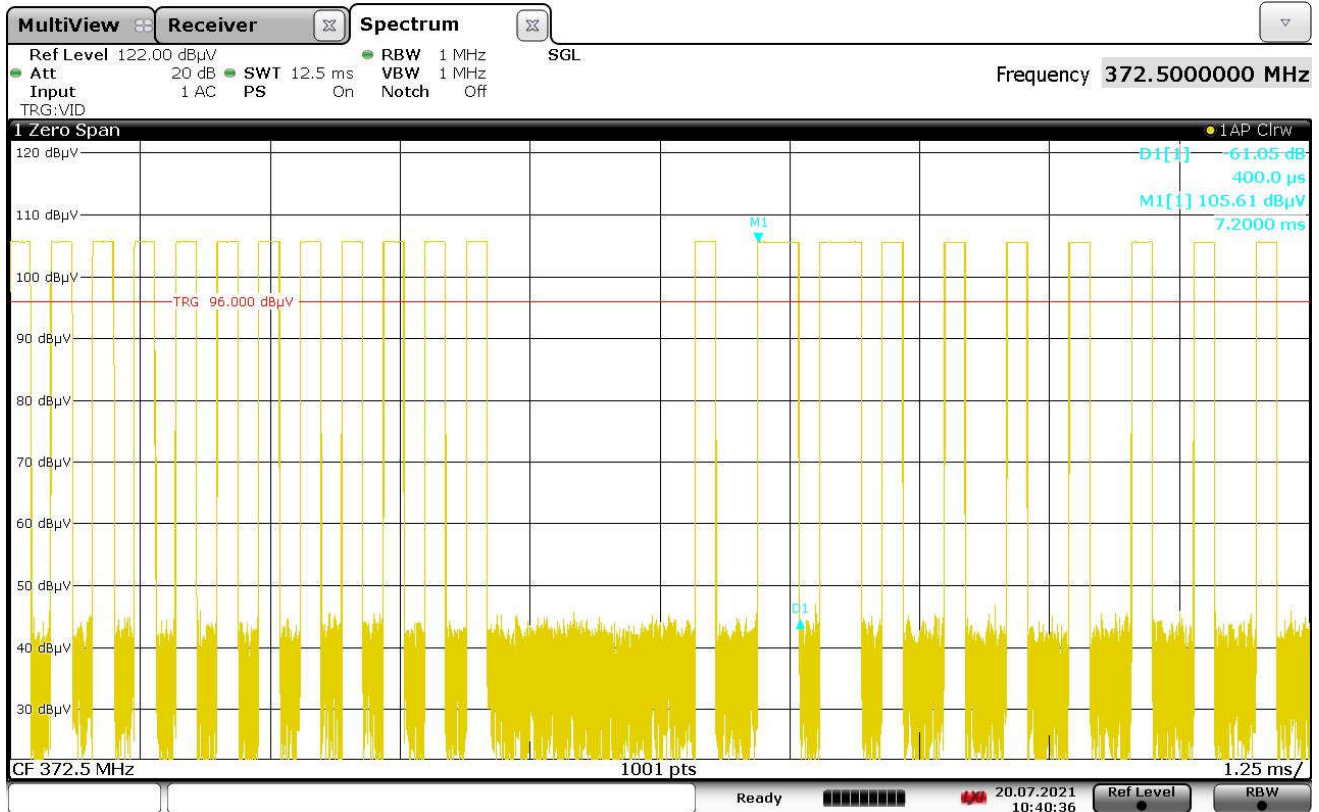


10:40:37 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Duty Cycle Correction Factor
Notes	None

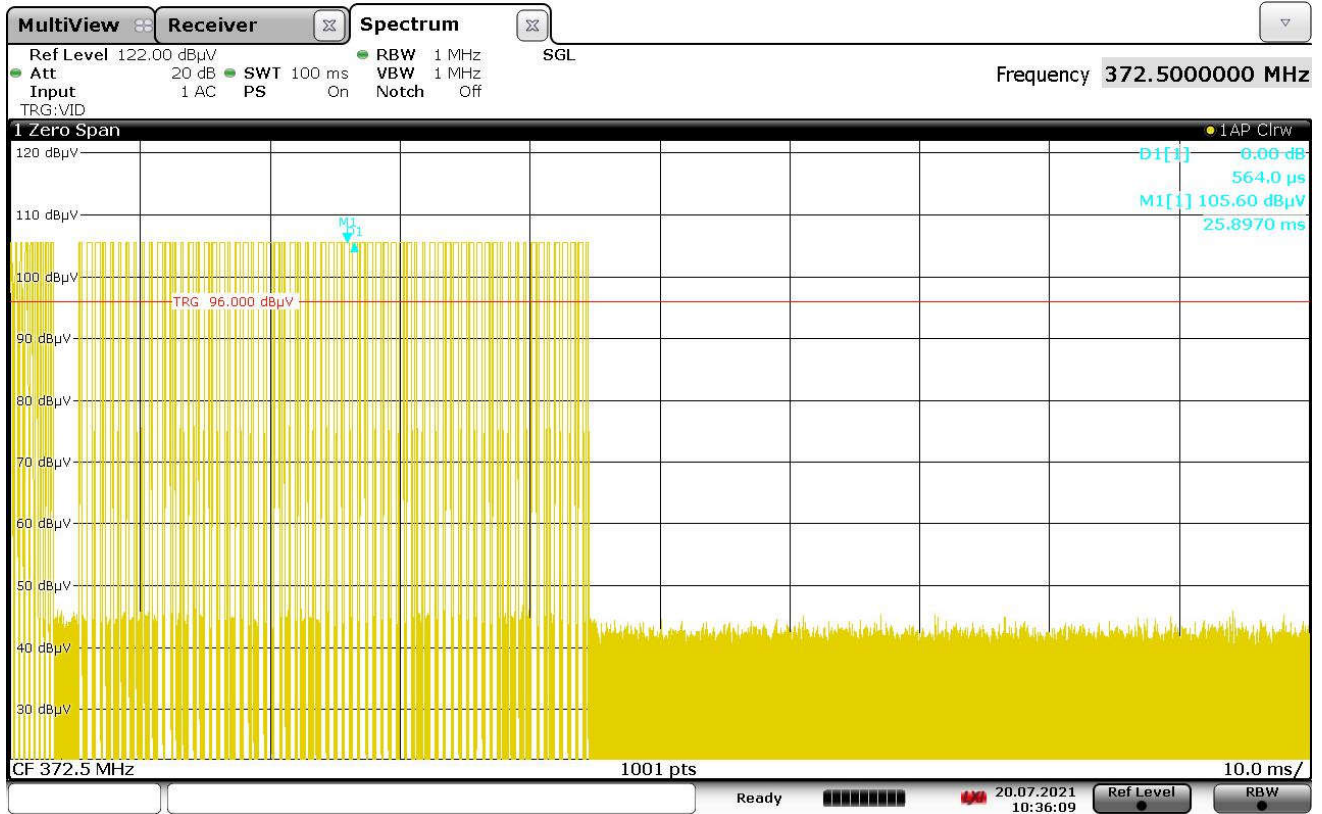

10:36:09 20.07.2021

Test Details	
Manufacturer	Chamberlain
Product	Mini-clicker
S/N	12
Mode	Tx On
Carrier Frequency	372.5 MHz, Ryobi Code
Parameters	Duty Cycle Correction Factor (zoom)
Notes	None

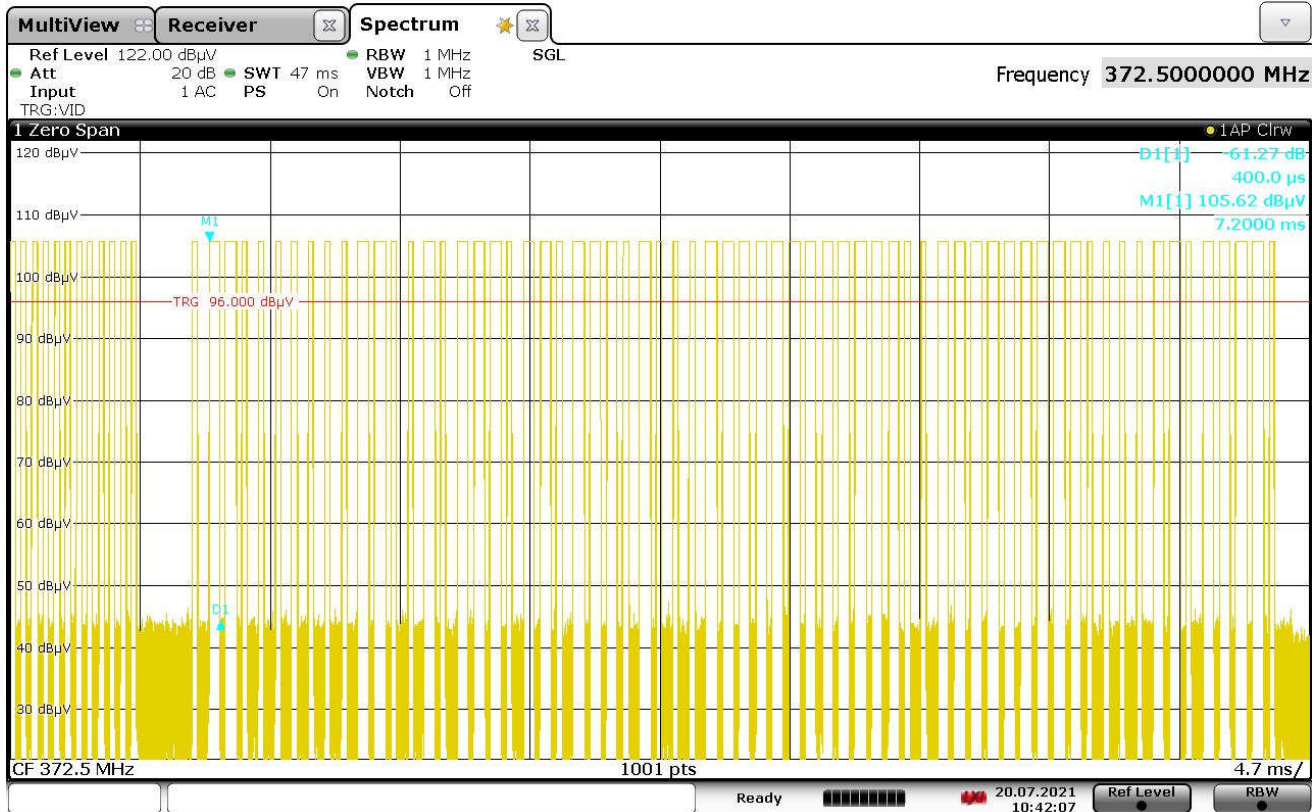

10:42:07 20.07.2021

37 short pulses

41 long pulses

$$\text{Duty Cycle Factor} = 20 \log \left(\frac{\text{On-Time}}{\text{Word Length (100msec)}} \right) = 20 * \log \left(\frac{37 * 0.2 + 41 * 0.4}{100} \right) = -12.46 \text{ dB}$$

22. Spurious Radiated Emissions

Test Information	
Manufacturer	Chamberlain
Product	Mini-clicker
Mode	Tx On
Test Date	07/21/2021

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 29
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements		
The EUT must comply with the requirements of FCC “Code of Federal Regulations Title 47”, Part 15, Subpart C, Section 15.205 et seq. as well as the requirements of the RSS-GEN specification Section 8.10.		
Carrier Frequency (MHz)	Field Strength of Carrier (μV/m)	Field Strength of Spurious Emissions (μV/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750*	125 to 375*
174-260	3750	375
260-470	3750 to 12500*	375 to 1250*
Above 470	12500	1250

*Linear interpolations

Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 4GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to 4GHz. Between 30MHz and 1000MHz, a bi-log antenna was used as the pick-up device. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

Above 1GHz, a broadband double ridged waveguide antenna was used as the pick-up device. The EUT was placed on an 150cm high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.

The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer and the antenna cannot be raised to 4 meters. The measuring antenna is raised or lowered as much as the cable will allow and the EUT is rotated through all axis to ensure the maximum readings are recorded.